


# IR.T SERIES

## CURRENT CONTROL RELAY

UL listed CSA recognized

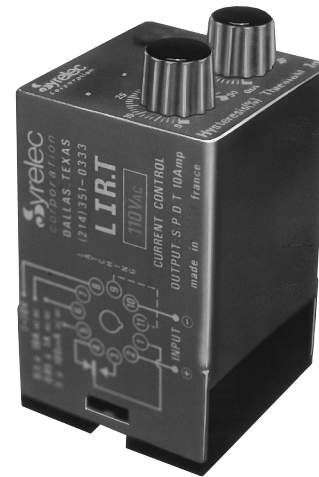


- **Automatic or Manual Control**
- **Start-up Inhibit**
- **Adjustable Hysteresis**
- **Multiple Voltages**
- **LED Relay Status Indicator**

### 1. AC Current Control Without Latching:

The output relay is energized when the current (peak current on AC) overshoots the level selected on the potentiometer. It de-energizes when the current falls below the normal current by 5 to 50% or when input power breaks. The hysteresis is controlled by a top mounted potentiometer and its selection does not change the chosen current level.

### 2. AC Current Control With Latching:

The output relay is energized when the current reaches the selected value and stays latched. The contact between terminal B1 and B2 (or 11 and 9) should be opened or input power to the device interrupted to reset. In this case, it is preferable to reduce the hysteresis 5%.

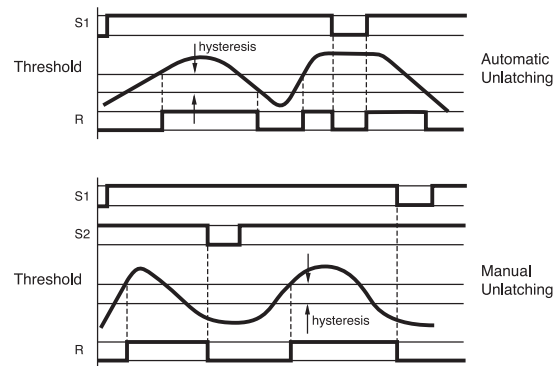


### SPECIFICATIONS:

|                                         |                                                |                   |                    |                  |
|-----------------------------------------|------------------------------------------------|-------------------|--------------------|------------------|
| <b>Input</b> .....                      | 24 VDC, 24, 48, 110, 220 VAC<br>±15%, 50/60 Hz |                   |                    |                  |
| <b>Power consumption</b> .....          | 3 VA maximum                                   |                   |                    |                  |
| <b>CONTROL RANGE</b>                    |                                                |                   |                    |                  |
| <b>DC</b>                               | <b>AC</b>                                      | <b>INPUT</b>      | <b>PERMITTED</b>   | <b>OVERLOAD</b>  |
| <b>CURRENT</b>                          | <b>CURRENT</b>                                 | <b>RESISTANCE</b> | <b>PERMANENTLY</b> | <b>LESS THAN</b> |
| 5 to 100 mA                             | 3.5 to 70.7 mA                                 | 1 ohm             | 1.5 V              | 5 A              |
| 0.05 to 1 A                             | 0.035 to 0.707 A                               | 0.1 ohm           | 5 A                | 17 A             |
| 0.5 to 10 A                             | 0.35 to 7.07 A                                 | 0.01 ohm          | 15 A               | 55 A             |
| <b>Hysteresis selection</b>             | 5 to 50% of input current                      |                   |                    |                  |
| <b>Repeat accuracy</b> .....            | ±2% at a constant ambient                      |                   |                    |                  |
| <b>Response time</b> .....              | 100 ms On Make                                 |                   |                    |                  |
|                                         | 200 ms On Break                                |                   |                    |                  |
| <b>Output Relay</b> .....               | SPDT Relay                                     |                   |                    |                  |
| <b>Contact material</b> .....           | AgCdO                                          |                   |                    |                  |
| <b>Maximum loading</b> .....            | 10 AAC resistive 1 A DC inductive              |                   |                    |                  |
| <b>Maximum switching voltage</b> .....  | 250 VAC or DC                                  |                   |                    |                  |
| <b>Relay maximum power rating</b> ..... | 2500 VA                                        |                   |                    |                  |
|                                         | 30W                                            |                   |                    |                  |
| <b>Mechanical life of relay</b> .....   | 30 x 10 <sup>4</sup> operations                |                   |                    |                  |
| <b>Electrical life of relay</b> .....   | 2 x 10 <sup>5</sup> at 2500 VA resistive load  |                   |                    |                  |
| <b>Operating temperature</b> .....      | +14°F to +140°F -10°C to +60°C                 |                   |                    |                  |
| <b>Weight</b> .....                     | 7 oz. (200g)                                   |                   |                    |                  |

**Option:** 24 VDC power - the voltage and the measured current must be from separate sources.

**Note:** It is recommended that the unit be adequately fused.

### WIRING DIAGRAM:

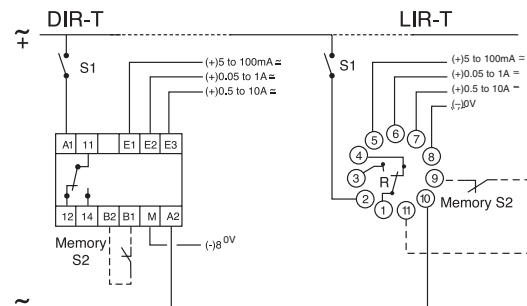

**Note:** Upon energization of the current control IR.T Series Relay, the time delay, which is adjustable from .1 to 10 seconds, inhibits the output relay during start-up periods. The delay time is adjustable via a potentiometer located on the side of the case. Applies to both versions, with and without latching.

### ORDERING INFORMATION:

**MOUNTING**  
**D** = DIN-rail mounting  
**L** = 11 pin plug-in

**IR.T**  
**SERIES**  
**IR.T**

**110A**  
**INPUT POWER**

**INPUT POWER**  
**24D** = 24VDC  
**24A** = 24VAC  
**48A** = 48VAC  
**110A** = 110VAC  
**220A** = 220VAC

Products and specifications subject to change without notice.


Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)

# IAR.T SERIES

## CURRENT CONTROL RELAY

UL listed CSA recognized

- **Automatic or Manual Control**
- **Start-up Inhibit**
- **Adjustable Hysteresis**
- **Multiple Voltages**
- **5 to 100 Amp RMS**

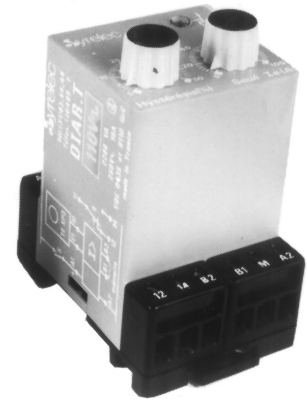


The DIAR.T is a current control which is capable of sensing up to 100 Amps. If requires a stepdown transformer, T1 100. The transformer has a 0.4" diameter center hole through which a current carrying lead is routed. Automatic or manual unlatching is available in each unit.

### 1. AC Current Control Without Latching:

The output relay is energized when the AC current overshoots the level selected on the potentiometer. It de-energizes when the current falls below the selected current by 5 to 50% or when input power breaks. The hysteresis is controlled by a top mounted potentiometer and its selection does not change the chosen current level.

### 2. AC Current Control With Latching:


The output relay is energized when the current reaches the selected value and stays latched. The contact between terminal B1 and B2 (or 11 and 9) should be opened or input power to the device interrupted to reset. In this case, it is preferable to reduce the hysteresis 5%.

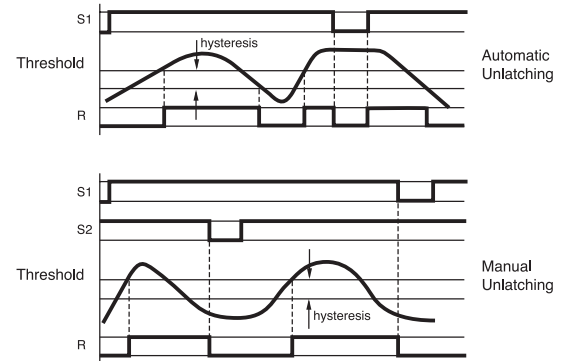

## SPECIFICATIONS:

|                            |                                               |                  |
|----------------------------|-----------------------------------------------|------------------|
| Input                      | 24 VDC, 24, 48, 110, 220 VAC                  |                  |
|                            | ±15%, 50/60 Hz                                |                  |
| Power consumption          | 3 VA maximum                                  |                  |
| Hysteresis selection       | 5 to 50% of input current                     |                  |
| Repeat accuracy            | ±2% at a constant ambient                     |                  |
|                            | ±5% with temperature variation                |                  |
|                            | VDE 0435                                      |                  |
| Response time              | 100 ms On Make                                |                  |
|                            | 200 ms On Break                               |                  |
| Output Relay               | SPDT Relay                                    |                  |
| Contact material           | AgCdO                                         |                  |
| Maximum loading            | 10 A AC resistive                             | 1 A DC inductive |
| Maximum switching voltage  | 250 VAC                                       | 30 VDC           |
| Relay maximum power rating | 2500 VA                                       | 30 W             |
| Mechanical life of relay   | 30 x 10 <sup>4</sup> operations               |                  |
| Electrical life of relay   | 2 x 10 <sup>5</sup> at 2500 VA resistive load |                  |
| Operating temperature      | +14°F to +140°F                               | -10°C to +60°C   |
| Weight                     | 7 oz. (200g)                                  |                  |

## WIRING DIAGRAM:

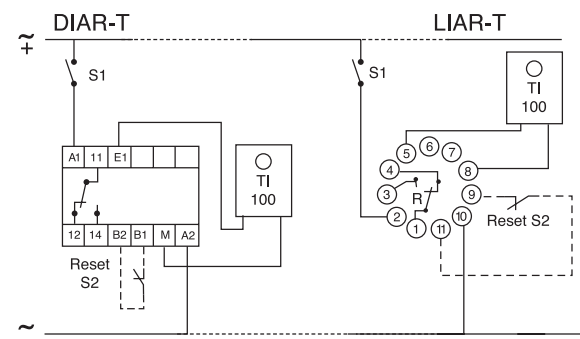


**Note:** Upon energization of the current control IAR.T Series Relay, the time delay, which is adjustable from .1 to 10 seconds, inhibits the output relay during start-up periods. The delay time is adjustable via a potentiometer located on the side of the case. For additional current transformer see "Accessories" section: L595 Series. Page 2/99

## TRANSFORMER: (Part Number 74 525 305)

Current  
Range: 5 to 100 A RMS

Maximum  
Overload: 1 max = 150 A



## ORDERING INFORMATION:

**L**  
MOUNTING

**MOUNTING**  
D = DIN-rail mounting  
L = 11 pin plug-in

**IAR.T**  
SERIES  
IAR.T

**110A**  
INPUT POWER

### INPUT POWER

24D = 24VDC    48A = 48VAC  
24A = 24VAC    110A = 110VAC  
220A = 220VAC

Products and specifications subject to change without notice.

Order/Technical Support – Tel: (800) 677-5311 / FAX: (800) 677-3865 / [www.crouzet-usa.com](http://www.crouzet-usa.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331