1.6GHz Low Noise High Linearity Differential Buffer/16-Bit ADC Driver with Fast Clamp

FEATURES

- **1.6GHz –3dB Small Signal Bandwidth**
- **Low Distortion Driving 50Ω Load, 2.4V_{P-P} Out**
  - **–100dBc/–69dBc HD2/HD3 at 140MHz**
  - **–80dBc IM3 and 46dBm OIP3 at 140MHz**
  - **–100dBc/–66dBc HD2/HD3 at 380MHz**
  - **–68dBc IM3 and 39dBm OIP3 at 380MHz**
- **1.5nV/√Hz Output Noise**
- **4.3pA/√Hz Input Current Noise**
- **Programmable High Speed, Fast Recovery Output Clamping**
- **4.28V_{P-P} Maximum Output Swing on a 50Ω Differential Load**
- DC-Coupled Signal Path
- Operates on Single 4.75V to 5.25V Supply
- Power: 615mW on 5V, Can Be Reduced to 370mW, Shutdown Mode 120mW
- 3mm × 4mm 20-Lead QFN Package

APPLICATIONS

- Differential ADC Driver
- CCD Buffer
- Cable Driver
- 50Ω Buffer

LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

DESCRIPTION

The LTC®6417 is a differential unity gain buffer that can drive a 50Ω load with extremely low noise and excellent linearity. It is well suited for driving high speed 14- and 16-bit pipeline ADCs with input signals from DC to beyond 600MHz. Differential input impedance is 18.5kΩ, allowing 1:4 and 1:8 transformers to be used at the input providing additional system gain in 50Ω systems.

With no external biasing or gain setting components and a flow-through pinout, the LTC6417 is very easy to use. It can be DC-coupled and has a common mode output offset of –60mV. The LTC6417 input pins are internally biased to provide an output common mode voltage that is set by the voltage on the V_{CM} pin for AC-coupled applications.

Supply current is typically 123mA and the LTC6417 operates on supply voltages ranging from 4.75V to 5.25V. Power consumption can be reduced to 74mA via the PWRADJ pin. The LTC6417 also has a hardware shutdown feature which reduces current consumption to 24mA.

The LTC6417 features fast, adjustable output voltage clamping to help protect subsequent circuitry. The CLHI pin sets the maximum swing, while a symmetric minimum swing is set up internally. LTC6417 $V_{\overline{OR}}$ pin will signal overrange when the clamps limit output voltage.

The LTC6417 is packaged in a 20-lead 3mm × 4mm QFN package. Pinout is optimized for placement directly adjacent to Linear Technology's high speed 14- and 16-bit ADCs.

TYPICAL APPLICATION

LTC6417 Driving an LTC2209 16-Bit ADC at 140MHz IF

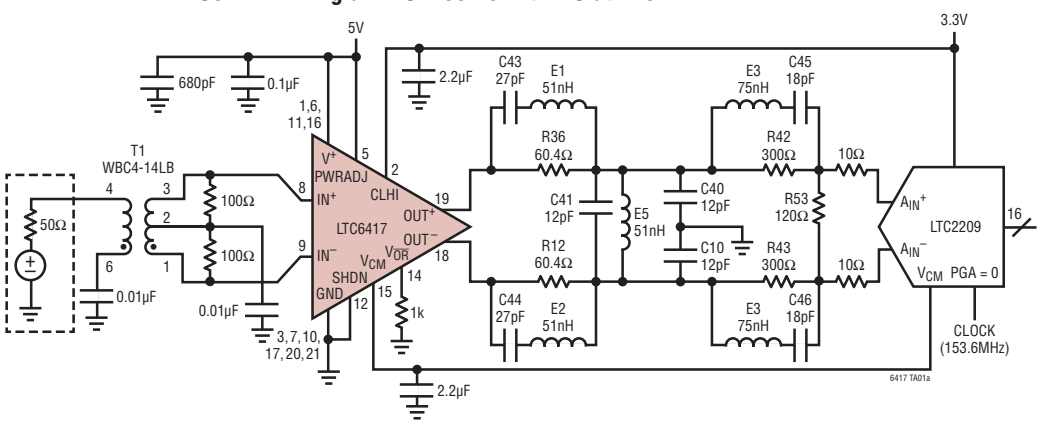

LTC6417 Driving LTC2209 16-Bit ADC 32K Point FFT, f_{IN} = 140MHz, –1dBFS, PGA = 0

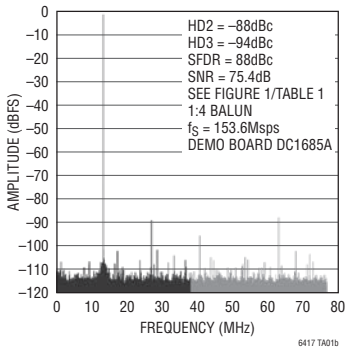

ABSOLUTE MAXIMUM RATINGS

(Note 1)

Total Supply Voltage (V^+ to GND) 5.5V
Input Current (CLHI, V_{CM}) ..... ±10mA
Input Current (IN^+, IN^-) ..... ±30mA
Output Current (OUT^+, OUT^-) ..... ±100mA
Output Current ($V_{\overline{OR}}$) ..... ±10mA
Operating Temperature Range
(T_C) (Note 2) ..... –40°C to 105°C
Specified Temperature Range
(T_C) (Note 3) ..... –40°C to 105°C
Storage Temperature Range ..... –65°C to 150°C
Junction Temperature (T_{JMAX}) ..... 150°C

PIN CONFIGURATION

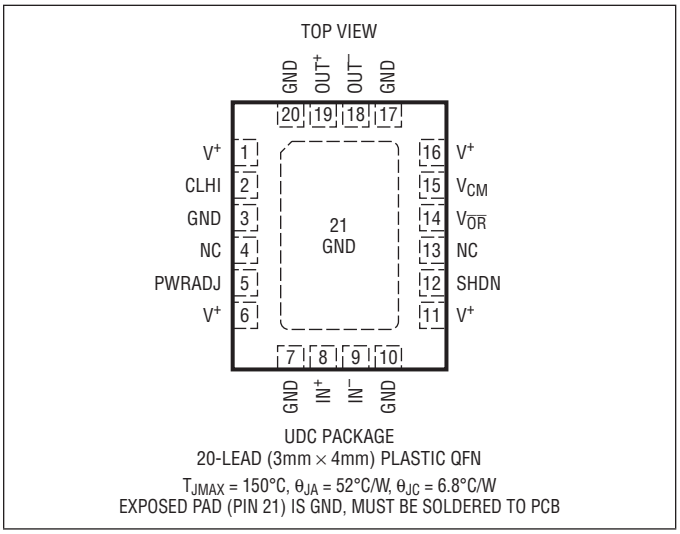

UDC PACKAGE
20-LEAD (3mm × 4mm) PLASTIC QFN
T_{JMAX} = 150°C, θ_{JA} = 52°C/W, θ_{JC} = 6.8°C/W
EXPOSED PAD (PIN 21) IS GND, MUST BE SOLDERED TO PCB

ORDER INFORMATION

LEAD FREE FINISH	TAPE AND REEL	PART MARKING*	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LTC6417CUDC#PBF	LTC6417CUDC#TRPBF	LFVN	20-Lead (3mm × 4mm) Plastic QFN	0°C to 70°C
LTC6417IUDC#PBF	LTC6417IUDC#TRPBF	LFVN	20-Lead (3mm × 4mm) Plastic QFN	–40°C to 105°C (T_C)

*Temperature grades are identified by a label on the shipping container.

Consult LTC Marketing for parts specified with wider operating temperature ranges.
Consult LTC Marketing for information on lead based finish parts.

For more information on lead free part marking, go to: http://www.linear.com/leadfree/
For more information on tape and reel specifications, go to: http://www.linear.com/tapeandreel/

DC ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V^+ = 5V, GND = 0V, No R_{LOAD}, C_{LOAD} = 6pF. V_{CM} = 1.25V, CLHI = V^+, PWRADJ = V^+, SHDN = 0V unless otherwise noted. V_{INCM} is defined as (IN^+ + IN^-)/2. V_{OUTCM} is defined as (OUT^+ + OUT^-)/2. V_{INDIFF} is defined as (IN^+ – IN^-). $V_{OUTDIFF}$ is defined as (OUT^+ – OUT^-). See DC test circuit schematic.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Input/Output Characteristics							
G_{DIFF}	Differential Gain	V_{INDIFF} = ±1.2V Differential	 ●	–0.15 –0.2	–0.1	0 0	dB dB
TCG_{DIFF}	Differential Gain Temperature Coefficient		●		0.0002		dB/°C
$V_{SWINGDIFF}$	Differential Output Voltage Swing	$V_{OUTDIFF}$, V_{INDIFF} = ±2.3V	 ●	4 3.3	4.28		V_{P-P} V_{P-P}
$V_{SWINGMIN}$	Output Voltage Swing Low	Single-Ended Measurement of OUT^+, OUT^- V_{INDIFF} = ±2.3V	 ●		0.19	0.28 0.4	V V
$V_{SWINGMAX}$	Output Voltage Swing High	Single-Ended Measurement of OUT^+, OUT^- V_{INDIFF} = ±2.3V	 ●	2.25 2.05	2.33		V V

DC ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V^+ = 5V, GND = 0V, No R_{LOAD}, C_{LOAD} = 6pF. V_{CM} = 1.25V, CLHI = V^+, PWRADJ = V^+, SHDN = 0V unless otherwise noted. V_{INCM} is defined as (IN^+ + IN^-)/2. V_{OUTCM} is defined as (OUT^+ + OUT^-)/2. V_{INDIFF} is defined as (IN^+ – IN^-). $V_{OUTDIFF}$ is defined as (OUT^+ – OUT^-). See DC test circuit schematic.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
I_{OUT}	Output Current Drive (Notes 1, 4)	Single-Ended Measurement of OUT^+, OUT^-	●	±100			mA
V_{OS}	Differential Input Offset Voltage	IN^+ = IN^- = 1.25V, V_{OS} = $V_{OUTDIFF}/G_{DIFF}$	 ●	–3.2 –4	–0.1	3.2 4	mV mV
TCV_{OS}	Differential Input Offset Voltage Drift		●		1		µV/°C
V_{IOCM}	Common Mode Offset Voltage, Input to Output	V_{OUTCM} – V_{INCM}	 ●	–120 –140	–60	–10 0	mV mV
IVR_{MIN}	Input Voltage Range, IN^+, IN^- (Minimum) (Single-Ended)	Defined by Output Voltage Swing Test	●			0.1	V
IVR_{MAX}	Input Voltage Range IN^+, IN^- (Maximum) (Single-Ended)	Defined by Output Voltage Swing Test	●	2.4			V
I_B	Input Bias Current, IN^+, IN^-	IN^+ = IN^- = 1.25V	 ●	–13 –18	2	13 18	µA µA
R_{INDIFF}	Differential Input Resistance	V_{INDIFF} = ±1.2V	 ●	12 11	18.5	25 27.5	kΩ kΩ
C_{INDIFF}	Differential Input Capacitance				1		pF
R_{INCM}	Input Common Mode Resistance	IN^+ = IN^- = 0.65V to 1.85V	 ●	5.8 5	9.25	13 15	kΩ kΩ
CMRR	Common Mode Rejection Ratio	IN^+ = IN^- = 0.65V to 1.85V, CMRR = ($V_{OUTDIFF}/G_{DIFF}$/1.2V)	 ●	63 60	91		dB dB
$R_{OUTDIFF}$	Differential Output Resistance				3		Ω
e_N	Input Noise Voltage Density	f = 100kHz			1.5		nV/√Hz
i_N	Input Noise Current Density	f = 100kHz			4.3		pA/√Hz
Output Common Mode Voltage Control							
G_{CM}	V_{CM} Pin Common Mode Gain	V_{CM} = 0.65V to 1.85V	 ●	0.82 0.8	0.92		V/V V/V
$V_{INCMDEFAULT}$	Default Input Common Mode Voltage	V_{INCM}. IN^+, IN^-, V_{CM} Pin Floating	 ●	1.15 1.1	1.25	1.35 1.4	V V
V_{OS} (V_{CM} – V_{INCM})	Offset Voltage, V_{CM} to V_{INCM}	V_{CM} – V_{INCM}, V_{CM} = 1.25V	 ●	–85 –90	15	115 135	mV mV
$V_{OUTCMDEFAULT}$	Default Output Common Mode Voltage	Inputs Floating, V_{CM} Pin Floating	 ●	1.1 1	1.2	1.3 1.35	V V
V_{OS} (V_{CM} – V_{OUTCM})	Offset Voltage, V_{CM} to V_{OUTCM}	V_{CM} – V_{OUTCM}, V_{CM} = 1.25V	 ●	–50 –45	75	200 230	mV mV
$V_{OUTCMMIN}$	Output Common Mode Voltage Range (Minimum)	V_{CM} = 0.1V	 ●		0.29	0.63 0.65	V V
$V_{OUTCMMAX}$	Output Common Mode Voltage Range (Maximum)	V_{CM} = 2.4V	 ●	2 1.85	2.25		V V
$V_{CMDEFAULT}$	V_{CM} Pin Default Voltage		 ●	1.15 1.1	1.25	1.35 1.4	V V
R_{VCM}	V_{CM} Pin Input Resistance	V_{CM} = 0.65V to 1.85V	 ●	2 1.9	2.7	3.4 3.7	kΩ kΩ
C_{VCM}	V_{CM} Pin Input Capacitance				1		pF
I_{BVCM}	V_{CM} Pin Bias Current	V_{CM} = 1.25V	 ●	–15 –27.5	1	15 27.5	µA µA

DC ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V^+ = 5V, GND = 0V, No R_{LOAD}, C_{LOAD} = 6pF. V_{CM} = 1.25V, CLHI = V^+, PWRADJ = V^+, SHDN = 0V unless otherwise noted. V_{INCM} is defined as (IN^+ + IN^-)/2. V_{OUTCM} is defined as (OUT^+ + OUT^-)/2. V_{INDIFF} is defined as (IN^+ – IN^-). $V_{OUTDIFF}$ is defined as (OUT^+ – OUT^-). See DC test circuit schematic.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
DC Clamping Characteristics							
$V_{CLHIDEFAULT}$	Default Output Clamp Voltage, High		 ●	2.4 2.35	2.48	2.55 2.6	V V
V_{OS} (CLHI – V_{OUTCM})	Offset Voltage, CLHI to V_{OUTCM}		 ●	–60 –85	20	80 85	mV mV
V_{OS} (CLLO – V_{OUT})	Offset Voltage, CLLO to V_{OUT}	V_{CLHI} = 2.0V, V_{CM} = 1.25V, IN^+ = 2.4V, IN^- = 0.1V	 ●	–100 –110	10	100 110	mV mV
G_{LOHI}	Low Side Clamp Gain with Respect to CLHI Pin	V_{CLHI} = 2.0V, V_{CM} = 1.25V, IN^+ = 2.4V, IN^- = 0.1V	 ●	–1.2 –1.25	–1	–0.8 –0.75	V/V V/V
G_{LOCM}	Low Side Clamp Gain with Respect to CM Pin	V_{CLHI} = 2.0V, V_{CM} = 1.25V, IN^+ = 2.4V, IN^- = 0.1V	 ●	1.65 1.5	1.9	2.2 2.25	V/V V/V
R_{CLHI}	CLHI Pin Input Resistance	V_{CLHI} = 1.5V to 2.5V	 ●	3.4 3.1	4.8	5.7 6	kΩ kΩ
IB_{CLHI}	CLHI Pin Bias Current	V_{CLHI} = 2.5V	 ●	–12 –12.5	3	18 18.5	µA µA
Power Supply							
V_S	Supply Voltage Range		●	4.75		5.25	V
I_S	Supply Current		 ●	100 95	123	140 145	mA mA
PSRR	Power Supply Rejection Ratio	V_S = 4.75V to 5.25V	 ●	65 63	72		dB dB
SHDN Pin							
IS_{SHDN}	Shutdown Current	V_{SHDN} = 5V	 ●	17 15	24	29 35	mA mA
$V_{SHDNDEFAULT}$	Default Shutdown Voltage		●			0.1	V
$V_{IL,SHDN}$	SHDN Input Low Voltage		●			2	V
$V_{IH,SHDN}$	SHDN Input High Voltage		●	3.5			V
$I_{IL,SHDN}$	SHDN Input Low Current	SHDN = 0V	 ●	–1.6 –2	0	1.6 2	µA µA
$I_{IH,SHDN}$	SHDN Input High Current	SHDN = 5V	 ●	275 250	380	450 475	µA µA
C_{SHDN}	SHDN Pin Input Capacitance				1		pF
R_{SHDN}	SHDN Pin Input Resistance	SHDN = 2.5V to 5V	 ●	6 5	10.5	14 15	kΩ kΩ
PWRADJ Pin							
$V_{PWRADJDEFAULT}$	Default PWRADJ Voltage	PWRADJ Floating		1.5 1.45	1.65	1.8 1.85	V V
IS_L	Supply Low Current	PWRADJ = 0V	 ●	45 40	74	105 110	mA mA
$I_{IL,PWRADJ}$	PWRADJ Input Low Current	PWRADJ = 0V	 ●	–145 –165	–120	–80 –75	µA µA
$I_{IH,PWRADJ}$	PWRADJ Input High Current	PWRADJ = 5V	 ●	210 200	240	290 300	µA µA
C_{PWRADJ}	PWRADJ Pin Input Capacitance				1		pF

DC ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V^+ = 5V, GND = 0V, No R_{LOAD}, C_{LOAD} = 6pF. V_{CM} = 1.25V, CLHI = V^+, PWRADJ = V^+, SHDN = 0V unless otherwise noted. V_{INCM} is defined as (IN^+ + IN^-)/2. V_{OUTCM} is defined as (OUT^+ + OUT^-)/2. V_{INDIFF} is defined as (IN^+ – IN^-). $V_{OUTDIFF}$ is defined as (OUT^+ – OUT^-). See DC test circuit schematic.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
R_{PWRADJ}	PWRADJ Pin Input Resistance	PWRADJ = 2.5V to 5.0V	 ●	10.5 10	14.5	19 20	kΩ kΩ
V_{OR} Pin							
$V_{\overline{OR}(HI)}$	Maximum Voltage on V_{OR} Pin	V_{CL} = 5.0V, V_{CM} = 1.25V	 ●	3.25 3.2	3.35	3.55 3.6	V V
$I_{\overline{OR}(DEFAULT)}$	Default Pull-Down Current on V_{OR} Pin	V_{CL} = 50V, V_{CM} = 1.25V	 ●	–900 –1150	–770	–650 –500	µA µA
$I_{\overline{OR}(MAX)}$	Maximum Pull-Down Current Both Clamps are Active	V_{CL} = 2.0V, V_{CM} = 1.25V, IN^+ = 2.4V, IN^- = 0.1V	 ●		1	1.5 2	µA µA

AC ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V^+ = 5V unless otherwise noted, GND = 0V, R_{LOAD} = 500Ω,C_{LOAD} = 6pF. V_{CM} = 1.25V, CLHI = V^+, PWRADJ = V_{CC}, SHDN = 0V unless otherwise noted. V_{INCM} is defined as (IN^+ + IN^-)/2. V_{OUTCM} is defined as (OUT^+ + OUT^-)/2. V_{INDIFF} is defined as (IN^+ – IN^-). $V_{OUTDIFF}$ is defined as (OUT^+ – OUT^-). See DC test circuit schematic.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
Differential AC Characteristics							
–3dBBW	–3dB Bandwidth	200m$V_{P-P,OUT}$ Differential			1.6		GHz
0.1dBBW	±0.1dB Bandwidth	200m$V_{P-P,OUT}$ Differential			0.18		GHz
0.5dBBW	±0.5dB Bandwidth	200m$V_{P-P,OUT}$ Differential			0.45		GHz
1/f	1/f Noise Corner				25		kHz
SR	Slew Rate	Differential			10		V/ns
$t_{S1\%}$	1% Settling Time	2$V_{P-P,OUT}$			0.8		ns
t_{OFF}	Shutdown Time	SHDN = 0V to 5V			40		ns
t_{ON}	Enable Time	SHDN = 5V to 0V			15		ns
$t_{PWRADJ,OFF}$	PWRADJ Off Time	PWRADJ = 5V to 0V			10		ns
$t_{PWRADJ,ON}$	PWRADJ On Time	PWRADJ = 0V to 5V			5		ns
$t_{CL,OFF}$ 10%	Clamp Release Time	CLHI = 1.5V, V_{CM} = 1.25V, IN^+ = 1.625V to 1.25V, IN^- = 1.25V to 0.875V			1		ns
$t_{CL,ON}$ 10%	Clamp Engage Time	CLHI = 1.5V, V_{CM} = 1.25V, IN^+ = 1.25V to 1.625V, IN^- = 1.25V to 0.875V			5		ns
Common Mode AC Characteristics (V_{CM} Pin)							
–3dBBW	V_{CM} Pin Small Signal –3dB BW	V_{CM} = 0.1V_{P-P}, Measured Single-Ended at Output			10		MHz
SR_{CM}	Common Mode Slew Rate	Measured Single-Ended at Output			2		V/µs
Overrange AC Characteristics (V_{OR} Pin)							
–3dBBW	V_{OR} Pin Small Signal –3dB BW	V_{OR} = 0.1V_{P-P}, CLHI = 2V, IN^+ = 2.4V, IN^- = 0.1V, R_{VOR} = 1k, Measured Single-Ended at Output			200		MHz
$SR_{V\overline{OR}}$	Overrange Slew Rate	Measured Single-Ended at Output			40		V/µs
AC Clamping Characteristics							
t_{OVDR}	Overdrive Recovery Time	1.9$V_{P-P,OUT}$			2		ns

AC ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V^+ = 5V unless otherwise noted, GND = 0V, R_{LOAD} = 500Ω,C_{LOAD} = 6pF. V_{CM} = 1.25V, CLHI = V^+, PWRADJ = V_{CC}, SHDN = 0V unless otherwise noted. V_{INCM} is defined as $(IN^+ + IN^-)/2$. V_{OUTCM} is defined as $(OUT^+ + OUT^-)/2$. V_{INDIFF} is defined as $(IN^+ – IN^-)$. $V_{OUTDIFF}$ is defined as $(OUT^+ – OUT^-)$. See DC test circuit schematic.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
AC Linearity							
10MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–89 –93		dBc dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–100 –110		dBc dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			56		dBm
P1dB	Output 1dB Compression Point				16.1		dBm
70MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–74 –77		dBc dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–86 –96		dBc dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			48		dBm
P1dB	Output 1dB Compression Point				15.8		dBm
140MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–69 –73		dBc dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–80 –91		dBc dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			46		dBm
P1dB	Output 1dB Compression Point				15.8		dBm
200MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–68 –71		dBc dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–78 –87		dBc dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			44		dBm
P1dB	Output 1dB Compression Point				15.8		dBm
240MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–67 –70		dBc dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–76 –85		dBc dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			43		dBm
P1dB	Output 1dB Compression Point				15.7		dBm
300MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–66 –69		dBc dBc

AC ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at T_A = 25°C. V^+ = 5V unless otherwise noted, GND = 0V, R_{LOAD} = 500Ω, C_{LOAD} = 6pF. V_{CM} = 1.25V, CLHI = V^+, PWRADJ = V_{CC}, SHDN = 0V unless otherwise noted. V_{INCM} is defined as (IN^+ + IN^-)/2. V_{OUTCM} is defined as (OUT^+ + OUT^-)/2. V_{INDIFF} is defined as (IN^+ – IN^-). $V_{OUTDIFF}$ is defined as (OUT^+ – OUT^-). See DC test circuit schematic.

SYMBOL	PARAMETER	CONDITIONS		MIN	TYP	MAX	UNITS
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–73 –79		dBc dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			41		dBm
P1dB	Output 1dB Compression Point				15.6		dBm
380MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–66 –68		dBc dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–68 –77		dBc dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω		36	39		dBm
P1dB	Output 1dB Compression Point				15.3		dBm
400MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–65 –68		dBc dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			–68		dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			39		dBm
P1dB	Output 1dB Compression Point				15.3		dBm
500MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω $V_{OUTDIFF}$ = 2.4V_{P-P}			–65 –67		dBc dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			–64		dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			37		dBm
P1dB	Output 1dB Compression Point				15.0		dBm
600MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			–60		dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			–58		dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			34		dBm
P1dB	Output 1dB Compression Point				14.7		dBm
700MHz Signal							
HD3	Third Harmonic Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			–55		dBc
IM3	Third Order Intermodulation Distortion	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			–52		dBc
OIP3	Output Third Order Intercept	$V_{OUTDIFF}$ = 2.4V_{P-P}, R_L = 50Ω			31		dBm
P1dB	Output 1dB Compression Point				14.2		dBm

Note 1: Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

Note 2: The LTC6417C/LTC6417I is guaranteed functional over the case temperature operating range of –40°C to 105°C. θ_{JC} = 6.8°C/W.

Note 3: The LTC6417C is guaranteed to meet specified performance from 0°C to 70°C. It is designed, characterized and expected to meet specified performance from –40°C and 105°C case temperature range but is not tested or QA sampled at these temperatures. The LT6417I is guaranteed to meet specified performance from –40°C to 105°C case temperature range.

Note 4: This parameter is pulse tested.

TYPICAL PERFORMANCE CHARACTERISTICS

HD3 at 30MHz vs V_{CM} Over Temperature

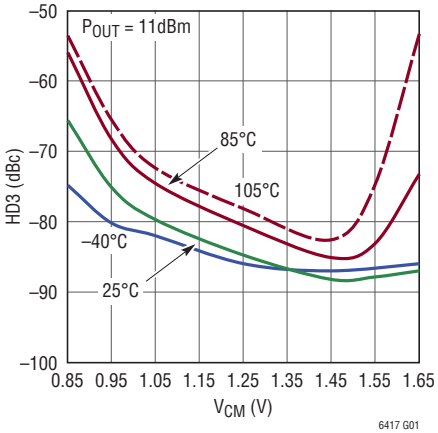

6417 G01

HD3 at 30MHz vs V_{CM} Over V+

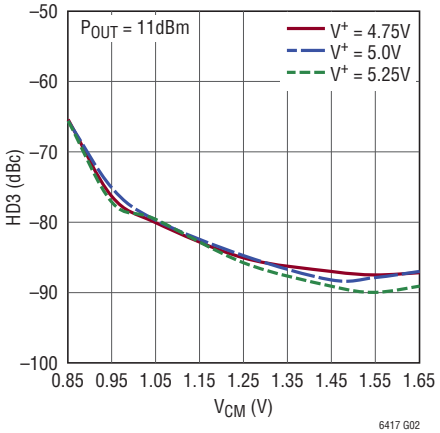

6417 G02

HD3 at 30MHz vs PWRADJ Over Temperature

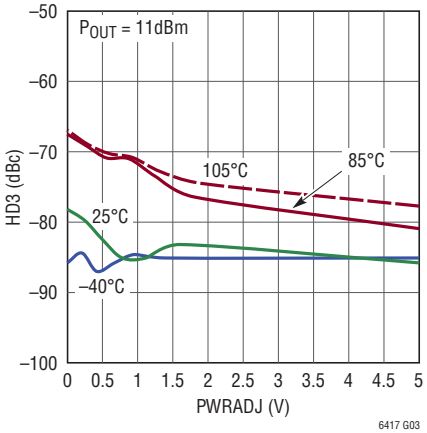

6417 G03

HD3 at 70MHz vs V_{CM} Over Temperature

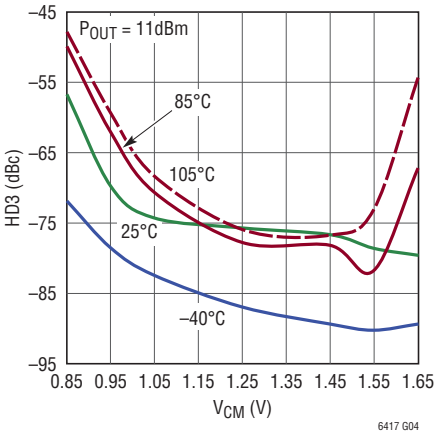

6417 G04

HD3 at 70MHz vs V_{CM} Over V+

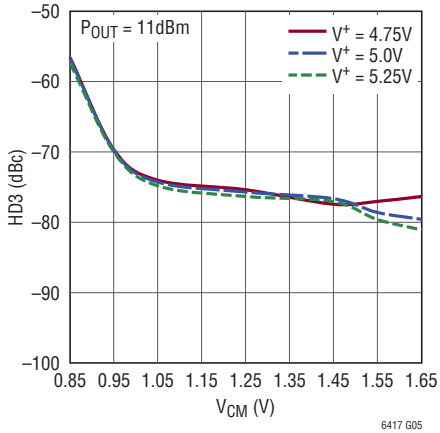

6417 G05

HD3 at 70MHz vs PWRADJ Over Temperature

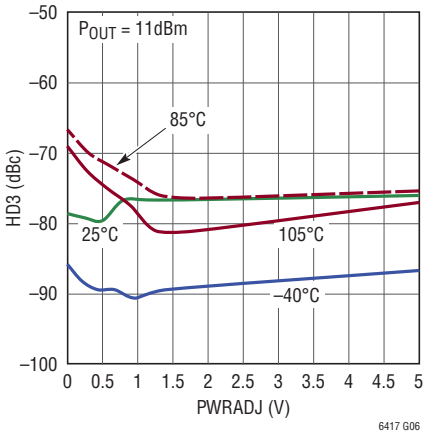

6417 G06

HD3 at 140MHz vs V_{CM} Over Temperature

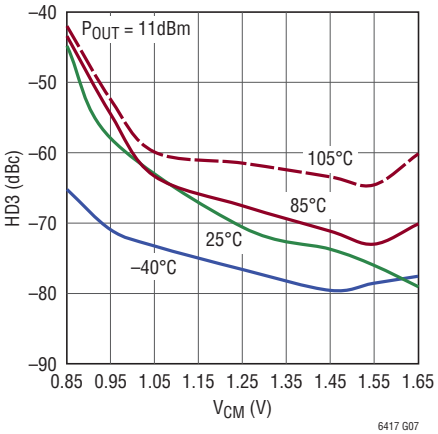

6417 G07

HD3 at 140MHz vs V_{CM} Over V+

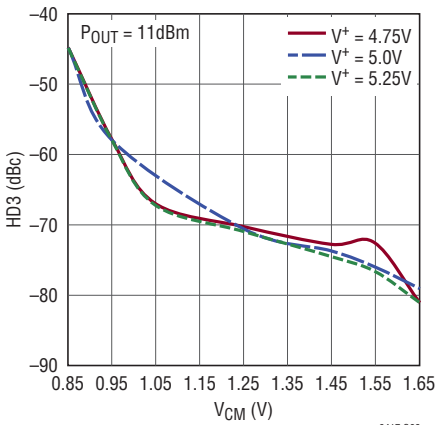

6417 G08

HD3 at 140MHz vs PWRADJ Over Temperature

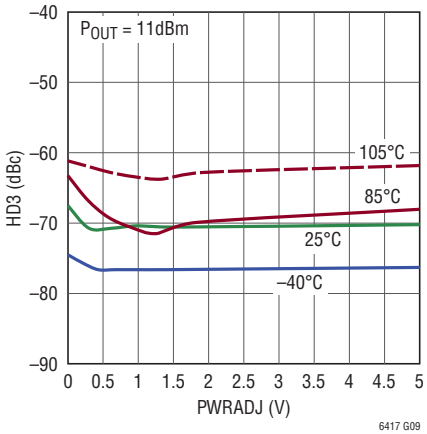

6417 G09

TYPICAL PERFORMANCE CHARACTERISTICS

HD3 at 240MHz vs V_{CM} Over Temperature

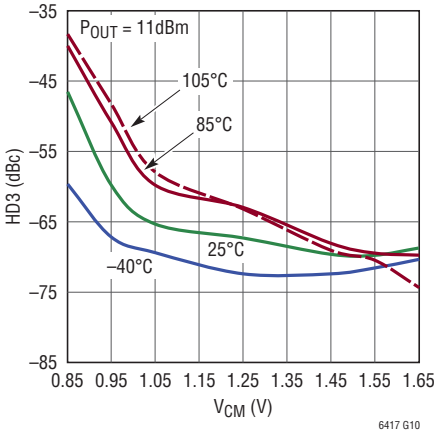

6417 G10

HD3 at 240MHz vs V_{CM} Over V+

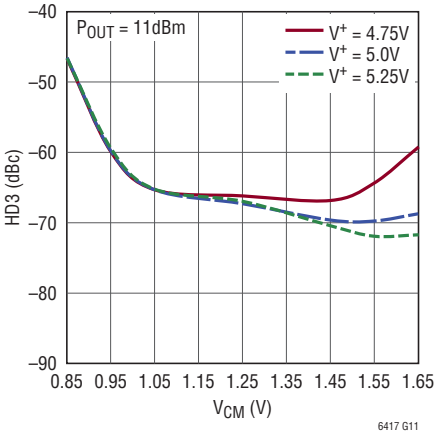

6417 G11

HD3 at 240MHz vs PWRADJ Over Temperature

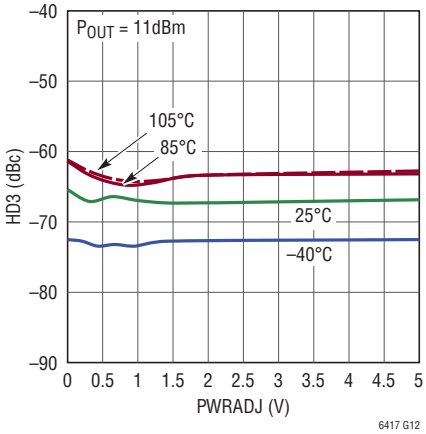

6417 G12

HD3 at 380MHz vs V_{CM} Over Temperature

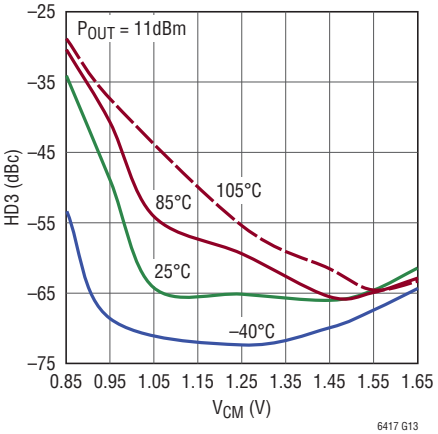

6417 G13

HD3 at 380MHz vs V_{CM} Over V+

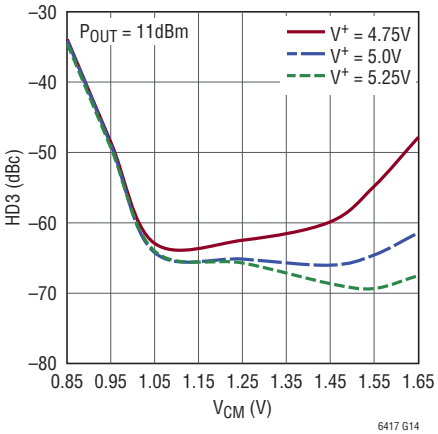

6417 G14

HD3 at 380MHz vs PWRADJ Over Temperature

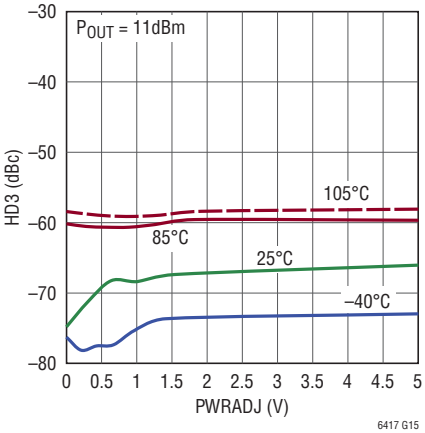

6417 G15

HD3 at 500MHz vs V_{CM} Over Temperature

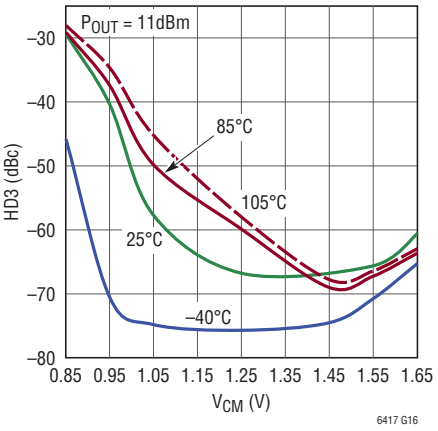

6417 G16

HD3 at 500MHz vs V_{CM} Over V+

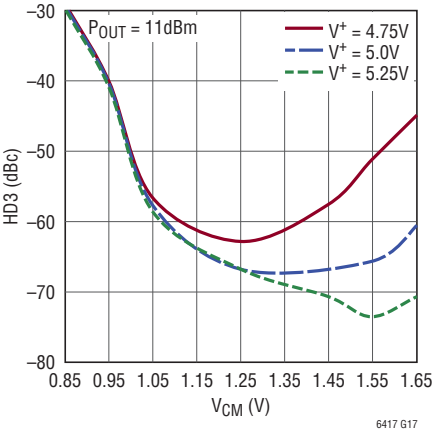

6417 G17

HD3 at 500MHz vs PWRADJ Over Temperature

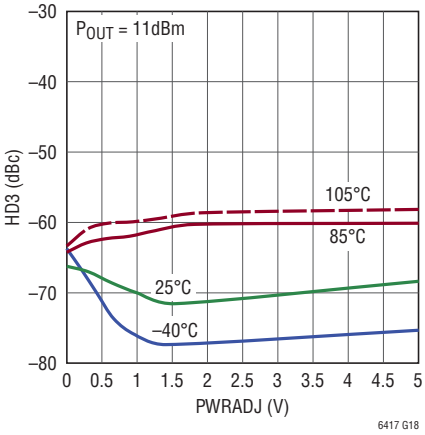

6417 G18

TYPICAL PERFORMANCE CHARACTERISTICS

HD3 at 600MHz vs V_{CM} Over Temperature

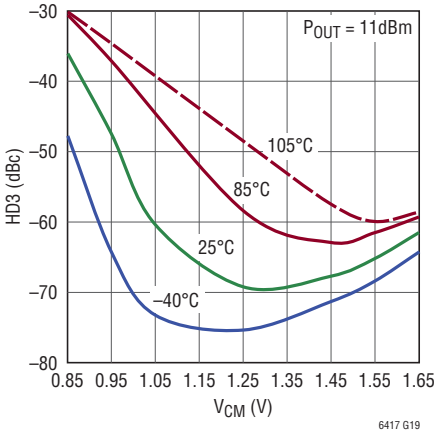

HD3 at 600MHz vs V_{CM} Over V+

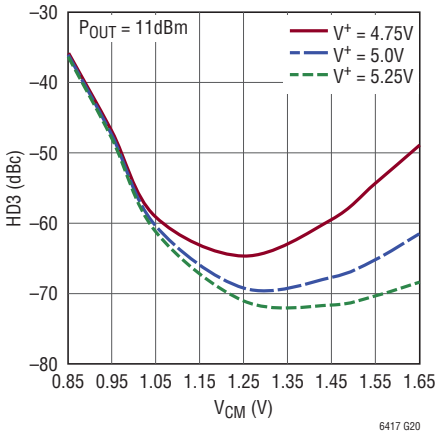

HD3 at 600MHz vs PWRADJ Over Temperature

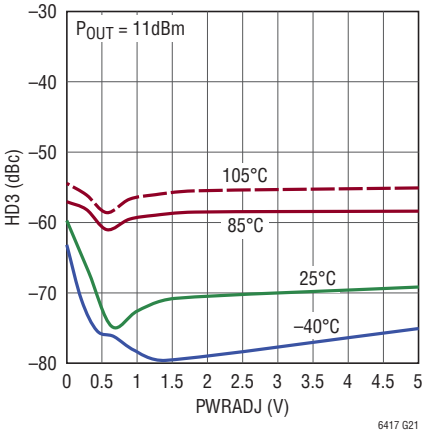

HD3 at 700MHz vs V_{CM} Over Temperature

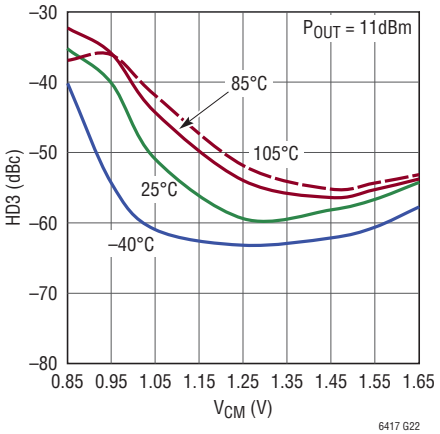

HD3 at 700MHz vs V_{CM} Over V+

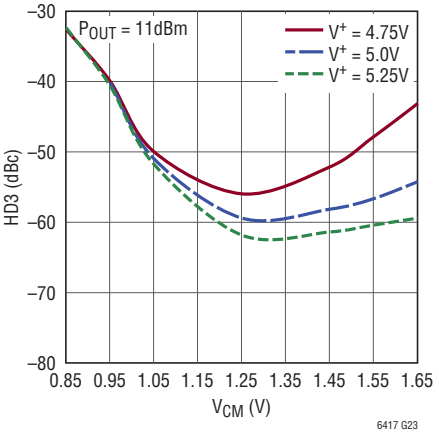

HD3 at 700MHz vs PWRADJ Over Temperature

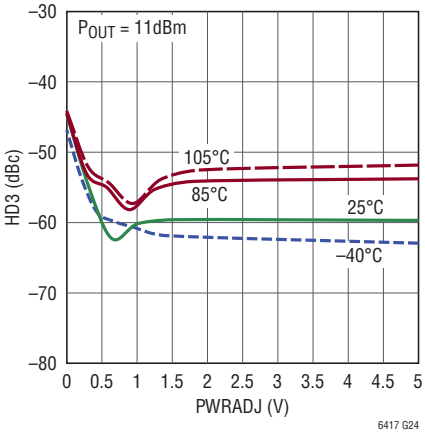

OIP3 at 30MHz vs V_{CM} Over Temperature

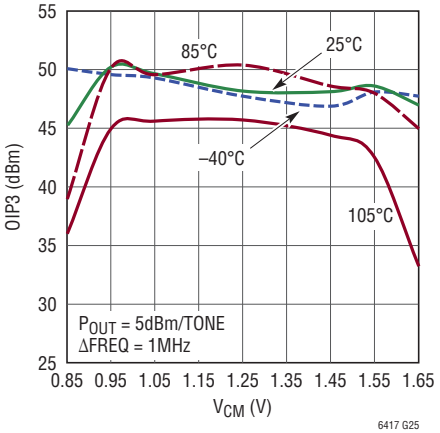

OIP3 at 30MHz vs V_{CM} Over V+

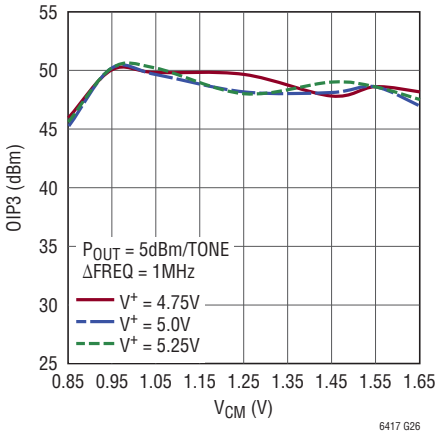

OIP3 at 30MHz vs PWRADJ Over Temperature

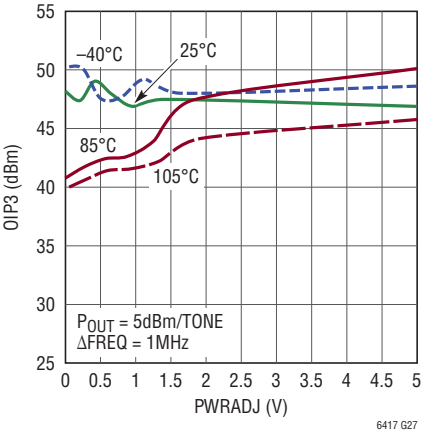

TYPICAL PERFORMANCE CHARACTERISTICS

OIP3 at 70MHz vs V_{CM} Over Temperature

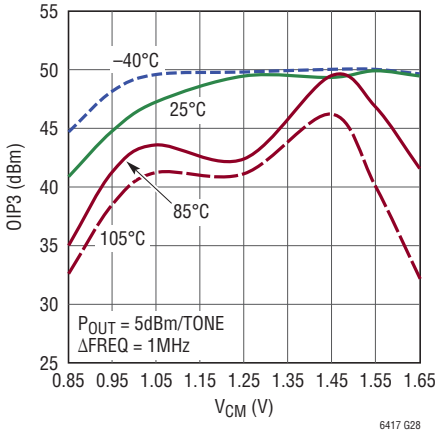

OIP3 at 70MHz vs V_{CM} Over V+

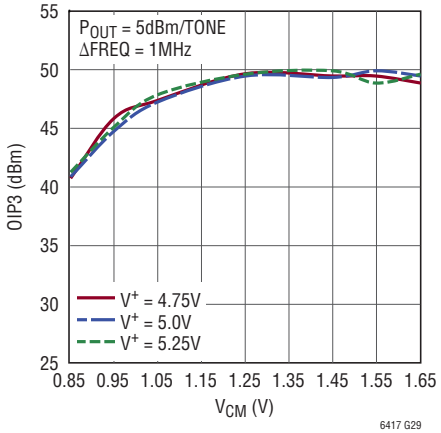

OIP3 at 70MHz vs PWRADJ Over Temperature

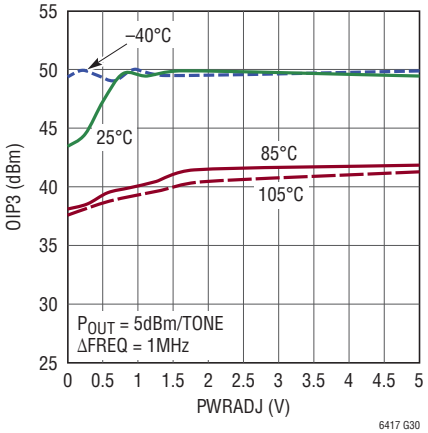

OIP3 at 100MHz vs V_{CM} Over Temperature

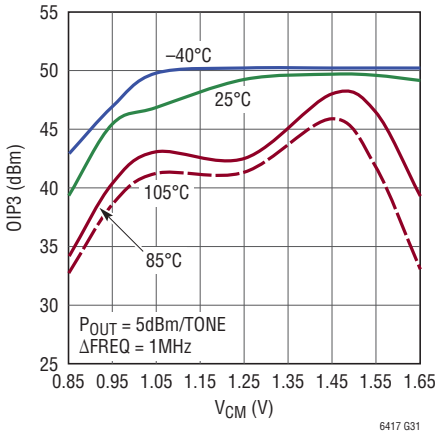

OIP3 at 100MHz vs V_{CM} Over V+

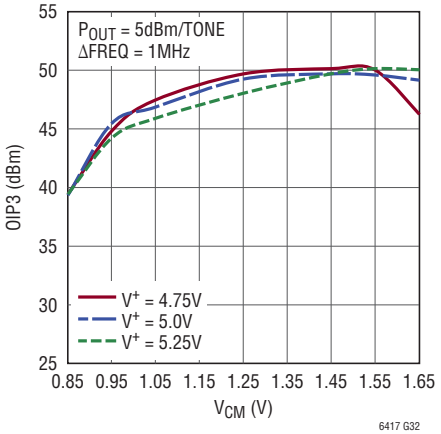

OIP3 at 100MHz vs PWRADJ Over Temperature

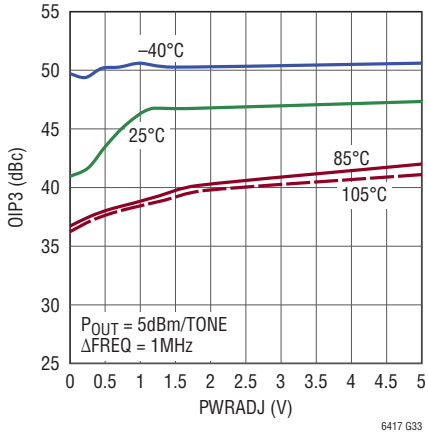

OIP3 at 140MHz vs V_{CM} Over Temperature

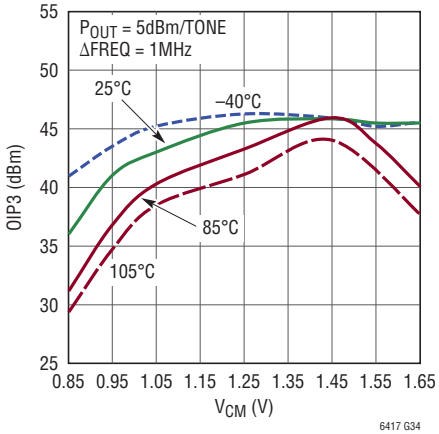

OIP3 at 140MHz vs V_{CM} Over V+

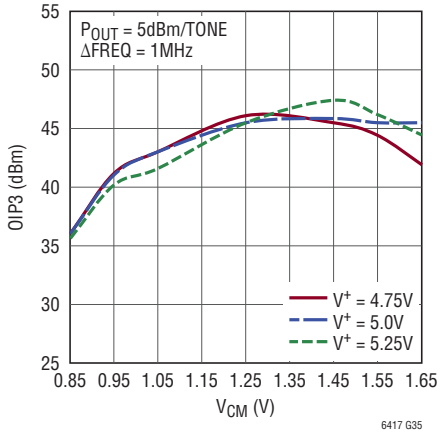

OIP3 at 140MHz vs PWRADJ Over Temperature

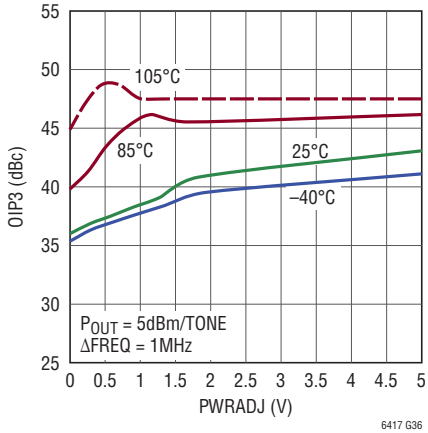

TYPICAL PERFORMANCE CHARACTERISTICS

OIP3 at 240MHz vs V_{CM} Over Temperature

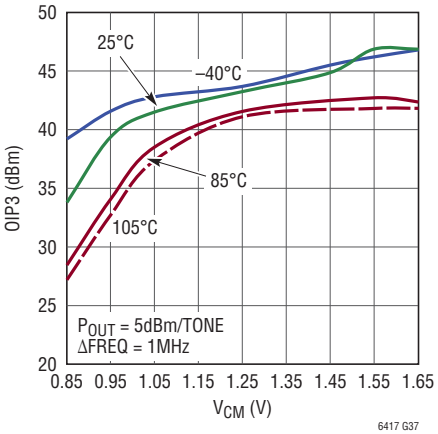

OIP3 at 240MHz vs V_{CM} Over V+

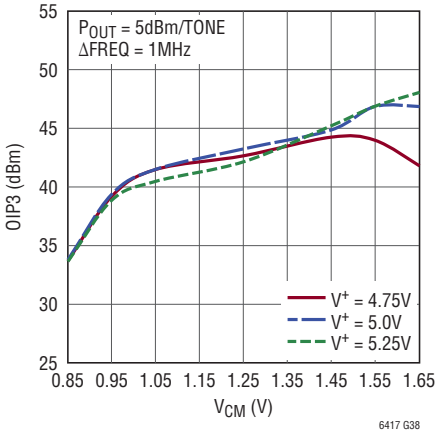

OIP3 at 240MHz vs PWRADJ Over Temperature

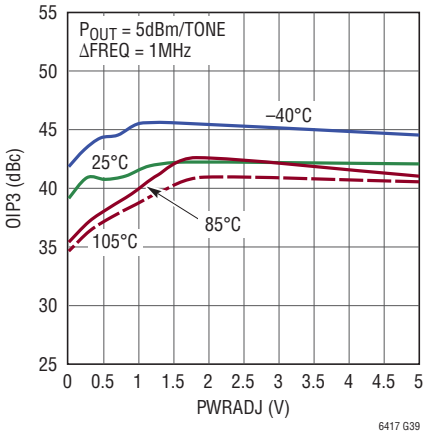

OIP3 at 380MHz vs V_{CM} Over Temperature

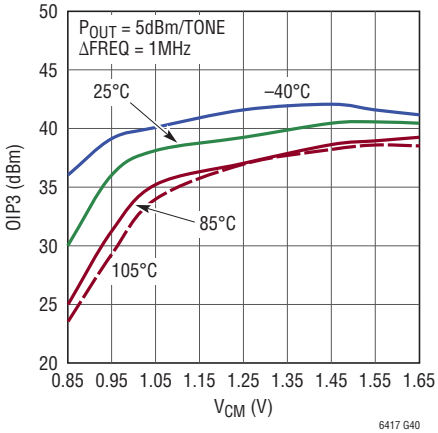

OIP3 at 380MHz vs V_{CM} Over V+

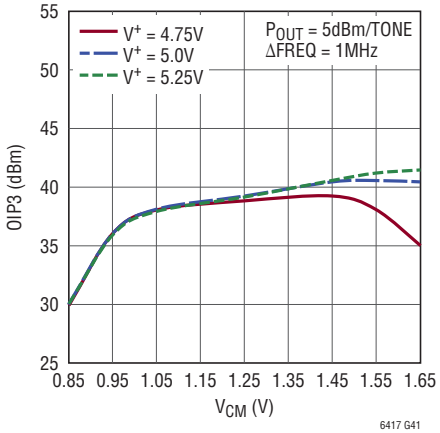

OIP3 at 380MHz vs PWRADJ Over Temperature

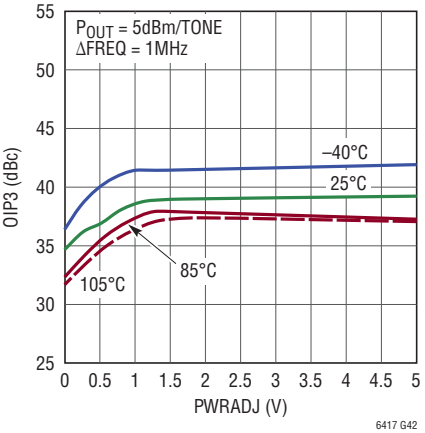

OIP3 at 500MHz vs V_{CM} Over Temperature

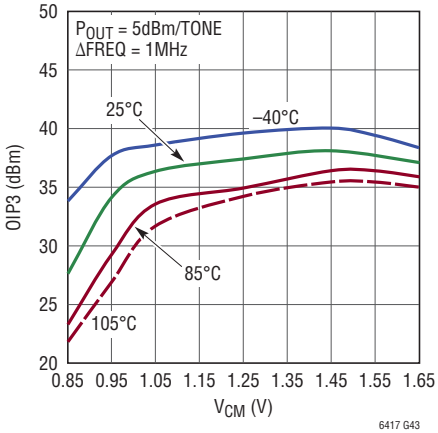

OIP3 at 500MHz vs V_{CM} Over V+

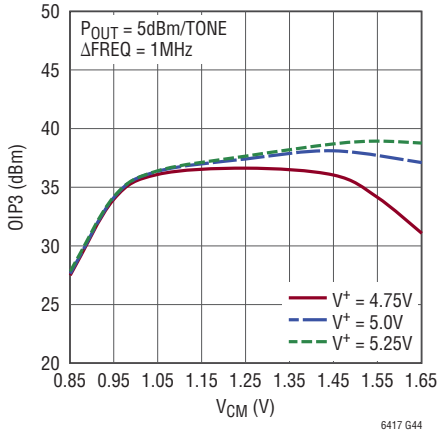

OIP3 at 500MHz vs PWRADJ Over Temperature

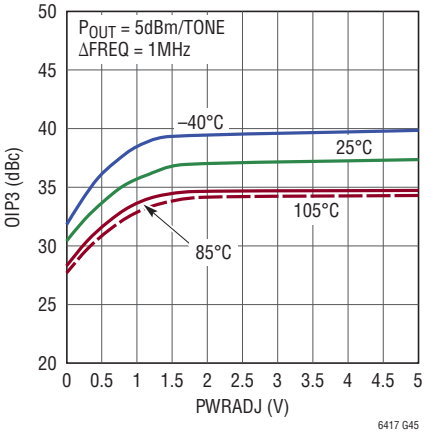

TYPICAL PERFORMANCE CHARACTERISTICS

OIP3 at 600MHz vs V_{CM} Over Temperature

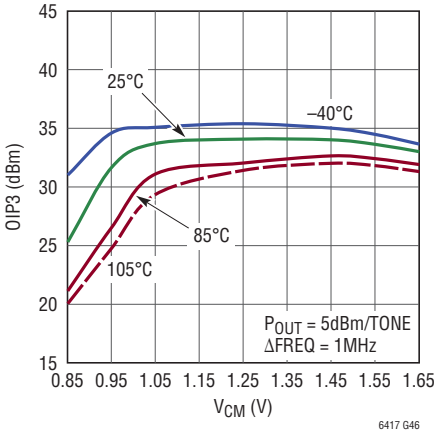

OIP3 at 600MHz vs V_{CM} Over V+

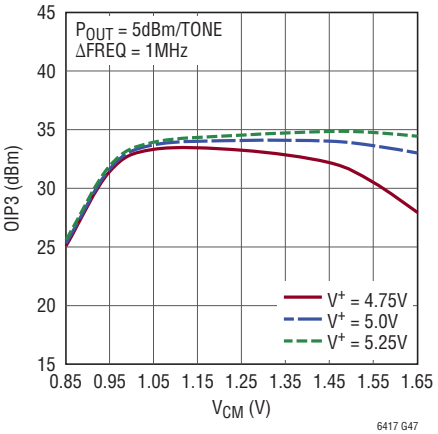

OIP3 at 600MHz vs PWRADJ Over Temperature

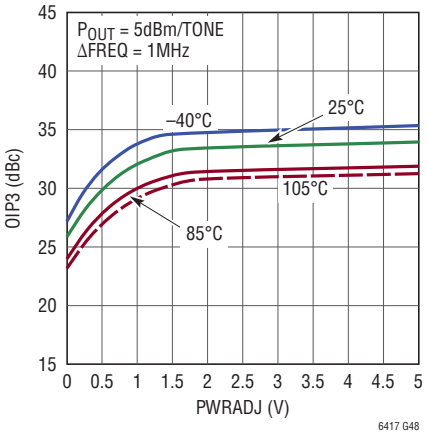

OIP3 at 700MHz vs V_{CM} Over Temperature

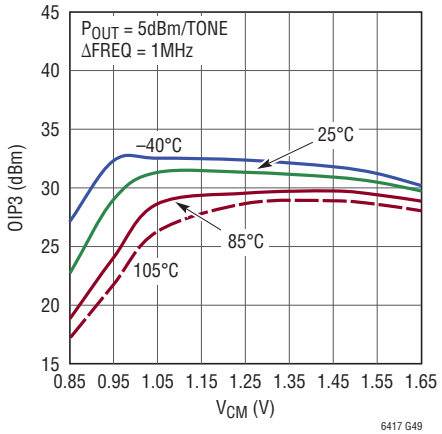

OIP3 at 700MHz vs V_{CM} Over V+

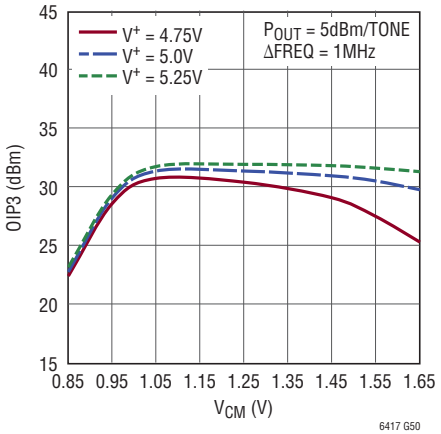

OIP3 at 700MHz vs PWRADJ Over Temperature

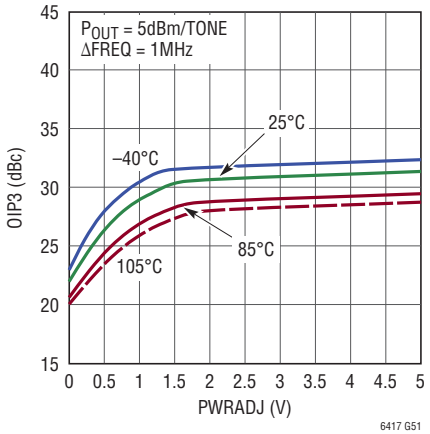

Output 1dB Compression vs Frequency and Supply Voltage

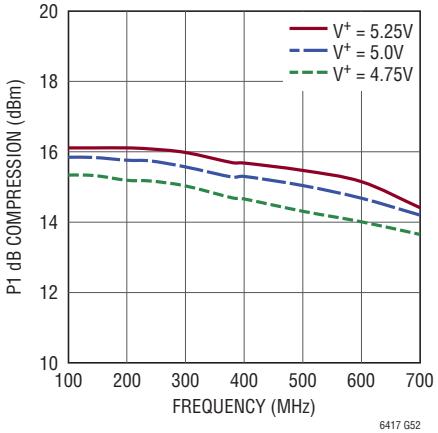

Supply Current vs Supply Voltage

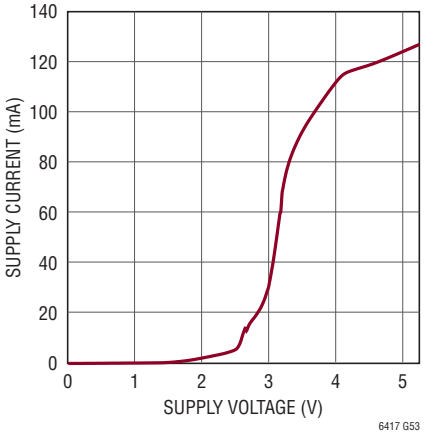

Supply Current vs PWRADJ

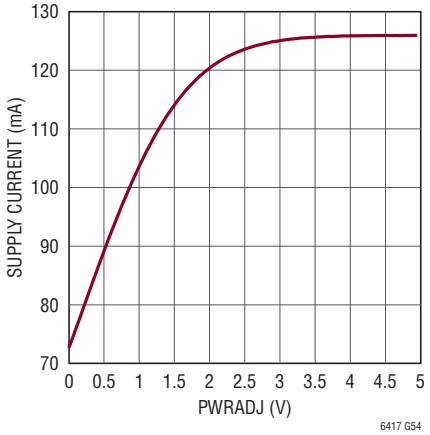

TYPICAL PERFORMANCE CHARACTERISTICS

Small Signal Transient Response, Falling Edge

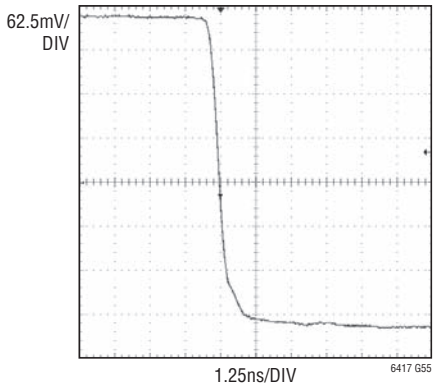

Small Signal Transient Response, Falling Edge with Input

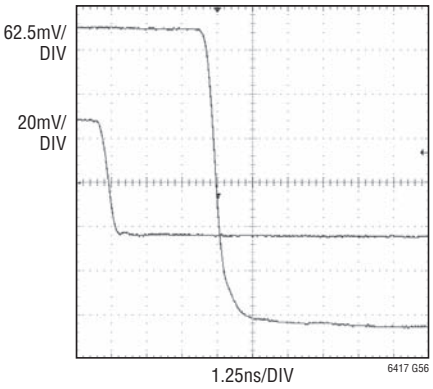

Small Signal Transient Response, Rising Edge

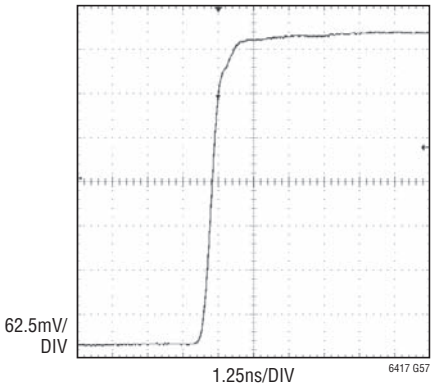

Overdrive Recovery and Overrange Response

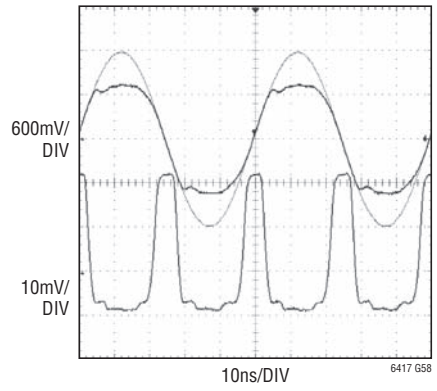

Differential Input Return Loss (S11) vs Frequency

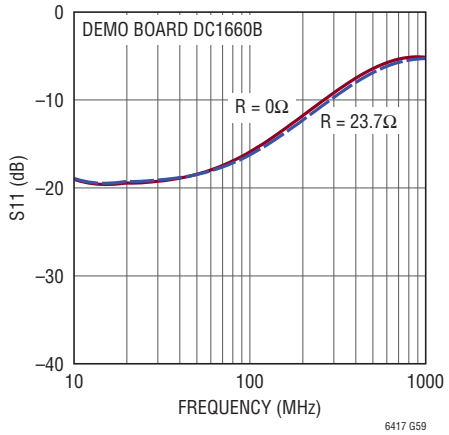

Differential Reverse Isolation (S12) vs Frequency

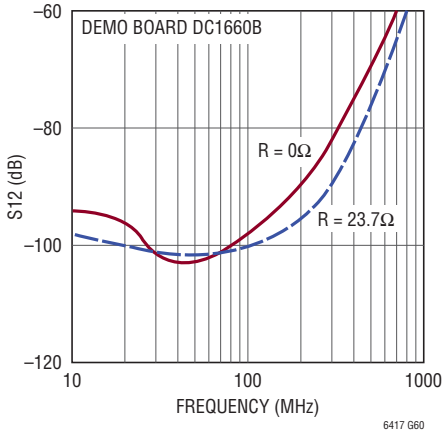

Differential Forward Gain (S21) vs Frequency

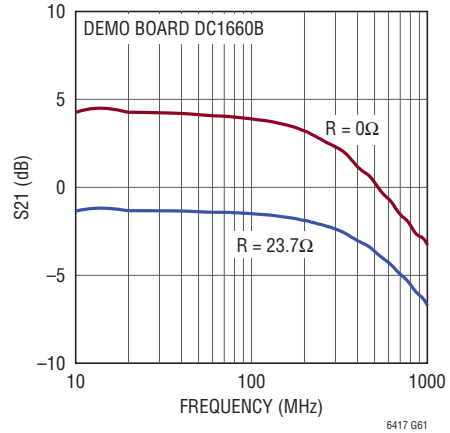

Differential Output Return Loss (S22) vs Frequency

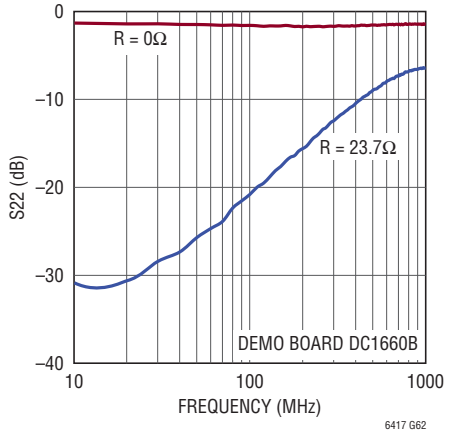

LTC6417 Driving LTC2209 16-Bit ADC, 32K Point FFT, f_{IN} = 69.5MHz, –1dBFS, PGA = 0

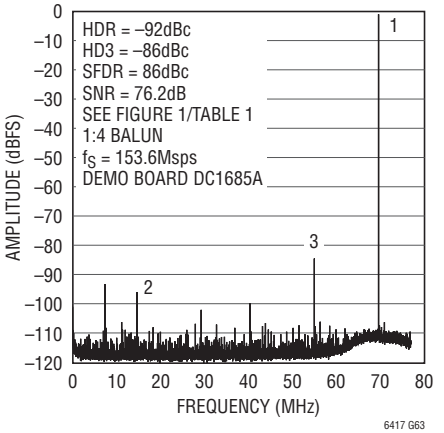

TYPICAL PERFORMANCE CHARACTERISTICS

LTC6417 Driving LTC2209 16-Bit ADC, 64K Point FFT, f_{IN} = 140MHz, –1dBFS, PGA = 0

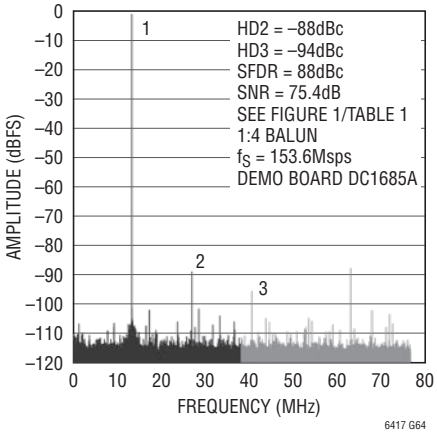

LTC6417 Driving LTC2209 16-Bit ADC, 64K Point FFT, f_{IN} = 270MHz, –1dBFS, PGA = 0

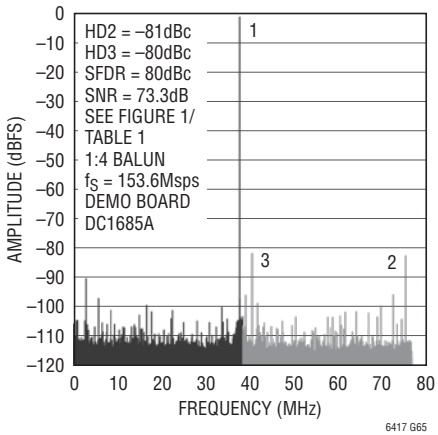

LTC6417 Driving LTC2209 16-Bit ADC, 64K Point FFT, f_{IN} = 380MHz, –1dBFS, PGA = 0

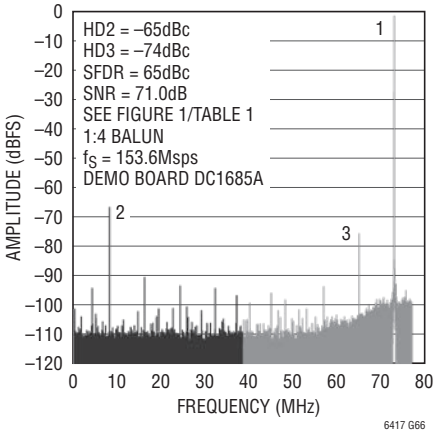

LTC6417 Driving LTC2209 16-Bit ADC, 32K Point FFT, f_{IN} = 69.5MHz and 70.5MHz, –7dBFS/Tone, PGA = 0

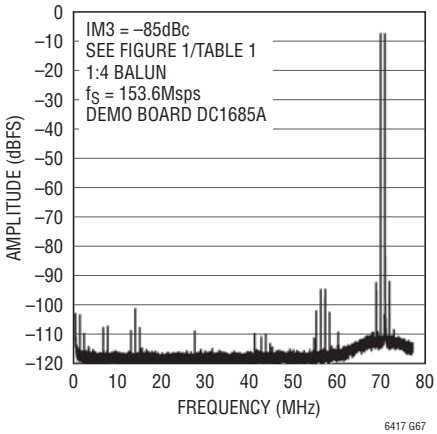

LTC6417 Driving LTC2209 16-Bit ADC, 64K Point FFT, f_{IN} = 139.5MHz and 140MHz, –7dBFS/Tone, PGA = 0

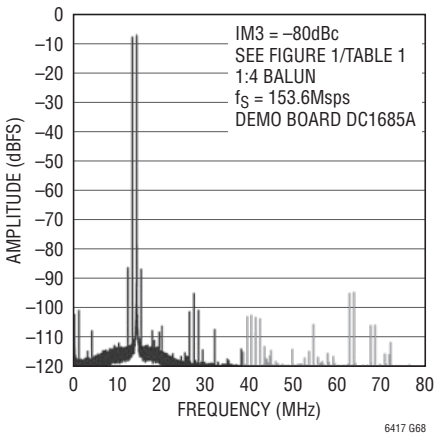

LTC6417 Driving LTC2209 16-Bit ADC, 64K Point FFT, f_{IN} = 269.5MHz and 270.5MHz, –7dBFS/Tone, PGA = 0

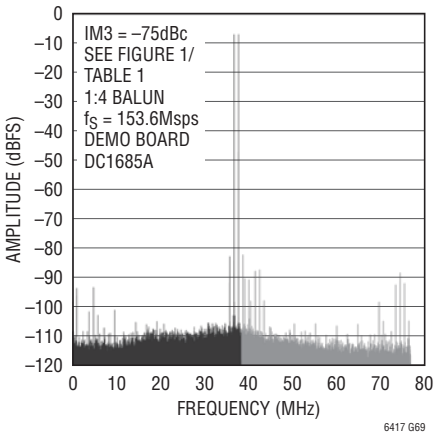

LTC6417 Driving LTC2209 16-Bit ADC, 64K Point FFT, f_{IN} = 379.5MHz and 380.5MHz, –7dBFS/Tone, PGA = 0

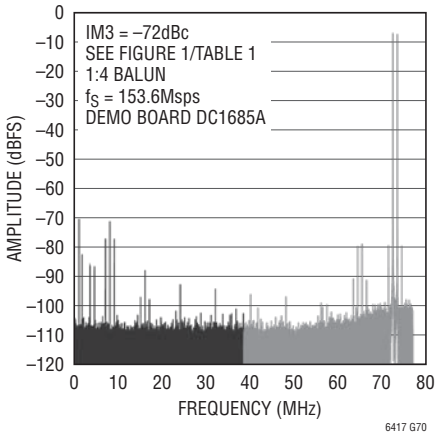

Input Referred Noise Voltage vs Frequency and Noise Figure for the DC1660B with 1:1 Input Balun

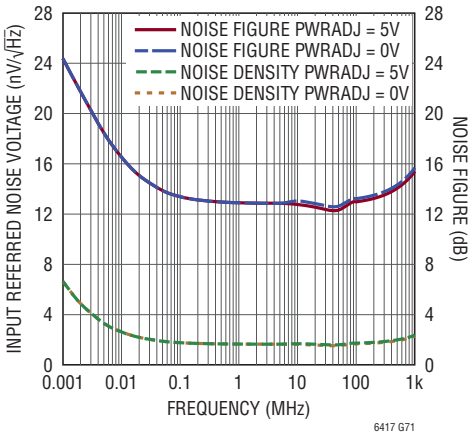

Input Referred Noise Voltage vs Frequency and Noise Figure for the DC1660B with 1:4 Input Balun

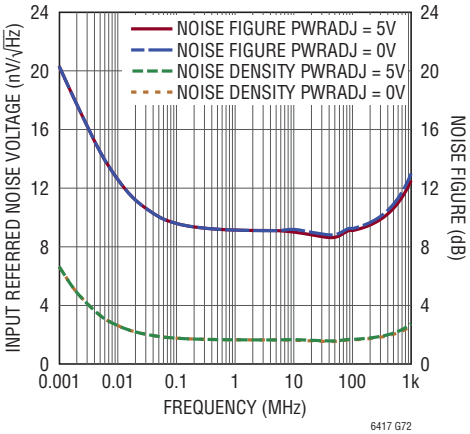

PIN FUNCTIONS

V^+ (Pins 1, 6, 11, 16): Positive Power Supply. Typically 5V. Split supplies are possible as long as the voltage between V^+ and GND is 4.75V to 5.25V. Bypass capacitors of 680pF and 0.1µF as close to the part as possible should be used between the supplies.

CLHI (Pin 2): High Side Clamp Voltage. The voltage applied to the CLHI pin defines the upper voltage limit of the OUT^+ and OUT^- pins. This voltage should be set at least 300mV above the upper voltage range of the ADC. On a 5V supply, the CLHI pin will float to a 2.5V default voltage. CLHI has a Thevenin equivalent of approximately 4.8kΩ and can be overdriven by an external voltage. The CLHI pin should be bypassed with a high quality ceramic bypass capacitor of at least 0.01µF.

GND (Pins 3, 7, 10, 17, 20, Exposed Pad Pin 21): Negative Power Supply. Normally tied to ground. All pins and the exposed pad must be tied to the same voltage. GND may be tied to a voltage other than ground as long as the voltage between V^+ and GND is 4.75V to 5.25V. If the GND pins are not tied to ground, bypass each with 680pF and 0.1µF capacitors as close to the package as possible. The exposed pad must be soldered to the printed circuit board ground plane for good heat transfer.

NC (Pins 4, 13): No Connection. These pins are not connected internally.

PWRADJ (Pin 5): Power Adjust Voltage. The voltage applied to this pin scales the bias current internal to the LTC6417. The PWRADJ pin will float to a 1.6V default voltage. PWRADJ has a Thevenin equivalent resistance of approximately 14.5k and can be overdriven by an external voltage. The PWRADJ pin should be bypassed with a high quality ceramic bypass capacitor of at least 0.01µF.

IN^+, IN^- (Pin 8, Pin 9): Non-inverting and inverting input pins of the buffer, respectively. These pins are high impedance, approximately 9.5k. If AC-coupled, these pins will self bias to the voltage applied to the V_{CM} pin.

SHDN (Pin 12): This pin puts the LTC6417 in sleep mode when pulled high. If no voltage is applied to the SHDN pin, it floats down to the same potential as GND.

$V_{\overline{OR}}$ (Pin 14): Overrange Output. This pin, by default at 3.4V, will be pulled down to GND, when one or both input signals go beyond the minimum or maximum swing set by the CLHI and V_{CM} pins.

V_{CM} (Pin 15): This pin sets the output common mode voltage seen at OUT^+ and OUT^- by driving IN^+ and IN^- through a buffer with a high output resistance of 9.5k. The V_{CM} pin has a Thevenin equivalent resistance of approximately 2.7k and can be overdriven by an external voltage. If no voltage is applied to V_{CM}, it will float to a default voltage of approximately 1.25V on a 5V supply. The V_{CM} pin should be bypassed with a high quality ceramic bypass capacitor of at least 0.01µF.

OUT^-, OUT^+ (Pin 18, Pin 19): Outputs.

DC TEST CIRCUIT SCHEMATIC

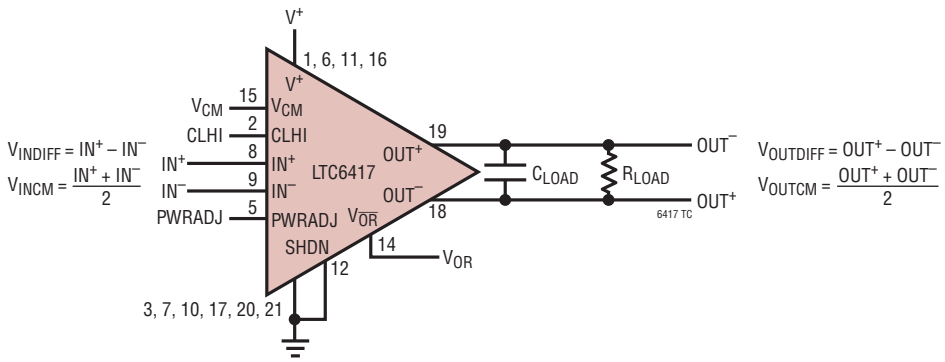

BLOCK DIAGRAM

LTC6417 Simplified Schematic

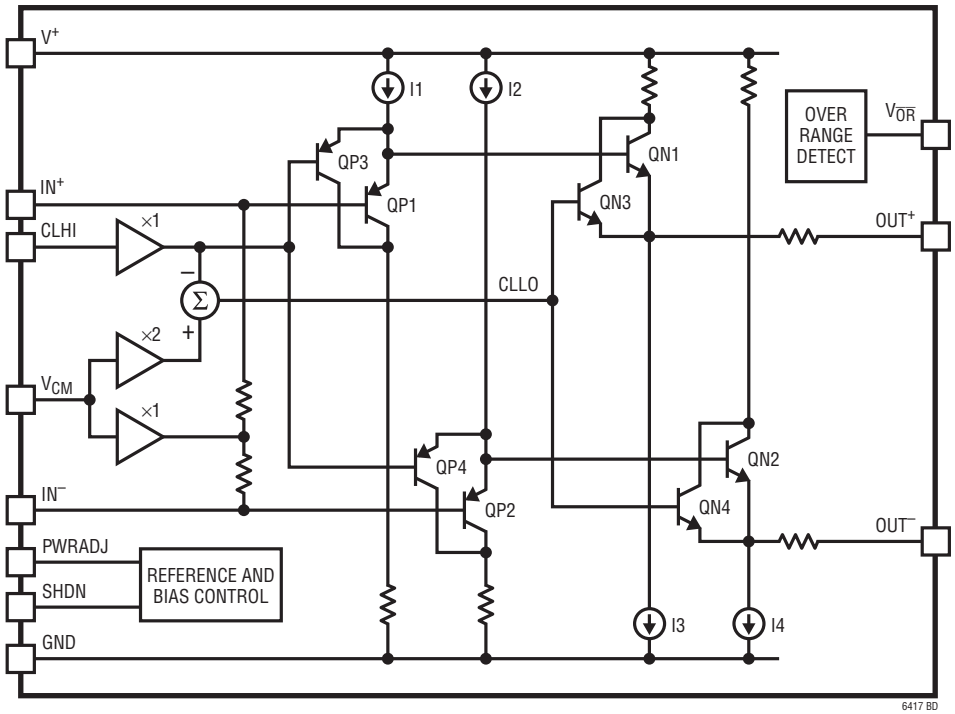

APPLICATIONS INFORMATION

Circuit Operation

The LTC6417 is a low noise and low distortion fully differential unity gain ADC driver with a –3dB bandwidth spanning DC to 1.6GHz, a differential input impedance of 18.5kΩ, and a differential output impedance of 3Ω. The LTC6417 is composed of a fully differential buffer with output common mode voltage control circuitry and high speed voltage-limiting clamps at the output. Lowpass or bandpass filters are easily implemented with just a few external components. The LTC6417 is very flexible in terms of I/O coupling. It can be AC- or DC-coupled at the inputs, the outputs or both. When using the LTC6417 with DC-coupled inputs, best performance is obtained with an input common mode voltage between 1V and 1.5V. For AC-coupled operation, the LTC6417 will take the voltage applied to the V_{CM} pin and use it to bias the inputs so that the output common mode voltage equals V_{CM}, thus no external circuitry is needed. The V_{CM} pin has been designed to directly interface with the V_{CM} pin found on Linear Technology's high speed ADC families.

Input Impedance and Matching

The LTC6417 has a high differential input impedance of 18.5kΩ. The differential inputs may need to be terminated to a lower value impedance, e.g. 50Ω, in order to provide an impedance match for the source. Figure 1 shows input matching and single-ended to differential conversion using a 1:1 balun, while Figure 2 shows a similar circuit using a 1:4 balun to achieve an additional 6dB of voltage gain. These circuits provide a wideband impedance match. The balun and matching resistors must be placed close to the input pins in order to minimize the rejection due to input mismatch. In Figures 1 and 2, the capacitor center-tapping the two input termination resistors improves high frequency common mode rejection. As an alternative to this wideband approach, a narrowband impedance match can be used at the inputs of the LTC6417 for frequency selection and/or noise reduction.

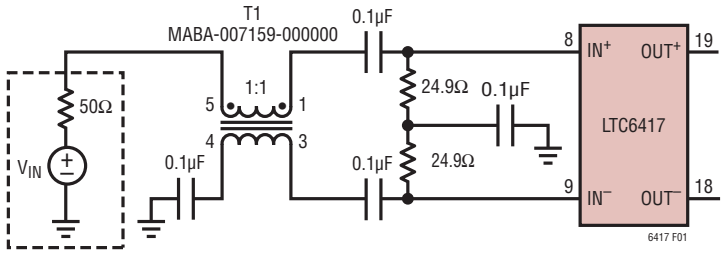

Figure 1. Input Termination for Differential 50Ω Input Impedance Using a 1:1 Balun

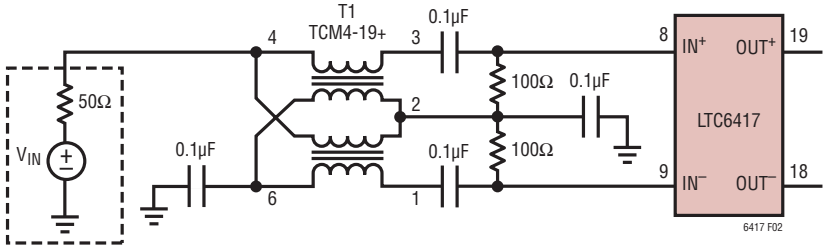

Figure 2. Input Termination for Differential 50Ω Input Impedance Using a 1:4 Balun

APPLICATIONS INFORMATION

The noise figure of the LTC6417 application circuit also depends upon the input termination. For example, the input 1:4 balun in Figure 2 improves noise figure by adding 6dB of voltage gain at the inputs. A trade-off between gain and noise is obvious when constant noise figure circle and constant gain circle are plotted within the same input Smith Chart. This technique can be used to determine the optimal source impedance for a given gain and noise requirement.

Output Match and Filter

The LTC6417 provides an output resistance of 1.5Ω at each output. In most cases, the LTC6417 can be used to drive an ADC without back termination but for testing purposes, Figure 3 shows the LTC6417 driving a differential 50Ω load impedance using a 1:1 balun. If output matching for the 1:1 balun is desired, resistors of 23.7Ω should be inserted in series with each LTC6417 output. This is shown in Figure 4 where the LTC6417 is driving a differential 100Ω load impedance.

As mentioned above, the LTC6417 can drive an ADC without external output impedance matching, but improved performance can usually be obtained with the addition of a few components. Figure 5 shows a 6th order bandpass filter with a 148MHz center frequency, –3dB points of 85MHz and 210MHz used for driving the LTC2209 16-bit ADC. In the passband the filter has less than 1 dB ripple. This higher order filter has a sharp roll-off outside its passband, therefore it rejects noise and suppresses distortion components in its stopband. To double the filter center frequency, halve the capacitor and inductor values, and maintain resistor values; this also doubles the filter bandwidth.

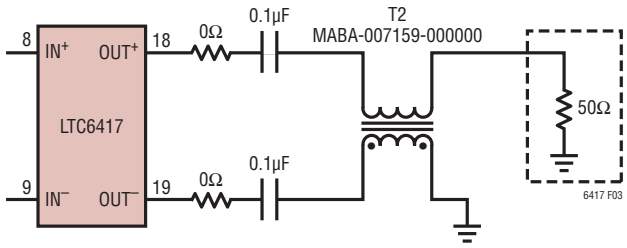

Figure 3. LTC6417 with No Back Termination Driving a 50Ω Load Using a 1:1 Balun

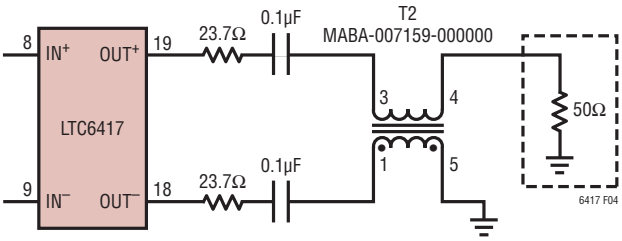

Figure 4. Output Termination for Differential 50Ω Load Using a 1:1 Balun

APPLICATIONS INFORMATION

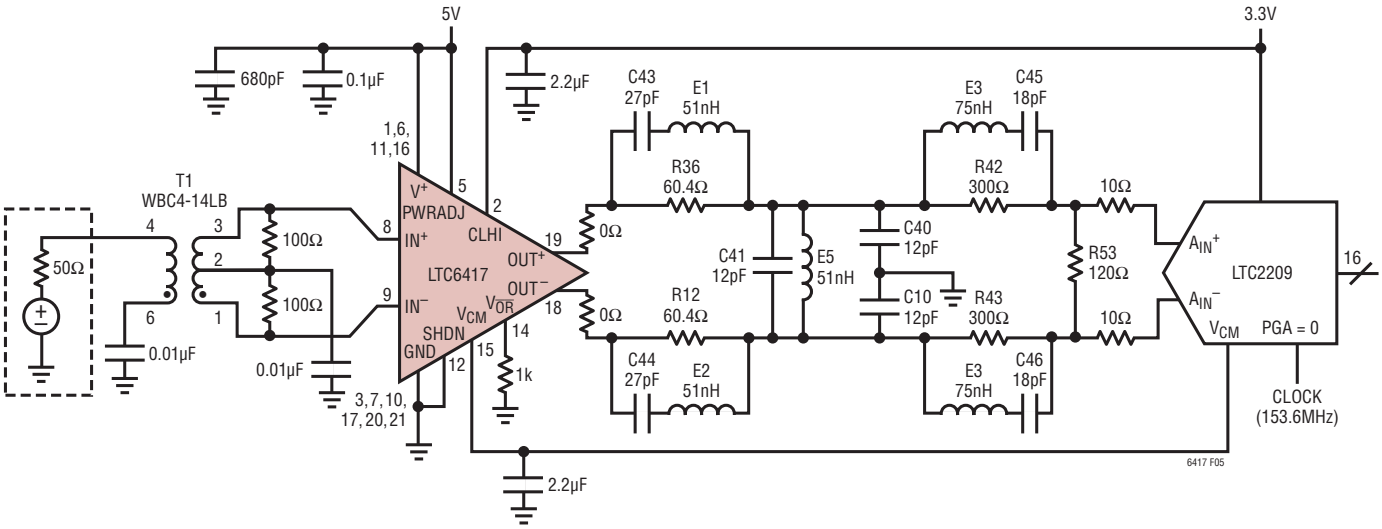

Figure 5. DC1685A Simplified Schematic with Suggested Bandpass Filter for Driving an LTC2209 16-Bit ADC at 140MHz

Table 1. Bandpass Filter Component Values for Different Input Frequencies

	INPUT FREQUENCIES			
COMPONENTS	**70MHz**	**140MHz**	**270MHz**	**380MHz**
R12 = R36	60.4Ω	60.4Ω	60.4Ω	60.4Ω
C43 = C44	56pF	27pF	15pF	12pF
E1 = E2	100nH	51nH	27nH	18nH
C41	47pF	12pF	12pF	10pF
C10 = C40	13pF	12pF	3.3pF	2.7pF
E5	100nH	51nH	27nH	18nH
R42 = R43	300Ω	300Ω	300Ω	300Ω
R53	120Ω	120Ω	120Ω	120Ω
C45 = C46	39pF	18pF	10pF	8.2pF
E3 = E4	150nH	75nH	39nH	27nH

APPLICATIONS INFORMATION

Output Common Mode Adjustment

For AC-coupled applications, the output common mode voltage is set by the V_{CM} pin. An internal buffer, as shown in Figure 6, couples the voltage on the V_{CM} pin to the inputs via high impedance resistors. Because the input common mode voltage is approximately the same as the output common mode voltage, both are approximately equal to the voltage applied to the V_{CM} pin. For DC-coupled applications, the internal V_{CM} is overdriven by the input signal. The V_{CM} pin has a Thevenin equivalent resistance of 2.7k and can be overdriven by an external voltage. The V_{CM} pin floats to a default voltage of 1.25V on a 5V supply. The output common mode voltage is capable of tracking V_{CM} in a range from 0.29V to 2.25V on a 5.0V supply. The V_{CM} pin can be floated, but it should always be bypassed close to the LTC6417 with a 0.1µF bypass capacitor to GND. When interfacing with A/D converters such as the LTC22xx families, the V_{CM} pin can be connected to the V_{CM} output pin of the ADC, as shown in Figure 5.

Clamping, the CLHI Pin and the V_{CM} Pin

The CLHI pin is used to set the high side clamp voltage of the high speed internal circuitry.

This limits the single-ended maximum and minimum voltage excursion at each of the outputs. This feature is extremely important in applications with input signals having very large peak-to-average ratios such as cellular base station receivers.

Internal circuitry generates a symmetric low side clamp voltage with respect to the common mode voltage V_{CM} (Figures 7 and 8). The LTC6417 clamp control circuitry features two additional mechanisms. First, internally imposed maximum swing of 2.5V and minimum swing of 0.2V ensure that the transistors do not go into deep saturation. This ensures a quick recovery after the clamps are released. Second, if CLHI voltage is less than V_{CM}, internal CLLO starts to track CLHI. This limits output swing and protects output transistors. Since the clamp response is on the order of 5ns to clamp and 1ns to release, clamp circuit becomes less effective at frequencies beyond 160MHz.

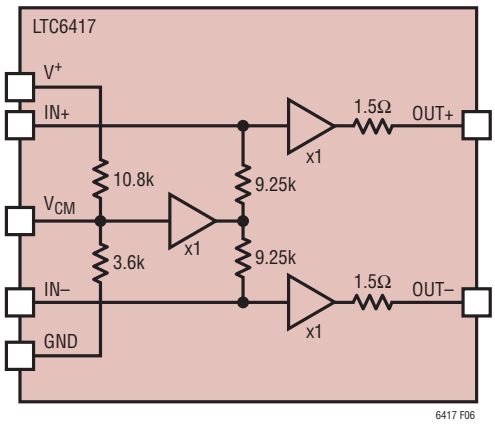

Figure 6. LTC6417 Internal Topology Showing the Common Mode Buffer Biasing the Inputs

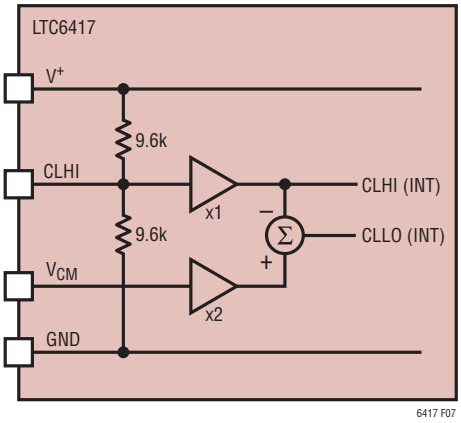

Figure 7. Internal Circuitry Generating Symmetric Clamp Voltages with Respect to V_{CM}

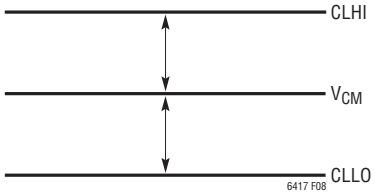

Figure 8. Symmetric High- and Low-Side Clamp Voltages with Respect to V_{CM}

APPLICATIONS INFORMATION

If a very large signal arrives at the LTC6417, the voltages applied to the CLHI and V_{CM} pins will determine the maximum and minimum output swing. Once the input signal returns to the normal operating range, the LTC6417 returns to linear operation within 2ns. For DC-coupled operation, the common mode of the input signals might be different than the voltage on the V_{CM} pin. The minimum swing will still be set by the voltages applied to the V_{CM} and CLHI pins.

CLHI is a high impedance input. It has an input impedance of 4.8k. On a 5V supply, CLHI self-biases to 2.5V. To limit the signal swing to a subsequent stage's power supply, e.g. an ADC such as the LTC2165, simply connect CLHI to the positive supply pin of the LTC2165. The CLHI pin should be bypassed with a 0.1µF capacitor as close to the LTC6417 as possible.

The $V_{\overline{OR}}$ Pin

The $V_{\overline{OR}}$, overrange pin signals an overrange condition when one or both inputs exceed the minimum or maximum signal swing limits set by the CLHI and V_{CM} pins.

The LTC6417 $V_{\overline{OR}}$ pin can be used by a control system to limit the input power dynamically. This is very useful in applications where the overload response of the complete system would be too slow.

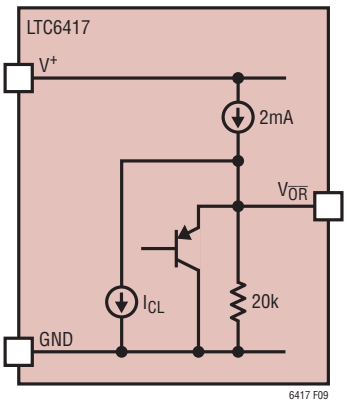

Figure 9. LTC6417 Internal Topology Showing $V_{\overline{OR}}$ Pin with Pull-Down Resistor and Clamp

The $V_{\overline{OR}}$ pin, as shown in Figure 9, is internally connected to a current source sourcing 2mA, plus an internal 20k resistor pull-down to GND. An internal clamp limits the maximum output to 3.4V. As soon as one of the inputs goes beyond the limits, and therefore engages one of the clamps, the output current, hence, the $V_{\overline{OR}}$ voltage goes to zero. The dynamic response of the $V_{\overline{OR}}$ pin can be adjusted with an external resistor and an optional external capacitor. For a high speed operation, add a 50Ω resistor from $V_{\overline{OR}}$ to GND, resulting in a high speed signal with 100mV swing.

The PWRADJ Pin

The voltage applied to the PWRADJ pin scales the supply current and performance of the LTC6417. This is useful for reducing power consumption in applications where linearity of the LTC6417 exceeds the linearity of the other components in the system; hence LTC6417's linearity can be derated without effecting system performance. PWRADJ is a high impedance input. It has an input impedance of 14.5k. On a 5V supply, PWRADJ self-biases to 1.6V. For full power, simply connect PWRADJ to the positive supply V^+. For minimum power, short the PWRADJ pin to GND. The PWRADJ pin should be bypassed with a 0.1µF capacitor as close to the LTC6417 as possible. LTC6417 performance vs PWRADJ can be found in the graphs.

The SHDN Pin

When pulled high, the SHDN pin puts the LTC6417 in sleep mode, significantly reducing supply current. SHDN is a high impedance input. It has an input impedance of 10.5kΩ. If the SHDN pin is not driven with an external voltage, it floats down to the same potential as GND, keeping the LTC6417 enabled. The SHDN pin should be bypassed with a 0.1µF capacitor as close to the LTC6417 as possible.

In sleep mode, the input and output stages are turned off, but the input and output clamps are kept alive to protect the part against overvoltage.

The supply current in sleep mode is only 24mA, instead of the typical 125mA. But should the clamps turn on, the current drawn from the supply can be as high as 180mA.

APPLICATIONS INFORMATION

This can be avoided by following a few precautions when putting the LTC6417 in sleep mode:

- Do not force the outputs below the inputs, this will turn the output stages on.
- Either float CLHI or tie it to V_{CC}. This will allow a wider signal range at the inputs before the clamps are activated.
- Maintain the inputs below CLHI or 2.5V whichever is lower, otherwise the input clamps will be activated.
- Do not short V_{CM} or the outputs to GND, in either case the output clamps will turn on. Current drawn from the supply can be as high as 180mA.
- Float the outputs if possible. The outputs will be pulled down by internal resistors to V_{CM}.

Heeding these precautions will protect the LTC6417 as well any part it is driving, while maintaining a low current consumption in sleep mode.

Noise and Noise Figure

The LTC6417's differential input referred voltage and current noise densities are 1.5nV/$\sqrt{Hz}$ and 4.3pA/$\sqrt{Hz}$, respectively.

Before presenting a noise model, the circuit with the transformer in Figure 10 will be simplified. In Figure 11, the circuit is redrawn with the source impedance reflected to the secondary side of the transformer. The source impedance is multiplied by the impedance ratio m of the transformer. In Figure 12, noise sources associated with the amplifier and resistors have been added. Based on this noise model of the LTC6417, the total output noise power excluding the noise contribution of the source is:

$$e_{no}^2 = e_{ni}^2 + \left(i_{ni} \bullet R_{EQ}\right)^2 + i_{RT}^2 \bullet R_{EQ}^2$$

$$= e_{ni}^2 + \left(i_{ni} \bullet R_{EQ}\right)^2 + \frac{4kT}{R_T} \bullet R_{EQ}^2$$

where $R_{EQ} = mR_S || R_T$ is the equivalent impedance seen at the input of the LTC6417. The output noise power due to the noise of source resistance is given by:

$$e_{no(mR_S)}^2 = i_{mR_S}^2 \bullet R_{EQ}^2$$

$$= \frac{4kT}{mR_S} \bullet R_{EQ}^2$$

Noise figure (NF) is calculated from the ratio of these noise powers:

$$NF = 10\log\left(1 + \frac{e_{no}^2}{e_{no(mR_S)}^2}\right)$$

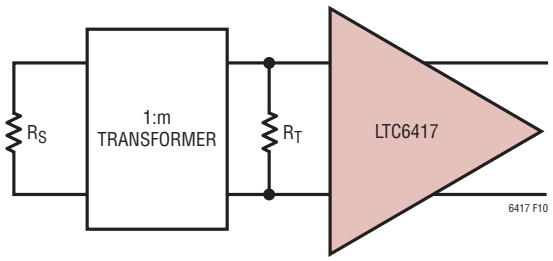

Figure 10. LTC6417 with a Transformer

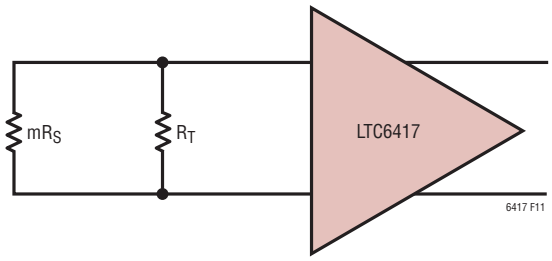

Figure 11. Source Resistance Referred to the Secondary

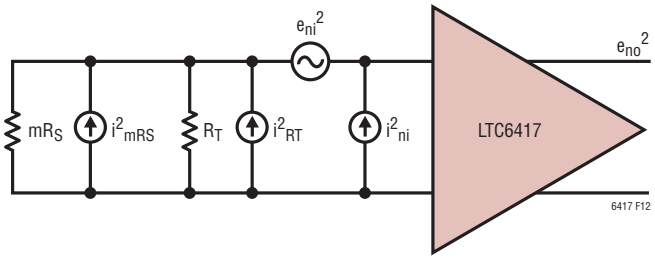

Figure 12. LTC6417 Simplified Noise Model

APPLICATIONS INFORMATION

In most cases the termination resistor will be matched to the source resistance, e.g. $R_T = mR_S$. For the LTC6417 with a wide-band terminated transformer, a plot of output and input noise density and NF versus termination resistor is shown in Figure 13. To get the best noise performance in the system, use the LTC6417 matched to a transformer with high impedance ratio. Although the output noise density will be higher, noise figure will improve because of the additional gain realized in the transformer. An impedance ratio greater than 8 is not recommended, as the increased termination resistance with the LTC6417 input capacitance will limit signal bandwidth. Consult Table 2 for a quick estimate of the LTC6417's output noise density and NF for different transformer impedance ratios. Measured NF numbers will be higher as the simple noise model does not take the insertion loss in the transformer into account.

Table 2. Output Noise Density and NF of the LTC4617 with a Wide-Band Terminated Transformer, $R_S = 50\Omega$

TRANSFORMER IMPEDANCE RATIO m	TERMINATION RESISTOR R_T (Ω)	GAIN (V/V)	OUTPUT NOISE DENSITY e_{no} (nV/√Hz)	NF (dB)
1	50	1.0	1.57	11.2
2	100	1.4	1.64	8.9
4	200	2.0	1.80	7.0
8	400	2.8	2.14	5.9

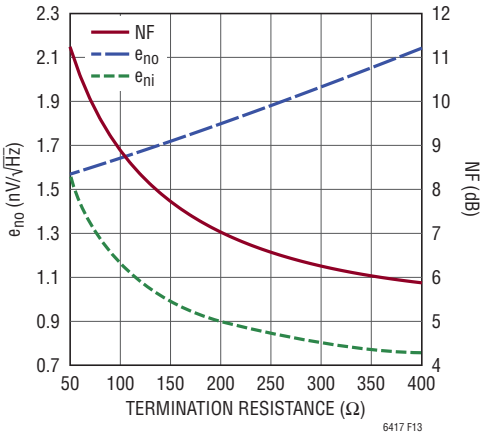

Figure 13. LTC4617 Output and Input Noise Density and NF vs Termination Resistance

Interfacing the LTC6417 to A/D Converters

The LTC6417 has been specially designed to interface directly with high speed A/D converters. It is possible to drive the ADC directly from the LTC6417. In practice, however, better performance may be obtained by adding a few external components at the output of the LTC6417. Figure 5 shows the LTC6417 driving an LTC2209 16-bit ADC. The differential outputs of the LTC6417 are bandpass filtered, then drive the differential inputs of the LTC2209. In many applications, a filter like this is desirable to limit the wideband noise of the amplifier. This is especially true in high performance 16-bit designs. The minimum recommended network between the LTC6417 and the ADC is simply two 10Ω series resistors, which are used to help eliminate resonances associated with the stray capacitance of PCB traces and the stray inductance of the internal bond wires at the ADC input pins and the driver output pins.

Single-Ended Signals

The LTC6417 has not been designed to convert single-ended signals to differential signals. A single-ended input signal can be converted to a differential signal via a balun connected to the inputs of the LTC6417. Figure 5 shows the LTC6417 driven by a 1:4 transformer which provides 6dB of voltage gain while also performing a single-ended to differential conversion.

Power Supply Considerations

For best linearity, the LTC6417 should have a positive supply of V^+ = 5V. For ESD protection, the LTC6417 has an internal edge-triggered supply voltage clamp. The timing mechanism of the clamp enables the LTC6417's protection circuit during ESD events. This internal clamp can also be activated by voltage overshoot and rapid slew rate on the positive supply V^+ pin. The LTC6417 should not be hot-plugged into a powered socket because there is a risk of activating this internal ESD clamp circuit. Bypass capacitors of 680pF and 0.1µF should be connected to the V^+ pin, as close as possible to the LTC6417.

Interfacing the LTC6417 with Active Mixers for Ultrawide IF Bandwidth

The LTC6417 is an excellent interface amplifier for use with active downconverting mixers like the LTC5567. By using

APPLICATIONS INFORMATION

the LTC6417 as a post-amplifier for the LTC5567, it is possible to achieve IF bandwidths in excess of 500MHz, while adding bandpass filtering. A key to achieving this extremely wide IF bandwidth is the use of pre-emphasis inductors in series with the LTC6417 inputs to compensate for the inherent rolloff caused by the LTC6417 input capacitance interacting with the interface impedance. In the example seen in Figure 14, a value of 33nH for each pre-emphasis inductor gives excellent wideband performance. Figure 15 shows performance for various values of L. For L = 33nH, overall conversion gain remains within 1dB from 90MHz to 590MHz, resulting in 500MHz of IF bandwidth.

Test Circuits

Due to the fully differential design of the LTC6417 and its usefulness in applications both with and without ADCs, two test circuits have been used to generate the information in this data sheet. Test circuit A is DC1660B, a two-port demonstration circuit for the LTC6417. The board layout and the schematic are shown in Figures 16 and 17. These circuits include a 1:4 input balun and a 1:1 output balun for single-ended-to-differential conversion, allowing direct analysis using a 2-port network analyzer. Including the input and output baluns, the –3dB bandwidth is approximately 600MHz. A 1:4 input balun before the LTC6417 inputs provides 6dB of voltage gain, but results in better noise figure performance compared to a 1:1 input balun. Noise figure measurements for both input baluns can be found in the graphs.

Test circuit B is DC1685A. It consists of an LTC6417 driving an LTC2209 16-bit 153.6Msps ADC. It is intended for use in conjunction with DC890B (computer interface board) and proprietary Linear Technology evaluation software to evaluate the performance of both parts together. Both the DC1685A board layout and the schematic can be seen Figures 18 and 19.

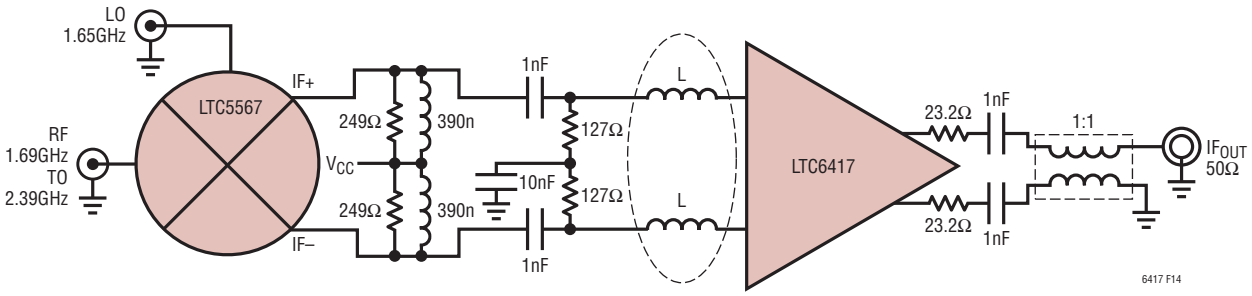

Figure 14

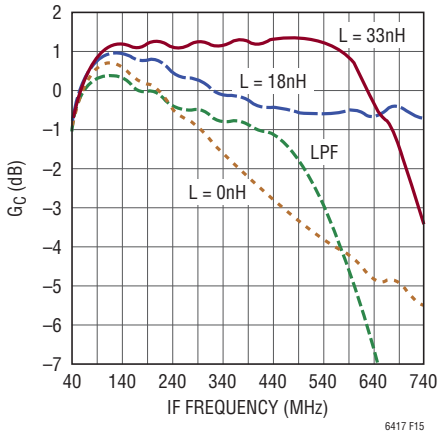

Figure 15

APPLICATIONS INFORMATION

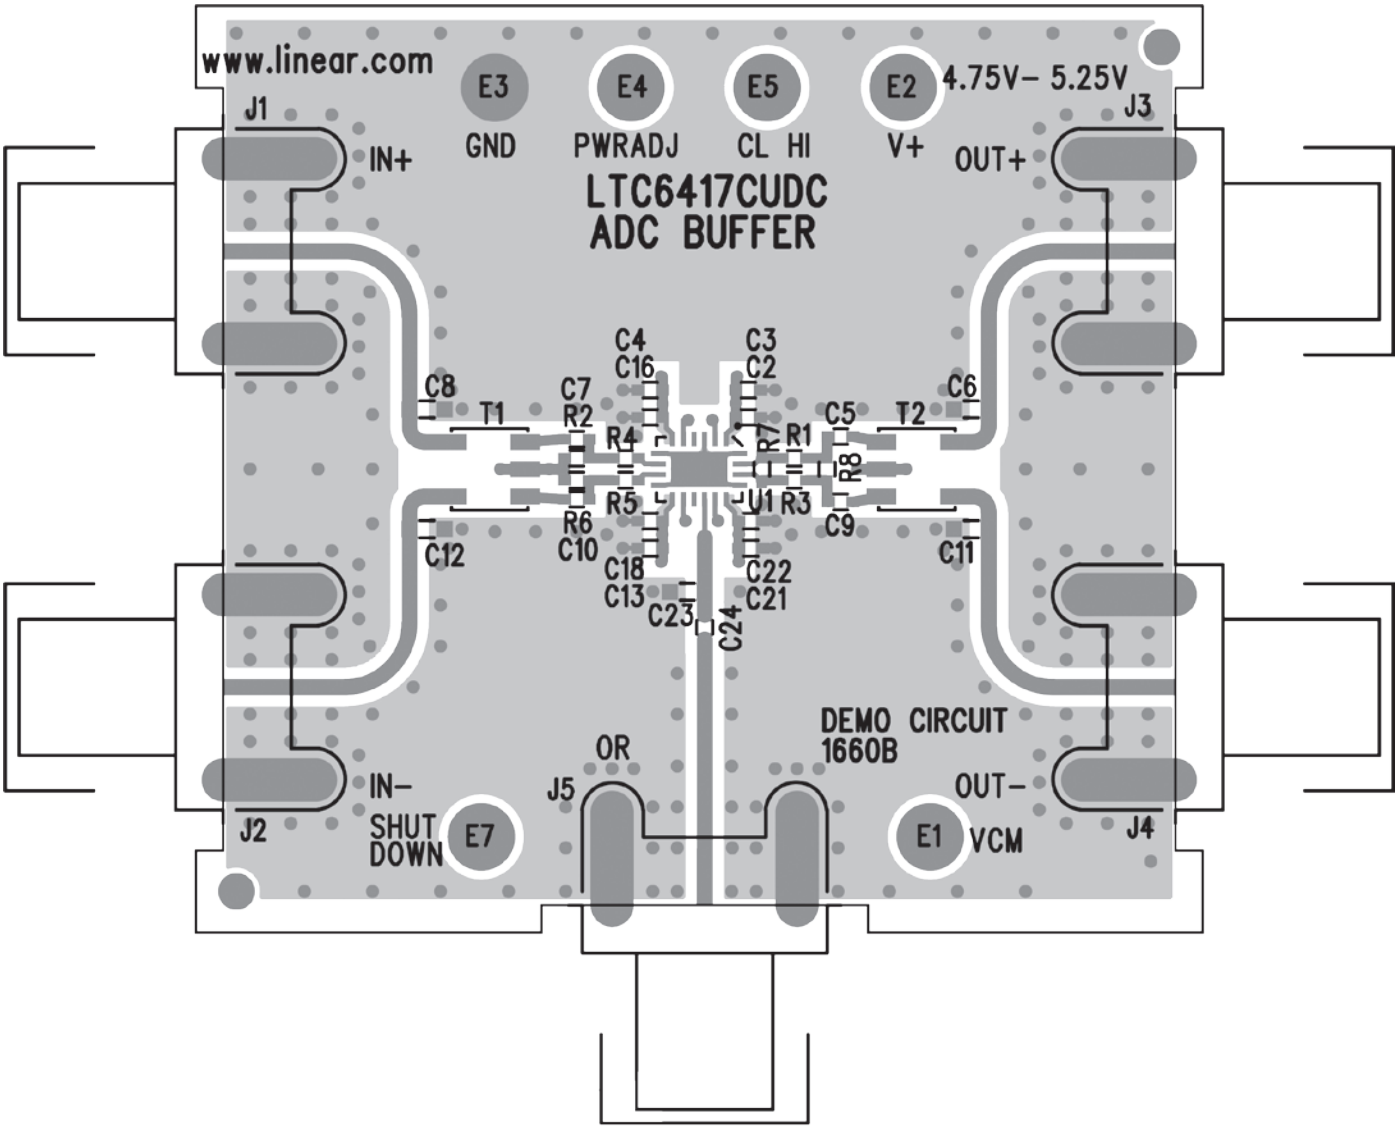

Figure 16. Demo Board DC1660B Layout

APPLICATIONS INFORMATION

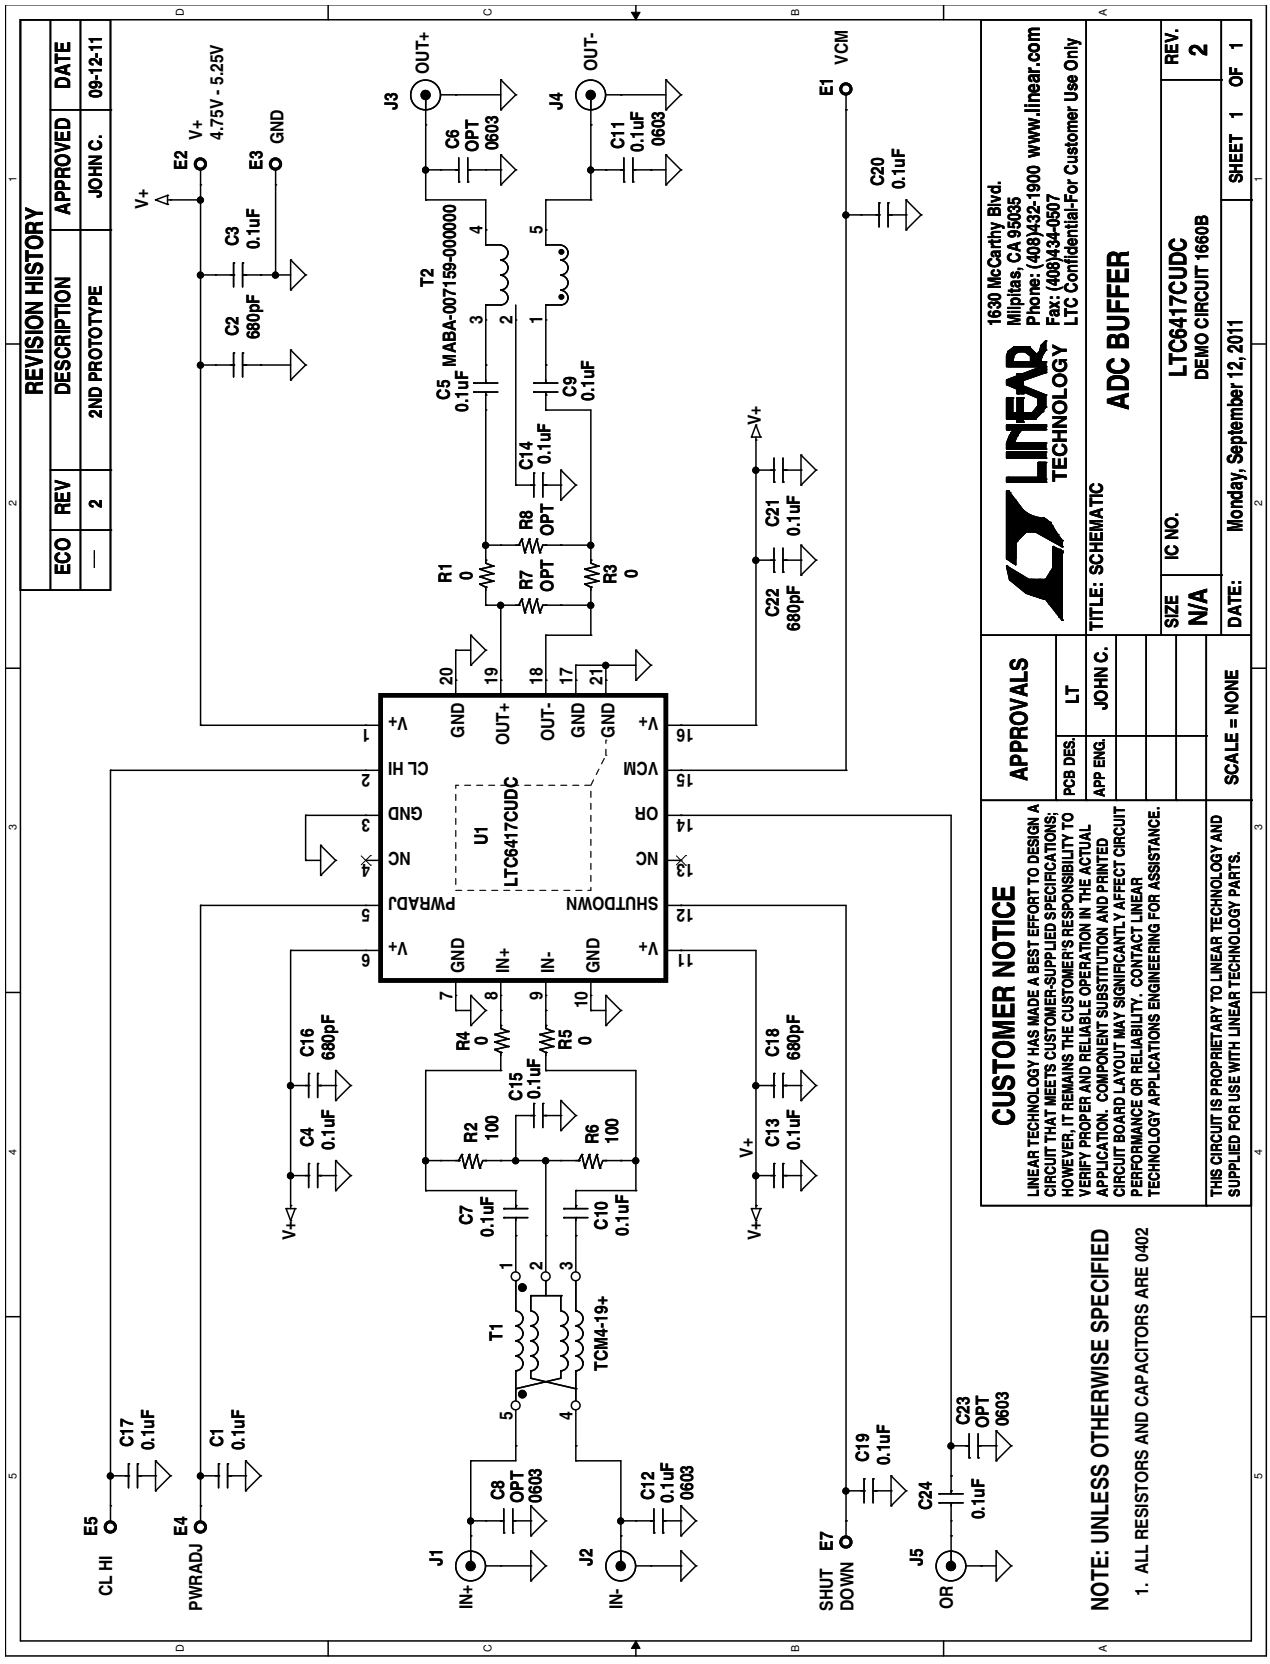

Figure 17. Demo Board DC1660B Schematic (Test Circuit A)

APPLICATIONS INFORMATION

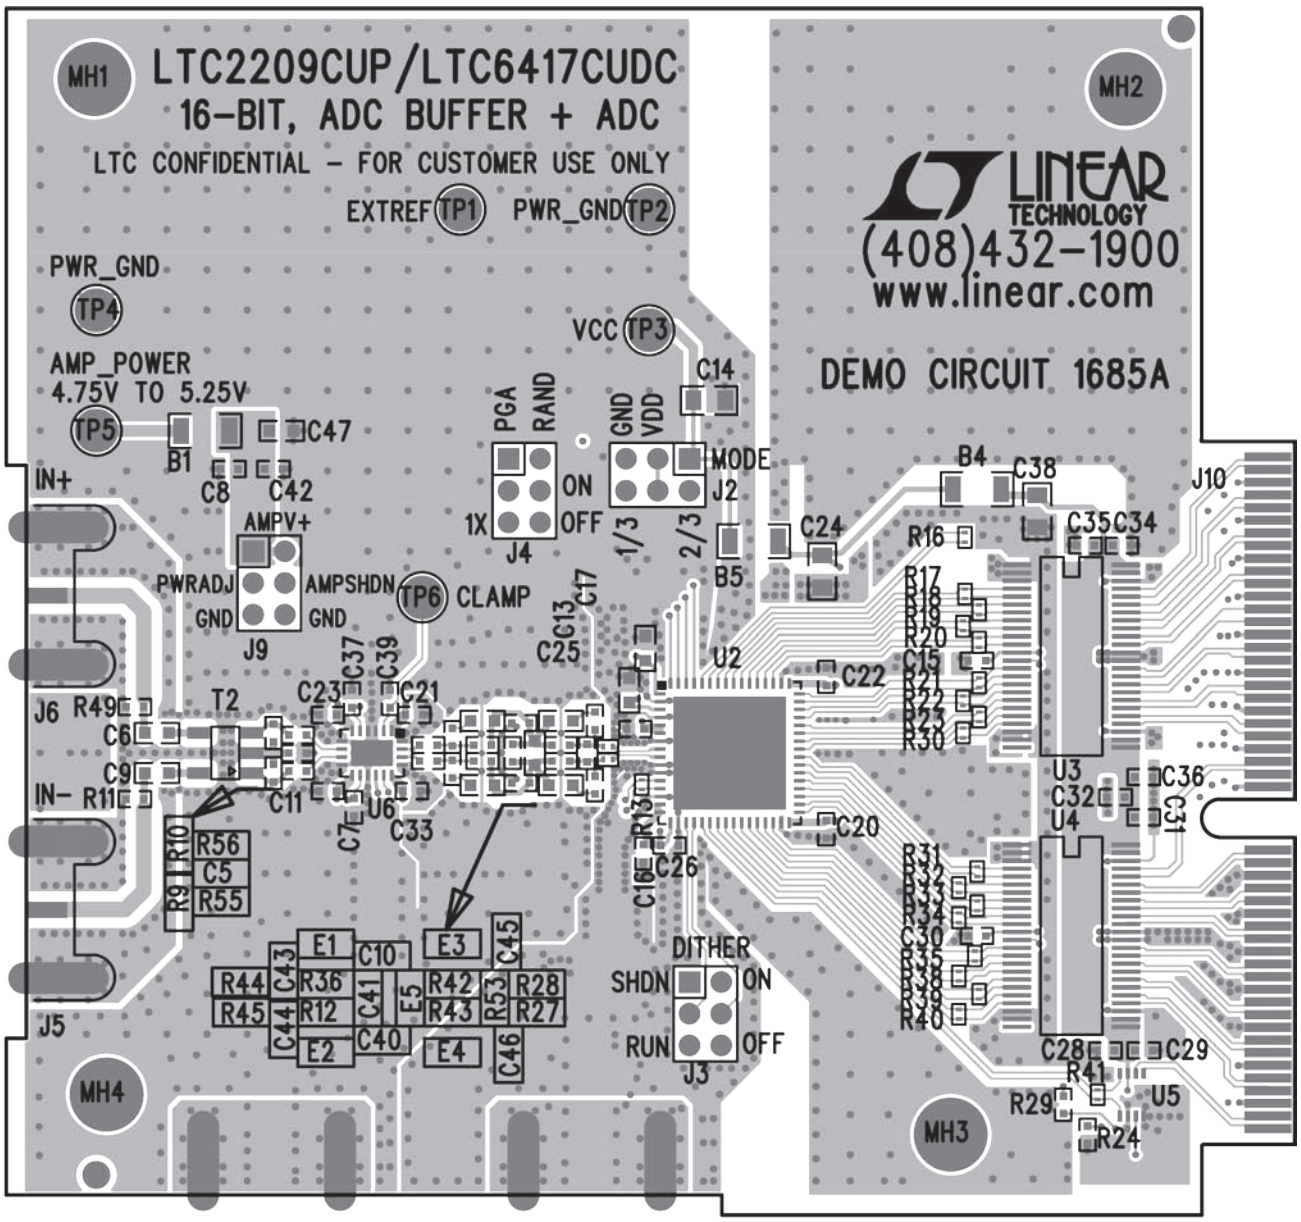

Figure 18. Demo Board DC1685A Layout

APPLICATIONS INFORMATION

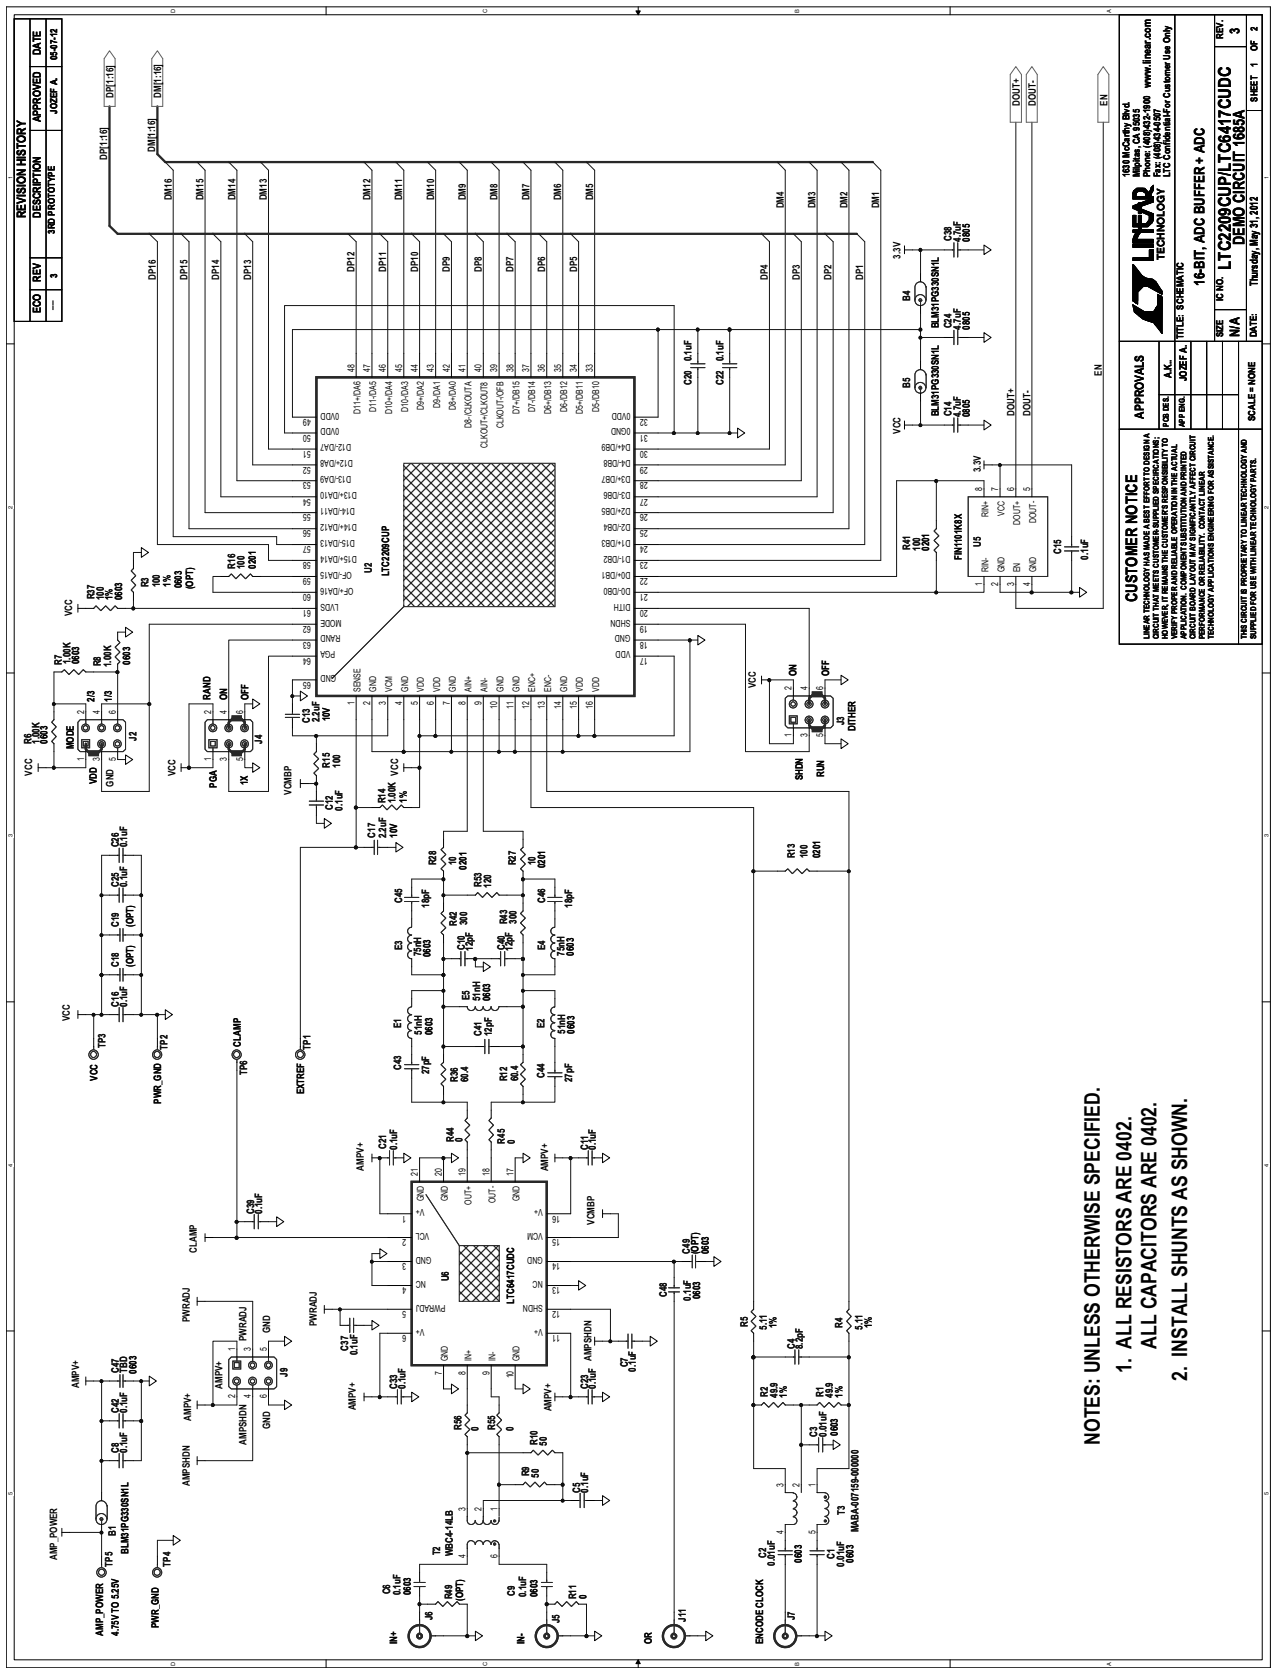

Figure 19. Demo Board DC1685A Schematic (Test Circuit B)

APPLICATIONS INFORMATION

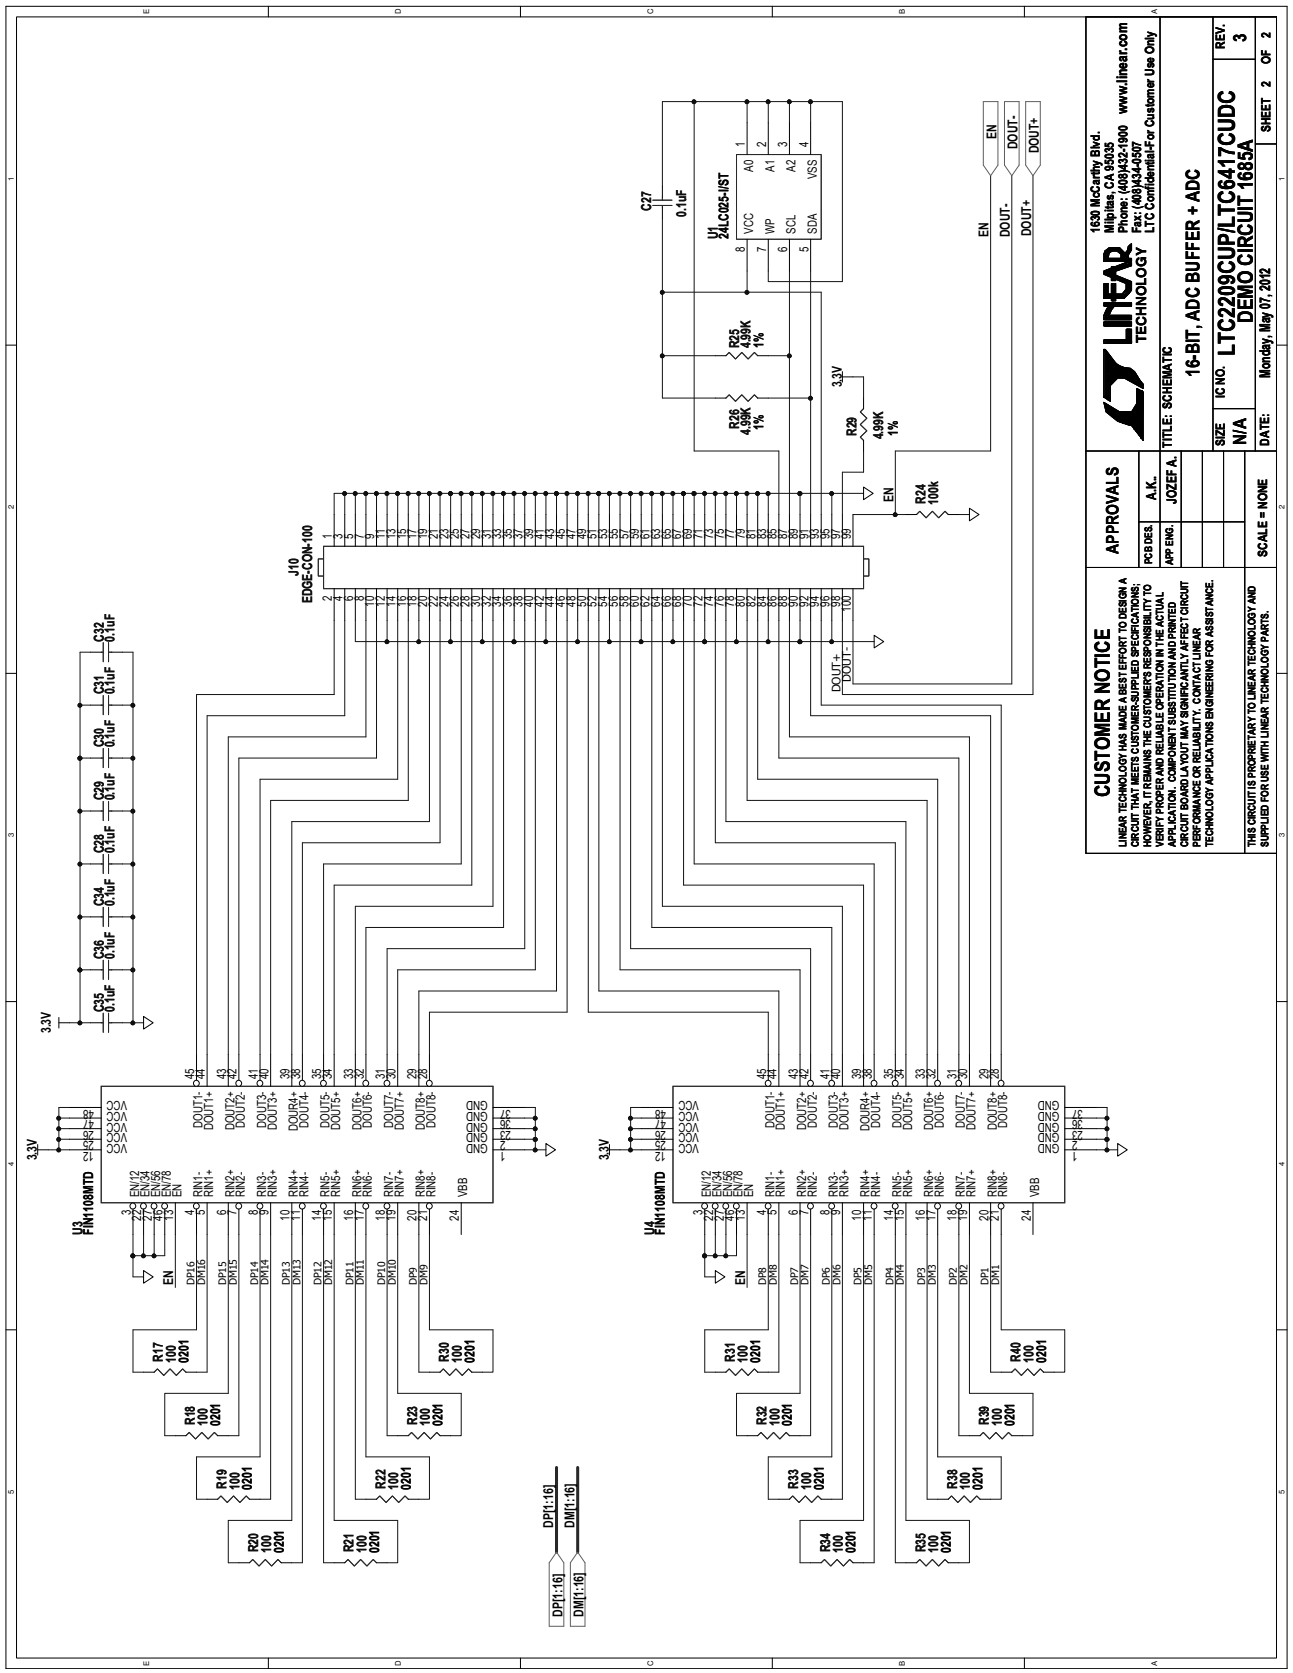

Figure 19 (Continued). Demo Board DC1685A Schematic (Test Circuit B)

PACKAGE DESCRIPTION

Please refer to http://www.linear.com/designtools/packaging/ for the most recent package drawings.

UDC Package
20-Lead Plastic QFN (3mm × 4mm)
(Reference LTC DWG # 05-08-1742 Rev Ø)

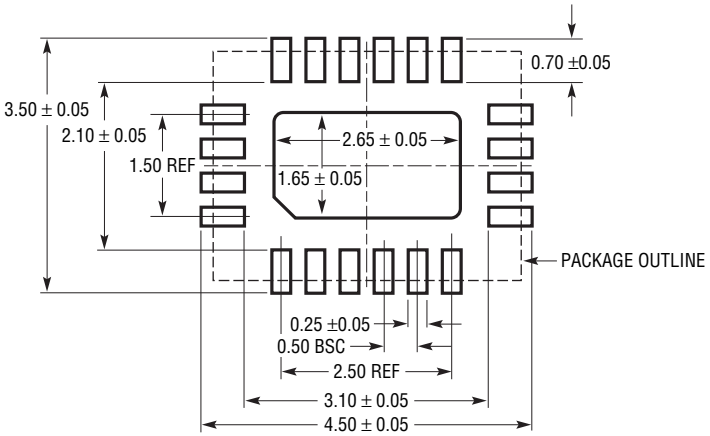

RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS
APPLY SOLDER MASK TO AREAS THAT ARE NOT SOLDERED

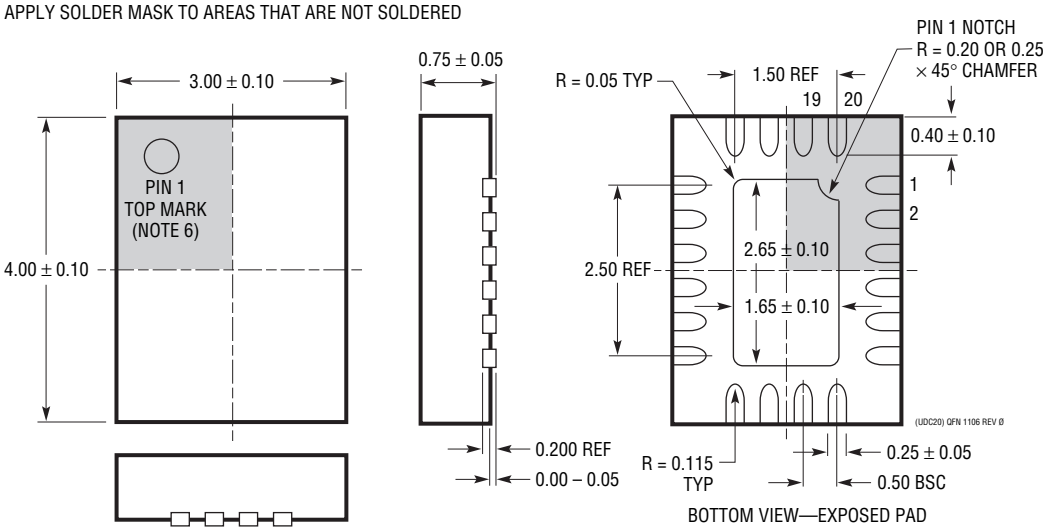

BOTTOM VIEW—EXPOSED PAD

NOTE:
1. DRAWING IS NOT A JEDEC PACKAGE OUTLINE
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

TYPICAL APPLICATION

DC1685A Simplified Schematic with Suggested Output Termination for Driving an LTC2209 16-Bit ADC at 140MHz

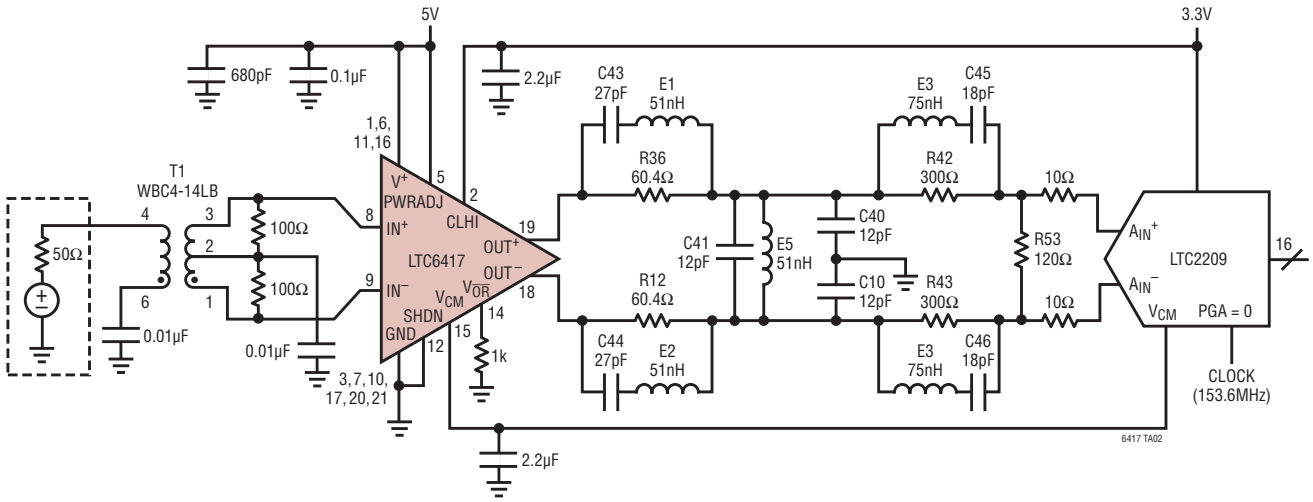

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
Fixed Gain IF Amplifiers/ADC Drivers		
LTC6400-8/LTC6400-14/ LTC6400-20/LTC6400-26	1.8GHz Low Noise, Low Distortion Differential ADC Drivers	–71dBc IM3 at 240MHz $2V_{P-P}$ Composite, I_S = 90mA, A_V = 8dB, 14dB, 20dB, 26dB
LTC6420-20	Dual 1.8GHz Low Noise, Low Distortion Differential ADC Drivers	Dual Version of the LTC6400-20, A_V = 8dB, 14dB, 20dB, 26dB
LTC6401-8/LTC6401-14/ LTC6401-20/LTC6401-26	1.3GHz Low Noise, Low Distortion Differential ADC Drivers	–74dBc IM3 at 140MHz $2V_{P-P}$ Composite, I_S = 50mA, A_V = 8dB, 14dB, 20dB, 26dB
LTC6421-20	Dual 1.3GHz Low Noise, Low Distortion Differential ADC Drivers	Dual Version of the LTC6401-20, A_V = 8dB, 14dB, 20dB, 26dB
IF Amplifiers/ADC Drivers with Variable Gain		
LTC6412	800MHz, 31dB Range Analog-Controlled VGA	Continuously Adjustable Gain Control, –14dB to 17dB Linear-in-dB Gain Range
LT5554	High Dynamic Range 7-Bit Digitally Controlled IF VGA/ADC Driver	OIP3 = 46dBm at 200MHz, Gain Range 1.725 to 17.6dB 0.125dB Steps
LT5514	Ultra-Low Distortion IF Amplifier/ADC Driver with Digitally Controlled Gain	OIP3 = 47dBm at 100MHz, Gain Range 10.5dB to 33dB 1.5dB Steps
LT5524	Low Distortion IF Amplifier/ADC Driver with Digitally Controlled Gain	OIP3 = 40dBm at 100MHz, Gain Range 4.5dB to 37dB 1.5dB Steps
Baseband Differential Amplifiers		
LT6416	2GHz Low Noise Differential 16-Bit ADC Buffer	–84dBc IM3 at 160MHz $2V_{P-P}$ Composite, A_V = 1, e_n = 1.8nV/√Hz, 42mA
LTC6409	10GHz 1.1nV√Hz ADC Driver	AC- or DC-Coupled 0MHz to 100MHz
LTC6406	3GHz Rail-to-Rail Input Differential Amplifier/ ADC Driver	–65dBc IM3 at 50MHz $2V_{P-P}$ Composite, Rail-to-Rail Inputs, e_n = 1.6nV/√Hz, 18mA
LTC6404-1/LTC6404-2/ LTC6404-4	Low Noise Rail-to-Rail Output Differential Amplifier/ADC Driver	16-Bit SNR and SFDR at 10MHz, Rail-to-Rail Outputs, e_n = 1.5nV/√Hz, LTC6404-1 is Unity-Gain Stable, LTC6404-2 is Gain-of-2 Stable
LTC6403-1	Low Noise Rail-to-Rail Output Differential Amplifier/ADC Driver	16-Bit SNR and SFDR at 3MHz, Rail-to-Rail Outputs, e_n = 2.8nV/√Hz
ADCs		
LTC2209	16-Bit 160Msps ADC	77.3dBFS Noise Floor, 100dB SFDR
LTC2208	16-Bit 130Msps ADC	78dBFS Noise Floor, 100dB SFDR

Linear Technology Corporation
1630 McCarthy Blvd., Milpitas, CA 95035-7417
(408) 432-1900 • FAX: (408) 434-0507 • www.linear.com
LT 0712 • PRINTED IN USA
© LINEAR TECHNOLOGY CORPORATION 2012

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331