

## Features

- Integrates LNA, Image Reject Mixer, LO Doubler, and LO Buffer
- 3.5 dB Noise Figure
- 12 dB Conversion Gain
- 30 dBc Image Rejection
- 9 dBm Input Third Order Intercept @ 2 GHz IF
- Lead-Free 6 mm Laminate Package
- RoHS<sup>^</sup> Compliant

## Description

The MADC-010736 is an integrated USB receiver that has a noise figure of 3.5 dB and a typical conversion gain of 12 dB. The integrated mixer provides image rejection of 30 dBc. I and Q mixer outputs are provided and an external 90° hybrid is required to complete the image rejection function. The device integrates an LNA, image reject mixer and LO buffer/doubler within a 6 mm laminate package. It is ideally suited for 42 GHz band point-to-point radios.

Each device is 100% RF tested to ensure performance compliance. The part is fabricated using an efficient pHEMT process.


The MTTF is > 1,000,000 hours at a 150°C junction temperature.

## Ordering Information<sup>1,2</sup>

| Part Number        | Package                 |
|--------------------|-------------------------|
| MADC-010736-000000 | Bulk Quantity           |
| MADC-010736-TR0200 | 200 Piece Reel          |
| MADC-010736-TR0500 | 500 Piece Reel          |
| MADC-010736-001SMB | Sample Evaluation board |

1. Reference Application Note M513 for reel size information.
2. All sample boards include 3 loose parts.

## Functional Schematic

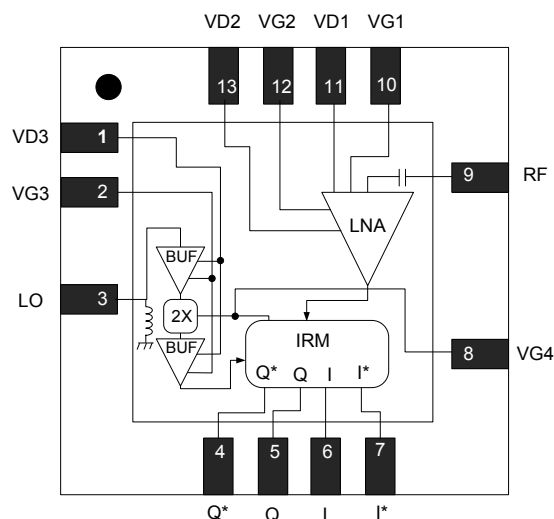

## Pin Configuration<sup>3,4</sup>

| Pin No. | Function              |
|---------|-----------------------|
| 1       | V <sub>D3</sub>       |
| 2       | V <sub>G3</sub>       |
| 3       | LO                    |
| 4       | Q* Input <sup>5</sup> |
| 5       | Q Input               |
| 6       | I Input               |
| 7       | I* Input <sup>5</sup> |
| 8       | V <sub>G4</sub>       |
| 9       | RF                    |
| 10      | V <sub>G1</sub>       |
| 11      | V <sub>D1</sub>       |
| 12      | V <sub>G2</sub>       |
| 13      | V <sub>D2</sub>       |

3. The exposed pad centered on the package bottom must be connected to RF and DC ground.
4. MACOM recommends connecting unused package pins to ground.
5. IF pins I\* and Q\* may be left open (unused) for un-balanced IF operation.

<sup>^</sup>Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

Receiver, High IIP3, SMD  
40.5 - 43.5 GHz

Rev. V2

Electrical Specifications<sup>6</sup>: $T_B = 25^\circ\text{C}$ ,  $V_{D1,2,3} = 4.0\text{ V}$ ,  $I_{D1} = 10\text{ mA}$ ,  $I_{D2} = 100\text{ mA}$ ,  $V_{G3} = -0.4\text{ V}$ ,  $V_{G4} = -3\text{ V}$ ,  $IF = 3.5\text{ GHz}$ 

| Parameter                    | Units | Min. | Typ. | Max.  |
|------------------------------|-------|------|------|-------|
| Frequency Range (RF)         | GHz   | 40.5 | —    | 43.5  |
| Frequency Range (LO)         | GHz   | 18.5 | —    | 21.75 |
| Frequency Range (IF)         | GHz   | DC   | —    | 3.5   |
| Conversion Gain              | dB    | 10   | 12   | —     |
| Image Rejection              | dBc   | —    | 30   | —     |
| Input IP3                    | dBm   | —    | 6    | —     |
| Noise Figure                 | dB    | —    | 3.5  | 5.0   |
| LO Power                     | dBm   | —    | 0    | —     |
| IF Return Loss               | dB    | —    | 15   | —     |
| RF Return Loss               | dB    | —    | 18   | —     |
| LO Return Loss               | dB    | —    | 15   | —     |
| DC Current ( $ID1+ID2+ID3$ ) | mA    | —    | 290  | —     |

6. Apply gate voltages prior to drain voltages. Adjust  $V_{G1}$ ,  $V_{G2}$  and  $V_{G3}$  between  $-1.0$  and  $-0.1\text{ V}$  to achieve specified drain current. Typical current,  $290\text{ mA} = 10 (ID1) + 100 (ID2) + 180 (ID3)$ . Refer to App Note [1] for biasing details.

Maximum Operating Ratings<sup>7,8</sup>

| Parameter             | Absolute Maximum                            |
|-----------------------|---------------------------------------------|
| Input Power           | +5 dBm                                      |
| Drain Supply Voltage  | +4.3 Volts                                  |
| Operating Temperature | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  |
| Junction Temperature  | $+150^\circ\text{C}$                        |
| Storage Temperature   | $-55^\circ\text{C}$ to $+150^\circ\text{C}$ |

7. Exceeding any one or combination of these limits may cause permanent damage to this device.  
 8. MACOM does not recommend sustained operation near these survivability limits.

## Handling Procedures

Please observe the following precautions to avoid damage:

## Static Sensitivity


Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

## Receiver, High IIP3, SMD 40.5 - 43.5 GHz


Rev. V2

### Typical Performance Curves: $T_A = 25^\circ\text{C}$


Conversion Gain @ 3.5 GHz IF

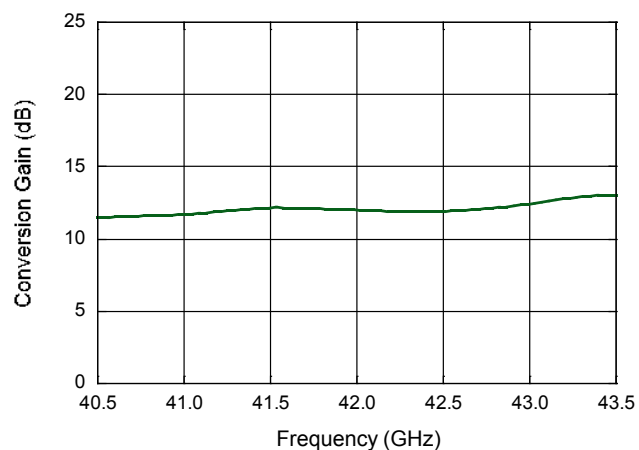

Conversion Gain @ 2.0 GHz IF

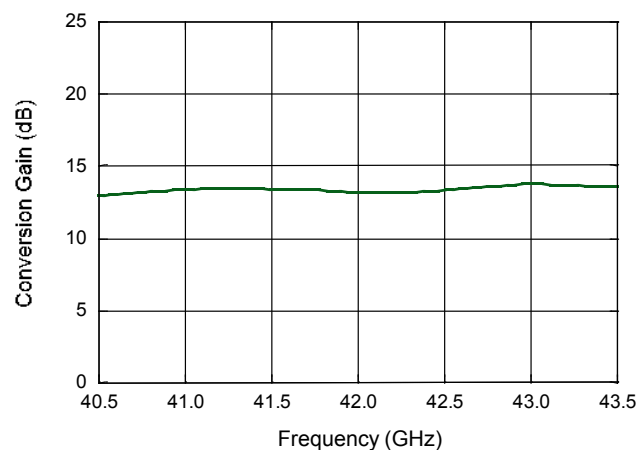

IP3 @ 3.5 GHz IF

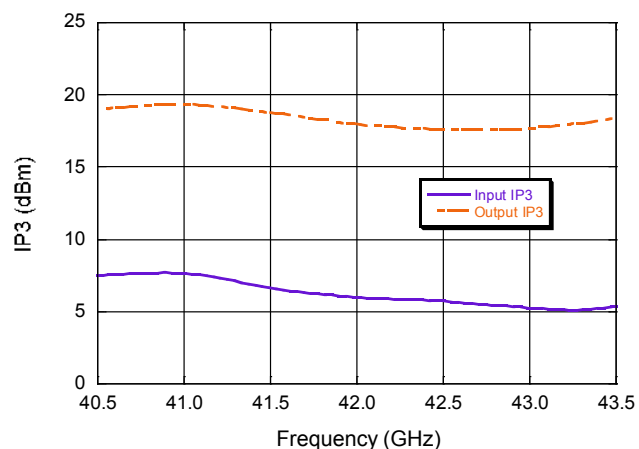

IP3 @ 2.0 GHz IF

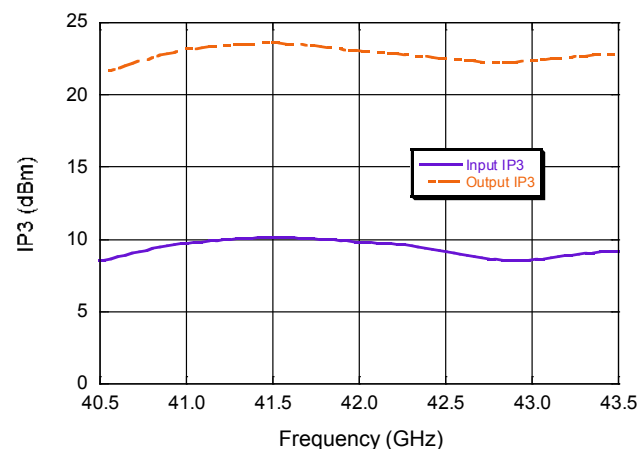


Image Rejection @ 3.5 GHz IF


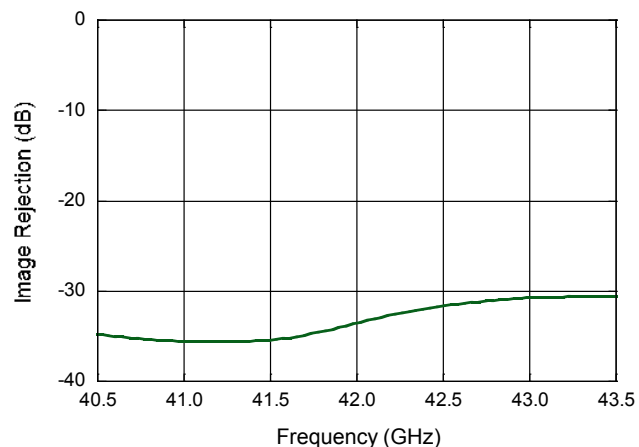


Image Rejection @ 2.0 GHz IF

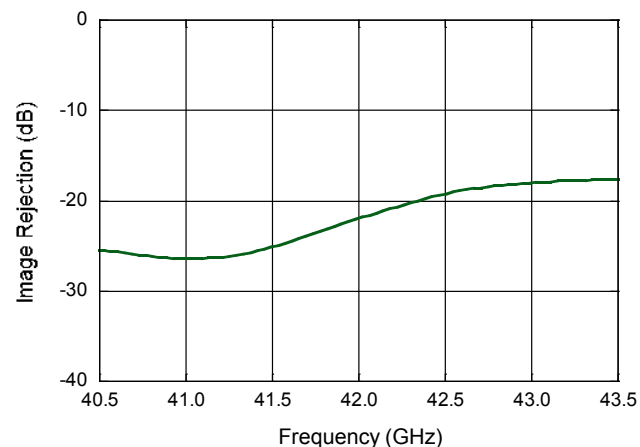


## Receiver, High IIP3, SMD 40.5 - 43.5 GHz


Rev. V2

### Typical Performance Curves: $T_A = 25^\circ\text{C}$


LO and 2xLO to RF Isolation

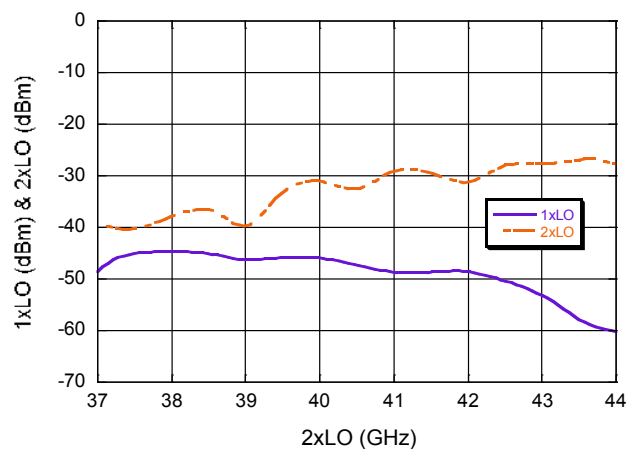


P1dB @ 2.0 GHz IF

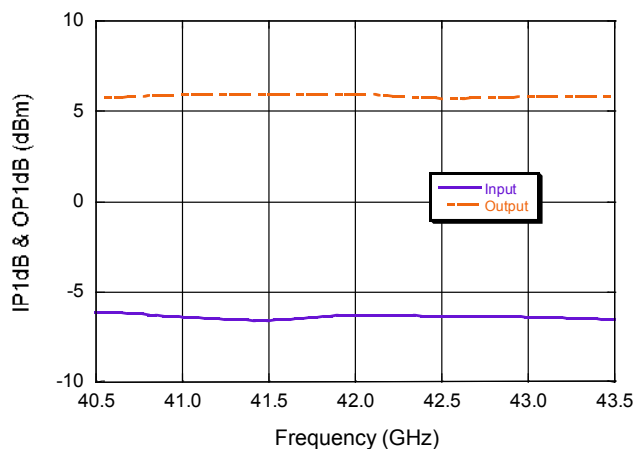


Noise Figure

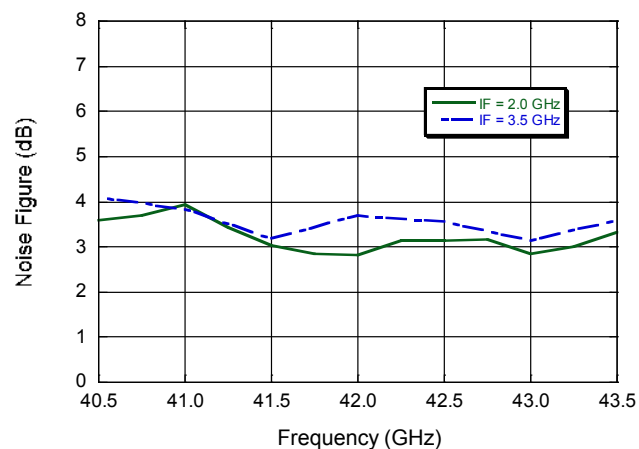


RF Return Loss

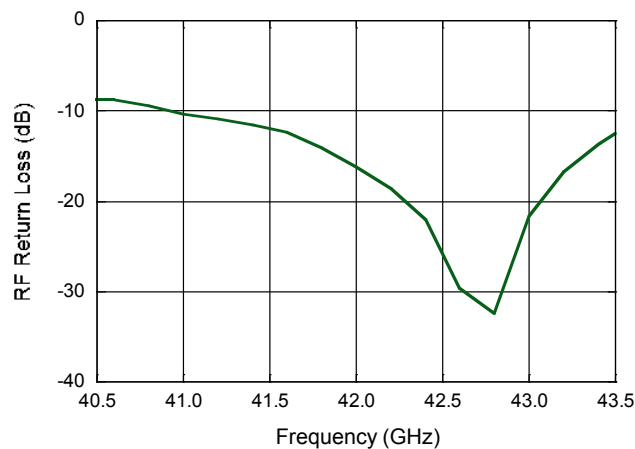

LO Return Loss

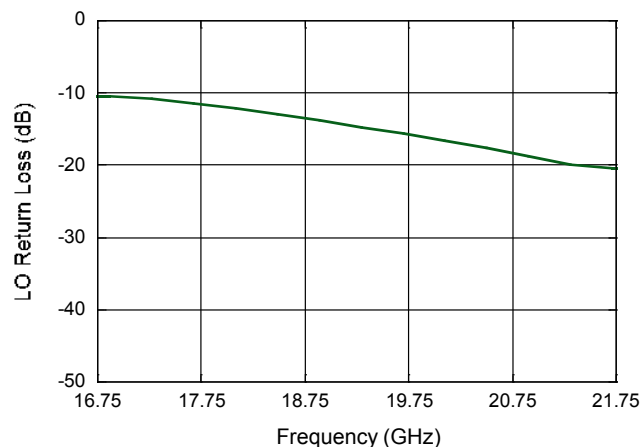


IF Return Loss

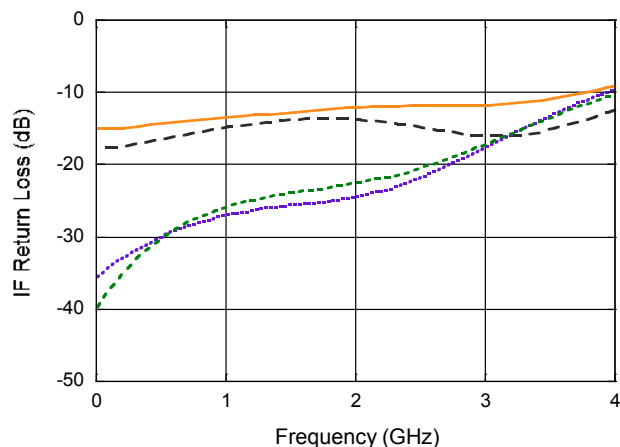


**App Note [1] Biasing** - The MADC-010736 is operated by biasing  $V_{D1}$ ,  $V_{D2}$ , and  $V_{D3}$  at 4.0 V. The corresponding drain currents are set to 10 mA, 100 mA, and 180 mA respectively.  $V_{G4}$  requires a fixed voltage bias of nominally  $-3.0$  V. It is recommended to use active bias on  $V_{G1}$ ,  $V_{G2}$ ,  $V_{G3}$  to keep the currents in  $V_{D1}$ ,  $V_{D2}$ , and  $V_{D3}$  constant, in order to maintain the best performance over temperature. Depending on the supply voltages available and the power dissipation constraints, the bias circuits may include a single transistor or a low power operational amplifier, with a low value resistor in series with the drain supply to sense the current. Make sure to sequence the applied voltage to ensure negative gate bias is available before applying the positive drain supply.

**App Note [2] I/Q** - For highest gain, best image rejection and lowest noise figure all 4 IF ports should be used. I/I\* and Q/Q\* will combine through two 180 degree hybrid couplers generating inphase and quadrature phase components. Inphase and quadrature signals then need to be combined through 90 degree hybrid combiner to create IF output.

**App Note [3] Board Layout** - It is recommended to provide 100 pF decoupling capacitors as close to the bias pins as possible. Additional 10 nF and 1  $\mu$ F on each of the bias lines are recommended placed a distance further away.

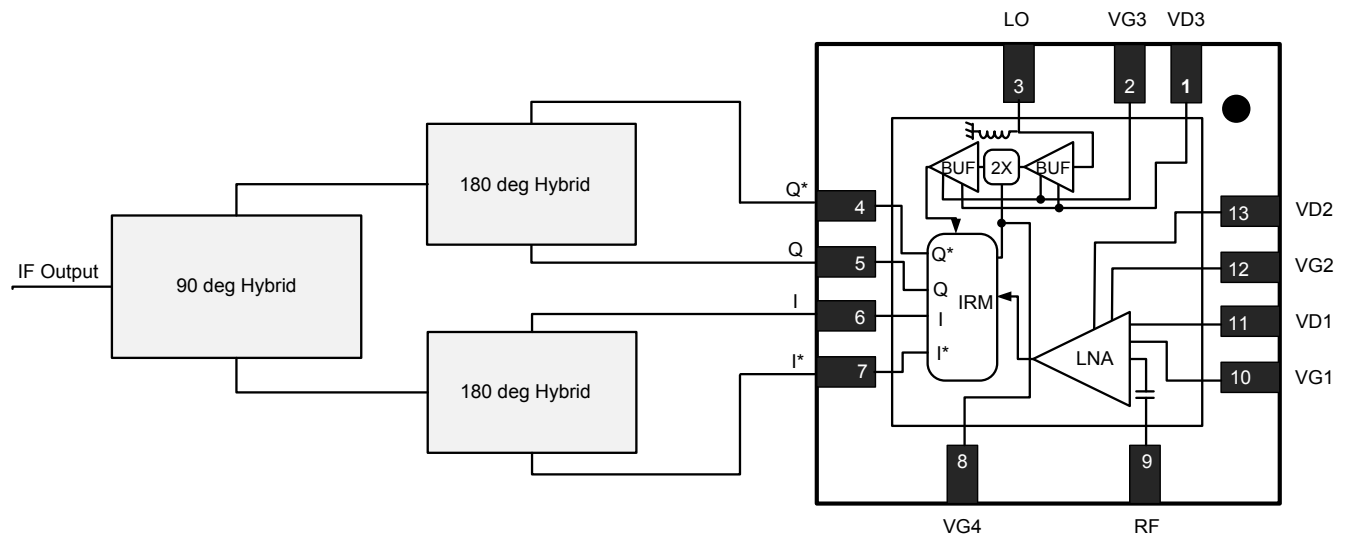

## Lead-Free 6 mm Laminate Package<sup>†</sup>

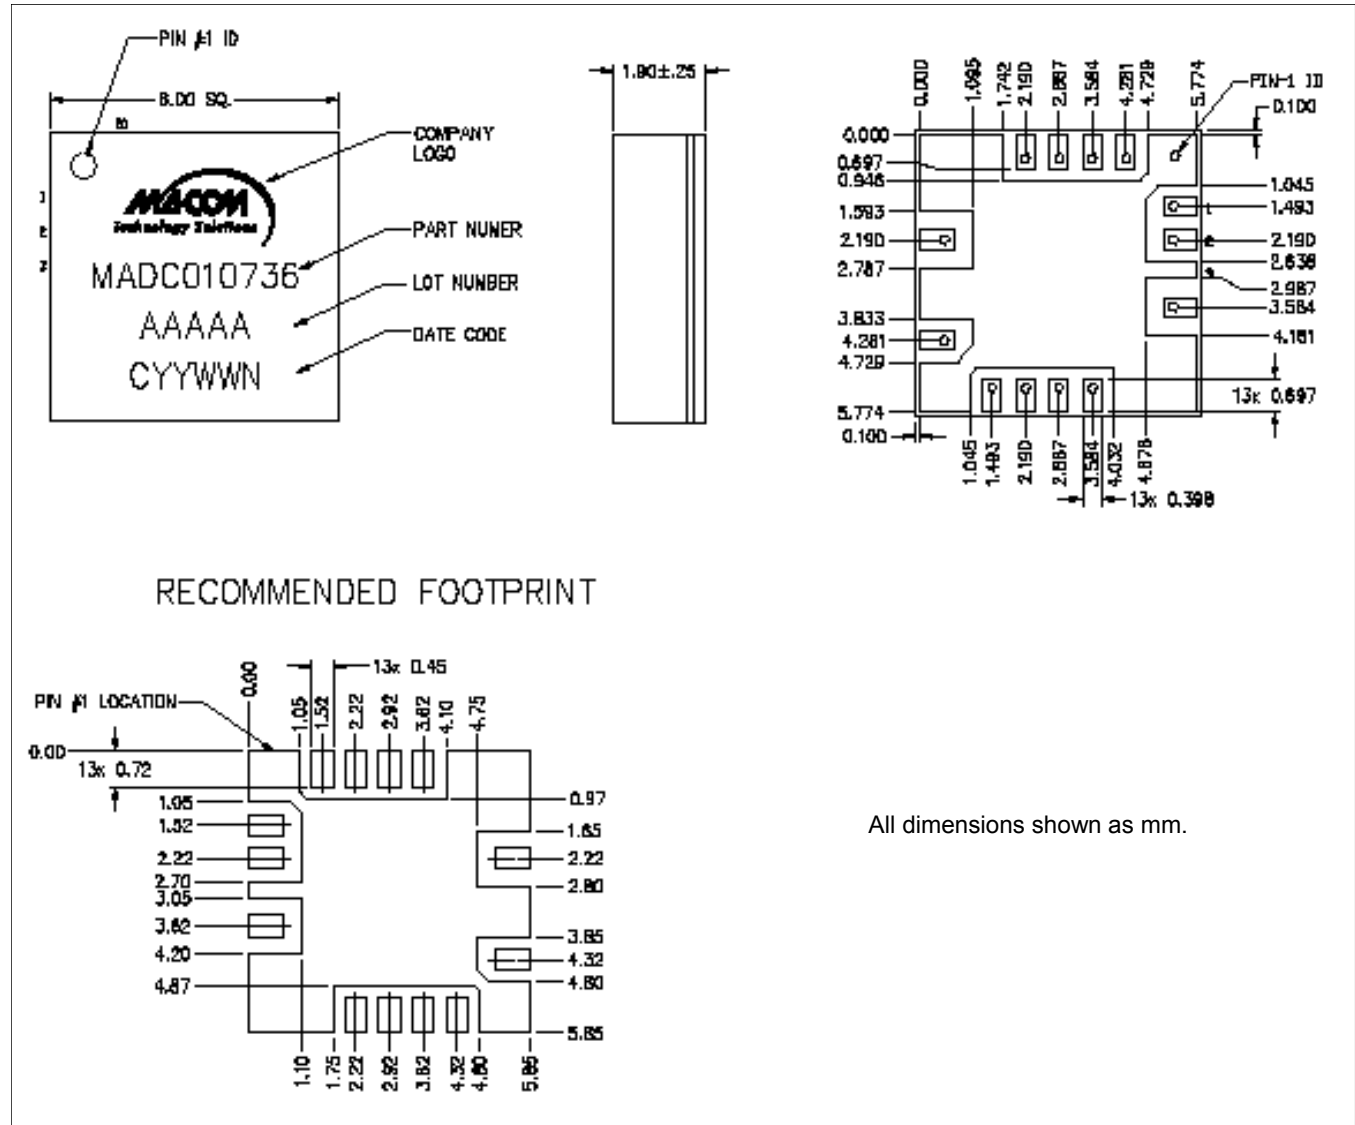

<sup>†</sup> Reference Application Note S2083 for lead-free solder reflow recommendations.  
Meets JEDEC moisture sensitivity level 3 requirements.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331