

## Features

- Temperature and Voltage Compensated Frequency (Fully Integrated Oscillator)
- Warning Indication of Lamp Failure by Means of Frequency Doubling
- Voltage Dependence of the Indicator Lamps also Compensated for Lamp Failure
- Relay Output with High Current Capability and Low Saturation Voltage
- Frequency Doubling only During Direction Mode
- Temperature Compensated Threshold for Lamp Failure Detection
- Overvoltage and Undervoltage Shut Down of the Relay Outputs
- Quiescent Current  $I \leq 10 \mu\text{A}$  (Switches Open)
- EMI Protection According to ISO TR 7637/1, Test Level 4 (Exclusive Load Dump)
- Reversed Battery Protection by Means of a Serial Resistor and Relay Coil Connected
- Load Dump Protection 80 V with External Protection Components
- 12 V/24 V Application
- Package: SO16

Electrostatic sensitive device.  
Observe precautions for handling.




## Two-relay Flasher

# ATA6140

## Description

The integrated circuit ATA6140 is used in relay-controlled automotive flashers. With two output stages, each side of the vehicle is controlled separately. A left and a right direction indicator input with only a small control current makes switch contacts for small loads possible. The separate hazard warning input simplifies the construction of the hazard switch. Lamp outage is indicated by frequency doubling during direction mode. Thanks to the extreme low current consumption the ATA6140 can be connected to the battery directly.

**Figure 1.** Block Diagram

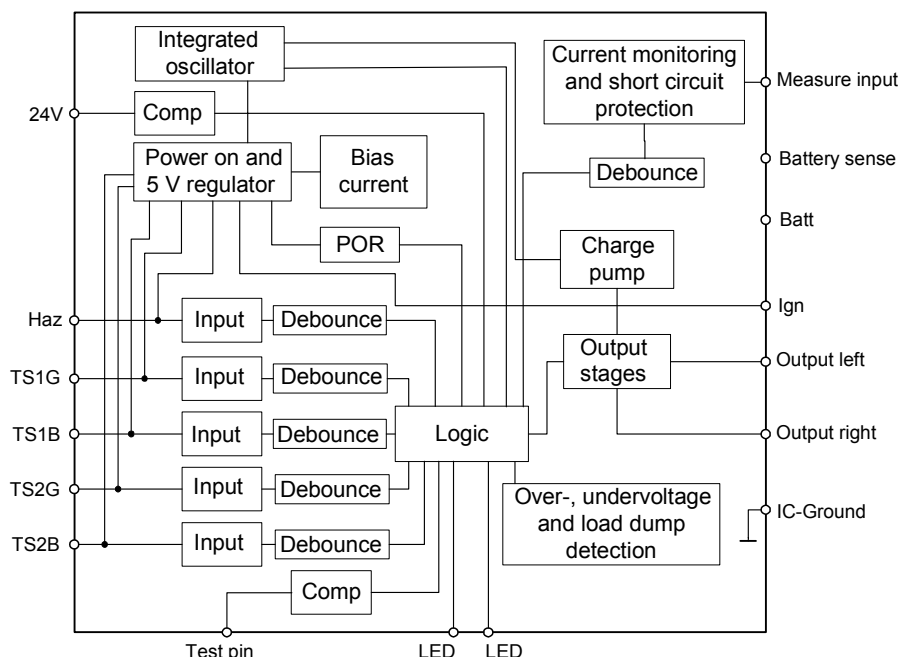


Rev. 4560C-AUTO-10/03



## Pin Configuration

**Figure 2.** Pinning SO16

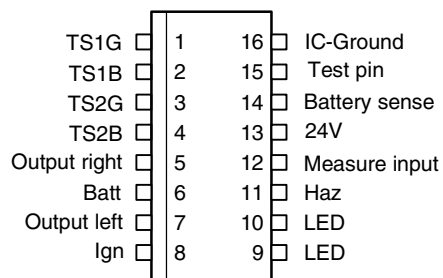

## Pin Description

| Pin | Symbol        | Function            |
|-----|---------------|---------------------|
| 1   | TS1G          | Input left ground   |
| 2   | TS1B          | Input left battery  |
| 3   | TS2G          | Input right ground  |
| 4   | TS2B          | Input right battery |
| 5   | Output right  | Output right        |
| 6   | Batt          | Battery force       |
| 7   | Output left   | Output left         |
| 8   | Ign           | Ignition            |
| 9   | LED           | LED outage left     |
| 10  | LED           | LED outage right    |
| 11  | Haz           | Input hazard        |
| 12  | Measure input | Measure input       |
| 13  | 24V           | 24 V version        |
| 14  | Battery sense | Battery sense       |
| 15  | Test pin      | Test pin            |
| 16  | IC-Ground     | IC ground           |

## Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

| Parameters                 | Symbol    | Value       | Unit |
|----------------------------|-----------|-------------|------|
| Supply voltage, pin 6      | $V_{VS}$  | 6 to 40     | V    |
| Ambient temperature range  | $T_{amb}$ | -40 to +105 | °C   |
| Junction temperature range | $T_j$     | -40 to +150 | °C   |
| Storage temperature range  | $T_{stg}$ | -55 to +150 | °C   |

## Thermal Resistance

| Parameters                      | Symbol     | Value | Unit |
|---------------------------------|------------|-------|------|
| Maximum thermal resistance SO16 | $R_{thJA}$ | 110   | K/W  |

## Operating Range

| Parameters                                             | Symbol   | Value    | Unit |
|--------------------------------------------------------|----------|----------|------|
| Supply voltage, pin 6                                  | $V_{VS}$ | 6 to 24  | V    |
| Supply voltage, pin 6<br>(24 V version, pin 13 to GND) | $V_{VS}$ | 18 to 33 | V    |

## Noise and Surge Immunity

| Parameters                                   | Test Conditions                                | Value   |
|----------------------------------------------|------------------------------------------------|---------|
| Conducted interferences <sup>(1)</sup>       | ISO 7637-1                                     | Level 4 |
| ESD (Human Body Model)                       | MIL-STD-883D Method 3015.7 <sup>(2)</sup>      | 2 kV    |
|                                              | MIL-STD-883D Method 3015.7 (pin 12 and pin 14) | 1 kV    |
| ESD FCDM (Field induced Charge Device Model) | ESD - S. 5.3                                   | 500 V   |

- Note:
1. At both outputs a relay of minimum 130  $\Omega$  should be added (for details see application circuits Figure 4 on page 7 to Figure 11 on page 11).
  2. Exclusive pin 12 and pin 14.

## Electrical Characteristics

| No.      | Parameters                                           | Test Conditions                                | Pin | Symbol       | Min. | Typ. | Max. | Unit    | Type* |
|----------|------------------------------------------------------|------------------------------------------------|-----|--------------|------|------|------|---------|-------|
| <b>1</b> | <b>Supply Voltage Range</b>                          |                                                |     |              |      |      |      |         |       |
| 1.1      | Supply voltage                                       |                                                | 6   | $V_{VS}$     | 8    |      | 16   | V       | C     |
| 1.1      | Supply voltage<br>(24 V version)                     |                                                | 6   | $V_{VS}$     | 18   |      | 33   | V       | C     |
| <b>2</b> | <b>Current Consumption</b>                           |                                                |     |              |      |      |      |         |       |
| 2.1      | Quiescent current<br>( $V_S$ )                       | $V_{VS} < 16$ V<br>switches open               | 6   | $I_{VS}$     |      |      | 10   | $\mu$ A | A     |
| 2.1      | Quiescent current<br>( $V_S$ , 24 V version)         | $V_{VS} < 33$ V<br>switches open               | 6   | $I_{VS}$     |      |      | 20   | $\mu$ A | A     |
| 2.2      | Supply current ( $V_S$ )                             | $V_{VS} < 16$ V                                | 6   | $I_{VS}$     |      |      | 6    | mA      | A     |
| 2.2      | Supply current<br>( $V_S$ , 24 V version)            | $V_{VS} < 33$ V                                | 6   | $I_{VS}$     |      |      | 8    | mA      | A     |
| <b>3</b> | <b>Under and Overvoltage Detection</b>               |                                                |     |              |      |      |      |         |       |
| 3.1      | Undervoltage<br>detection threshold                  |                                                | 6   | $V_{VU}$     | 6    |      | 8    | V       | A     |
| 3.2      | Undervoltage<br>detection delay time                 |                                                |     | $t_{dUV}$    | 2.5  |      | 10   | ms      | A     |
| 3.3      | Overvoltage detection<br>threshold                   |                                                | 6   | $V_{VO}$     | 18   |      | 22   | V       | A     |
| 3.3      | Overvoltage detection<br>threshold<br>(24 V version) | Disabled in<br>24 V version<br>(pin 13 to GND) | 6   | $V_{VO}$     |      |      |      | V       | A     |
| <b>4</b> | <b>Relay Outputs</b>                                 |                                                |     |              |      |      |      |         |       |
| 4.1      | Current output right                                 |                                                | 5   | $I_{I5}$     |      |      | 170  | mA      | A     |
| 4.2      | Current output left                                  |                                                | 7   | $I_{I7}$     |      |      | 170  | mA      | A     |
| 4.3      | Saturation voltage<br>right                          | 170 mA at 23°C                                 | 5   | $V_{SATR}$   |      |      | 1    | V       | A     |
| 4.4      | Saturation voltage left                              | 170 mA at 23°C                                 | 7   | $V_{SATL}$   |      |      | 1    | V       | A     |
| 4.5      | Leakage current right                                |                                                | 5   | $I_{LEAKR}$  |      |      | 3    | $\mu$ A | A     |
| 4.5      | Leakage current right<br>(24 V version)              |                                                | 5   | $I_{LEAKR}$  |      |      | 6    | $\mu$ A | A     |
| 4.6      | Leakage current left                                 |                                                | 7   | $I_{LEAKL}$  |      |      | 3    | $\mu$ A | A     |
| 4.6      | Leakage current left<br>(24 V version)               |                                                | 7   | $I_{LEAKL}$  |      |      | 6    | $\mu$ A | A     |
| 4.7      | Start delay time right                               |                                                | 5   | $T_{DR}$     | 10   |      | 40   | ms      | A     |
| 4.8      | Start delay time left                                |                                                | 7   | $T_{DL}$     | 10   |      | 40   | ms      | A     |
| <b>5</b> | <b>Control Signal Thresholds</b>                     |                                                |     |              |      |      |      |         |       |
| 5.1      | Frequency doubling                                   | $V_S = 9$ V                                    | 12  | $V_{THFD9}$  | 42   | 45   | 48   | mV      | A     |
| 5.2      | Frequency doubling                                   | $V_S = 15$ V                                   | 12  | $V_{THFD15}$ | 50   | 53   | 57   | mV      | A     |
| 5.2      | Frequency doubling<br>(24 V version)                 | $V_S = 24$ V                                   | 12  | $V_{THFD24}$ |      | 65   |      | mV      | A     |
| 5.3      | Short circuit detection                              | $V_S = 13.5$ V                                 | 12  | $V_{THSC}$   | 425  | 475  | 525  | mV      | B     |

\*) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter

## Electrical Characteristics (Continued)

| No.      | Parameters                             | Test Conditions                                 | Pin | Symbol     | Min.  | Typ. | Max.             | Unit             | Type* |
|----------|----------------------------------------|-------------------------------------------------|-----|------------|-------|------|------------------|------------------|-------|
| 5.3      | Short circuit detection (24 V version) | $V_S = 24\text{ V}$                             | 12  | $V_{THSC}$ |       | 650  |                  | mV               | B     |
| 5.4      | Temperature coefficient                | $-40^{\circ}\text{C}$ to $+105^{\circ}\text{C}$ | 12  | $C_{TH}$   |       | 30   |                  | $\mu\text{V/K}$  | C     |
| 5.5      | Input current                          | $V_S = 13.5\text{ V}$                           | 12  | $I_{TH}$   |       |      | 2                | $\mu\text{A}$    | A     |
| 5.5      | Input current (24 V version)           | $V_S = 24\text{ V}$                             | 12  | $I_{TH}$   |       |      | 4                | $\mu\text{A}$    | A     |
| <b>6</b> | <b>LED Inputs</b>                      |                                                 |     |            |       |      |                  |                  |       |
| 6.1      | Threshold left                         | $V_S = 13.5\text{ V}$                           | 9   | $V_{LEDL}$ | 1     |      | 4.5              | V                | A     |
| 6.2      | Threshold right                        | $V_S = 13.5\text{ V}$                           | 10  | $V_{LEDR}$ | 1     |      | 4.5              | V                | A     |
| 6.3      | Pull-up resistor left                  |                                                 | 9   | $R_{LEDL}$ | 10    |      | 75               | $\text{k}\Omega$ | A     |
| 6.4      | Pull-up resistor right                 |                                                 | 10  | $R_{LEDR}$ | 10    |      | 75               | $\text{k}\Omega$ | A     |
| <b>7</b> | <b>Timing</b>                          |                                                 |     |            |       |      |                  |                  |       |
| 7.1      | Basic frequency                        | $1/f = 706\text{ ms}$                           |     | $F_B$      | -10.5 |      | +12              | %                | A     |
| 7.2      | Bright period                          |                                                 |     |            |       | 50   |                  | %                | A     |
| 7.3      | Bright period in failure mode          |                                                 |     |            |       | 40   |                  | %                | A     |
| 7.4      | Failure frequency                      |                                                 |     | $F_F$      |       |      | $2.2 \times F_B$ |                  | A     |

\*) Type means: A = 100% tested, B = 100% correlation tested, C = Characterized on samples, D = Design parameter

## Short Circuit or Overload Detection Delay

Direction mode:

100 ms during the first bright phase, 50 ms during all following bright phases

Hazard mode: 100 ms during all bright phases

In case of overload the relay output switches off (not stored)

## Bulb Outage Detection

The detection of bulb outage takes place during the bright phase. There is a delay time of typically 128 ms before ATA6140 measures the bulb current with a debounce period of 5 ms. After this time the inrush current dropped significantly.

Application hint:

It has to be considered that a slow relay contact may shorten the inrush current decay time and too high current would be measured and falsely an outage may not be detected. If operated with low supply voltage (e.g., 8 V) the relay speed could be even slower.

## Flasher Operating Mode

| Ignition | Input Left Ground | Input Right Ground | Input Left Ignition | Input Right Ignition | Input Hazard | Left Lamps <sup>(1)</sup> | Right Lamps <sup>(1)</sup> | Frequency in Case of Lamp Failure <sup>(1)</sup> |
|----------|-------------------|--------------------|---------------------|----------------------|--------------|---------------------------|----------------------------|--------------------------------------------------|
| Off      | Open              | Open               | IC-Ground           | IC-Ground            | Open         | x                         | x                          | x                                                |
| Off      | Ground            | Open               | IC-Ground           | IC-Ground            | Open         | x                         | x                          | x                                                |
| Off      | Open              | Ground             | IC-Ground           | IC-Ground            | Open         | x                         | x                          | x                                                |
| Off      | Open              | Open               | IC-Ground           | IC-Ground            | Ground       | Flash                     | Flash                      | Normal                                           |
| Off      | Ground            | Open               | IC-Ground           | IC-Ground            | Ground       | Flash                     | Flash                      | Normal                                           |
| Off      | Open              | Ground             | IC-Ground           | IC-Ground            | Ground       | Flash                     | Flash                      | Normal                                           |
| Off      | Ground            | Ground             | IC-Ground           | IC-Ground            | Ground       | Flash                     | Flash                      | Normal                                           |
| Off      | Ground            | Ground             | IC-Ground           | IC-Ground            | Open         | x                         | x                          | x <sup>(2)</sup>                                 |
| On       | Open              | Open               | IC-Ground           | IC-Ground            | Open         | x                         | x                          | x                                                |
| On       | Ground            | Open               | IC-Ground           | IC-Ground            | Open         | Flash                     | x                          | Double                                           |
| On       | Open              | Ground             | IC-Ground           | IC-Ground            | Open         | x                         | Flash                      | Double                                           |
| On       | Open              | Open               | IC-Ground           | IC-Ground            | Ground       | Flash                     | Flash                      | Normal                                           |
| On       | Ground            | Open               | IC-Ground           | IC-Ground            | Ground       | Flash                     | Flash                      | Normal                                           |
| On       | Open              | Ground             | IC-Ground           | IC-Ground            | Ground       | Flash                     | Flash                      | Normal                                           |
| On       | Ground            | Ground             | IC-Ground           | IC-Ground            | Ground       | Flash                     | Flash                      | Normal                                           |
| On       | Ground            | Ground             | IC-Ground           | IC-Ground            | Open         | Flash                     | Flash                      | Normal                                           |
| Off      | V <sub>BATT</sub> | V <sub>BATT</sub>  | Open                | Open                 | Open         | x                         | x                          | x                                                |
| Off      | V <sub>BATT</sub> | V <sub>BATT</sub>  | Ignition            | Open                 | Open         | x                         | x                          | x                                                |
| Off      | V <sub>BATT</sub> | V <sub>BATT</sub>  | Open                | Ignition             | Open         | x                         | x                          | x                                                |
| Off      | V <sub>BATT</sub> | V <sub>BATT</sub>  | Open                | Open                 | Ground       | Flash                     | Flash                      | Normal                                           |
| Off      | V <sub>BATT</sub> | V <sub>BATT</sub>  | Ignition            | Open                 | Ground       | Flash                     | Flash                      | Normal                                           |
| Off      | V <sub>BATT</sub> | V <sub>BATT</sub>  | Open                | Ignition             | Ground       | Flash                     | Flash                      | Normal                                           |
| Off      | V <sub>BATT</sub> | V <sub>BATT</sub>  | Ignition            | Ignition             | Ground       | Flash                     | Flash                      | Normal                                           |
| Off      | V <sub>BATT</sub> | V <sub>BATT</sub>  | Ignition            | Ignition             | Open         | x                         | x                          | x <sup>(3)</sup>                                 |
| On       | V <sub>BATT</sub> | V <sub>BATT</sub>  | Open                | Open                 | Open         | x                         | x                          | x                                                |
| On       | V <sub>BATT</sub> | V <sub>BATT</sub>  | Ignition            | Open                 | Open         | Flash                     | x                          | Double                                           |
| On       | V <sub>BATT</sub> | V <sub>BATT</sub>  | Open                | Ignition             | Open         | x                         | Flash                      | Double                                           |
| On       | V <sub>BATT</sub> | V <sub>BATT</sub>  | Open                | Open                 | Ground       | Flash                     | Flash                      | Normal                                           |
| On       | V <sub>BATT</sub> | V <sub>BATT</sub>  | Ignition            | Open                 | Ground       | Flash                     | Flash                      | Normal                                           |
| On       | V <sub>BATT</sub> | V <sub>BATT</sub>  | Open                | Ignition             | Ground       | Flash                     | Flash                      | Normal                                           |
| On       | V <sub>BATT</sub> | V <sub>BATT</sub>  | Ignition            | Ignition             | Ground       | Flash                     | Flash                      | Normal                                           |
| On       | V <sub>BATT</sub> | V <sub>BATT</sub>  | Ignition            | Ignition             | Open         | Flash                     | Flash                      | Normal                                           |

Notes: 1. x = no flashing


2. If ignition is OFF, the input level cannot be sensed (the IC is in the sleep mode). For hazard mode use the input hazard.

3. For hazard mode use input hazard or switch to battery as shown in Figure 6 on page 8 and Figure 10 on page 10.

## Diagrams

**Figure 3.** Timing Diagram

### Basic frequency

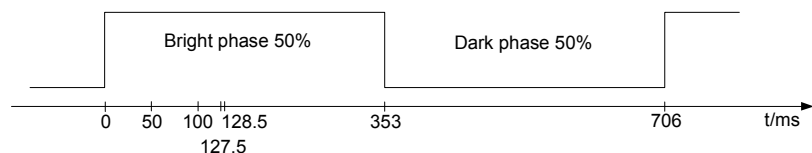


50 ms - 353 ms => short circuit detection  
 100 ms - 353 ms => short circuit detection during first bright phase (turn signal mode)  
 100 ms - 353 ms => short circuit detection during each bright phase (hazard signal mode)  
 127.5 ms - 128.5 ms => lamp outage detection


### Doubled frequency




**Figure 4.** Application 1: 12 V Version, Turn Signal Switches to GND, Hazard Switch to GND

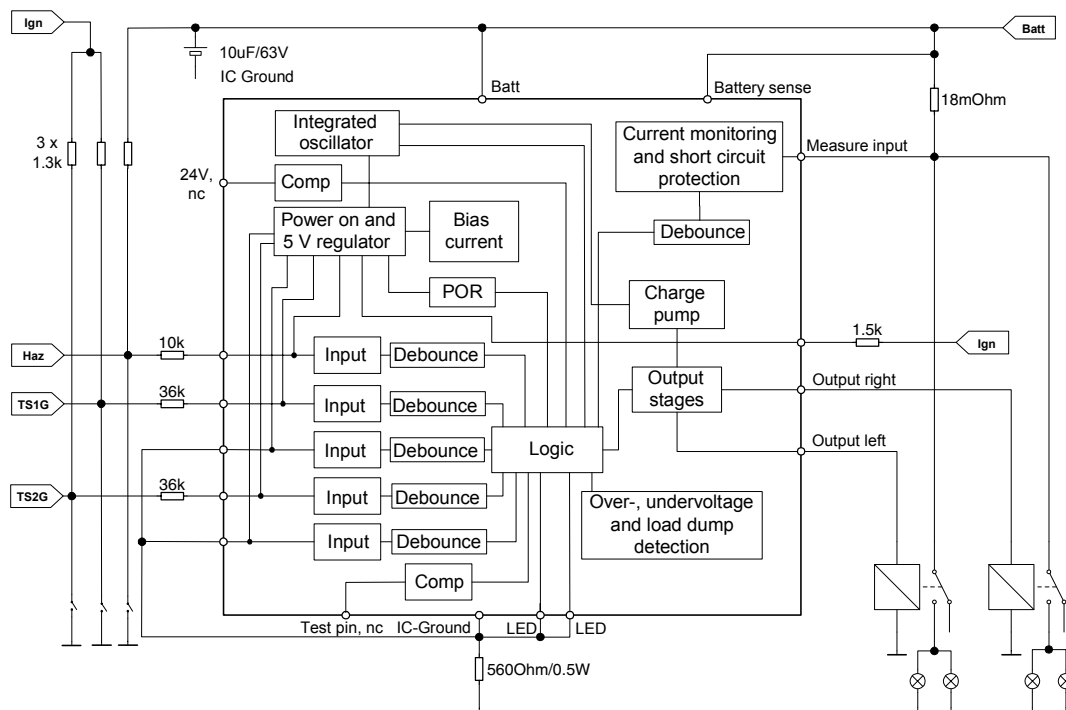


**Figure 5.** Application 2: 12 V Version, Turn Signal Switches to Ignition, Hazard Switch to GND

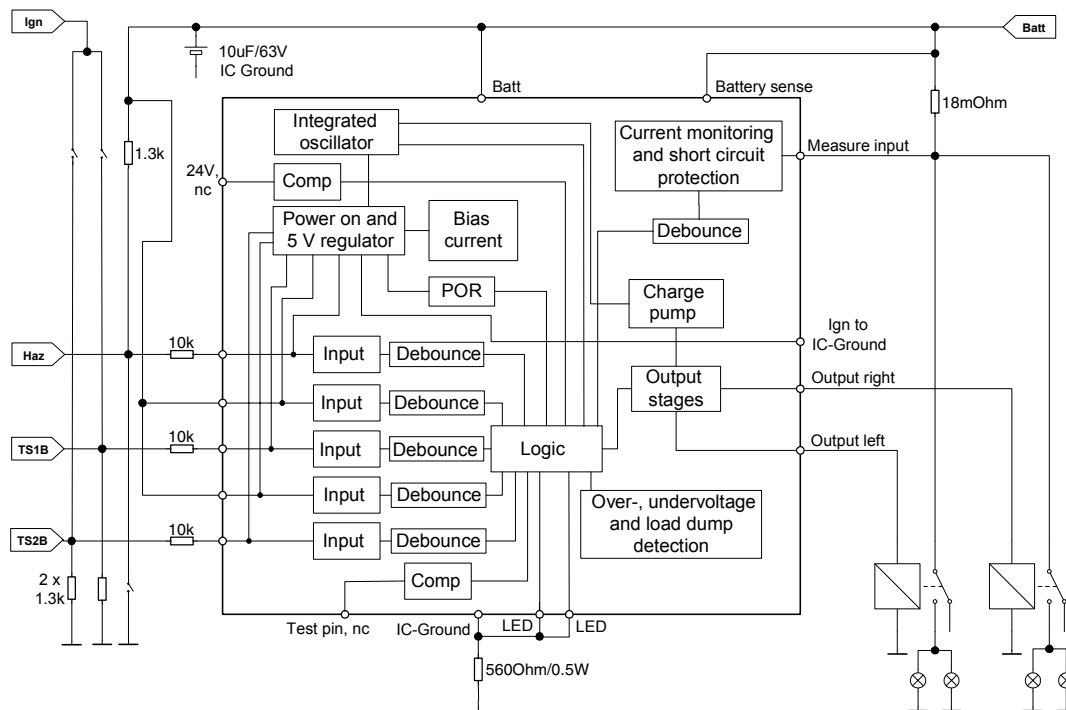


**Figure 6.** Application 3: 12 V Version, Turn Signal Switches to Ignition, Hazard Switch to Battery

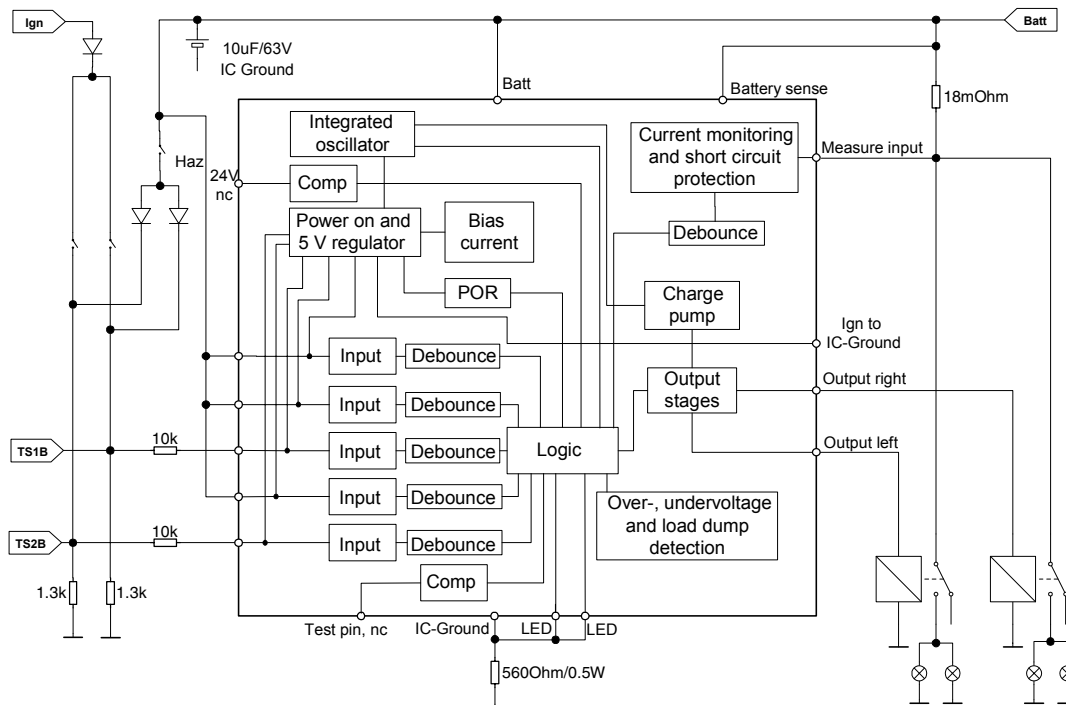


**Figure 7.** Application 4: 12 V Version, Turn Signal Switches to Ignition, Hazard Switch to GND, additional LED Outage

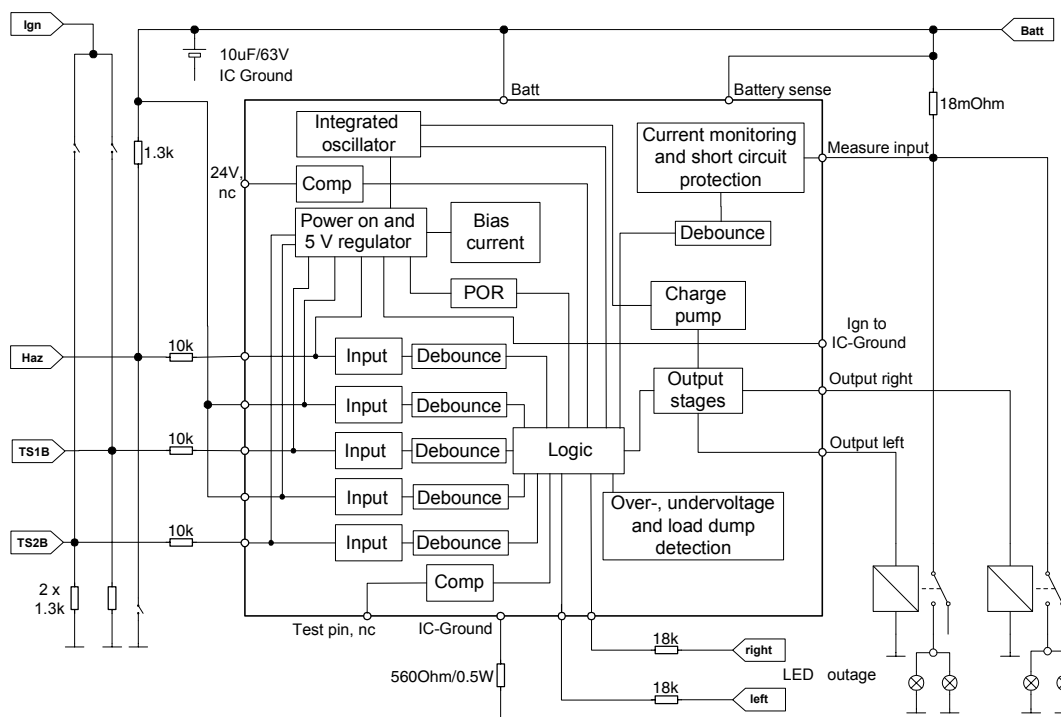


**Figure 8.** Application 1: 24 V Version, Turn Signal Switches to GND, Hazard Switch to GND

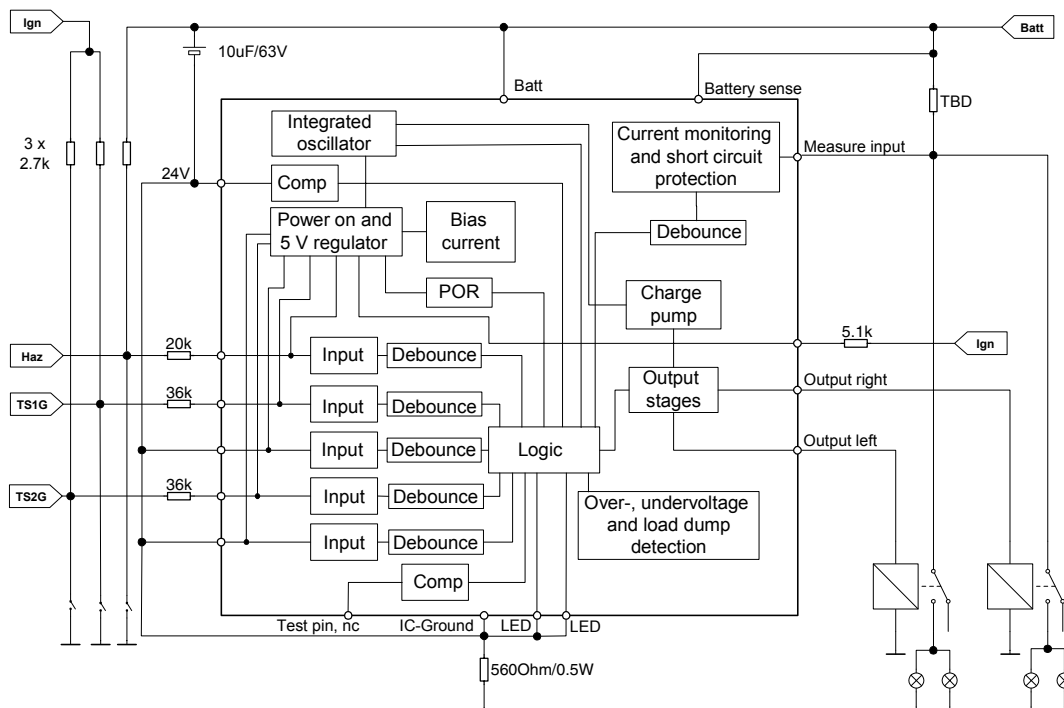


**Figure 9.** Application 2: 24 V Version, Turn Signal Switches to Ignition, Hazard Switch to GND

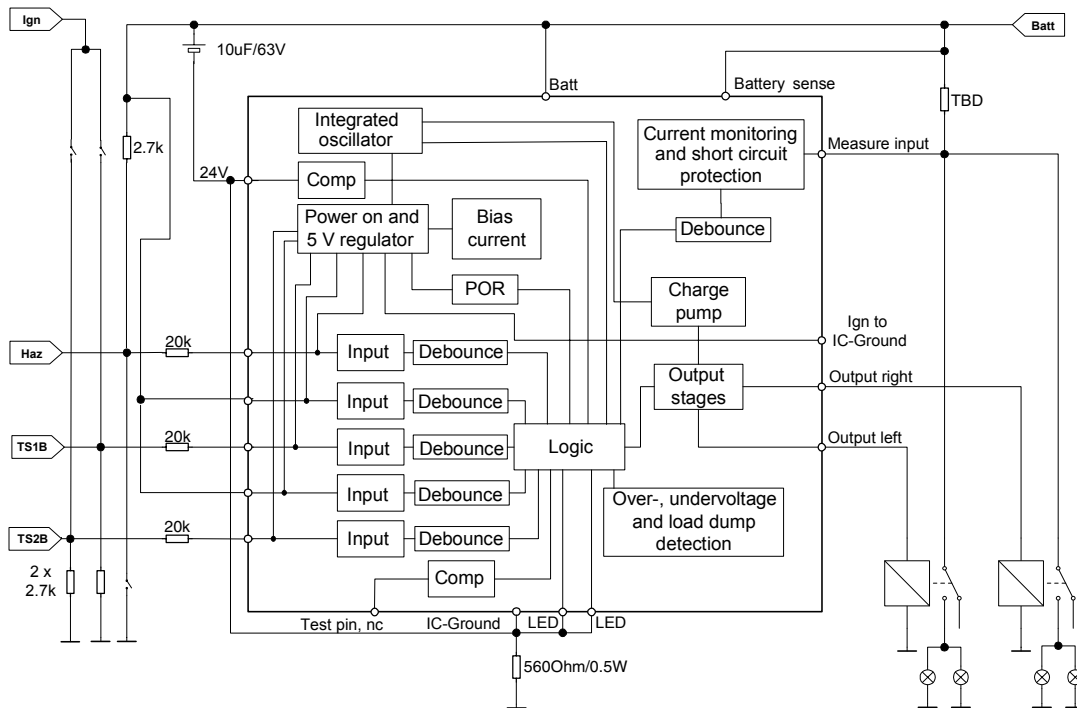

**Figure 10.** Application 3: 24 V Version, Turn Signal Switches to Ignition, Hazard Switch to Battery

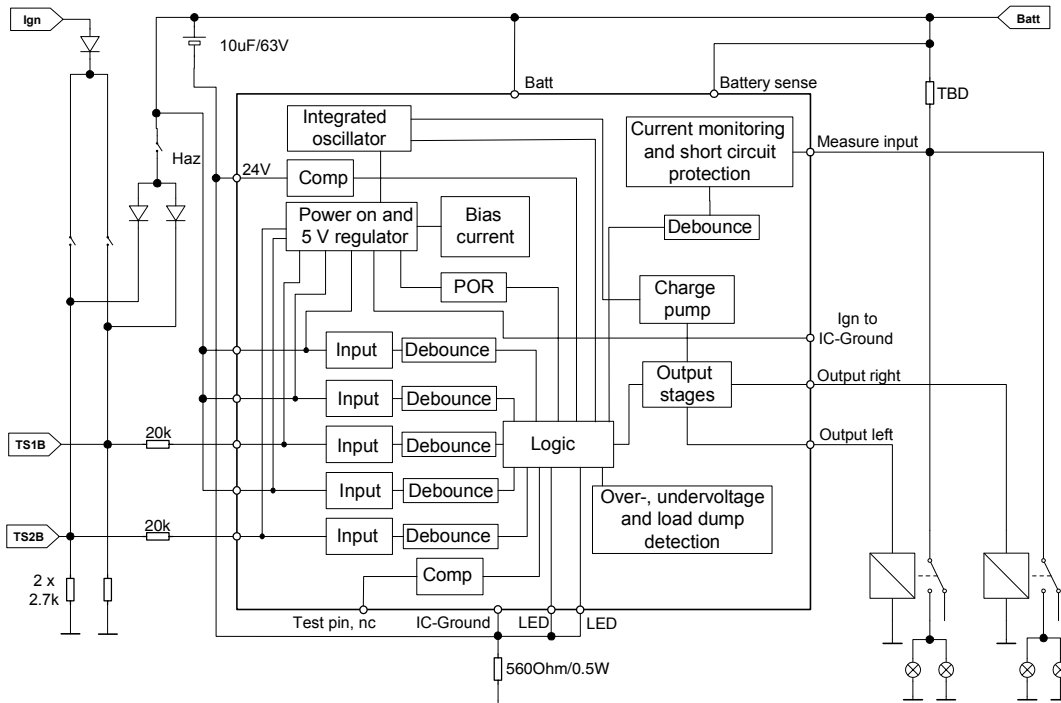

**Figure 11.** Application 4: 24 V Version, Turn Signal Switches to Ignition, Hazard Switch to GND, additional LED Outage

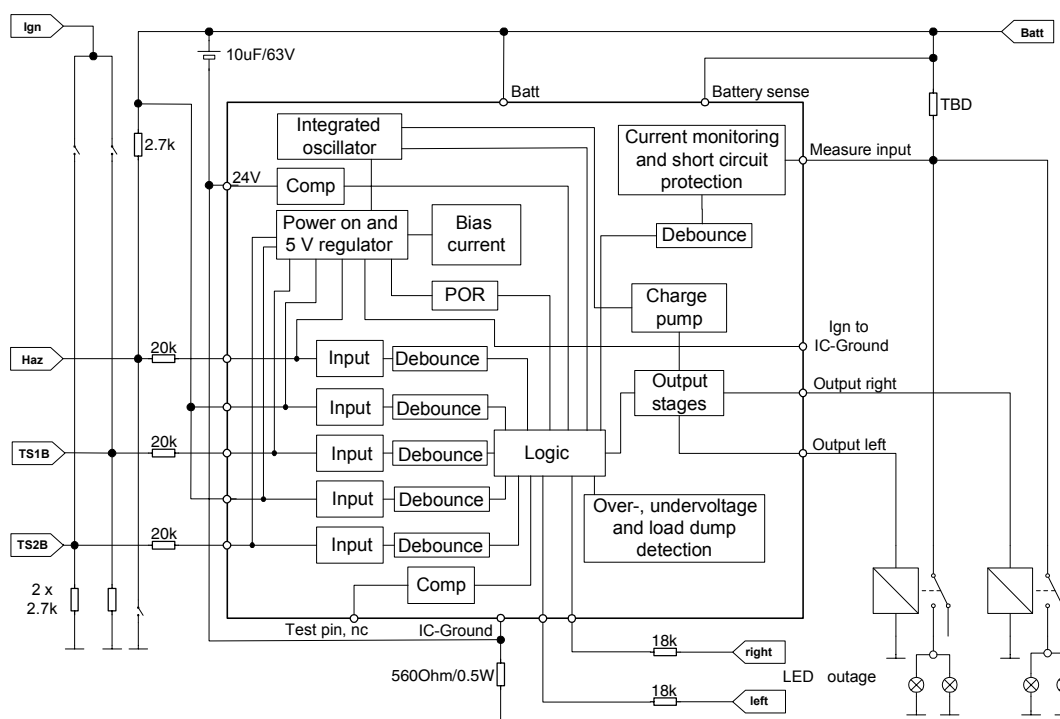


## Ordering Information

| Extended Type Number | Package | Remarks          |
|----------------------|---------|------------------|
| ATA6140-TBQ          | SO16    | Taped and reeled |

## Package Information

### Package SO16

Dimensions in mm

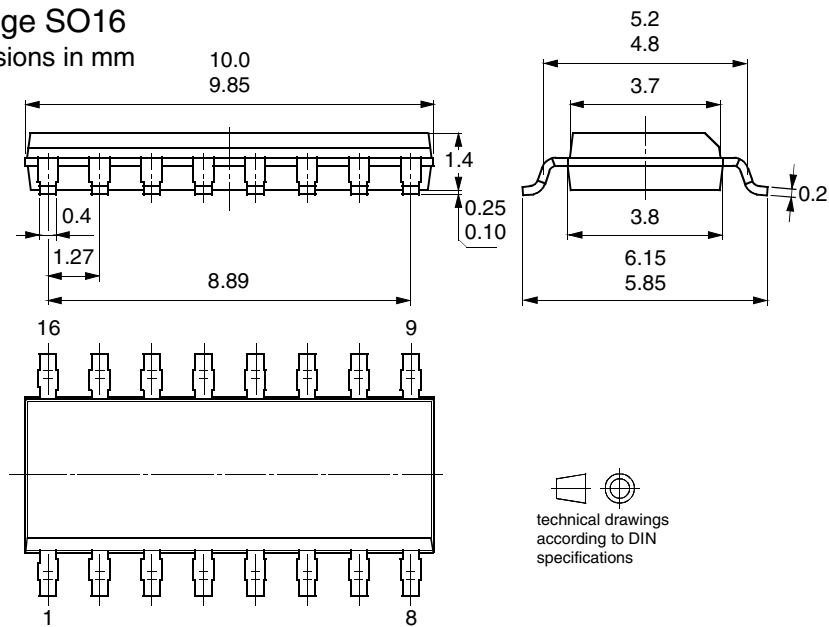



## **Atmel Corporation**

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## **Regional Headquarters**

### ***Europe***

Atmel Sarl  
Route des Arsenaux 41  
Case Postale 80  
CH-1705 Fribourg  
Switzerland  
Tel: (41) 26-426-5555  
Fax: (41) 26-426-5500

### ***Asia***

Room 1219  
Chinachem Golden Plaza  
77 Mody Road Tsimshatsui  
East Kowloon  
Hong Kong  
Tel: (852) 2721-9778  
Fax: (852) 2722-1369

### ***Japan***

9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## **Atmel Operations**

### ***Memory***

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

### ***Microcontrollers***

2325 Orchard Parkway  
San Jose, CA 95131, USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 436-4314

La Chantrerie  
BP 70602  
44306 Nantes Cedex 3, France  
Tel: (33) 2-40-18-18-18  
Fax: (33) 2-40-18-19-60

### ***ASIC/ASSP/Smart Cards***

Zone Industrielle  
13106 Rousset Cedex, France  
Tel: (33) 4-42-53-60-00  
Fax: (33) 4-42-53-60-01

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

Scottish Enterprise Technology Park  
Maxwell Building  
East Kilbride G75 0QR, Scotland  
Tel: (44) 1355-803-000  
Fax: (44) 1355-242-743

### ***RF/Automotive***

Theresienstrasse 2  
Postfach 3535  
74025 Heilbronn, Germany  
Tel: (49) 71-31-67-0  
Fax: (49) 71-31-67-2340

1150 East Cheyenne Mtn. Blvd.  
Colorado Springs, CO 80906, USA  
Tel: 1(719) 576-3300  
Fax: 1(719) 540-1759

### ***Biometrics/Imaging/Hi-Rel MPU/ High Speed Converters/RF Datacom***

Avenue de Rochepleine  
BP 123  
38521 Saint-Egreve Cedex, France  
Tel: (33) 4-76-58-30-00  
Fax: (33) 4-76-58-34-80

---

### ***Literature Requests***

[www.atmel.com/literature](http://www.atmel.com/literature)

**Disclaimer:** Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

© Atmel Corporation 2003. All rights reserved.

Atmel® and combinations thereof are the registered trademarks of Atmel Corporation or its subsidiaries.

Other terms and product names may be the trademarks of others.



Printed on recycled paper.

4560C-AUTO-10/03



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331