

LTM4611EV: Ultralow V_{IN} 15A Step-Down Power μ Module® Regulator

DESCRIPTION

Demonstration circuit DC1588A features the LTM®4611EV, a low input voltage 15A step-down power module. The operating input voltage range is 1.5V to 5.5V with an output voltage range from 0.8V to 5V. DC1588A can support a load current up to 15A, while derating may be necessary for different V_{IN} , V_{OUT} and thermal conditions. The LTM4611EV can operate in pulse-skipping mode or Burst Mode® operation for high efficiency under a light load. The DC1588A has a default programmable switching frequency of 500kHz and may be synchronized to an external clock from 360kHz up to 710kHz. The TRACK/SS input allows the output voltage to ramp up and ramp down; coincidentally or ratiometrically with an external voltage. A remote

output voltage sense feature improves the output voltage accuracy under high loads. These features and the availability of the LTM4611EV in a compact 15mm × 15mm × 4.32mm LGA package make the demonstration circuit ideal for use in many high density point-of-load regulation applications. The LTM4611 data sheet must be read in conjunction with this demo manual for working on or modifying the demo circuit 1588A.


Design files for this circuit board are available at
<http://www.linear.com/demo>

LT, LT, LTC, LTM, μ Module, Burst Mode, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITIONS	VALUE
Input Voltage Range		1.5V to 5.5V
Output Voltage V_{OUT}	Selectable with Jumpers (Open for 0.8V)	0.8V, 1.0V, 1.2V, 1.5V, 1.8V, 2.5V, 3.3V
Maximum Continuous Output Current	Derating is Necessary for Certain Operating Conditions. See Data Sheet for Details	15A DC
Default Operating Frequency		500kHz
External Clock Synchronous Frequency Range		360kHz to 710kHz
Efficiency	$V_{IN} = 5V$, $V_{OUT} = 3.3V$, $I_{OUT} = 15A$	93%, See Figure 2

BOARD PHOTO

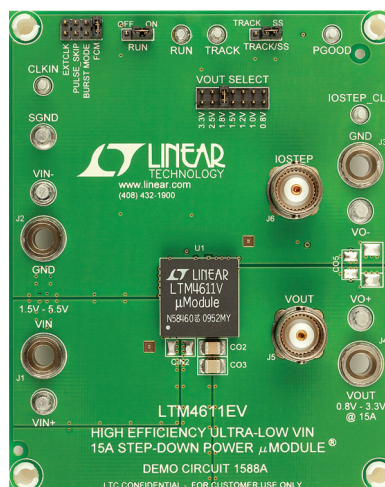

dc1588af

1. Place jumpers in the following positions for a typical 1.8V_{OUT} application:

JP4	JP1	JP2	JP3
V _{OUT} SELECT	RUN	MODE/PLLIN	TRACK/SS
1.8V	ON	FCM	SS

2. With power off, connect the input power supply, load and meters as shown in Figure 1. Preset the load to 0A and V_{IN} supply to be 5V.
3. Turn on the power supply at the input. The output voltage should be $1.8V \pm 1.5\%$.
4. Once the proper output voltage is established, adjust the load within the operating range and observe the output voltage regulation, output voltage ripple, efficiency and other parameters. Output ripple should be measured at J5 with a BNC cable.

5. To perform a load transient test, apply a square-wave pulse signal between IOSTEP_CLK and GND pins. The pulse amplitude (3V ~ 3.5V) sets the amplitude of load current step. The pulse signal should have very small duty cycle (<10%) to limit the thermal stress on the transient load circuit. The output transient current can be monitored at BNC connector J6 (15mV/A).
6. The LTM4611 can be synchronized to an external clock signal. Place the jumper JP2 in the EXTCLK position and apply the clock signal on the “CLKIN” (TP17) test point.
7. The output of LTM4611 can track another supply. The jumper JP3 allows selection of the soft-start or output tracking feature. If tracking external voltage is selected, the corresponding test point, “TRACK” (TP7), needs to be connected to a valid reference voltage signal.

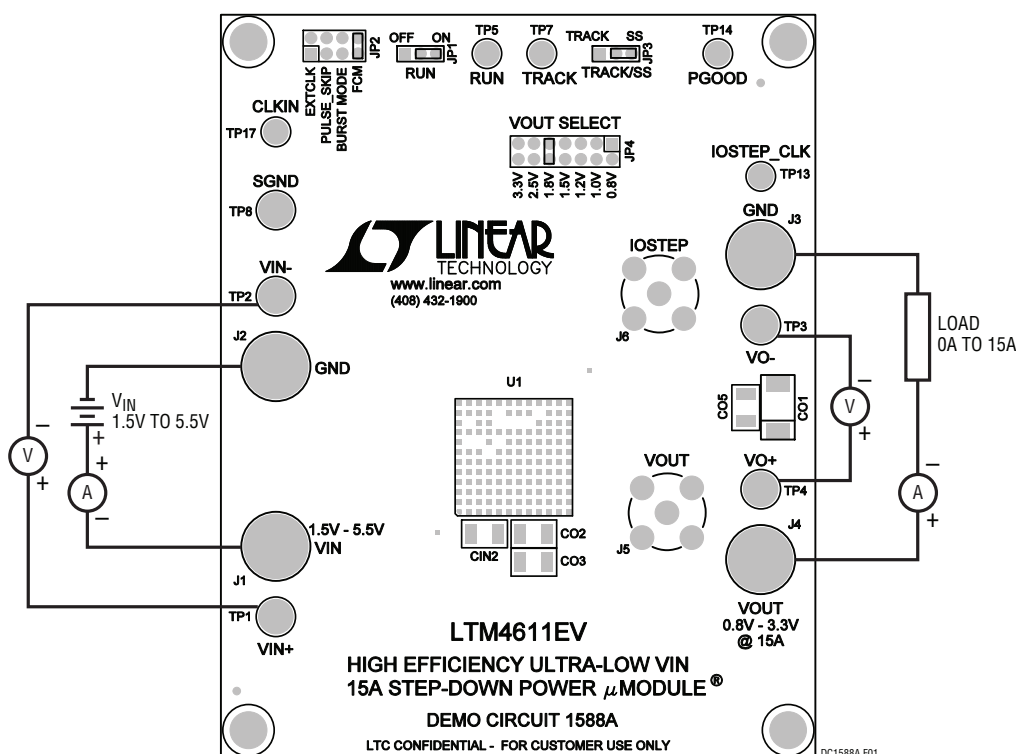


Figure 1. Test Setup of DC1588A

QUICK START PROCEDURE

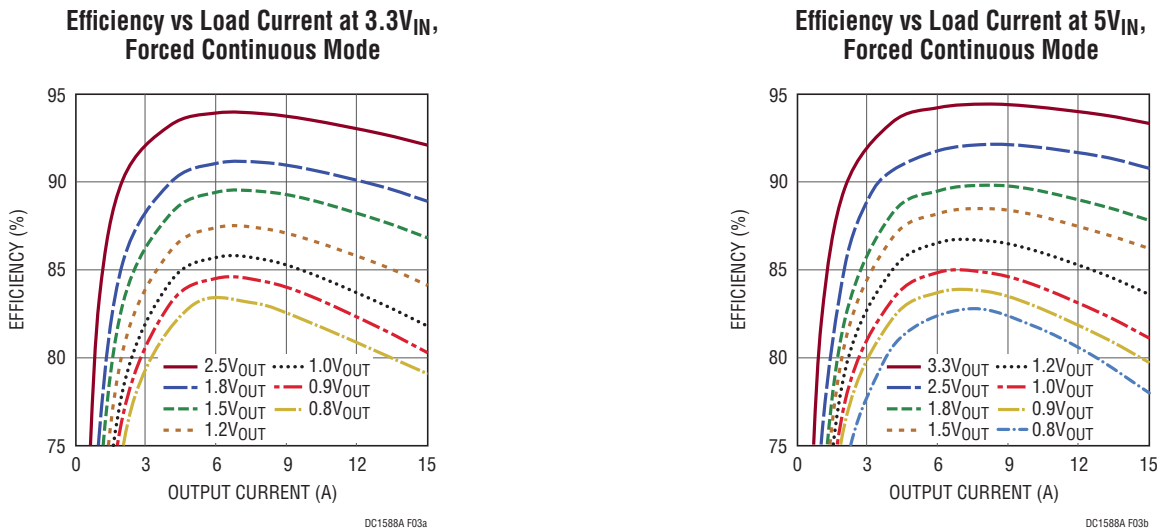


Figure 2. Measured Supply Efficiency with Different V_{IN} and V_{OUT}

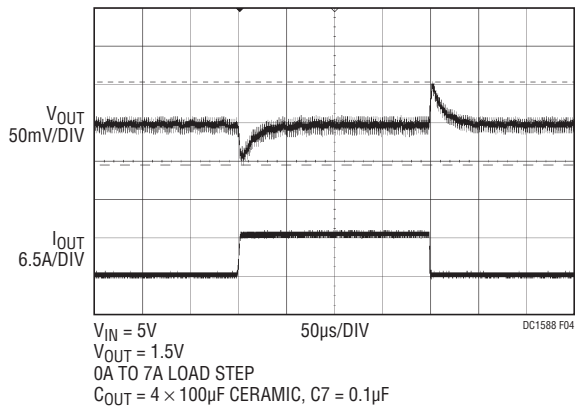



Figure 3. Measured Load Transient Response (0A to 7A Step)

DEMO MANUAL DC1588A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	CIN1	CAP, 120 μ F 20% 16V OS-CON	SANYO OS-CON 16SVP120M
2	2	CIN3, CIN4	CAP, 1210 47 μ F 20% 16V X5R	TAIYO YUDEN EMK325BJ476MM-T
3	4	C02, C03, C04, C06	CAP, 1210 100 μ F 20% 6.3V X5R	AVX 12106D107MAT2A
4	2	R9, R10	RES, 0603 10 Ω 5% 1/10W	VISHAY CRCW060310R0JNEA
5	1	R5	RES, 0603 48.7k 1% 1/10W	VISHAY CRCW060348K7FKEA
6	1	C2	CAP, 0603 47pF 10% 50V NPO	AVX 06035A470KAT
7	1	U1	IC, HIGH EFFICIENCY STEP-DOWN MODULE	LINEAR TECH.LTM4611EV
Additional Demo Board Circuit Components				
1	0	CIN2	CAP, 1210 22 μ F 20% 16V X5R OPTION	TDK C3225X5R1C226M OPTION
2	0	C01	CAP, 7343 330 μ F 20% 4V POSCAP OPTION	SANYO POSCAP 4TPE330MI OPTION
3	0	C05	CAP, 1210 100 μ F 20% 6.3V X5R OPTION	AVX 12106D107MAT2A OPTION
4	0	C1	CAP, 0603 220pF 10% 50V NPO OPTION	AVX 06035A221KAT OPTION
5	1	C3	CAP, 0603 4.7 μ F 20% 10V X5R	TAIYO YUDEN LMK107BJ475MA-T
6	0	C4,C6	CAP, 0603 OPTION	OPTION
7	1	C5	CAP, 0603 10nF 10% 50V X7R	TDK C1608X7R1H103K
8	1	C7	CAP, 0603 0.1 μ F 20% 16V X7R	TAIYO YUDEN EMK107BJ104MA-T
9	0	C8	CAP, 0805 OPTION	OPTION
10	0	D1	DIODE, ZENER 350mW OPTION	DIODES INC. BZX84C5V6 OPTION
11	1	Q1	XSTR, MOSFET	VISHAY SILICONIX SUD50N03-09P-E3
12	1	RS1	RES, 2512 0.015 Ω 1% 1W	PANASONIC ERJM1WSF15MU
13	0	R1,R13-R15, R18, R21, R23	RES, 0603 OPTION	OPTION
14	1	R2	RES, 0603 243k 1% 1/10W	VISHAY CRCW0603243KFKEA
15	1	R3	RES, 0603 121k 1% 1/10W	VISHAY CRCW0603121KFKEA
16	1	R4	RES, 0603 69.8k 1% 1/10W	VISHAY CRCW060369K8FKEA
17	1	R6	RES, 0603 28.7k 1% 1/10W	VISHAY CRCW060328K7FKEA
18	1	R7	RES, 0603 19.1k 1% 1/10W	VISHAY CRCW060319K1FKEA
19	2	R11, R12	RES, 0603 10k 5% 1/10W	VISHAY CRCW060310K0JNEA
20	1	R17	RES, 0603 60.4k 1% 1/10W	VISHAY CRCW060360K4FKEA
21	1	R19	RES, 0603 100k 5% 1/10W	VISHAY CRCW0603100KJNEA
22	1	R22	RES, 0603 0 Ω JUMPER	VISHAY CRCW06030000Z0EA
Hardware				
1	2	JP1, JP3	HEADER, 3 PIN, 2mm	SAMTEC TMM-103-02-L-S
2	1	JP2	HEADER, 2MM DOUBLE ROW, 2X4	SAMTEC TMM-104-02-L-D
3	1	JP4	HEADER, 2MM DOUBLE ROW, 2X7	SAMTEC TMM-107-02-L-D
4	4	J1, J2, J3, J4	JACK, BANANA	KEYSTONE 575-4
5	2	J5, J6	CONN, BNC, 5 PINS	CONNEX 112404
6	5	TP1, TP2, TP3, TP4, TP8	TURRET	MILL MAX 2501-2-00-80-00-00-07-0
7	5	TP5, TP7, TP13, TP14, TP17	TURRET	MILL MAX 2308-2-00-80-00-00-07-0
8	4	XJP1, XJP2, XJP3, XJP4	SHUNT, 2mm	SAMTEC 2SN-BK-G
9	4		STANDOFF, SNAP ON	KEYSTONE_8834

SCHEMATIC DIAGRAMS

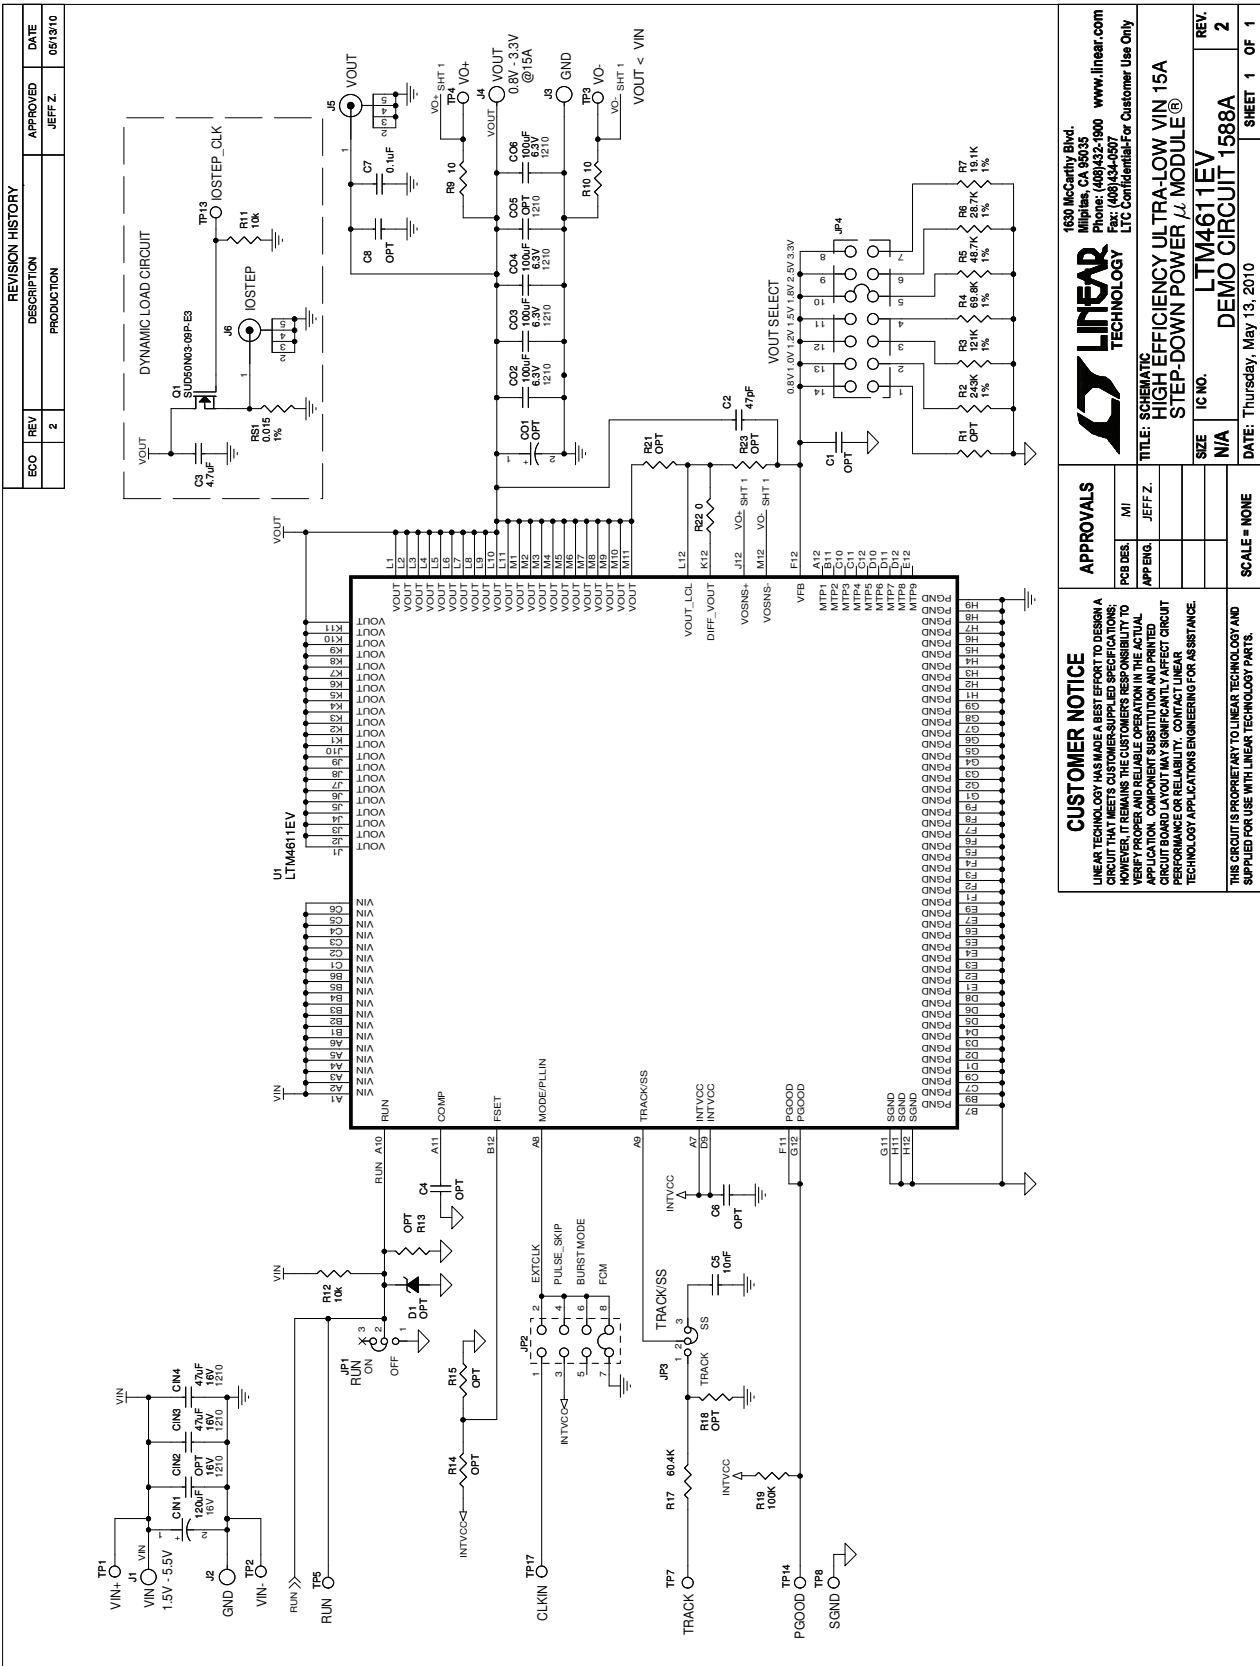

dc1588af

DEMO MANUAL DC1588A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331