

## LOW DROPOUT VOLTAGE REGULATOR

### ■ GENERAL DESCRIPTION

The NJM2861/62 is a low dropout voltage regulator. Advanced Bipolar technology achieves low noise, high ripple rejection and low quiescent current.

### ■ PACKAGE OUTLINE




NJM2861F/62F

### ■ FEATURES


- High Ripple Rejection      70dB typ. (f=1kHz,Vo=3V Version)
- Output Noise Voltage       $V_{no}=30\mu V_{rms}$  typ.(Cp=0.01 $\mu F$ )
- Output capacitor with 1.0 $\mu F$  ceramic capacitor (Vo $\geq$ 2.7V)
- Output Current              Io(max.)=100mA
- High Precision Output      Vo $\pm$ 1%
- Low Dropout Voltage      0.10V typ. (Io=60mA)
- ON/OFF Control            (Active High)
- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline              SOT-23-5

### ■ PIN CONFIGURATION



NJM2861F


1. CONTROL (Active High)
2. GND
3. NOISE BYPASS
4. V<sub>OUT</sub>
5. V<sub>IN</sub>



NJM2862F

- 1.V<sub>IN</sub>
- 2.GND
- 3.CONTROL (Active High)
- 4.NOISE BYPASS
- 5.V<sub>OUT</sub>

### ■ EQUIVALENT CIRCUIT

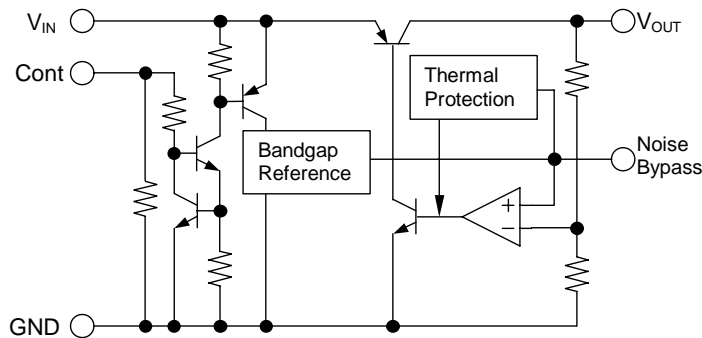

# NJM2861/62

## ■ OUTPUT VOLTAGE RANK LIST

Device Name	V <sub>OUT</sub>	Device Name	V <sub>OUT</sub>	Device Name	V <sub>OUT</sub>
NJM286×F21	2.1V	NJM286×F285	2.85V	NJM286×F38	3.8V
NJM286×F25	2.5V	NJM286×F03	3.0V	NJM286×F04	4.0V
NJM286×F26	2.6V	NJM286×F31	3.1V	NJM286×F46	4.6V
NJM286×F27	2.7V	NJM286×F33	3.3V	NJM286×F47	4.7V
NJM286×F28	2.8V	NJM286×F35	3.5V	NJM286×F05	5.0V

## ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V <sub>IN</sub>	+14	V
Control Voltage	V <sub>CONT</sub>	+14(*1)	V
Power Dissipation	P <sub>D</sub>	SOT-23-5 350(*2) 200(*3)	mW
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C

(\*1): When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.

(\*2): Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(\*3): Device itself

## ■ ELECTRICAL CHARACTERISTICS


(V<sub>IN</sub>=V<sub>O</sub>+1V, C<sub>IN</sub>=0.1μF, C<sub>O</sub>=1.0μF: V<sub>O</sub>≥2.7V (C<sub>O</sub>=2.2μF: V<sub>O</sub>≤2.6V), C<sub>p</sub>=0.01μF, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	I <sub>O</sub> =30mA	-1%	-	+1%	V
Quiescent Current	I <sub>Q</sub>	I <sub>O</sub> =0mA, expect I <sub>cont</sub>	-	120	180	μA
Quiescent Current at Control OFF	I <sub>Q(OFF)</sub>	V <sub>CONT</sub> =0V	-	-	100	nA
Output Current	I <sub>O</sub>	V <sub>O</sub> =0.3V	100	130	-	mA
Line Regulation	ΔV <sub>O</sub> /ΔV <sub>IN</sub>	V <sub>IN</sub> =V <sub>O</sub> +1V ~ V <sub>O</sub> +6V, I <sub>O</sub> =30mA	-	-	0.10	%/V
Load Regulation	ΔV <sub>O</sub> /ΔI <sub>O</sub>	I <sub>O</sub> =0 ~ 60mA	-	-	0.03	%/mA
Dropout Voltage	ΔV <sub>I-O</sub>	I <sub>O</sub> =60mA	-	0.10	0.18	V
Ripple Rejection	RR	e <sub>in</sub> =200mVrms, f=1kHz, I <sub>O</sub> =10mA V <sub>IN</sub> =V <sub>O</sub> +1V, V <sub>O</sub> =3V Version	-	70	-	dB
Average Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔTa	Ta=0~85°C, I <sub>O</sub> =10mA	-	±50	-	ppm/°C
Output Noise Voltage	V <sub>NO</sub>	f=10Hz~80kHz, I <sub>O</sub> =10mA, V <sub>O</sub> =3V Version	-	30	-	μVrms
Control Voltage for ON-state	V <sub>CONT(ON)</sub>		1.6	-	-	V
Control Voltage for OFF-state	V <sub>CONT(OFF)</sub>		-	-	0.6	V

The above specification is a common specification for all output voltages.

Therefore, it may be different from the individual specification for a specific output voltage.

## ■ TEST CIRCUIT

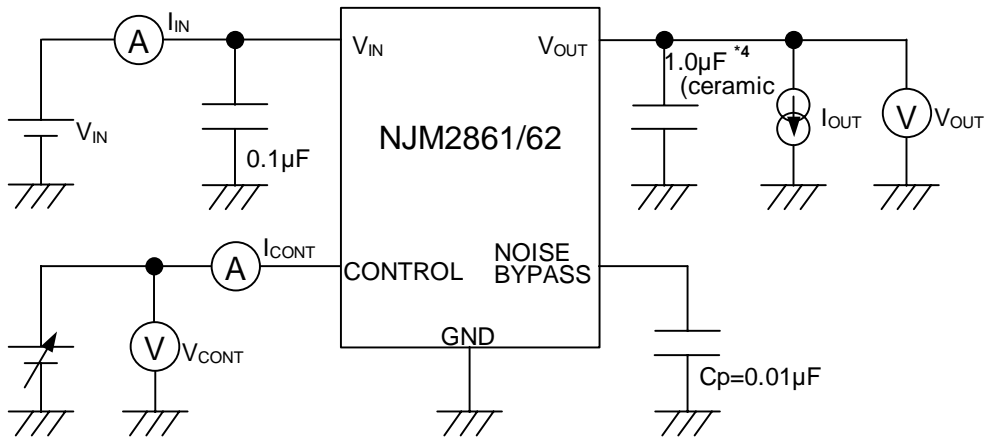


\*4  $V_o \leq 2.6V$  version:  $C_o = 2.2\mu F$  (ceramic)

# NJM2861/62

## ■ TYPICAL APPLICATION


① In case that ON/OFF Control is not required:

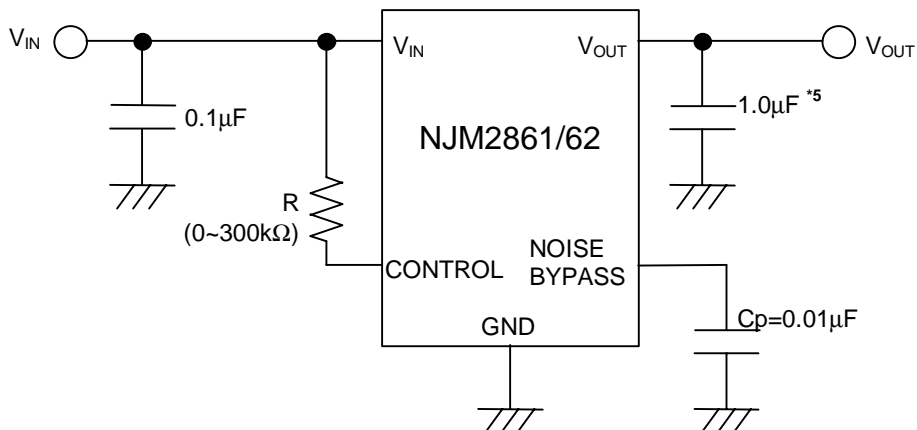

\*5  $V_o \leq 2.6V$  version:  $C_o = 2.2\mu F$

Connect control terminal to  $V_{IN}$  terminal

② In use of ON/OFF CONTROL:

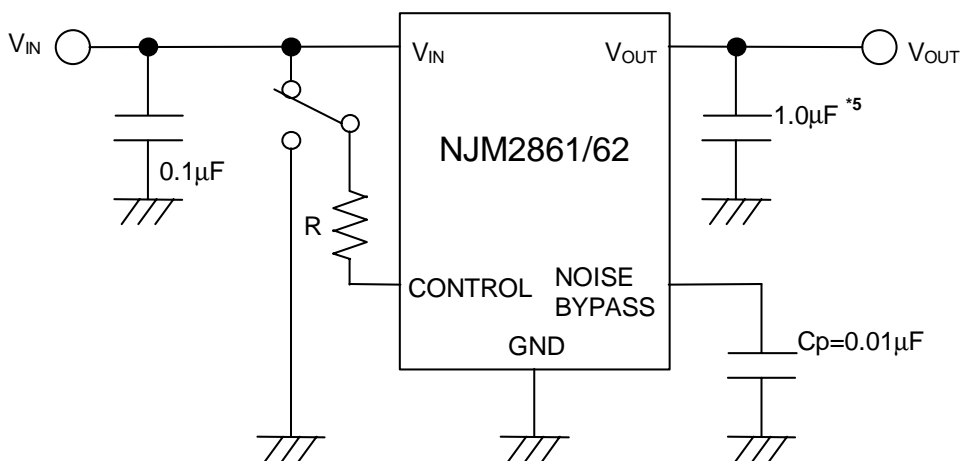

\*5  $V_o \leq 2.6V$  version:  $C_o = 2.2\mu F$

State of control terminal:

- "H" → output is enabled.
- "L" or "open" → output is disabled.

### \*Noise bypass Capacitance $C_p$


Noise bypass capacitance  $C_p$  reduces noise generated by band-gap reference circuit. Noise level and ripple rejection will be improved when larger  $C_p$  is used. Use of smaller  $C_p$  value may cause oscillation. Use the  $C_p$  value of  $0.01\mu F$  greater to avoid the problem.

### \*In the case of using a resistance "R" between $V_{IN}$ and control.

The current flow into the control terminal while the IC is ON state ( $I_{CONT}$ ) can be reduced when a pull up resistance "R" is inserted between  $V_{IN}$  and the control terminal.







The minimum control voltage for ON state ( $V_{CONT(ON)}$ ) is increased due to the voltage drop caused by  $I_{CONT}$  and the resistance "R". The  $I_{CONT}$  is temperature dependence as shown in the "Control Current vs. Temperature" characteristics. Therefore, the resistance "R" should be carefully selected to ensure the control voltage exceeds the  $V_{CONT(ON)}$  over the required temperature range.

## POWER DISSIPATION vs. AMBIENT TEMPERATURE






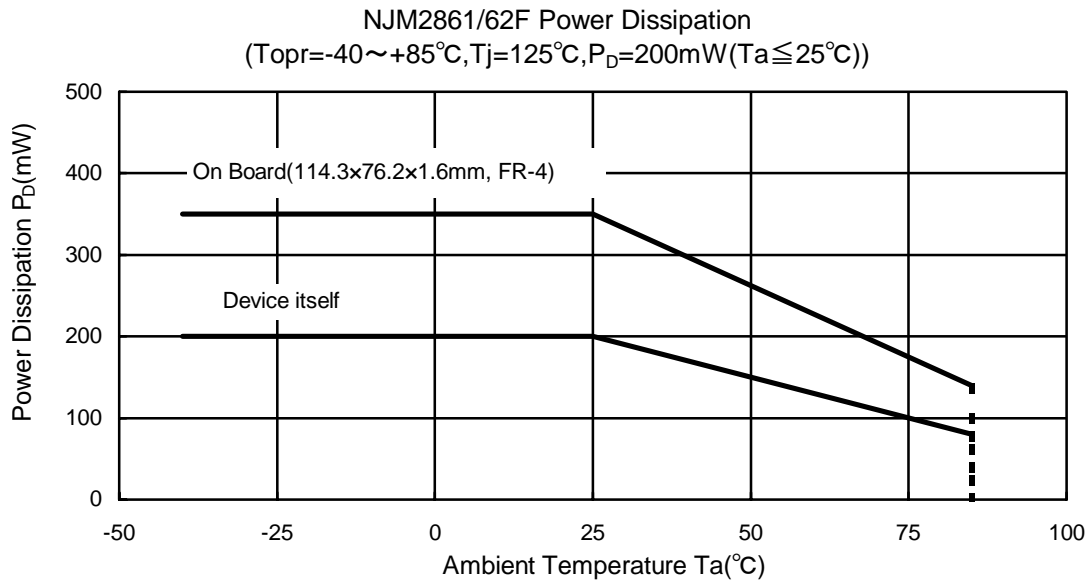


# NJM2861/62

## ELECTRICAL CHARACTERISTICS

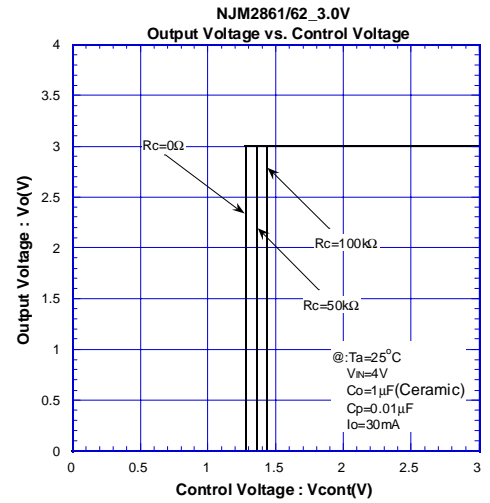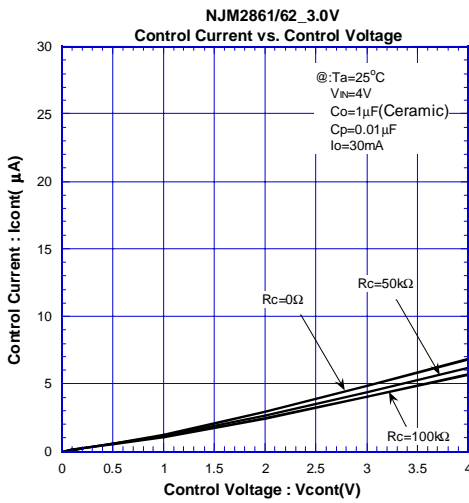
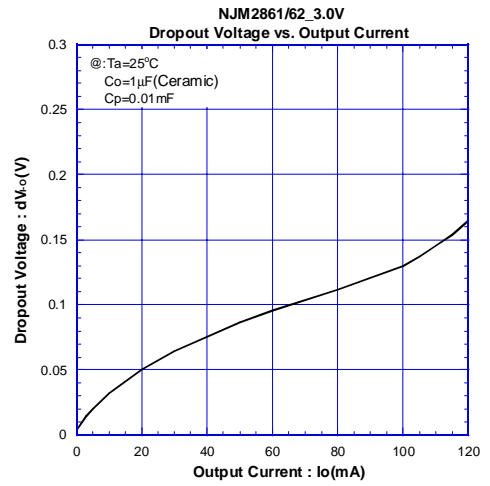
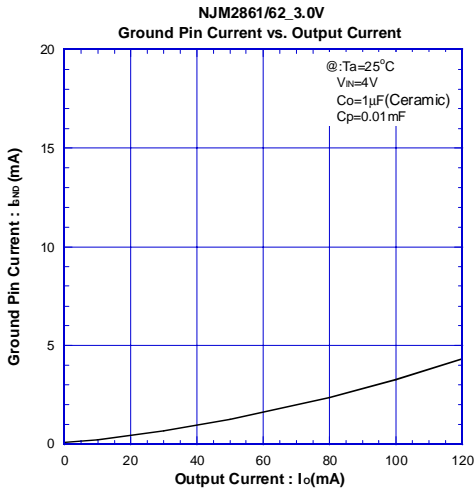
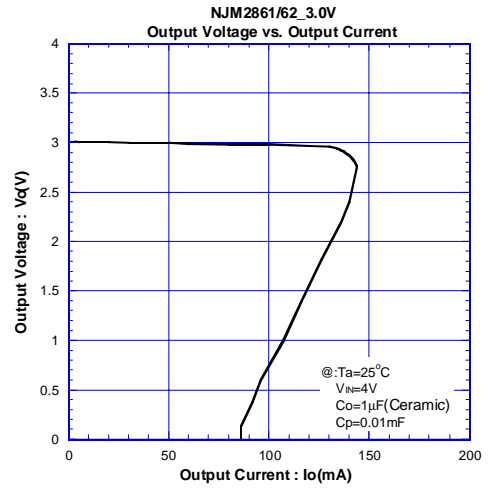
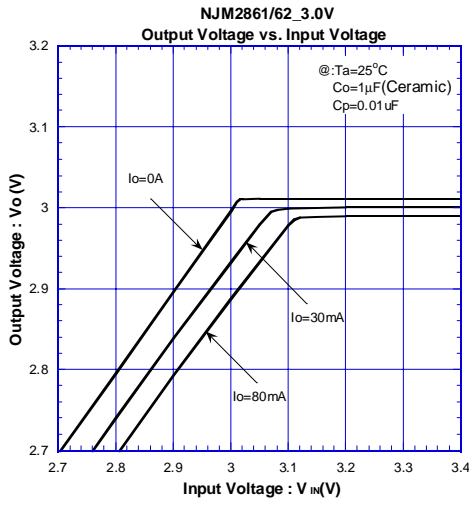


## ELECTRICAL CHARACTERISTICS

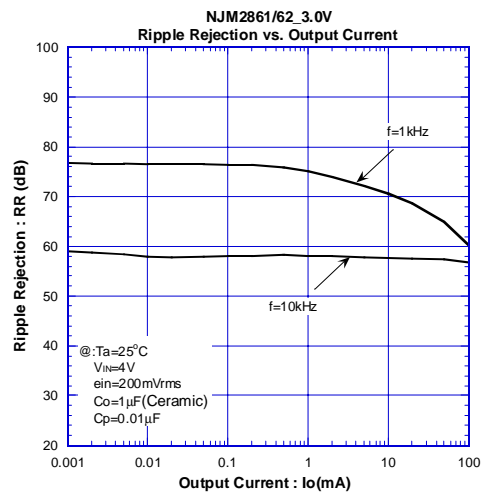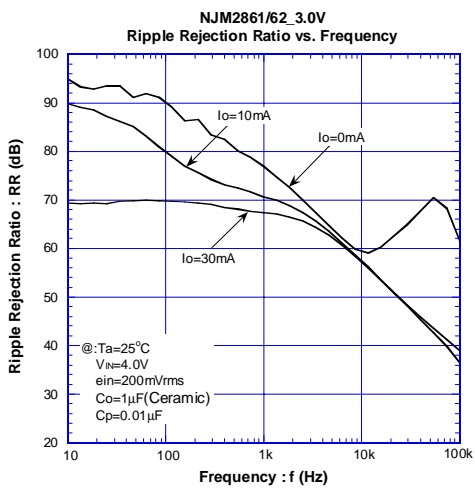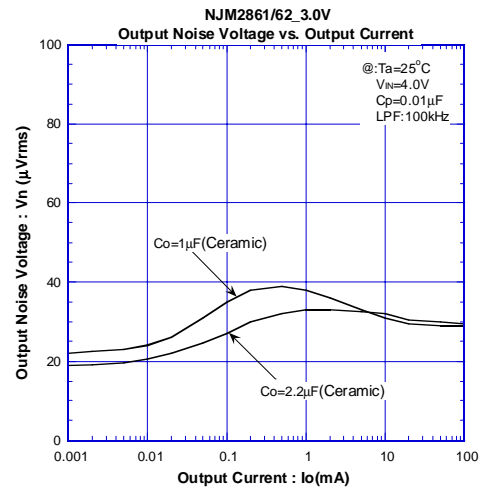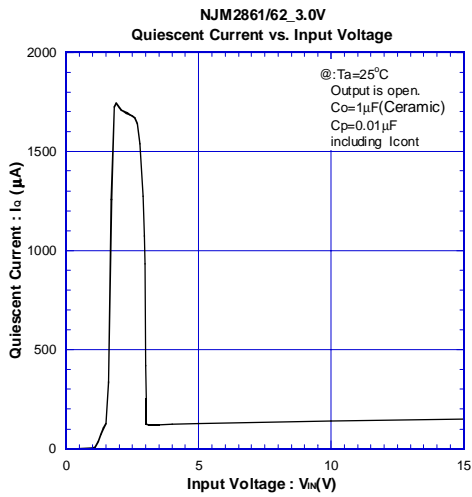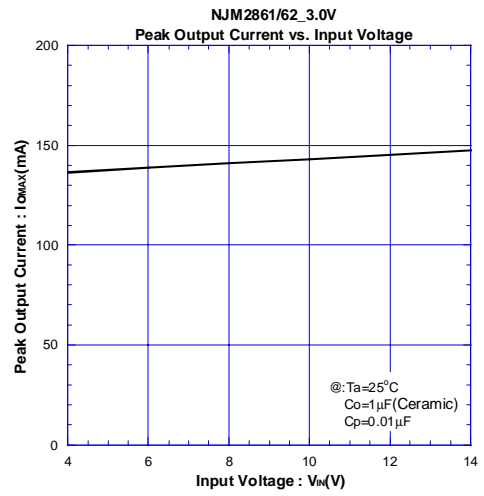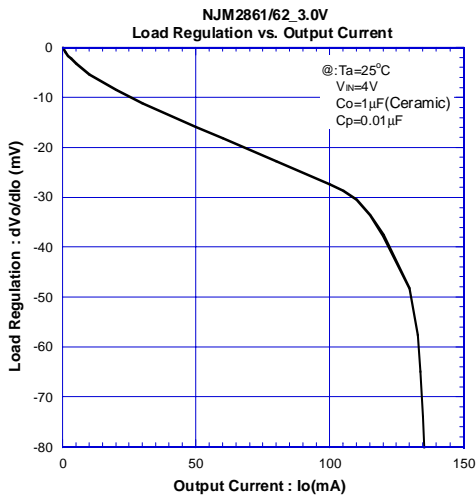






# NJM2861/62

## ■ ELECTRICAL CHARACTERISTICS

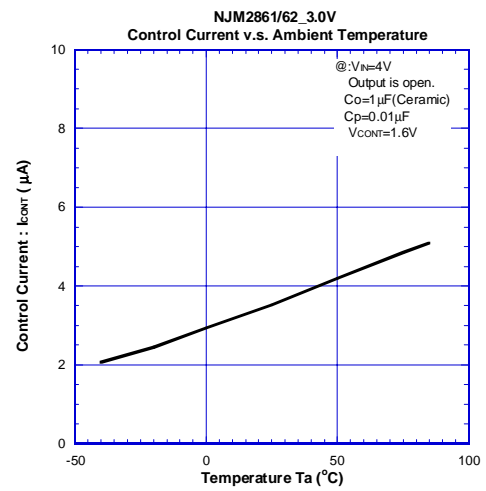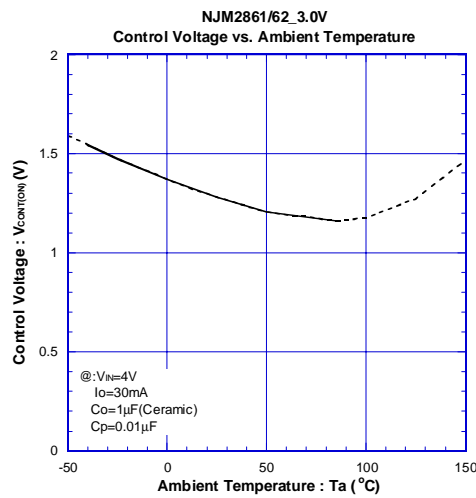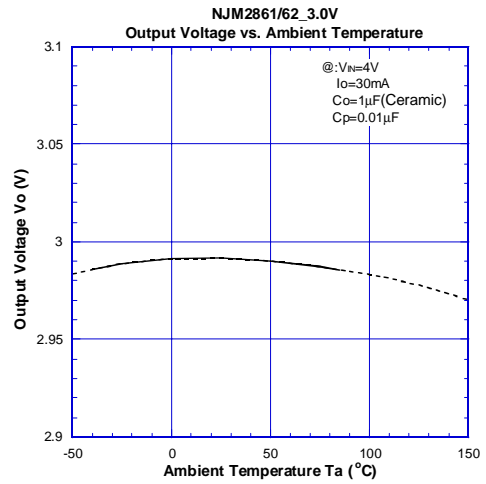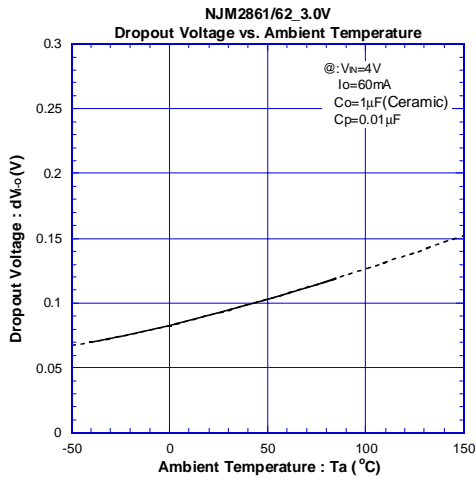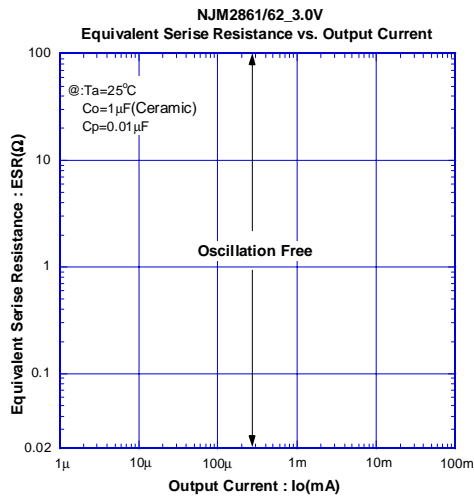







## ■ ELECTRICAL CHARACTERISTICS

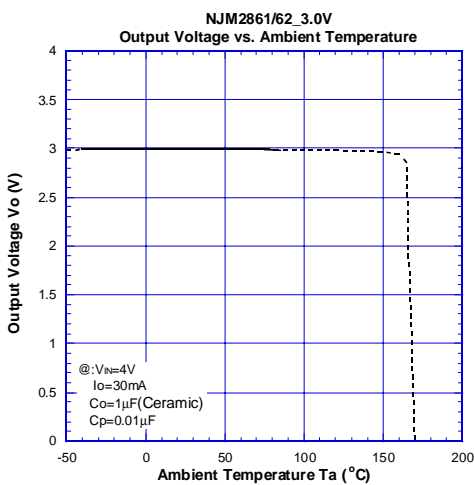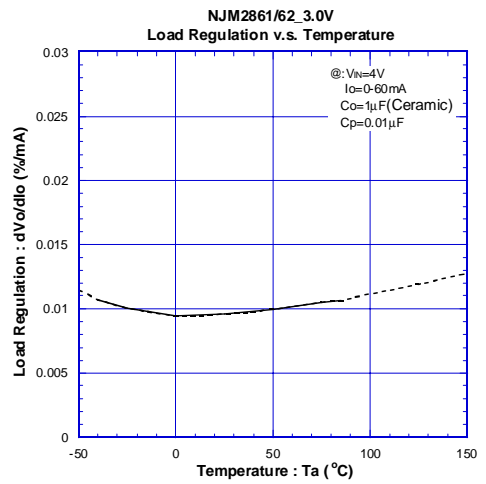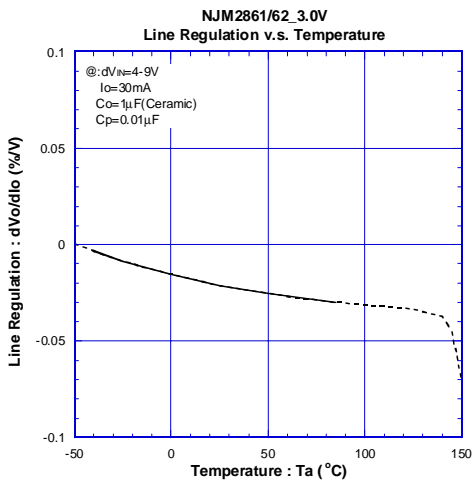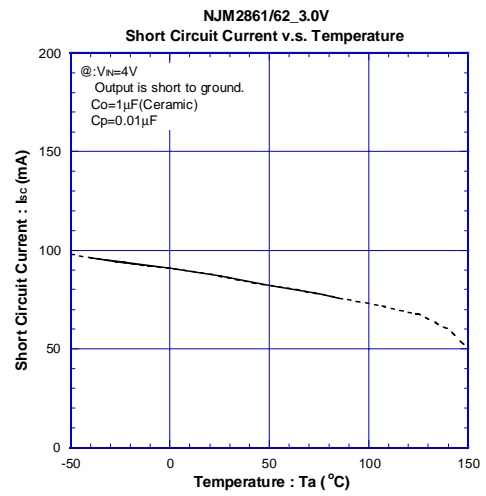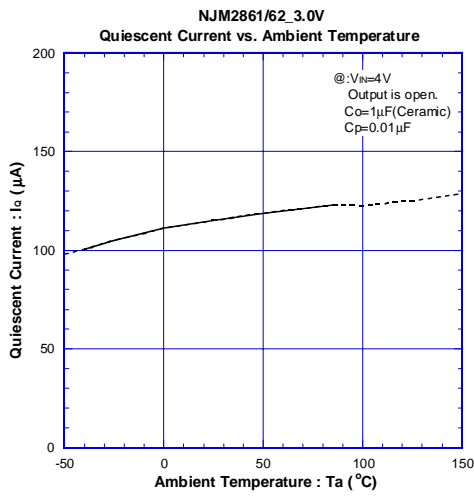

# NJM2861/62

## ■ ELECTRICAL CHARACTERISTICS

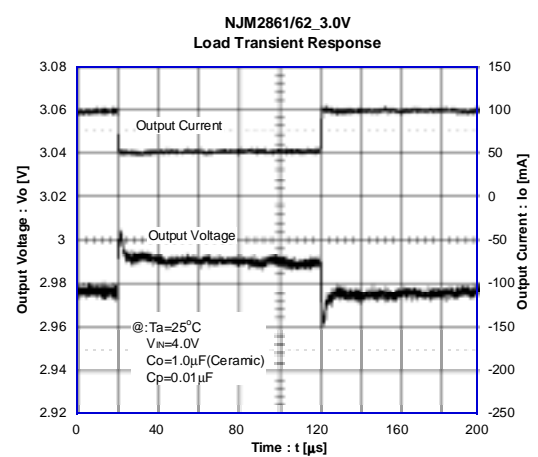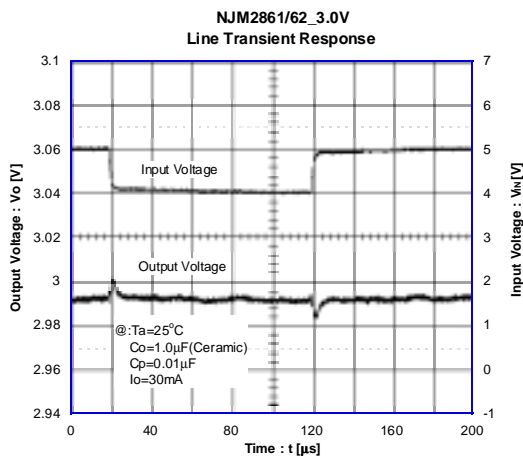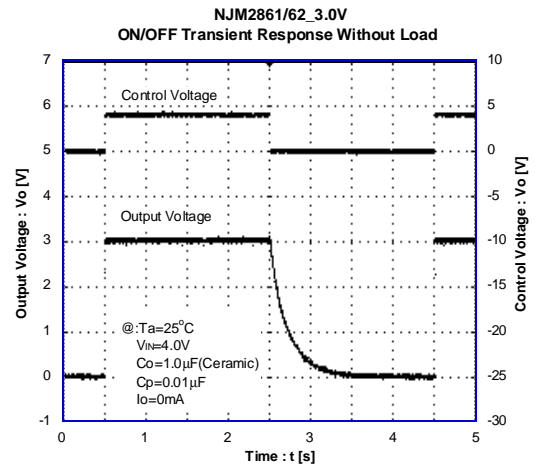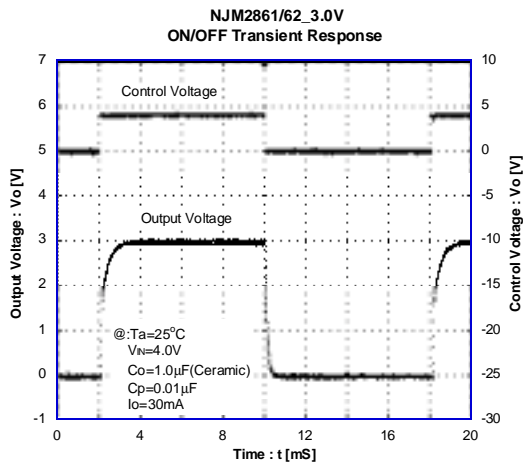

[CAUTION]  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [NJR:](#)

[NJM2861F21-TE1](#) [NJM2862F21-TE1](#) [NJM2862F25-TE1](#) [NJM2861F25-TE1](#) [NJM2862F26-TE1](#) [NJM2861F26-TE1](#)  
[NJM2862F05-TE1](#) [NJM2861F05-TE1](#) [NJM2861F38-TE1](#) [NJM2862F38-TE1](#) [NJM2861F28-TE1](#) [NJM2862F28-TE1](#)  
[NJM2861F285-TE1](#) [NJM2862F27-TE1](#) [NJM2861F27-TE1](#) [NJM2862F33-TE1](#) [NJM2861F33-TE1](#) [NJM2862F03-TE1](#)  
[NJM2861F03-TE1](#) [NJM2862F285-TE1](#) [NJM2862F04-TE1](#) [NJM2861F31-TE1](#) [NJM2861F46-TE1](#) [NJM2861F35-TE1](#)



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331