



TABLE OF CONTENTS

|                           |   |                                           |    |
|---------------------------|---|-------------------------------------------|----|
| Features .....            | 1 | Absolute Maximum Ratings .....            | 5  |
| Applications .....        | 1 | ESD Caution.....                          | 5  |
| General Description ..... | 1 | Typical Performance Characteristics ..... | 6  |
| Connection Diagrams.....  | 1 | Theory of Operation .....                 | 11 |
| Revision History .....    | 2 | Outline Dimensions .....                  | 13 |
| Specifications.....       | 3 | Ordering Guide .....                      | 14 |

REVISION HISTORY

1/10—Rev. D to Rev. E

|                                                                                                      |           |
|------------------------------------------------------------------------------------------------------|-----------|
| Updated Format.....                                                                                  | Universal |
| Changes to Features and General Description Section,<br>Added Table 1, Renumbered Sequentially ..... | 1         |
| Changes to Table 2.....                                                                              | 3         |
| Changes to Table 3.....                                                                              | 5         |
| Updated Outline Dimensions .....                                                                     | 13        |
| Changes to Ordering Guide .....                                                                      | 14        |

12/09—Rev. C to Rev. D

|                                  |    |
|----------------------------------|----|
| Updated Outline Dimensions ..... | 10 |
| Changes to Ordering Guide .....  | 10 |

11/01—Rev. B to Rev. C

|                                         |   |
|-----------------------------------------|---|
| Edits to Features.....                  | 1 |
| Edits to Product Description .....      | 1 |
| Edits to Absolute Maximum Ratings ..... | 3 |
| Deleted Metalization Photograph .....   | 3 |
| Edits to Ordering Guide .....           | 4 |

## SPECIFICATIONS

$T_A = 25^\circ\text{C}$ ,  $V_{CM} = 0\text{ V}$ , and  $V_S = \pm 15\text{ V}$  dc, unless otherwise noted.

Table 2.

| Parameters                          | Conditions                                                                 | AD704J/A   |          |     | Unit                         |
|-------------------------------------|----------------------------------------------------------------------------|------------|----------|-----|------------------------------|
|                                     |                                                                            | Min        | Typ      | Max |                              |
| INPUT OFFSET VOLTAGE                |                                                                            |            |          |     |                              |
| Initial Offset                      |                                                                            |            | 50       | 150 | $\mu\text{V}$                |
| Offset                              | $T_{MIN} - T_{MAX}$                                                        |            | 100      | 250 | $\mu\text{V}$                |
| vs. Temp, Average TC                |                                                                            |            | 0.2      | 1.5 | $\mu\text{V}/^\circ\text{C}$ |
| vs. Supply (PSRR)                   | $V_S = \pm 2\text{ V to } \pm 18\text{ V}$                                 | 100        | 132      |     | dB                           |
| $T_{MIN} - T_{MAX}$                 | $V_S = \pm 2.5\text{ V to } \pm 18\text{ V}$                               | 100        | 126      |     | dB                           |
| Long-Term Stability                 |                                                                            |            | 0.3      |     | $\mu\text{V}/\text{month}$   |
| INPUT BIAS CURRENT <sup>1</sup>     | $V_{CM} = 0\text{ V}$                                                      |            | 100      | 270 | pA                           |
|                                     | $V_{CM} = \pm 13.5\text{ V}$                                               |            |          | 300 | pA                           |
| vs. Temp, Average TC                |                                                                            |            | 0.3      |     | $\text{pA}/^\circ\text{C}$   |
| $T_{MIN} - T_{MAX}$                 | $V_{CM} = 0\text{ V}$                                                      |            |          | 300 | pA                           |
|                                     | $V_{CM} = \pm 13.5\text{ V}$                                               |            |          | 400 | pA                           |
| INPUT OFFSET CURRENT                | $V_{CM} = 0\text{ V}$                                                      |            | 80       | 250 | pA                           |
|                                     | $V_{CM} = \pm 13.5\text{ V}$                                               |            |          | 300 | pA                           |
| vs. Temp, Average TC                |                                                                            |            | 0.6      |     | $\text{pA}/^\circ\text{C}$   |
| $T_{MIN} - T_{MAX}$                 | $V_{CM} = 0\text{ V}$                                                      |            | 100      | 300 | pA                           |
|                                     | $V_{CM} = \pm 13.5\text{ V}$                                               |            | 100      | 400 | pA                           |
| MATCHING CHARACTERISTICS            |                                                                            |            |          |     |                              |
| Offset Voltage                      | $T_{MIN} - T_{MAX}$                                                        |            |          | 250 | $\mu\text{V}$                |
|                                     |                                                                            |            |          | 400 | $\mu\text{V}$                |
| Input Bias Current <sup>2</sup>     | $T_{MIN} - T_{MAX}$                                                        |            |          | 500 | pA                           |
|                                     |                                                                            |            |          | 600 | pA                           |
| Common-Mode Rejection <sup>3</sup>  | $T_{MIN} - T_{MAX}$                                                        | 94         |          |     | dB                           |
|                                     |                                                                            | 94         |          |     | dB                           |
| Power Supply Rejection <sup>4</sup> | $T_{MIN} - T_{MAX}$                                                        | 94         |          |     | dB                           |
|                                     |                                                                            | 94         |          |     | dB                           |
| Crosstalk <sup>5</sup>              | $T_{MIN} - T_{MAX}$<br>$f = 10\text{ Hz}$<br>$R_{LOAD} = 2\text{ k}\Omega$ | 94         |          |     | dB                           |
|                                     |                                                                            |            | 150      |     | dB                           |
| FREQUENCY RESPONSE UNITY GAIN       |                                                                            |            |          |     |                              |
| Crossover Frequency                 |                                                                            |            | 0.8      |     | MHz                          |
| Slew Rate, Unity Gain               | $G = -1$                                                                   |            | 0.15     |     | $\text{V}/\mu\text{s}$       |
| Slew Rate                           | $T_{MIN} - T_{MAX}$                                                        |            | 0.1      |     | $\text{V}/\mu\text{s}$       |
| INPUT IMPEDANCE                     |                                                                            |            |          |     |                              |
| Differential                        |                                                                            |            | 40  2    |     | $\text{M}\Omega  \text{pF}$  |
| Common-Mode                         |                                                                            |            | 300  2   |     | $\text{G}\Omega  \text{pF}$  |
| INPUT VOLTAGE RANGE                 |                                                                            |            |          |     |                              |
| Common-Mode Voltage                 |                                                                            | $\pm 13.5$ | $\pm 14$ |     | V                            |
| Common-Mode Rejection Ratio         | $V_{CM} = \pm 13.5\text{ V}$                                               | 100        | 132      |     | dB                           |
|                                     | $T_{MIN} - T_{MAX}$                                                        | 98         | 128      |     | dB                           |
| INPUT CURRENT NOISE                 | 0.1 Hz to 10 Hz                                                            |            | 3        |     | pA p-p                       |
|                                     | $f = 10\text{ Hz}$                                                         |            | 50       |     | $\text{fA}/\sqrt{\text{Hz}}$ |
| INPUT VOLTAGE NOISE                 | 0.1 Hz to 10 Hz                                                            |            | 0.5      |     | $\mu\text{V p-p}$            |
|                                     | $f = 10\text{ Hz}$                                                         |            | 17       |     | $\text{nV}/\sqrt{\text{Hz}}$ |
|                                     | $f = 1\text{ kHz}$                                                         |            | 15       | 22  | $\text{nV}/\sqrt{\text{Hz}}$ |

# AD704

| Parameters             | Conditions                     | AD704J/A  |          |          | Unit |
|------------------------|--------------------------------|-----------|----------|----------|------|
|                        |                                | Min       | Typ      | Max      |      |
| OPEN-LOOP GAIN         | $V_O = \pm 12\text{ V}$        |           |          |          |      |
|                        | $R_{LOAD} = 10\text{ k}\Omega$ | 200       | 2000     |          | V/mV |
|                        | $T_{MIN} - T_{MAX}$            | 150       | 1500     |          | V/mV |
|                        | $V_O = \pm 10\text{ V}$        |           |          |          |      |
|                        | $R_{LOAD} = 2\text{ k}\Omega$  | 200       | 1000     |          | V/mV |
|                        | $T_{MIN} - T_{MAX}$            | 150       | 1000     |          | V/mV |
| OUTPUT CHARACTERISTICS |                                |           |          |          |      |
| Voltage Swing          | $R_{LOAD} = 10\text{ k}\Omega$ |           |          |          | V    |
|                        | $T_{MIN} - T_{MAX}$            | $\pm 13$  | $\pm 14$ |          |      |
| Current                | Short circuit                  |           | $\pm 15$ |          | mA   |
| CAPACITIVE LOAD        |                                |           |          |          |      |
| Drive Capability       | Gain = 1                       |           | 10,000   |          | pF   |
| POWER SUPPLY           |                                |           |          |          |      |
| Rated Performance      |                                |           | $\pm 15$ |          | V    |
| Operating Range        |                                | $\pm 2.0$ |          | $\pm 18$ | V    |
| Quiescent Current      |                                |           | 1.5      | 2.4      | mA   |
|                        | $T_{MIN} - T_{MAX}$            |           | 1.6      | 2.6      | mA   |
| TRANSISTOR COUNT       | Number of transistors          |           | 180      |          |      |

<sup>1</sup> Bias current specifications are guaranteed maximum at either input.

<sup>2</sup> Input bias current match is the maximum difference between corresponding inputs of all four amplifiers.

<sup>3</sup> CMRR match is the difference of  $\Delta V_{OS}/\Delta V_{CM}$  between any two amplifiers, expressed in dB.

<sup>4</sup> PSRR match is the difference between  $\Delta V_{OS}/\Delta V_{SUPPLY}$  for any two amplifiers, expressed in dB.

<sup>5</sup> See Figure 5 for test circuit.

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                                      | Rating          |
|------------------------------------------------|-----------------|
| Supply Voltage                                 | $\pm 18$ V      |
| Internal Power Dissipation (25°C) <sup>1</sup> |                 |
| Input Voltage                                  | $\pm V_S$       |
| Differential Input Voltage <sup>2</sup>        | $\pm 0.7$ V     |
| Output Short-Circuit Duration (Single Input)   | Indefinite      |
| Storage Temperature Range                      | -65°C to +125°C |
| Operating Temperature Range                    |                 |
| AD704J                                         | 0°C to 70°C     |
| AD704A                                         | -40°C to +85°C  |
| Lead Temperature (Soldering, 10 sec)           | 300°C           |

<sup>1</sup>Specification is for the device in free air:


14-lead plastic package:  $\theta_{JA} = 150^\circ\text{C/W}$ .

16-lead SOIC package:  $\theta_{JA} = 100^\circ\text{C/W}$ .

20-terminal LCC package:  $\theta_{JA} = 150^\circ\text{C/W}$ .

<sup>2</sup>The input pins of this amplifier are protected by back-to-back diodes. If the differential voltage exceeds  $\pm 0.7$  volts, external series protection resistors should be added to limit the input current to less than 25 mA.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

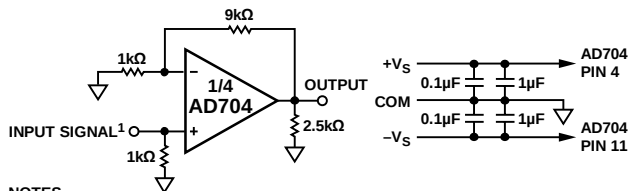

#### NOTES

1. ALL FOUR AMPLIFIERS ARE CONNECTED AS SHOWN.

<sup>1</sup>THE SIGNAL INPUT (SUCH THAT THE AMPLIFIER'S OUTPUT IS AT MAXIMUM AMPLITUDE WITHOUT CLIPPING OR SLEW LIMITING) IS APPLIED TO ONE AMPLIFIER AT A TIME. THE OUTPUTS OF THE OTHER THREE AMPLIFIERS ARE THEN MEASURED FOR CROSSTALK.

Figure 5. Crosstalk Test Circuit

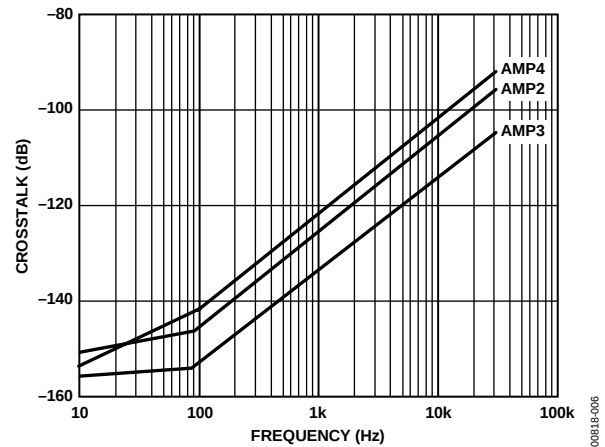


Figure 6. Crosstalk vs. Frequency

## ESD CAUTION



### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

T<sub>A</sub> = 25°C, V<sub>S</sub> = ±15 V dc, unless otherwise noted.

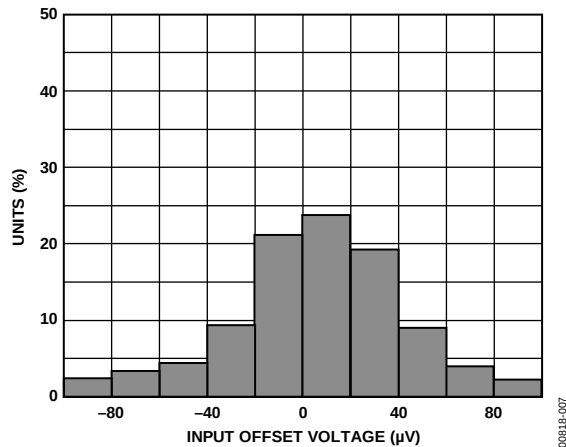


Figure 7. Typical Distribution of Input Offset Voltage

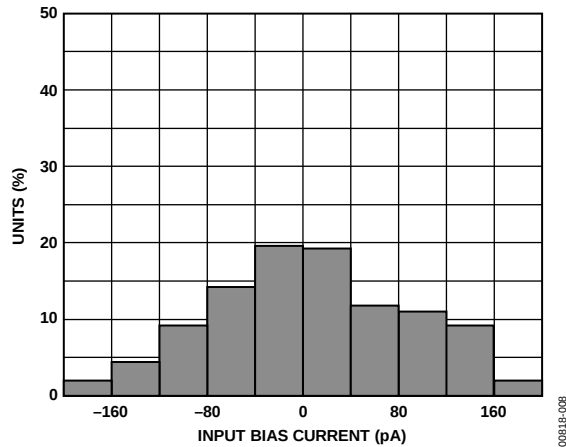


Figure 8. Typical Distribution of Input Bias Current

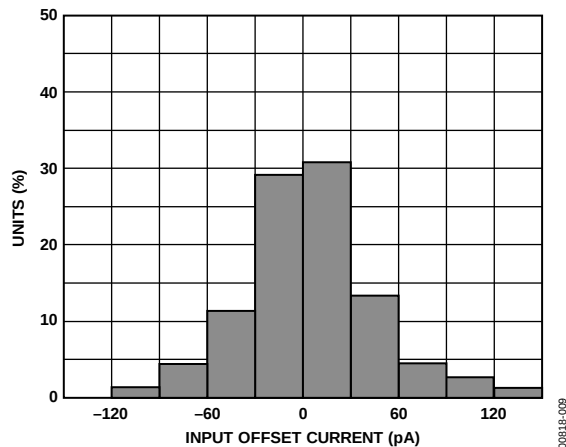


Figure 9. Typical Distribution of Input Offset Current

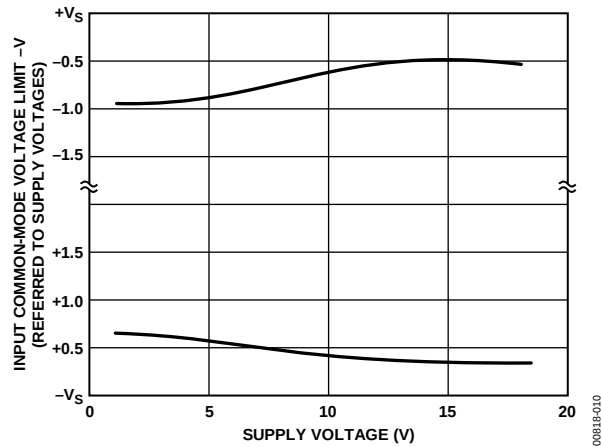


Figure 10. Input Common-Mode Voltage Range vs. Supply Voltage

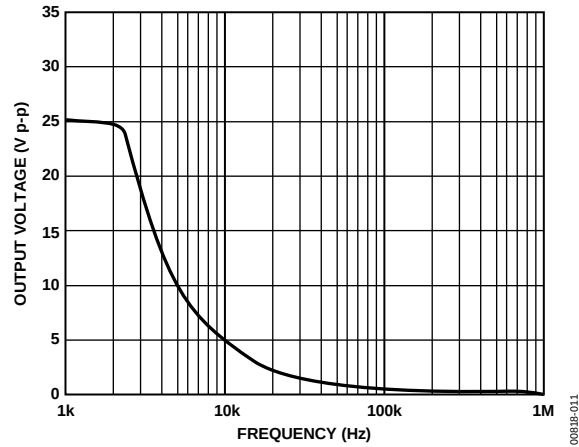


Figure 11. Large Signal Frequency Response

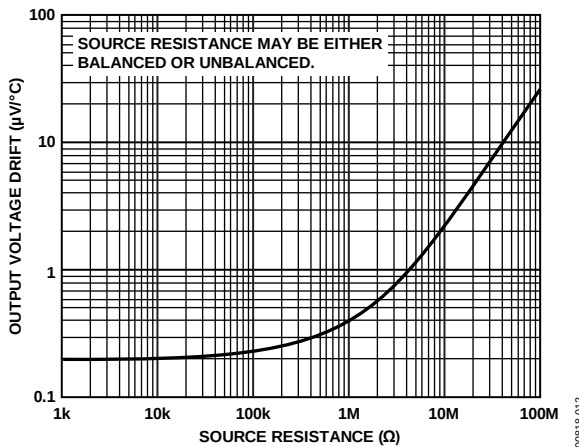


Figure 12. Offset Voltage Drift vs. Source Resistance

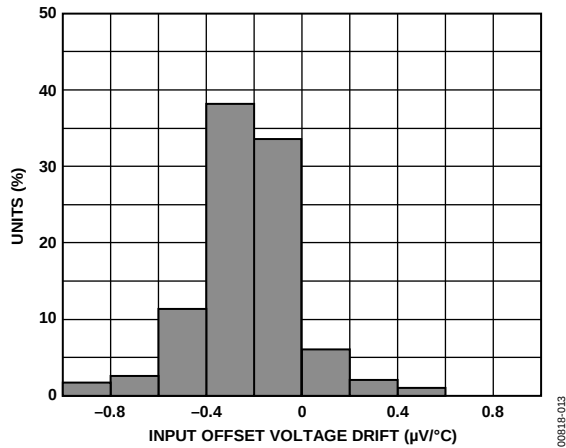


Figure 13. Typical Distribution of Input Offset Voltage Drift

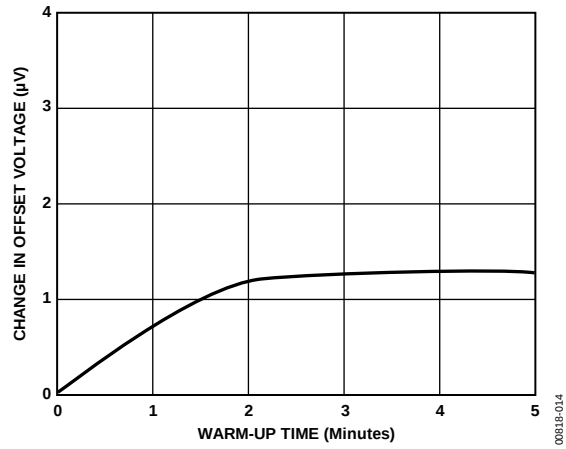


Figure 14. Change in Input Offset Voltage vs. Warm-Up Time

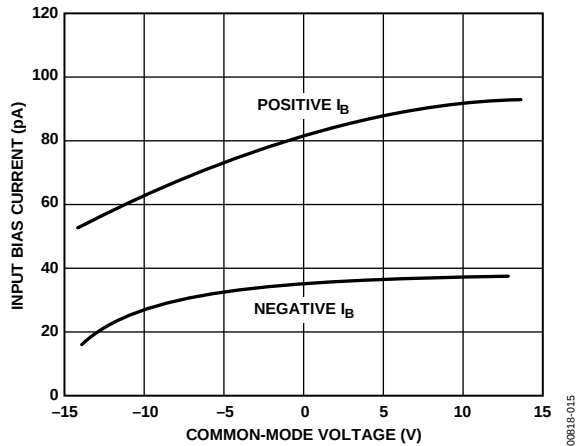


Figure 15. Input Bias Current vs. Common-Mode Voltage

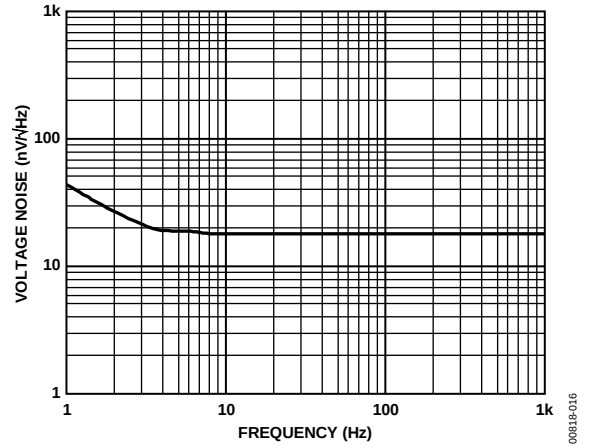


Figure 16. Input Noise Voltage Spectral Density

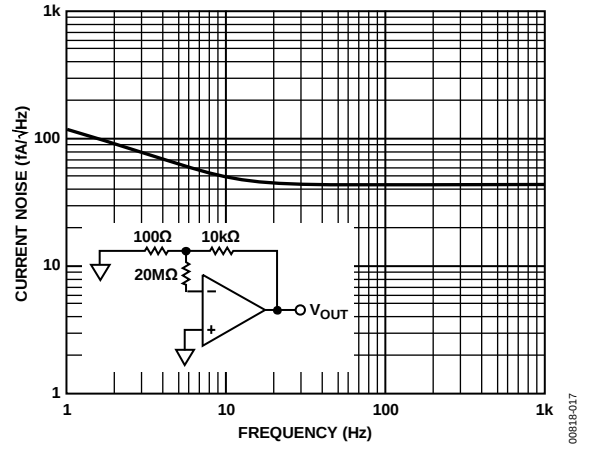


Figure 17. Input Noise Current Spectral Density

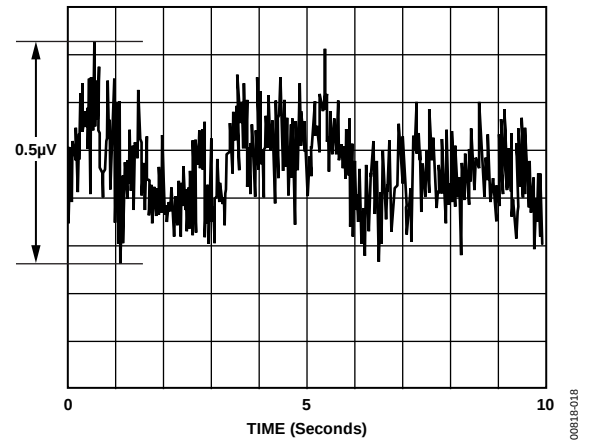


Figure 18. 0.1 Hz to 10 Hz Noise Voltage

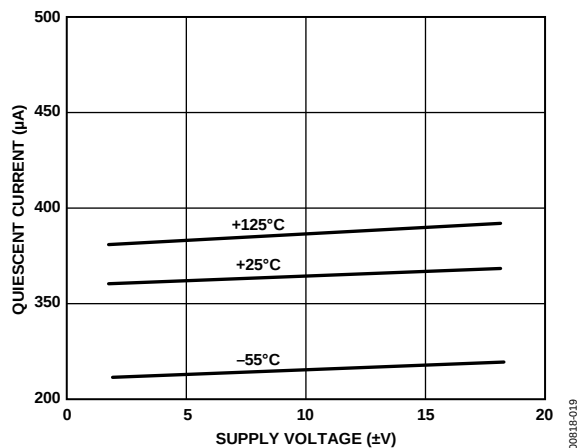


Figure 19. Quiescent Supply Current vs. Supply Voltage (per Amplifier)

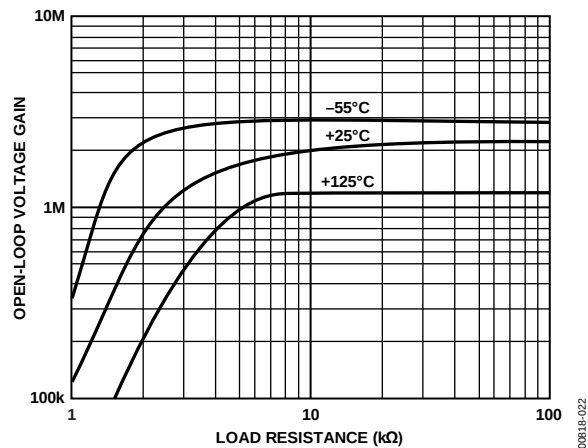


Figure 22. Open-Loop Gain vs. Load Resistance Over Temperature

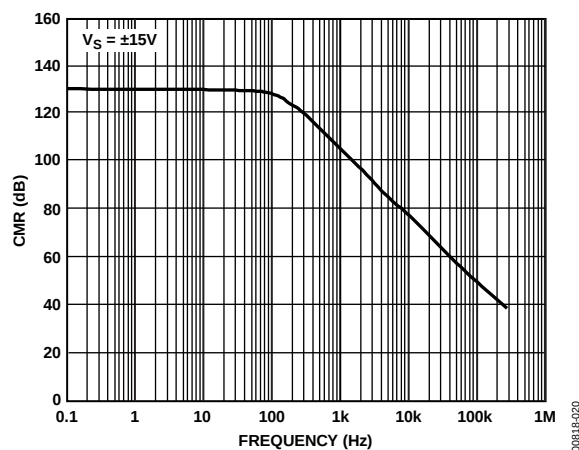


Figure 20. Common-Mode Rejection vs. Frequency

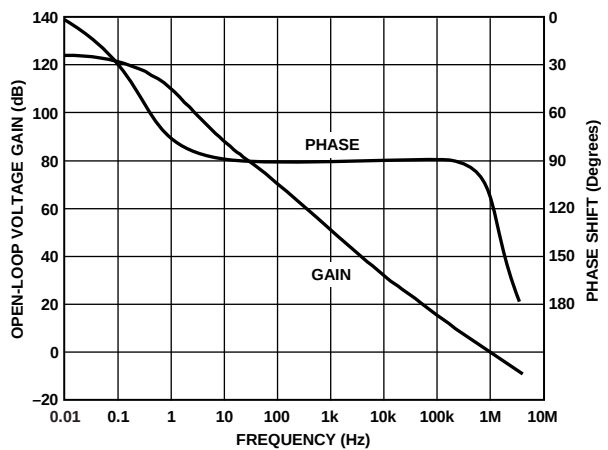


Figure 23. Open-Loop Gain and Phase vs. Frequency

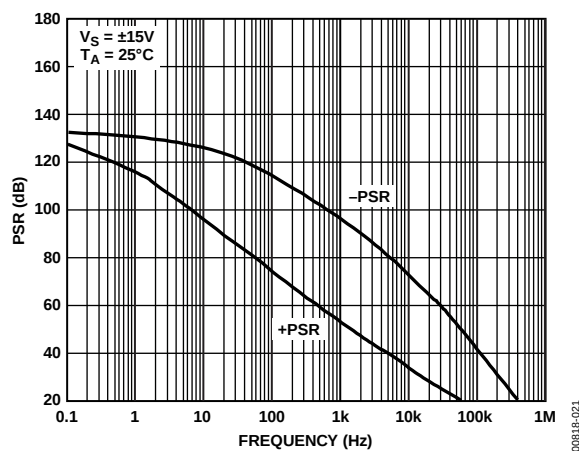


Figure 21. Power Supply Rejection vs. Frequency

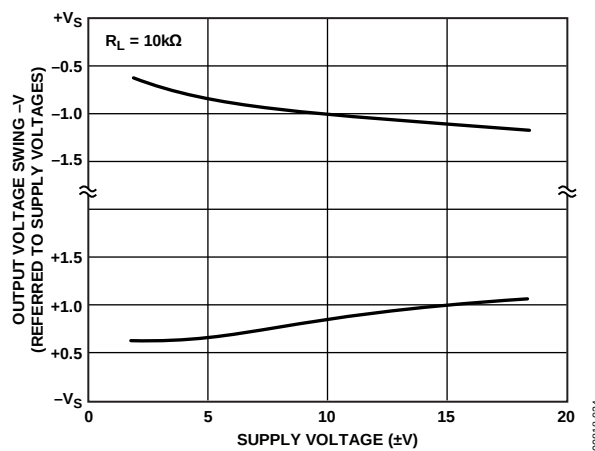


Figure 24. Output Voltage Swing vs. Supply Voltage

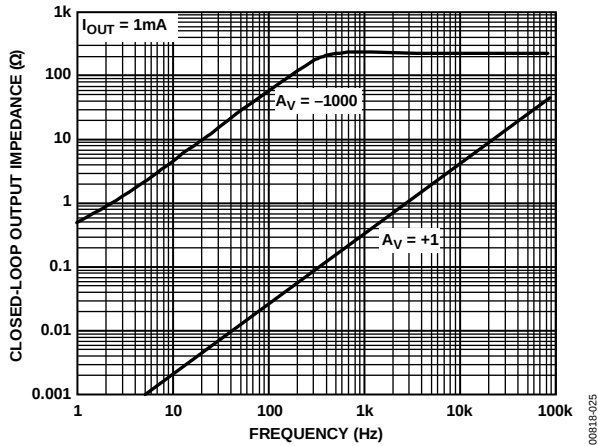


Figure 25. Closed-Loop Output Impedance vs. Frequency

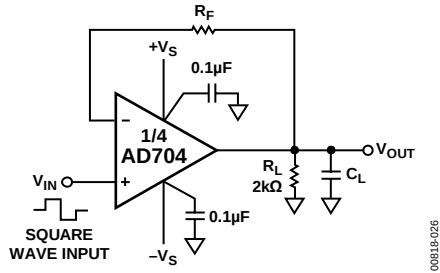


Figure 26. Unity Gain Follower (for Large Signal Applications, Resistor  $R_F$  Limits the Current Through the Input Protection Diodes)

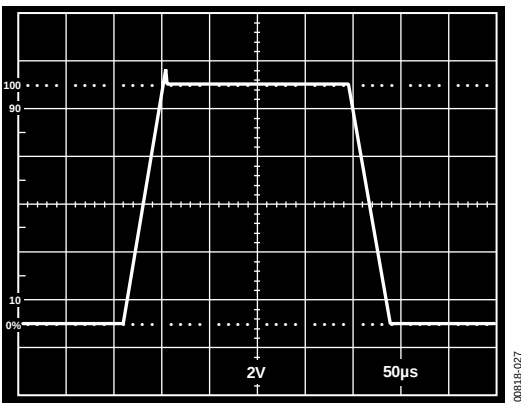


Figure 27. Unity Gain Follower Large Signal Pulse Response  $R_F = 10 k\Omega$ ,  $C_L = 1000 pF$

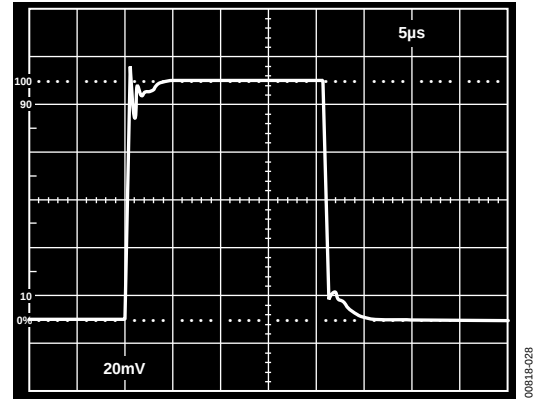


Figure 28. Unity Gain Follower Small Signal Pulse Response  $R_F = 0 \Omega$ ,  $C_L = 100 pF$

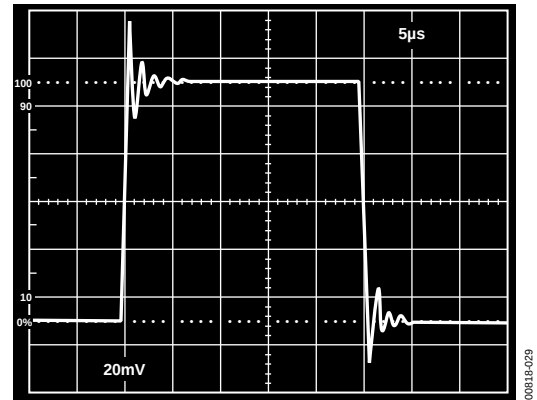


Figure 29. Unity Gain Follower Small Signal Pulse Response  $R_F = 0 \Omega$ ,  $C_L = 1000 pF$

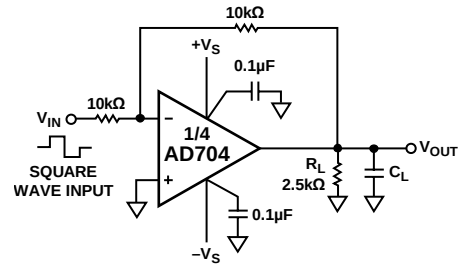


Figure 30. Unity Gain Inverter Connection

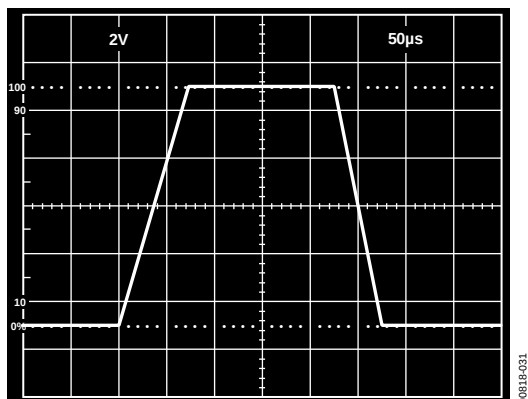


Figure 31. Unity Gain Inverter Large Signal Pulse Response,  $C_L = 1000 \text{ pF}$

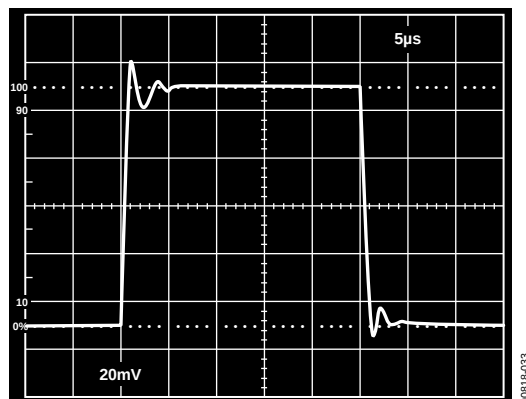


Figure 33. Unity Gain Inverter Small Signal Pulse Response,  $C_L = 1000 \text{ pF}$


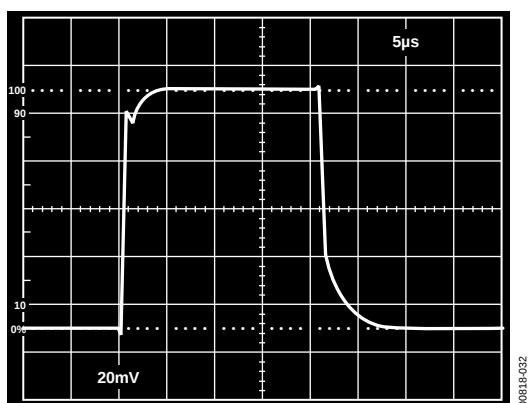


Figure 32. Unity Gain Inverter Small Signal Pulse Response,  $C_L = 100 \text{ pF}$

## THEORY OF OPERATION

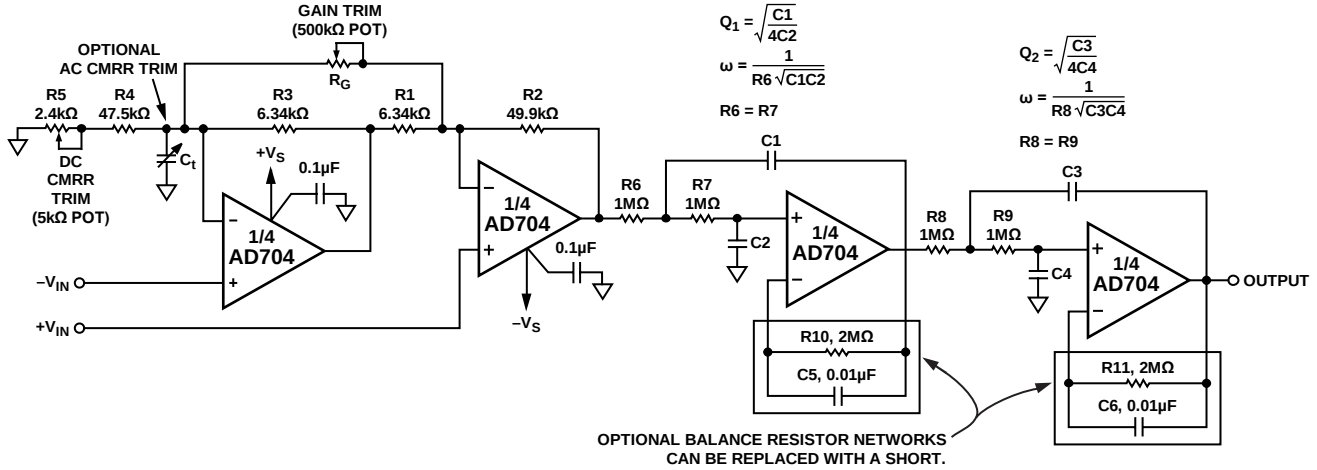

### NOTES

1. INSTRUMENTATION AMPLIFIER GAIN  $= 1 + \frac{R_2}{R_1} + \frac{2R_2}{R_G}$  (FOR  $R_1 = R_3$ ,  $R_2 = R_4 + R_5$ ).
2. CAPACITORS C2 AND C4 ARE SOUTHERN ELECTRONICS MPCC, POLYCARBONATE,  $\pm 5\%$ , 50V.
3. ALL RESISTORS METAL FILM, 1%.

Figure 34. Gain-of-10 Instrumentation Amplifier with Post Filtering

The instrumentation amplifier with post filtering (see Figure 34) combines two applications that benefit greatly from the AD704. This circuit achieves low power and dc precision over temperature with a minimum of components.

The instrumentation amplifier circuit offers many performance benefits, including BiFET level input bias currents, low input offset voltage drift, and only 1.2 mA quiescent current. It operates for gains that are  $G \geq 2$  and, at lower gains, it benefits from no output amplifier offset and no noise contribution as encountered in a 3-op-amp design. Good low frequency CMRR is achieved even without the optional ac CMRR trim (see Figure 35). Table 4 provides resistance values for three common circuit gains. For other gains, use the following equations:

$$R_2 = R_4 + R_5 = 49.9 \text{ k}\Omega$$

$$R_1 = R_3 = \frac{49.9 \text{ k}\Omega}{0.9 G - 1}$$

$$\text{Max Value of } R_G = \frac{99.8 \text{ k}\Omega}{0.06 G}$$

$$C_t \approx \frac{1}{2\pi (R_3) 5 \times 10^5}$$

Table 4. Resistance Values for Various Gains

| Circuit Gain (G) | R1 and R3 | RG (Max Value of Trim Potentiometer) | Bandwidth (–3 dB), Hz |
|------------------|-----------|--------------------------------------|-----------------------|
| 10               | 6.34 kΩ   | 166 kΩ                               | 50 k                  |
| 100              | 526 Ω     | 16.6 kΩ                              | 5k                    |
| 1000             | 56.2 Ω    | 1.66 kΩ                              | 0.5 k                 |

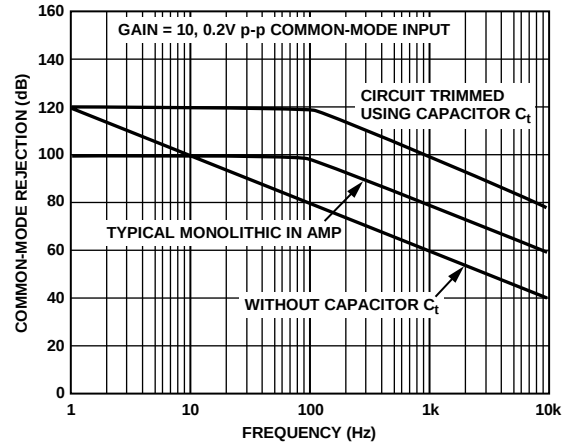


Figure 35. Common-Mode Rejection vs. Frequency with and Without Capacitor  $C_t$

# AD704

The 1 Hz, four-pole active filter offers dc precision with a minimum of components and cost. The low current noise,  $I_{OS}$ , and  $I_B$  allow the use of 1 M $\Omega$  resistors without sacrificing the 1  $\mu$ V/ $^{\circ}$ C drift of the AD704. This means that lower capacitor values can be used, reducing cost and space. Furthermore, because the AD704's  $I_B$  is as low as its  $I_{OS}$ , over most of the MIL temperature range, most applications do not require the use of the normal balancing resistor (with its stability capacitor). Adding the optional balancing resistor enhances performance at high temperatures, as shown in Figure 36. Table 5 gives capacitor values for several common low pass responses.

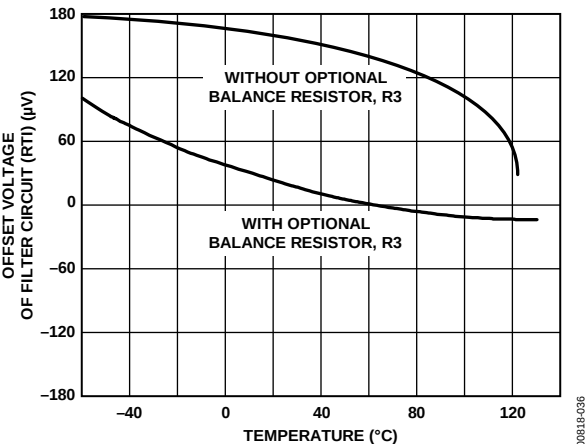



Figure 36.  $V_{OS}$  vs. Temperature Performance of the 1 Hz Filter Circuit

Table 5. 1 Hz, Four-Pole Low-Pass Filter Recommended Component Values<sup>1</sup>

| Desired Low Pass Response | Section 1 Frequency (Hz) | Q     | Section 2 Frequency (Hz) | Q     | C1 ( $\mu$ F) | C2 ( $\mu$ F) | C3 ( $\mu$ F) | C4 ( $\mu$ F) |
|---------------------------|--------------------------|-------|--------------------------|-------|---------------|---------------|---------------|---------------|
| Bessel                    | 1.43                     | 0.522 | 1.60                     | 0.806 | 0.116         | 0.107         | 0.160         | 0.0616        |
| Butterworth               | 1.00                     | 0.541 | 1.00                     | 1.31  | 0.172         | 0.147         | 0.416         | 0.0609        |
| 0.1 dB Chebychev          | 0.648                    | 0.619 | 0.948                    | 2.18  | 0.304         | 0.198         | 0.733         | 0.0385        |
| 0.2 dB Chebychev          | 0.603                    | 0.646 | 0.941                    | 2.44  | 0.341         | 0.204         | 0.823         | 0.0347        |
| 0.5 dB Chebychev          | 0.540                    | 0.705 | 0.932                    | 2.94  | 0.416         | 0.209         | 1.00          | 0.0290        |
| 1.0 dB Chebychev          | 0.492                    | 0.785 | 0.925                    | 3.56  | 0.508         | 0.206         | 1.23          | 0.0242        |


<sup>1</sup> Specified values are for a -3 dB point of 1.0 Hz. For other frequencies, simply scale the C1 through C4 capacitors directly; that is, for a 3 Hz Bessel response, C1 = 0.0387  $\mu$ F, C2 = 0.0357  $\mu$ F, C3 = 0.0533  $\mu$ F, and C4 = 0.0205  $\mu$ F.

# OUTLINE DIMENSIONS

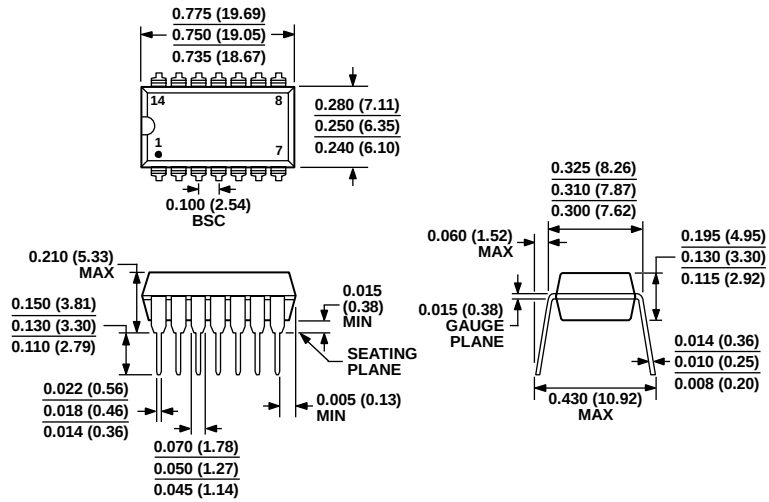


COMPLIANT TO JEDEC STANDARDS MS-001  
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN. CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

Figure 37. 14-Lead Plastic Dual In-Line Package [PDIP]  
Narrow Body (N-14)  
Dimensions shown in inches and (millimeters)

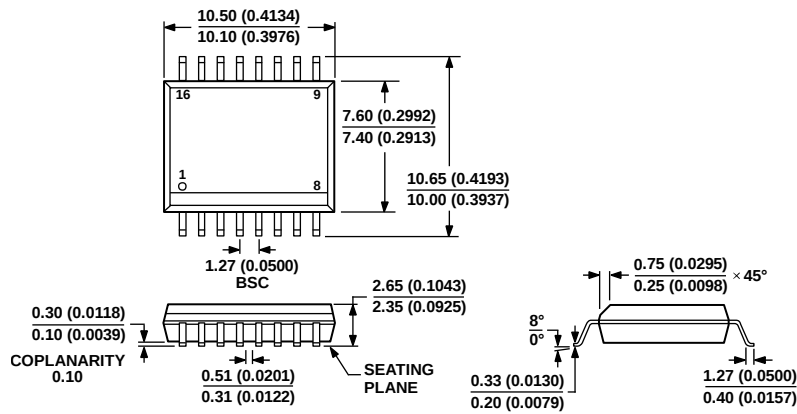

COMPLIANT TO JEDEC STANDARDS MS-013-AA  
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 38. 16-Lead Standard Small Outline Package [SOIC\_W]  
Wide Body (RW-16)  
Dimensions shown in millimeters and (inches)

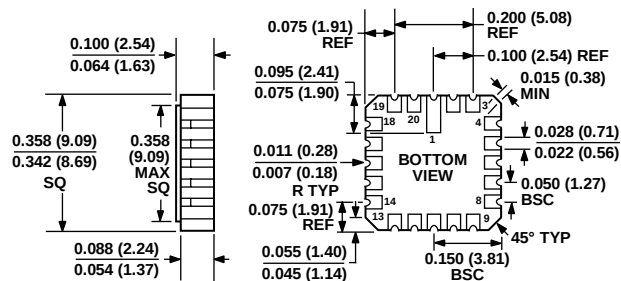

CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 39. 20-Terminal Ceramic Leadless Chip Carrier [LCC]  
(E-20-1)

Dimensions shown in inches and (millimeters)

002106-A

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description | Package Option |
|--------------------|-------------------|---------------------|----------------|
| AD704AR-16         | −40°C to +85°C    | 16-Lead SOIC_W      | RW -16         |
| AD704AR-16-REEL    | −40°C to +85°C    | 16-Lead SOIC_W      | RW -16         |
| AD704ARZ-16        | −40°C to +85°C    | 16-Lead SOIC_W      | RW -16         |
| AD704ARZ-16-REEL   | −40°C to +85°C    | 16-Lead SOIC_W      | RW -16         |
| AD704JN            | 0°C to 70°C       | 14-Lead PDIP        | N-14           |
| AD704JNZ           | 0°C to 70°C       | 14-Lead PDIP        | N-14           |
| AD704JR-16         | 0°C to 70°C       | 16-Lead SOIC_W      | RW -16         |
| AD704JR-16-REEL    | 0°C to 70°C       | 16-Lead SOIC_W      | RW -16         |
| AD704JRZ-16        | 0°C to 70°C       | 16-Lead SOIC_W      | RW -16         |
| AD704JRZ-16-REEL   | 0°C to 70°C       | 16-Lead SOIC_W      | RW -16         |
| AD704SE/883B       | −55°C to +125°C   | 20-Terminal LCC     | E-20-1         |

<sup>1</sup> Z = RoHS Compliant Part.

NOTES

**AD704**

**NOTES**



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331