

DESCRIPTION

Demonstration circuit 561 is a high current step-down PolyPhase™ converter featuring the LTC®3731 three-phase synchronous buck controller. To minimize the supply footprint size and improve the thermal performance, the 5mm x 5mm QFN package LTC3731CUH controller is used. The switching frequency of the LTC3731 is in the 250kHz to 600kHz range. The input voltage is from 10V to 14V and output is 1.5V. An optional VID controller circuit is available on both DC561A-A and DC561A-B demo circuits for output voltage programming. DC561A-A can provide up to 180A output current with a 12-phase buck circuit, while DC561A-B is a 6-phase buck converter

with up to 90A output current. Optional 0.1% external voltage reference and external OP-AMP compensation circuits are also available on DC561A-A and DC561A-B for accurate voltage regulation and best transient response. Additional MOSFETs can be populated for higher output current.

Design files for this circuit board are available. Call the LTC factory.

LTC is a trademark of Linear Technology Corporation

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITION	VALUE
Minimum Input Voltage		10V
Maximum Input Voltage		14V
V_{OUT}	DC561A-A: $I_{OUT} = 0\text{A to } 180\text{A}$ DC561A-B: $I_{OUT} = 0\text{A to } 90\text{A}$	$1.5\text{V} \pm 1\%$
Nominal Switching Frequency	Set by resistor divider on demo circuit	450kHz
Typical Efficiency	DC561A-A: $V_{IN} = 12\text{V}$, $V_{OUT} = 1.5\text{V}$, $I_{OUT} = 180\text{A}$ DC561A-B: $V_{IN} = 12\text{V}$, $V_{OUT} = 1.5\text{V}$, $I_{OUT} = 90\text{A}$	83% 84%

QUICK START PROCEDURE

Demonstration circuit 561 is easy to set up to evaluate the performance of the LTC3731. Refer to Figure 2. For proper measurement equipment setup and follow the procedure below:

1. Preset the following jumpers on the demo circuit: JP1-Int Prog, JP2-Off, JP4-Off, JP9-Int. and JP10-On. With above jumper setup, the supply is running at about 450kHz phase frequency, and using the on board +5V bias supply.
2. Preset the voltage of the input power supply to be 12V. Preset the current limit of the input power supply to be greater than 30A for DC561A-A or 15A

for DC561A-B. With power off, connect the input power supply to Vin and GND.

3. Connect the electronic load to Vout+ and Vout-. Preset the load current to be 0A.
4. Turn on the power at the input.
5. Check for the proper output voltages at no load and full load (180A for DC561A-A and 90A for DC561A-B). $V_{out} = 1.485\text{V to } 1.515\text{V}$. A cooling fan is needed if the load current is higher than 50% of the full rated load current.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

6. Adjust the loads within the operating range and observe the output voltage regulation, efficiency and other parameters.
7. (Optional) To perform the load transient test, set jumpers JP4-On and JP2-On. Use coaxial cables to

connect LOAD STEP and Vout+ coaxial outputs to oscilloscope inputs. Adjust R81 and R75 for desired load current step and rising slope. Adjust R73 for desired load current falling slope.

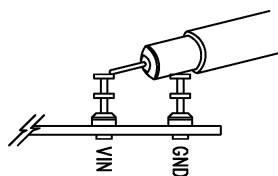


Figure 1. Scope Probe Placement for Measuring Input or Output Ripple

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

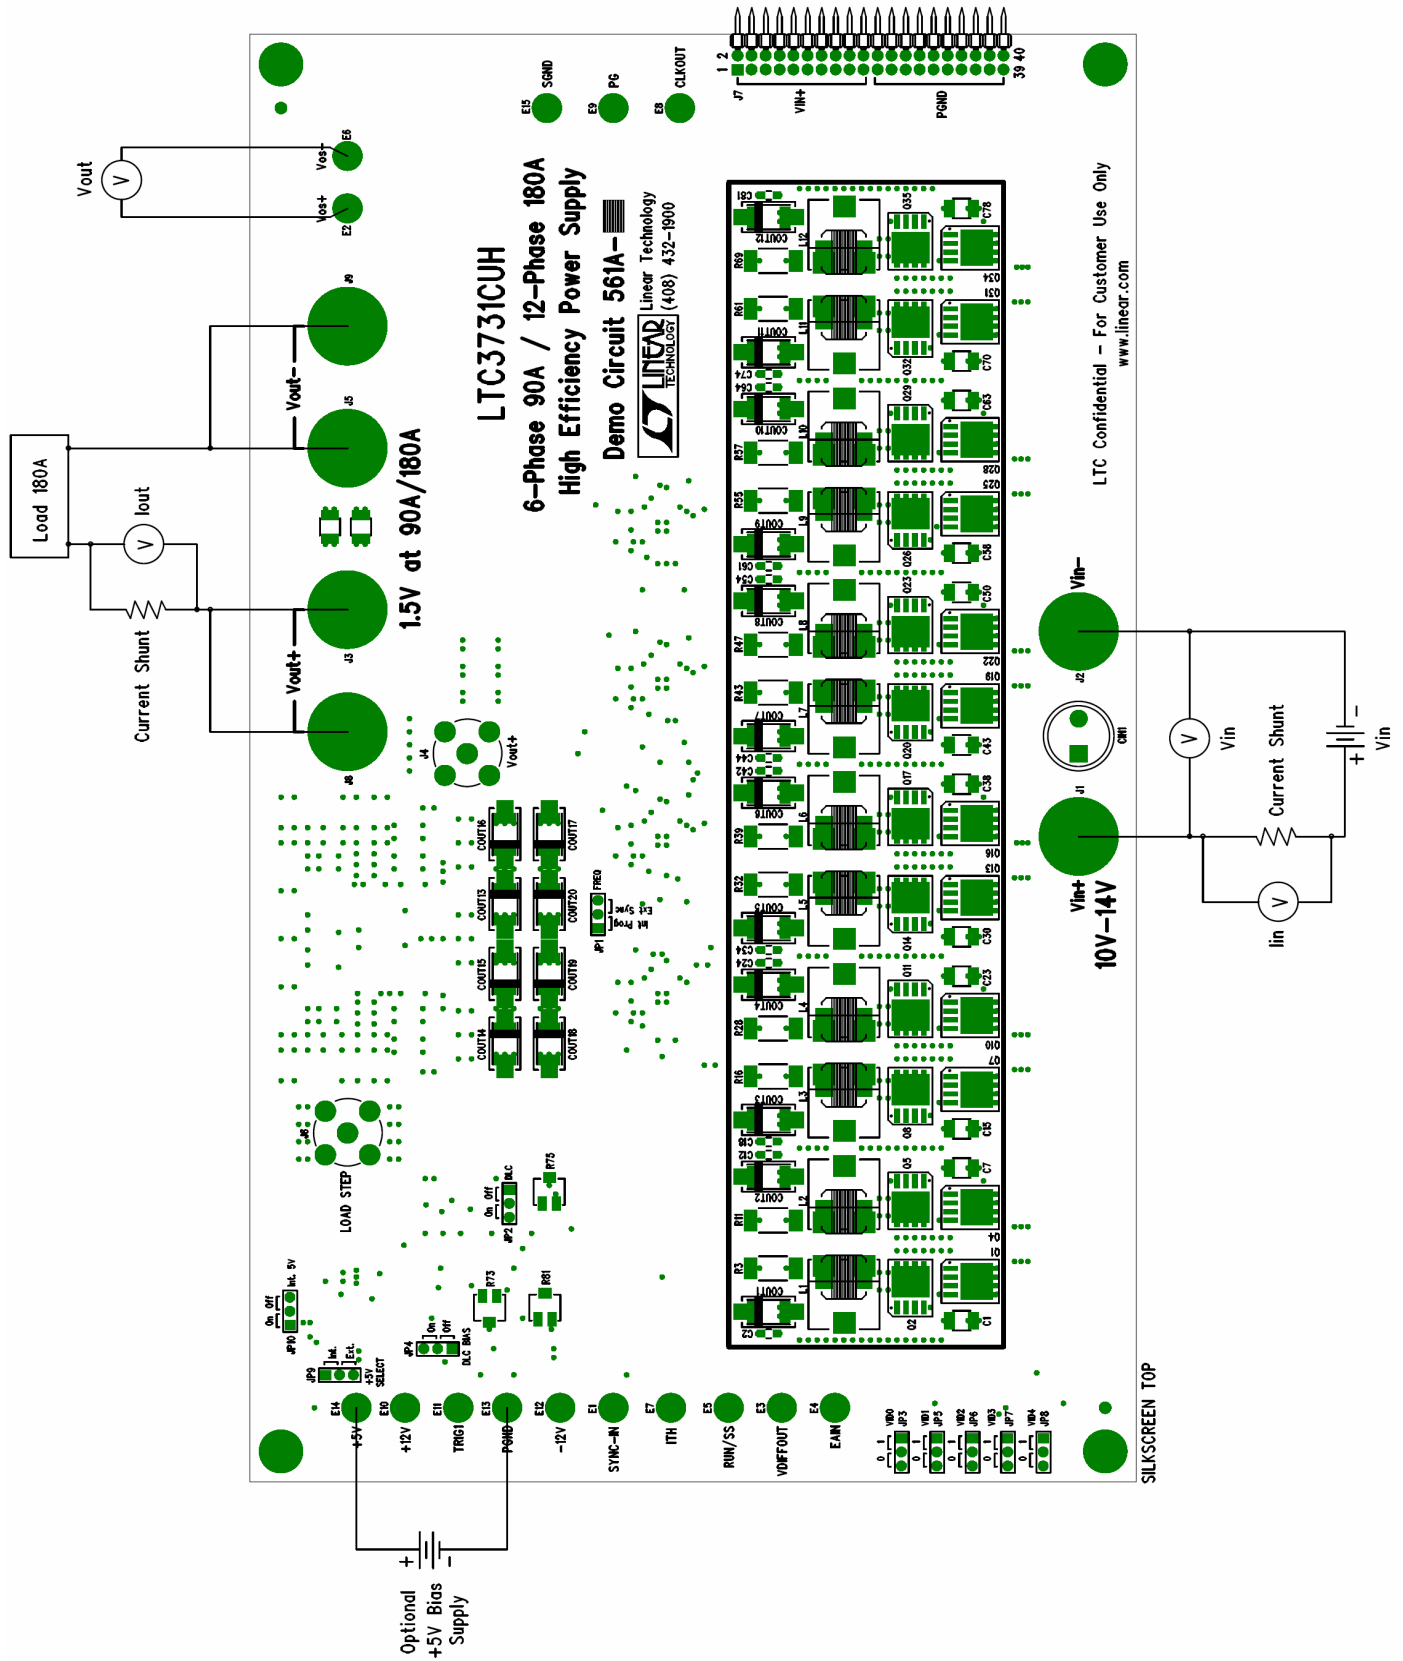


Figure 2. Proper Measurement Equipment Setup

12-Phase 180A Version




1630 McCarthy Blvd.
Milpitas, CA. 95035
Phone : (408) 954-8400 Fax : (408) 434-0507

6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

Size	Document Number	Rev
	DC561A	A
	TC3731	C114

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

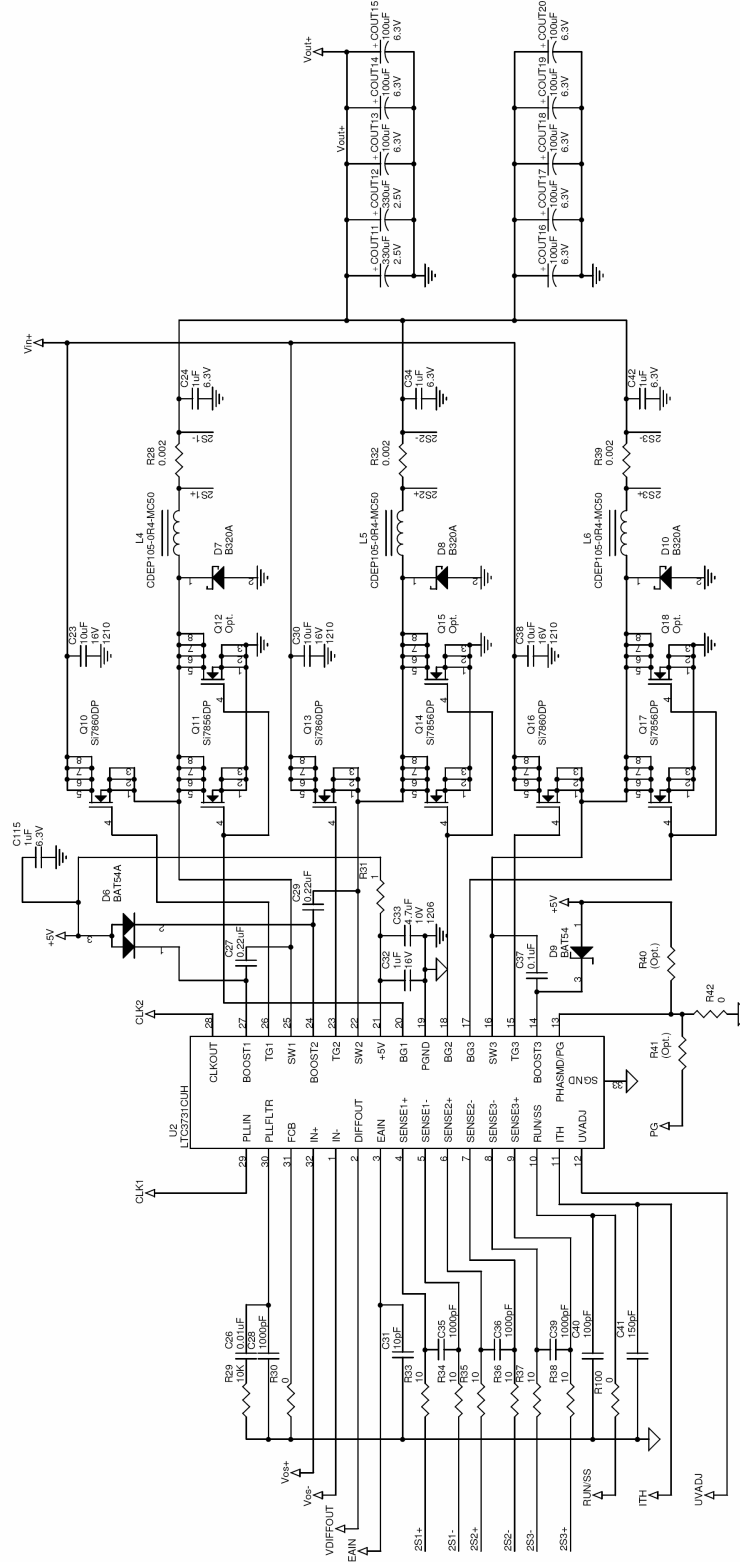

LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.
Milpitas, CA 95035
Tel: 408/292-4400 Fax: 408/292-4507


File: 6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

Size: Document Number DC561A-A LTC3731CUH Rev

2 of 5

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

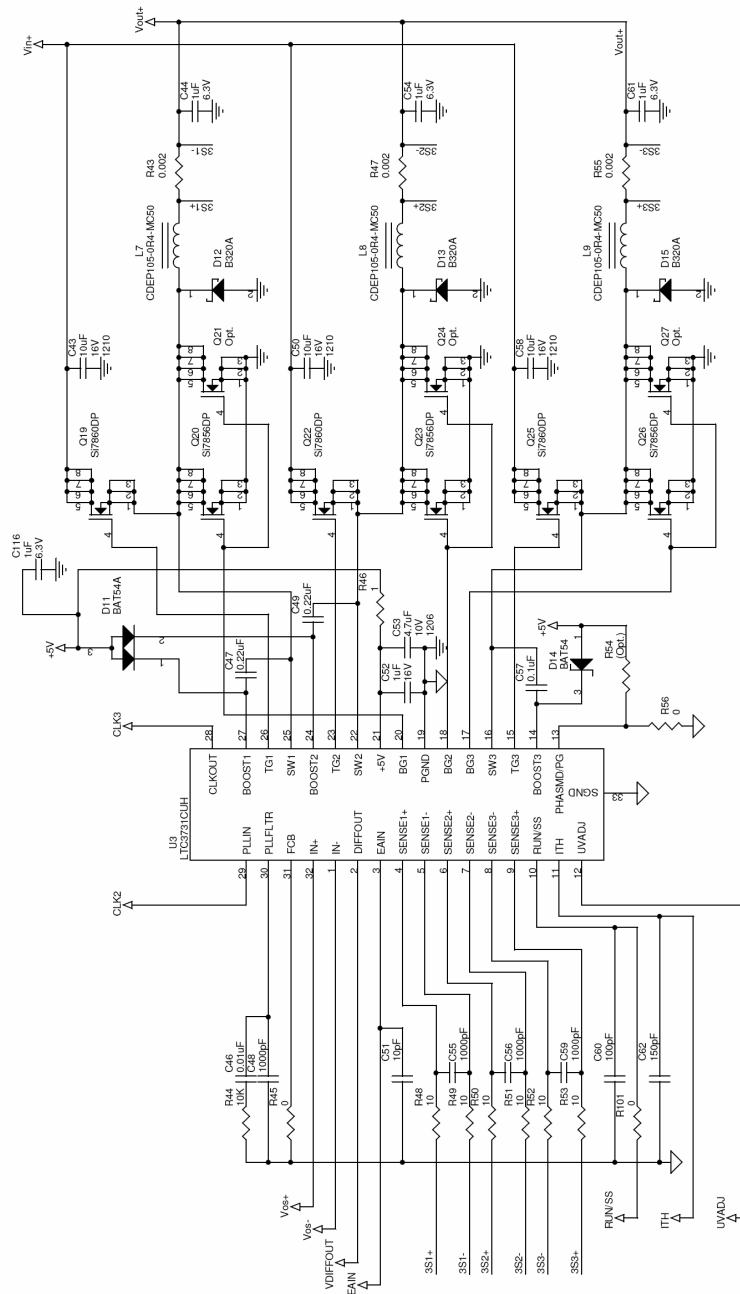

LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.

Folsom, CA 95605

Phone: (916) 352-4000 Fax: (916) 352-4007


Title: 6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

Size: Document Number DC561A-A LTC3731CUH Rev

Sheet 3 of 5

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

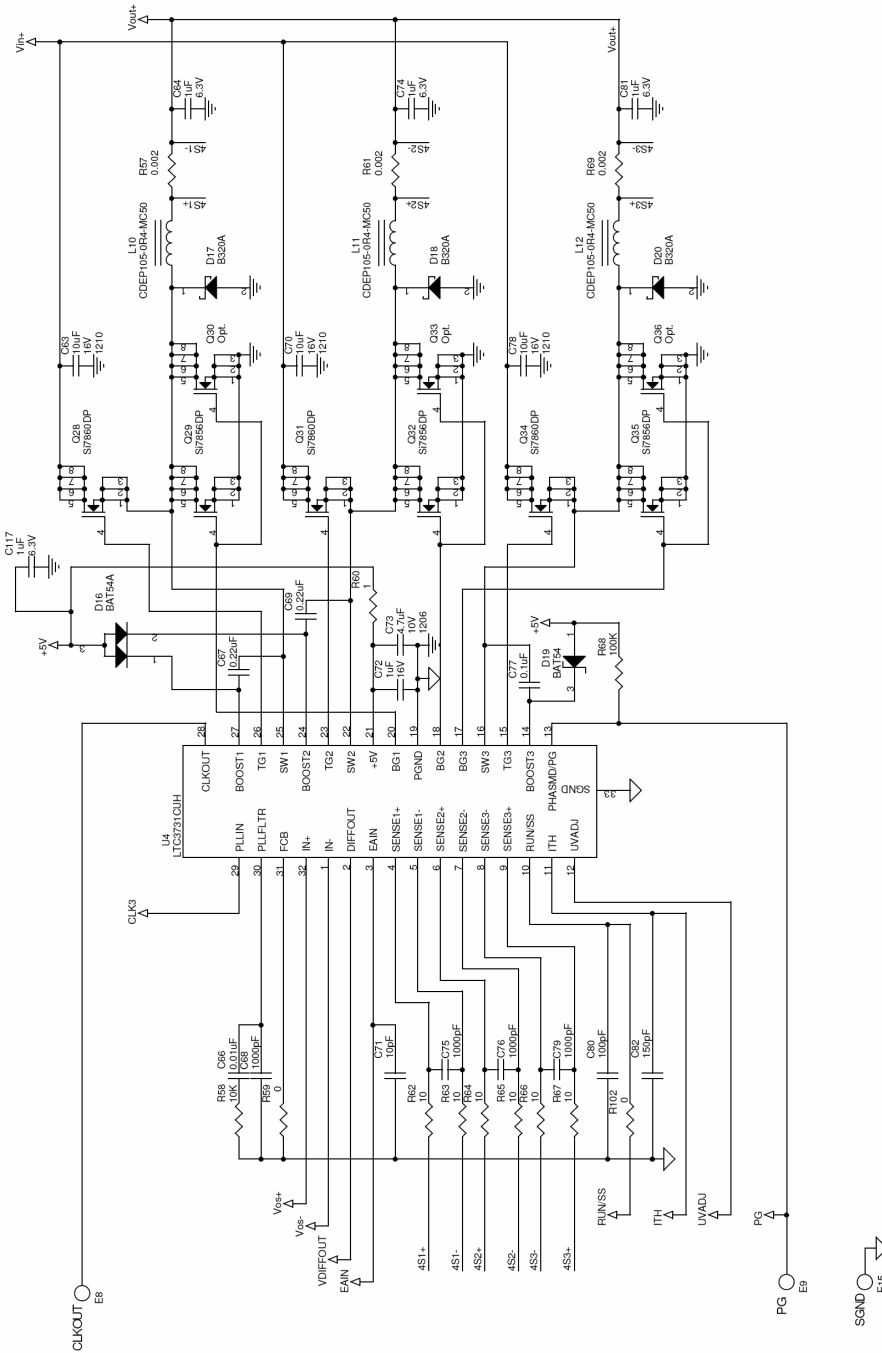

LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.
Milpitas, CA 95035
Tel: (408) 292-9900 Fax: (408) 434-0907

Title: 6-Phase 90A / 12-Phase 180A High Efficiency Power Supply



Size: Document Number: DC561A-A LTC3731CUH

Rev: 4 of 5


QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

Dynamic Load Circuit

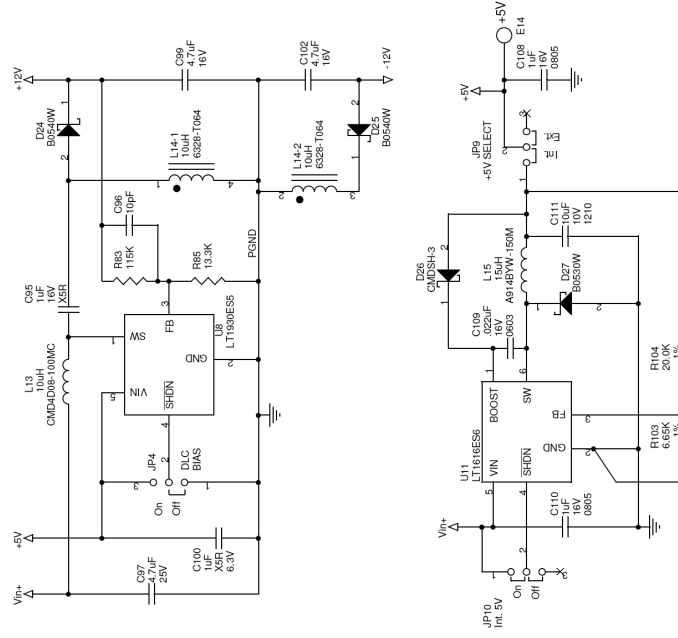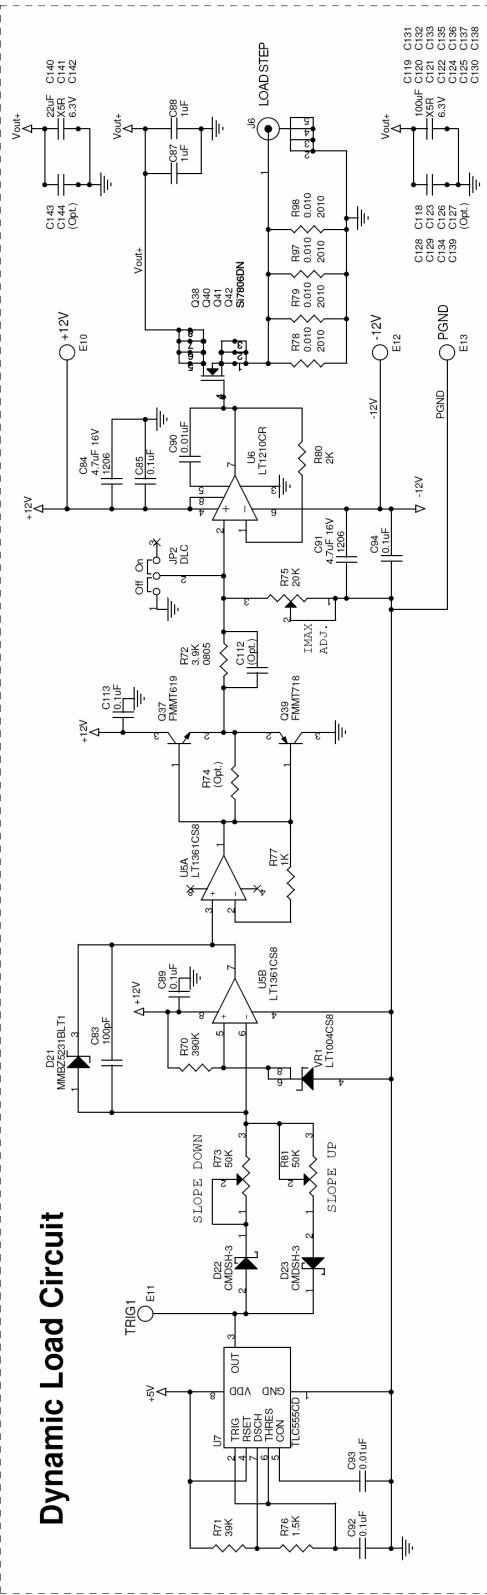

Optional External Compensation and Voltage Programming Circuit

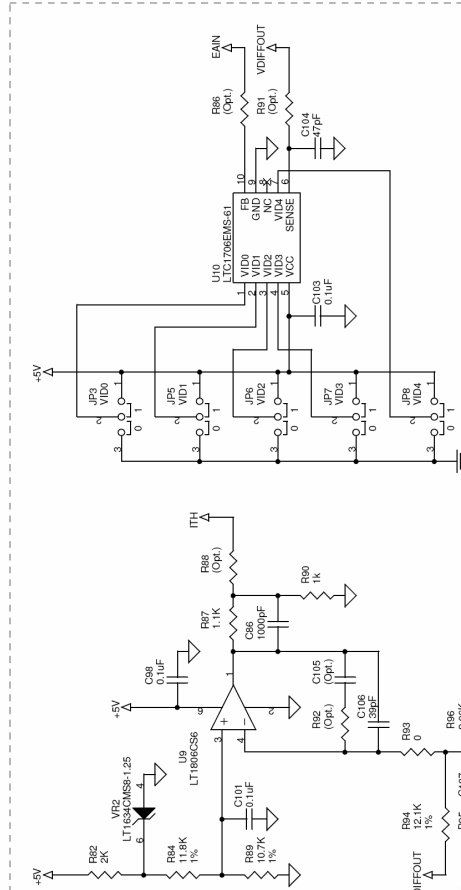

LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.

Milpitas, CA 95035

Phone: (408) 253-4600 Fax: (408) 434-6507


Title: 6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

Size: Document Number DC561A-A LTC3731QUH

Rev: 5 of 5

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

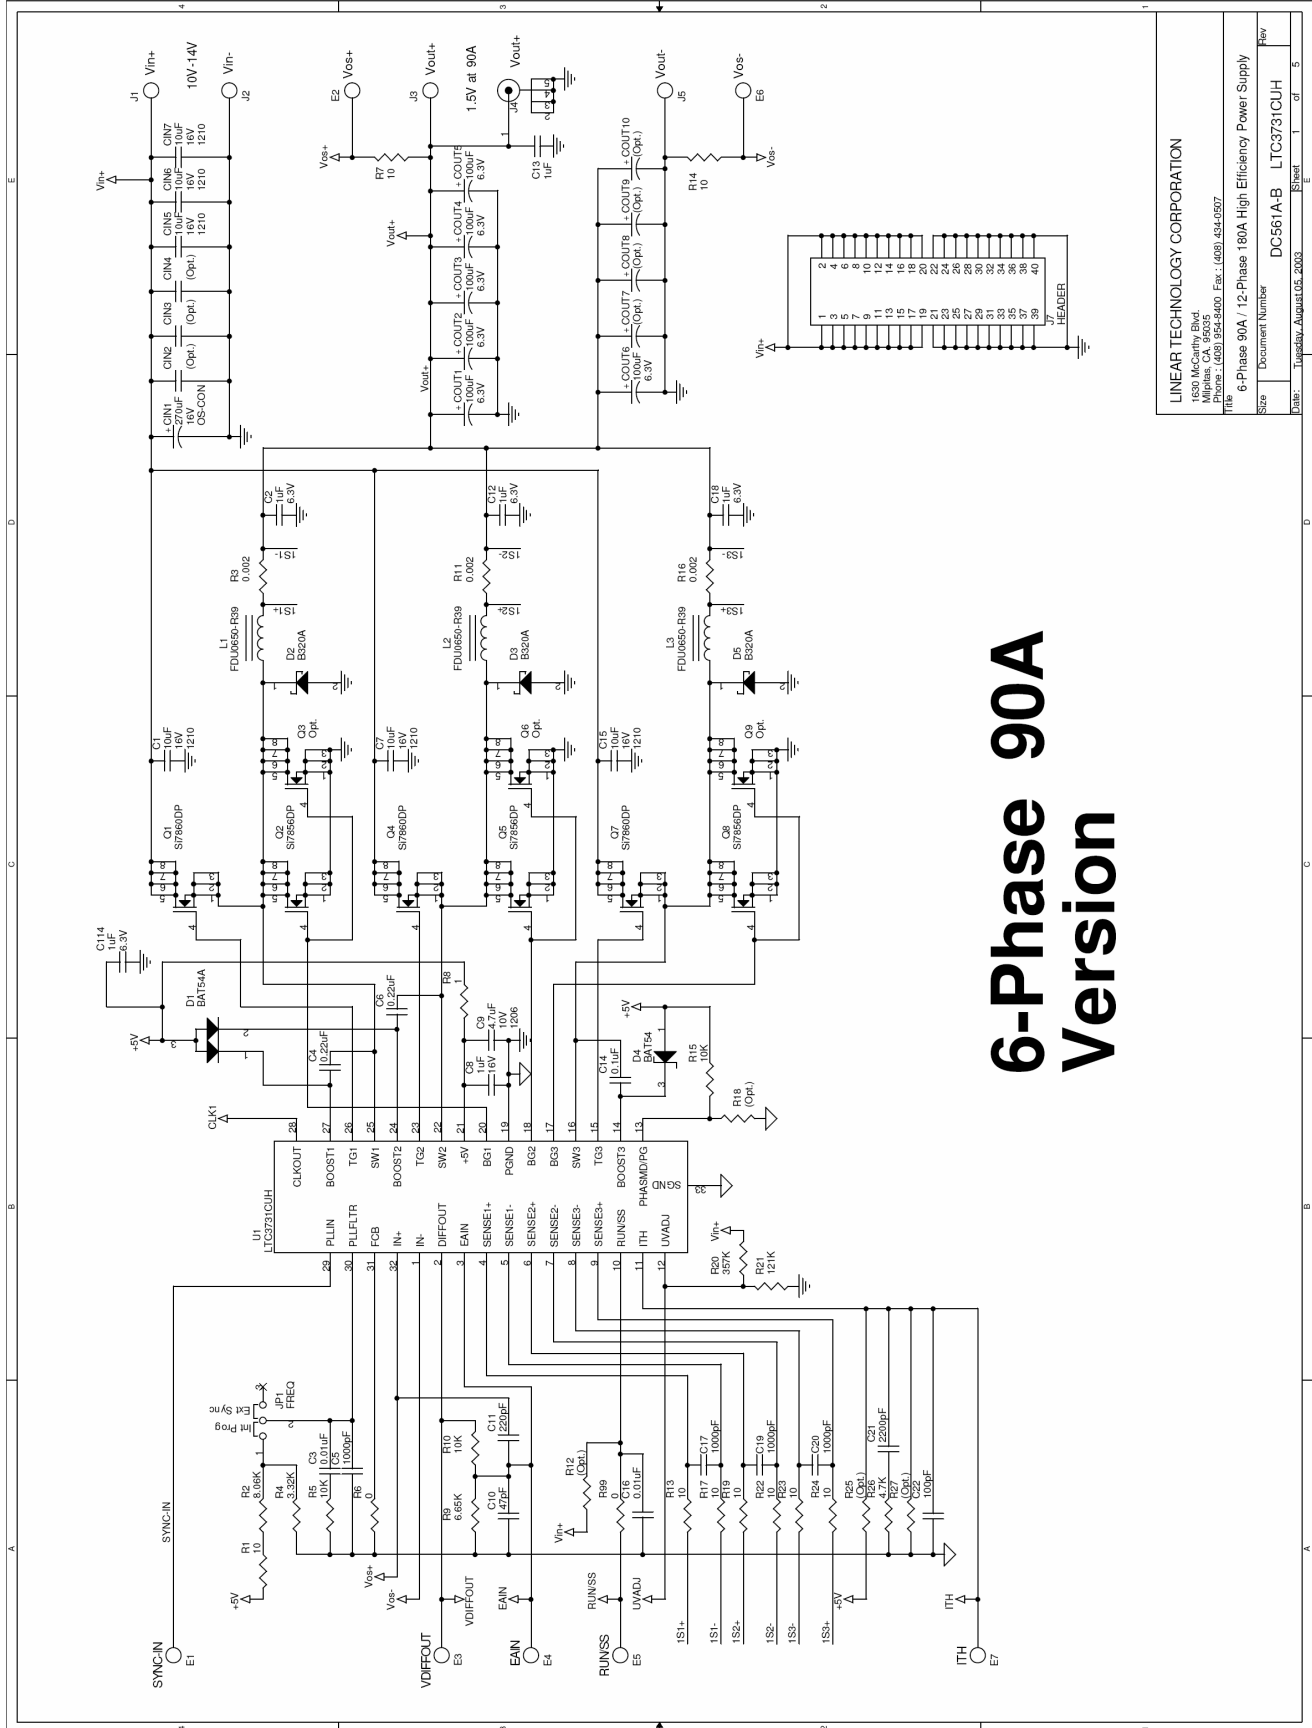

LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.
Milpitas, CA 95035

Phone: (408) 954-6400 Fax: (408) 434-0907


File: 6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

Size Document Number DC-561A-B LTC3731CUH Rev

Date: Tuesday, August 05, 2003 Sheet 1 of 5

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

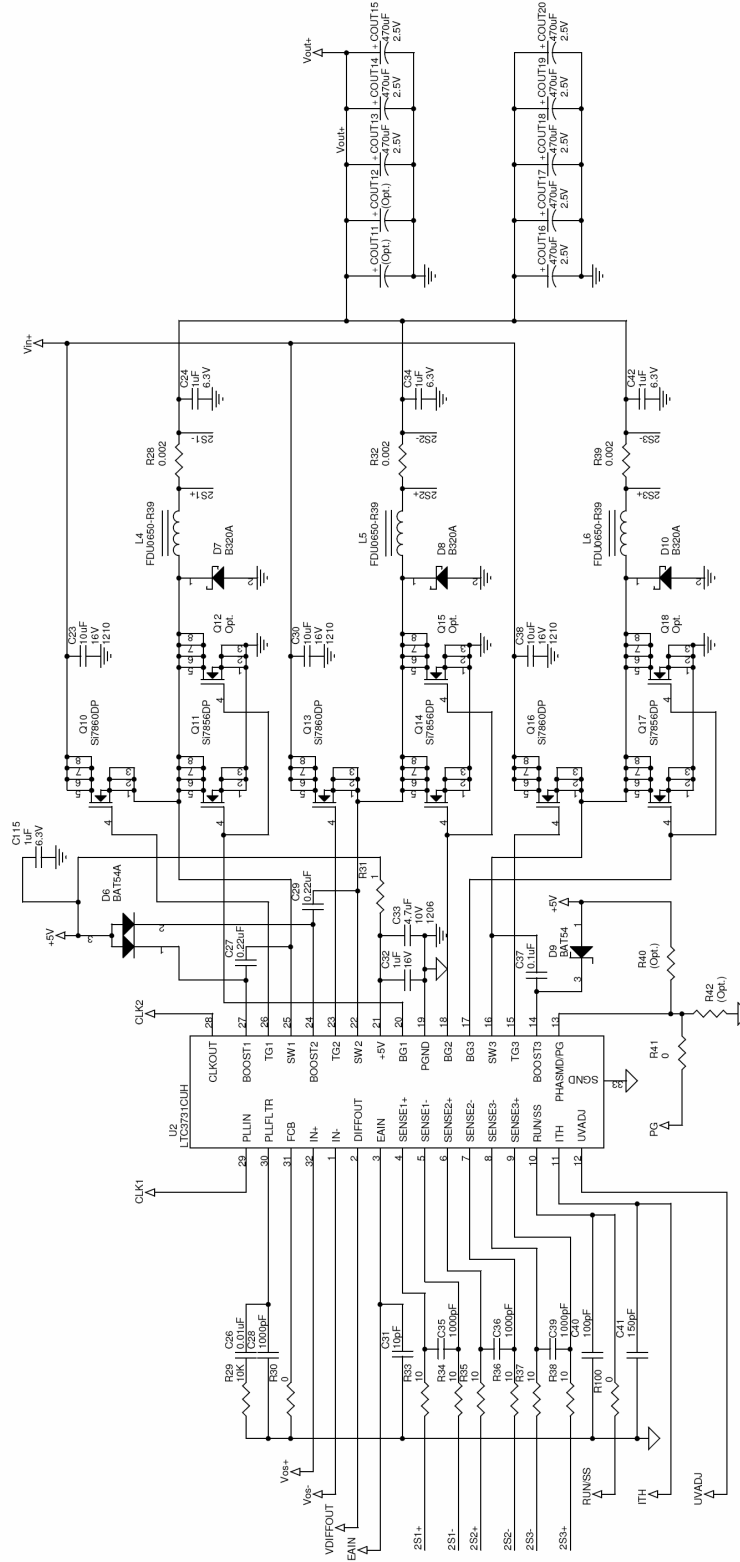

LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.
Milpitas, CA 95035
Tel: (408) 955-6000 Fax: (408) 434-6507


Title: 6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

Size: Document Number: DC561A-B LTC3731CUH Rev

Sheet: 2 of 5

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

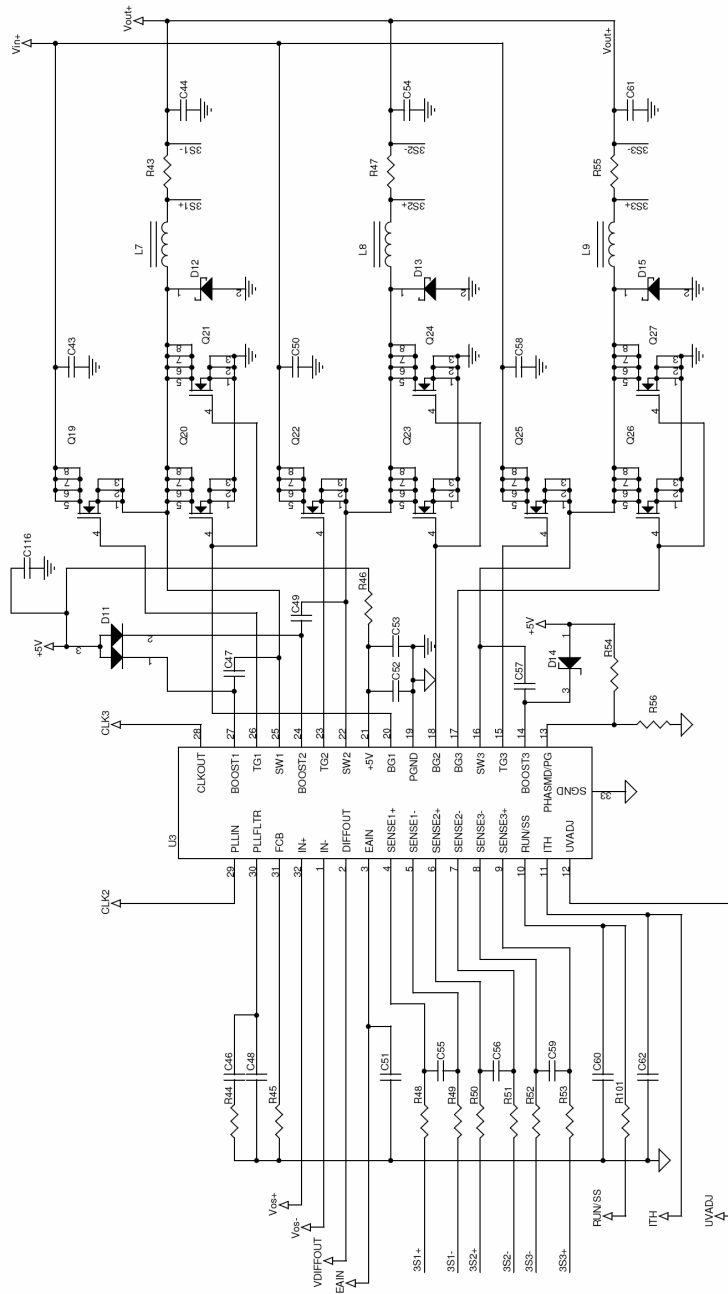

This Page Is Not Used For 6-Phase

LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.

Milpitas, CA 95035

Phone: (408) 292-6900 Fax: (408) 434-0907


Title: 6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

Size: Document Number DC561A-B LTC3731CUH Rev

Sheet 3 of 5

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 561A

6-PHASE 90A / 12-PHASE 180A HIGH EFFICIENCY POWER SUPPLY

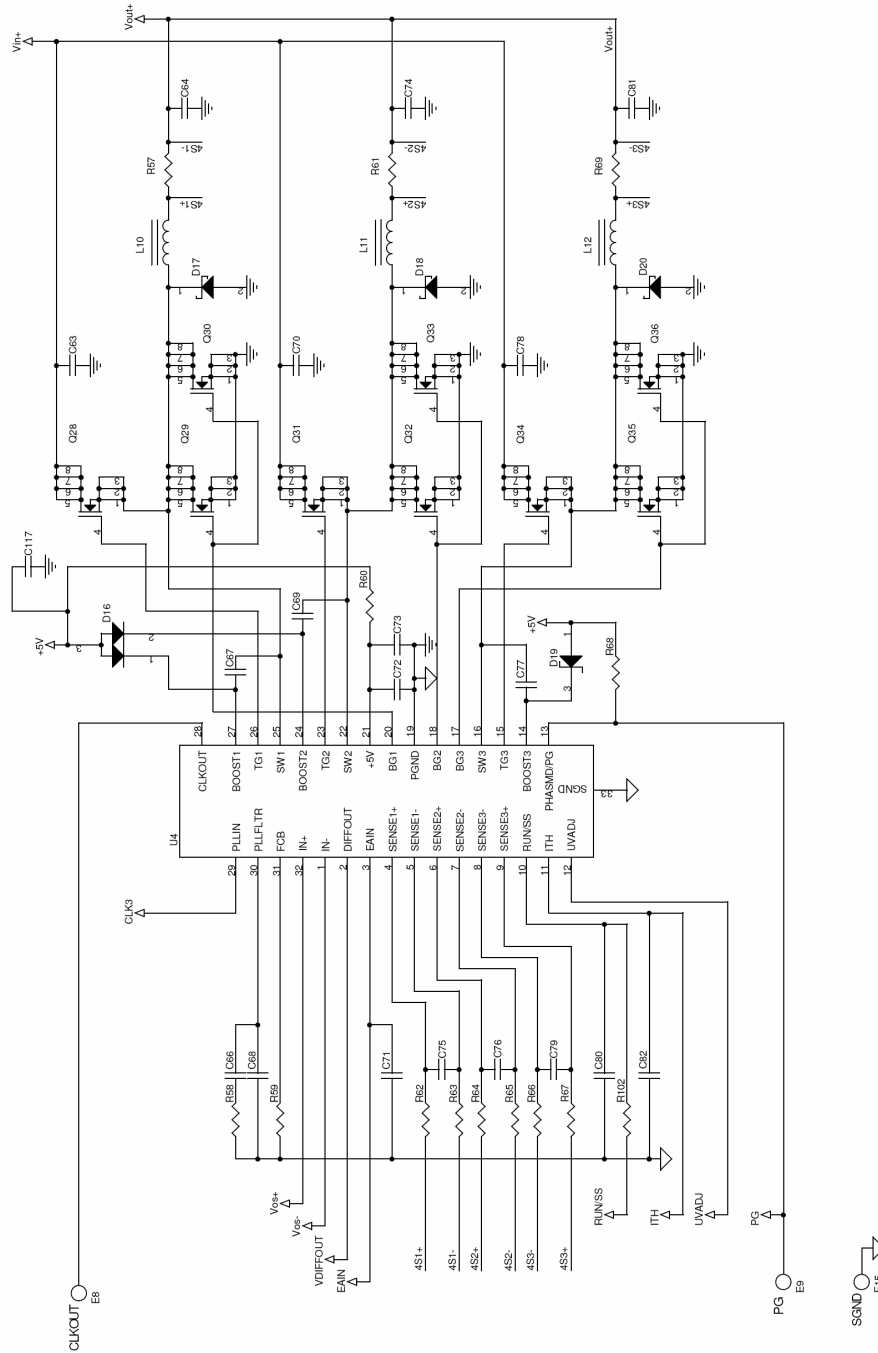

This Page Is Not Used For 6-Phase


LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.
Milpitas, CA 95035
Tel: (408) 992-9600 Fax: (408) 434-6577


Title: 6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

Document Number: DC561A-B LTC3731CUH

Size: 4 of 5
Date: Tuesday, August 05, 2003
Sheet: 4 of 5

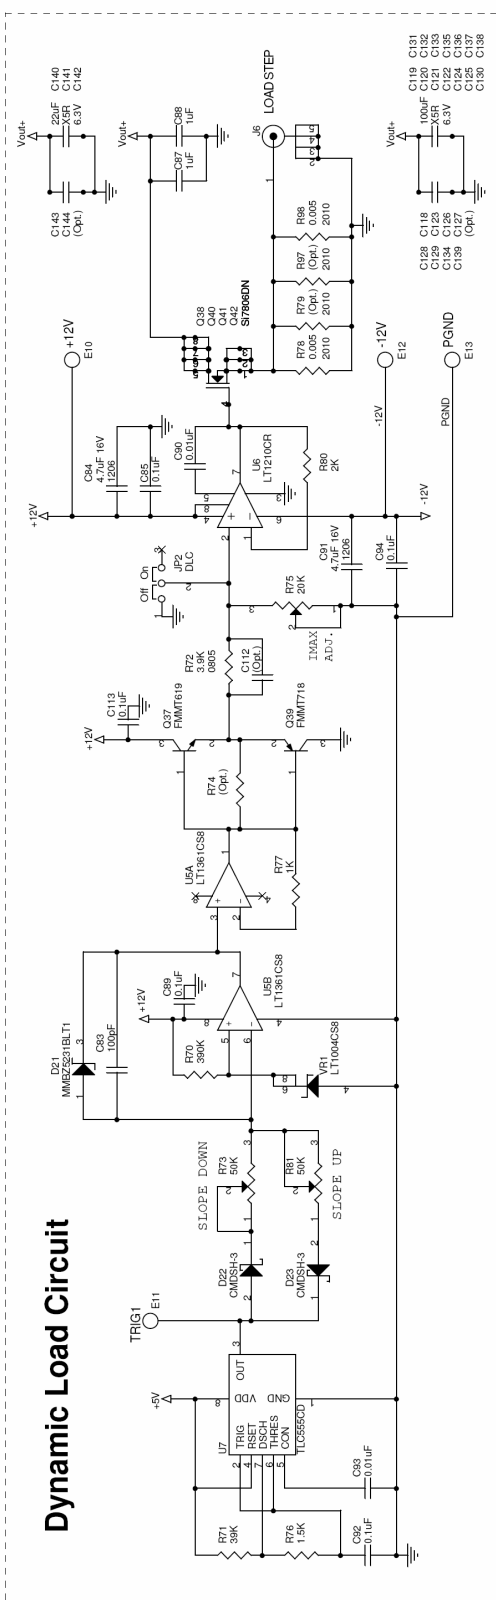

Dynamic Load Circuit

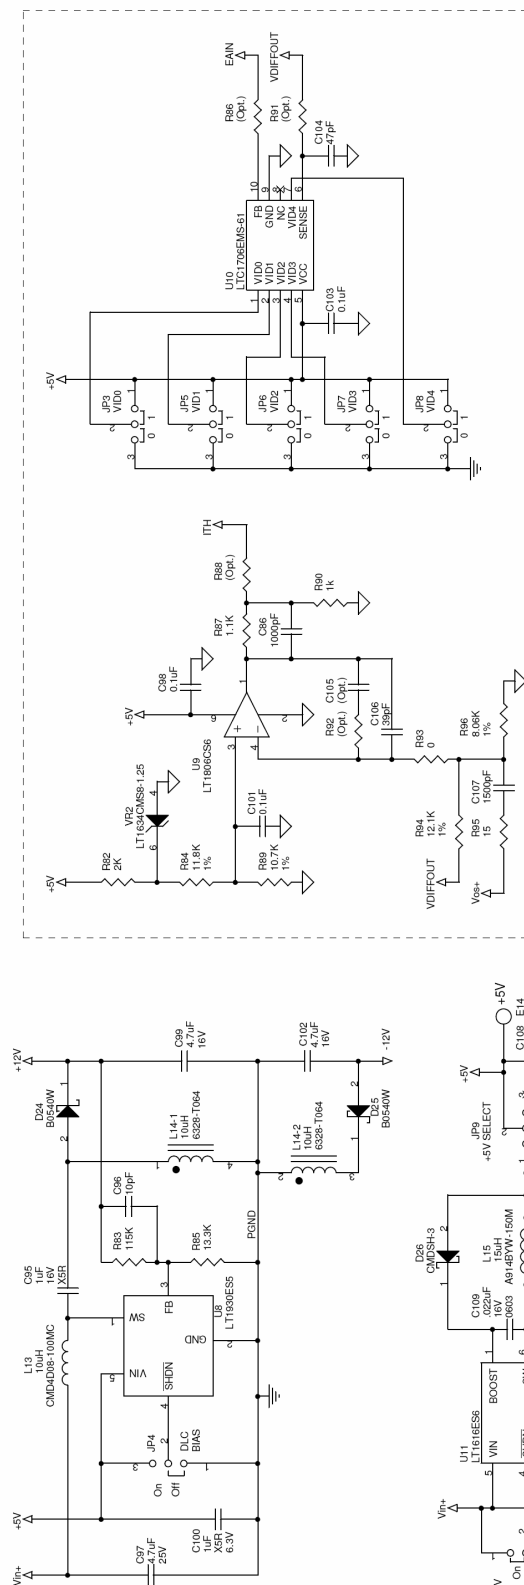

Optional External Compensation and Voltage Programming Circuit

LINEAR TECHNOLOGY CORPORATION

1630 McCarthy Blvd.

Milpitas, CA. 95035
Phone : (408) 954-8400 Fax : (408) 434-0507

110

6-Phase 90A / 12-Phase 180A High Efficiency Power Supply

[illegible]

DC561A-B LIC3/31CUH

ate: Tuesday, August 05, 2003 Sheet 5 of 5



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331