

DETAILS


Product Number	C13529_VERONICA-O
Family	Veronica
Type	Lens
Color	clear
Diameter	26 mm
Height	12,2 mm
Style	round
Optic Material	PMMA
Holder Material	
Fastening	pin, glue
Status	ready
ROHS Compliant	Yes
Date Updated	28/10/2013




OPTICAL PROPERTIES

LED	Viewing Angle	Light Beam	Efficiency	cd/lm	Connector
MK-R	48 + 28 deg	Oval	80 %	1.600	-
LUXEON M	49 + 28 deg	Oval	79 %	1.600	-
XHP35 HD	52+19 deg	Oval	80 %	2.260	-
NCSxx19B	52+15 deg	Oval	80 %	2.970	-
XHP35 HI	53+16 deg	Oval	82 %	2.900	-
NVSxx19A	53 + 18 deg	Oval	79 %	2.500	-
XP-E2	54 + 11 deg	Oval	84 %	4.200	-
LUXEON R	54 + 16 deg	Oval	81 %	2.800	-
LUXEON A	54 + 15 deg	Oval	82 %	2.900	-
LUXEON Rebel	54 + 14 deg	Oval	82 %	3.200	-
XM-L2	54 + 18 deg	Oval	82 %	2.400	-
Oslon Square EC	54 + 14 deg	Oval	81 %	3.000	-
Oslon SSL 150	54 + 11 deg	Oval	83 %	4.200	-
Oslon Square PC	54 + 15 deg	Oval	81 %	3.000	-
LUXEON Rebel ES	54 + 17 deg	Oval	81 %	2.700	-
Z5M1/Z5M2	54+15 deg	Oval	83 %	3.100	-
Z5	54+13 deg	Oval	83 %	3.600	-
NVSxx19B/NVSxx19C	54 + 17 deg	Oval	79 %	2.700	-
XM-L	54 + 18 deg	Oval	83 %	2.500	-
XT-E	54 + 15 deg	Oval	81 %	2.900	-
XP-E	54 + 11 deg	Oval	83 %	4.200	-
LH351Z	54+13 deg	Oval	83 %	3.300	-
LH351B	54+14 deg	Oval	84 %	2.800	-
H35C0 (LEMWA33)	55 + 15 deg	Oval	81 %	3.000	-
XP-G	55 + 13 deg	Oval	83 %	3.300	-


Relative intensity of C13529_VERONICA-O_(XHP35_HD)

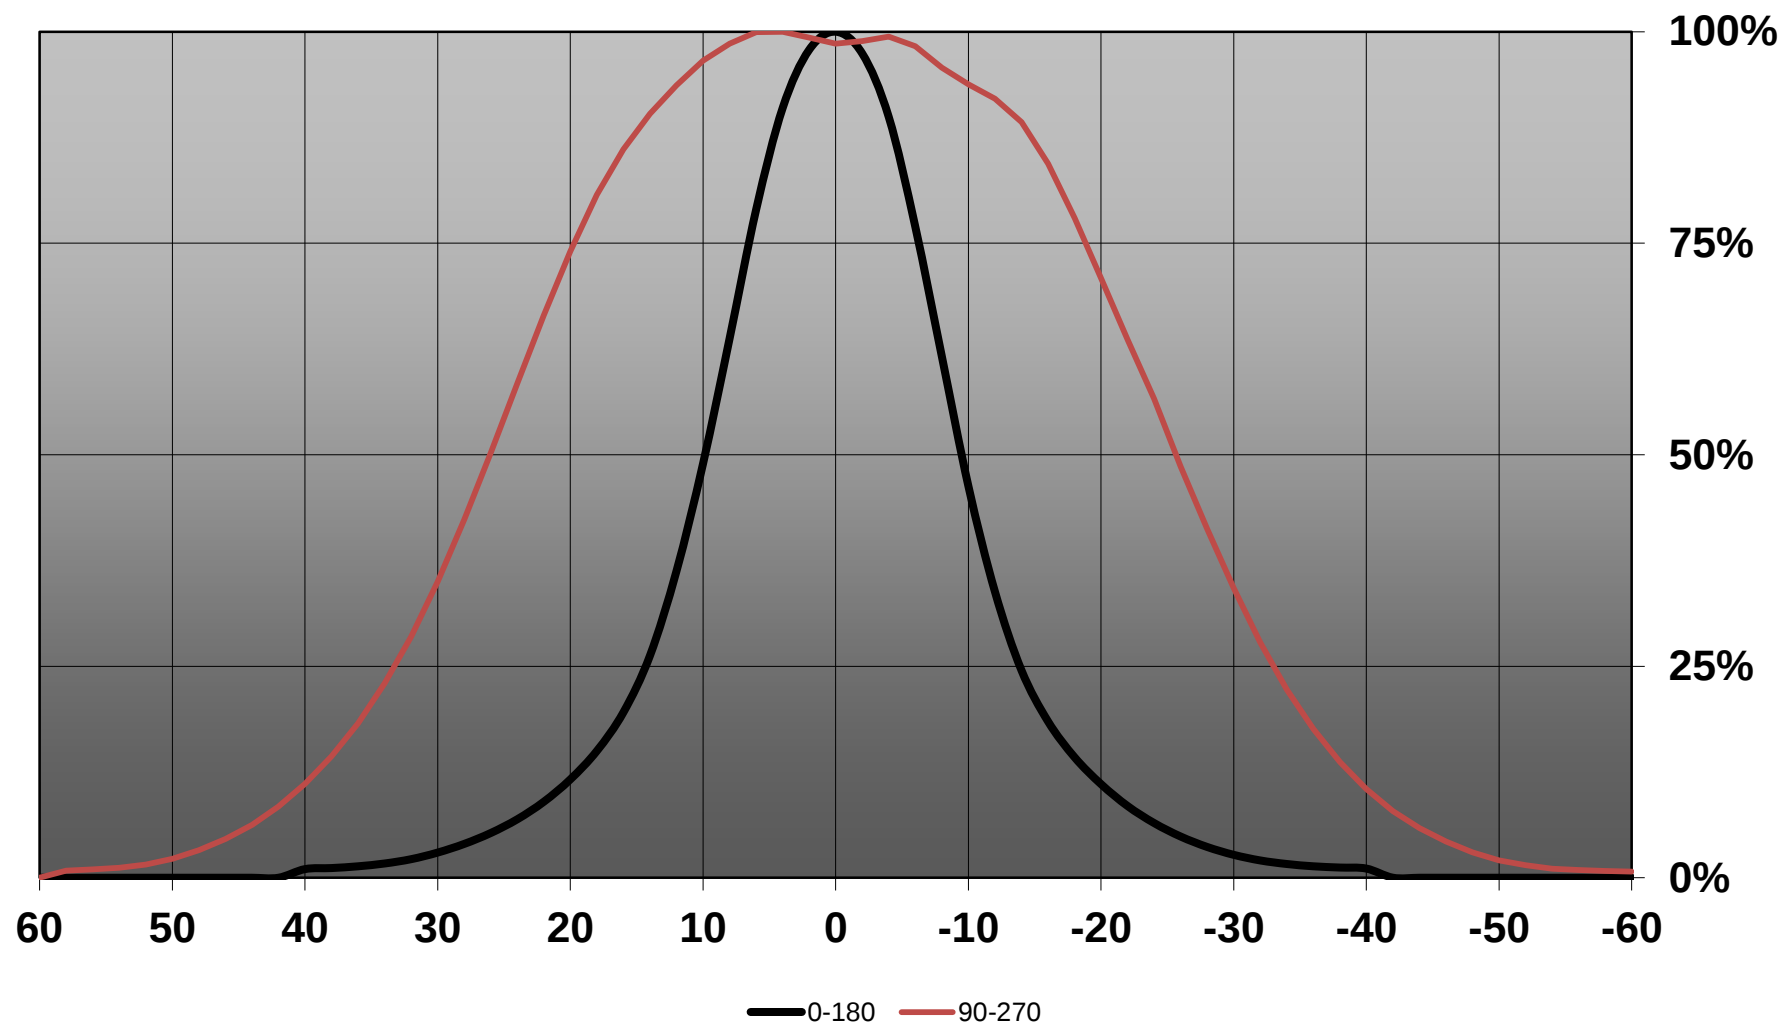

Relative intensity of C13529_VERONICA-O_(NCSxx19B)

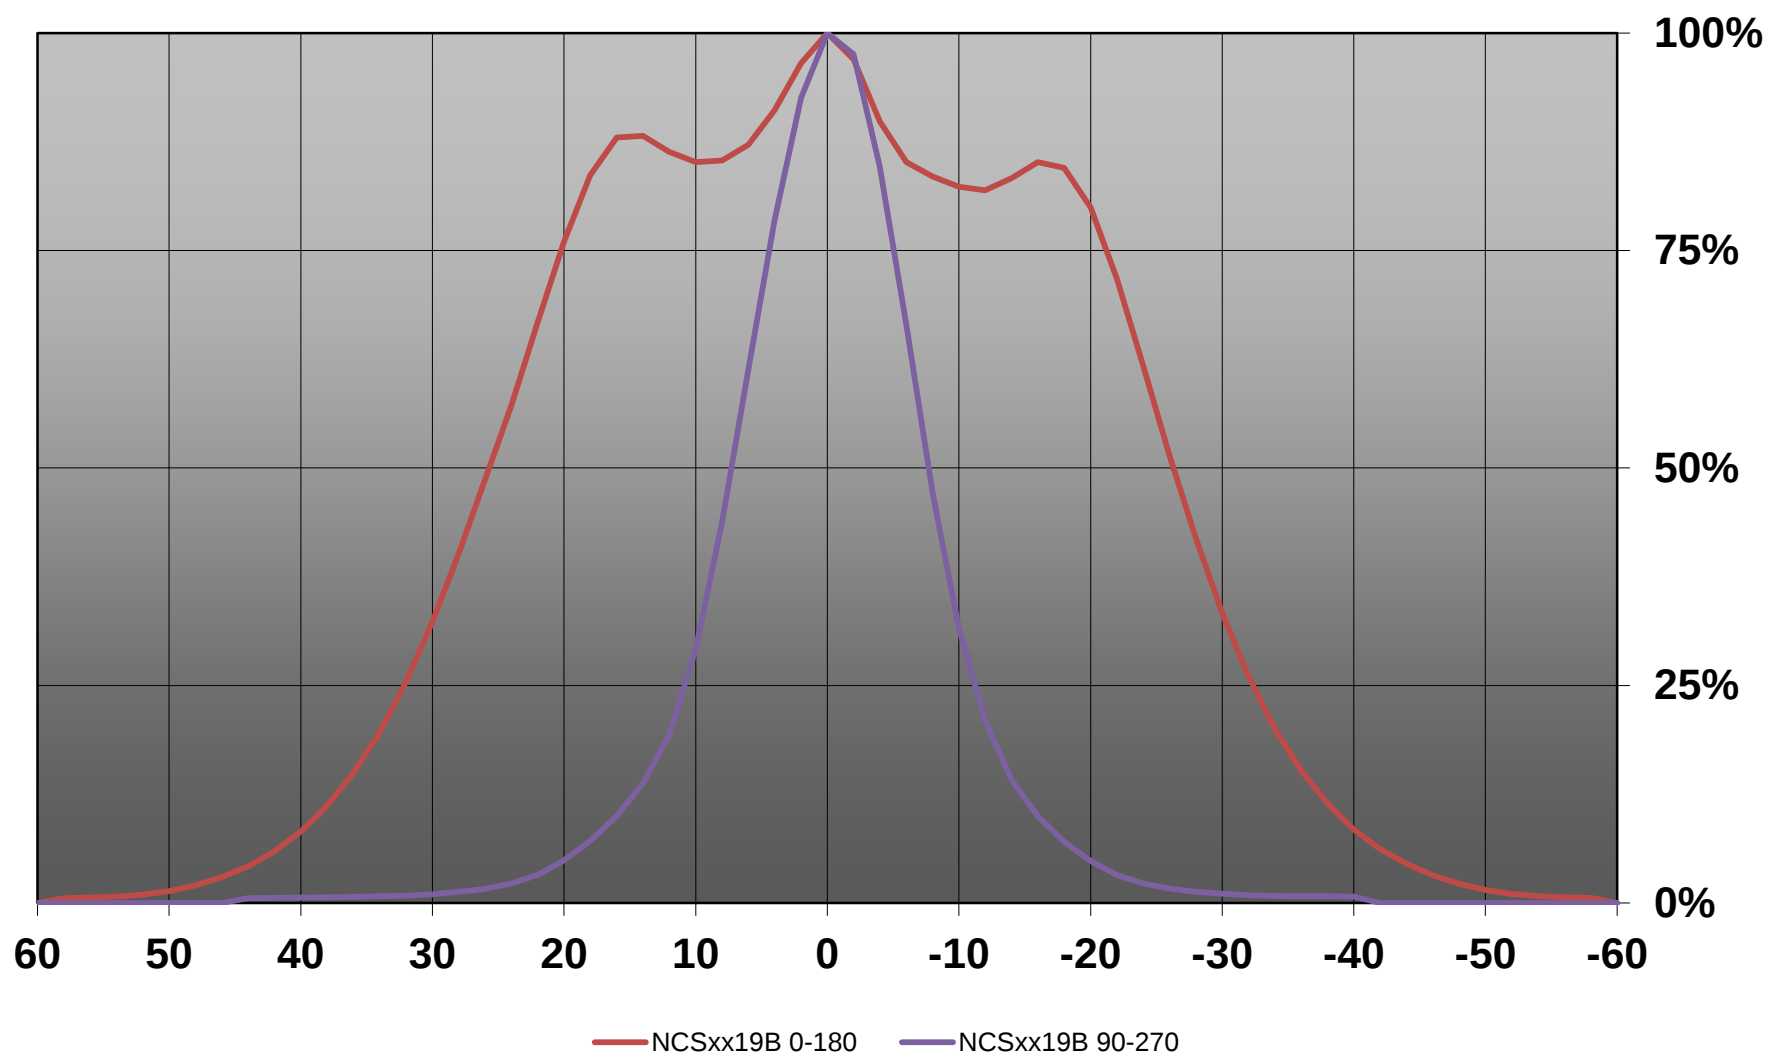

Relative intensity of C13529_VERONICA-O_(XPH35_HI)

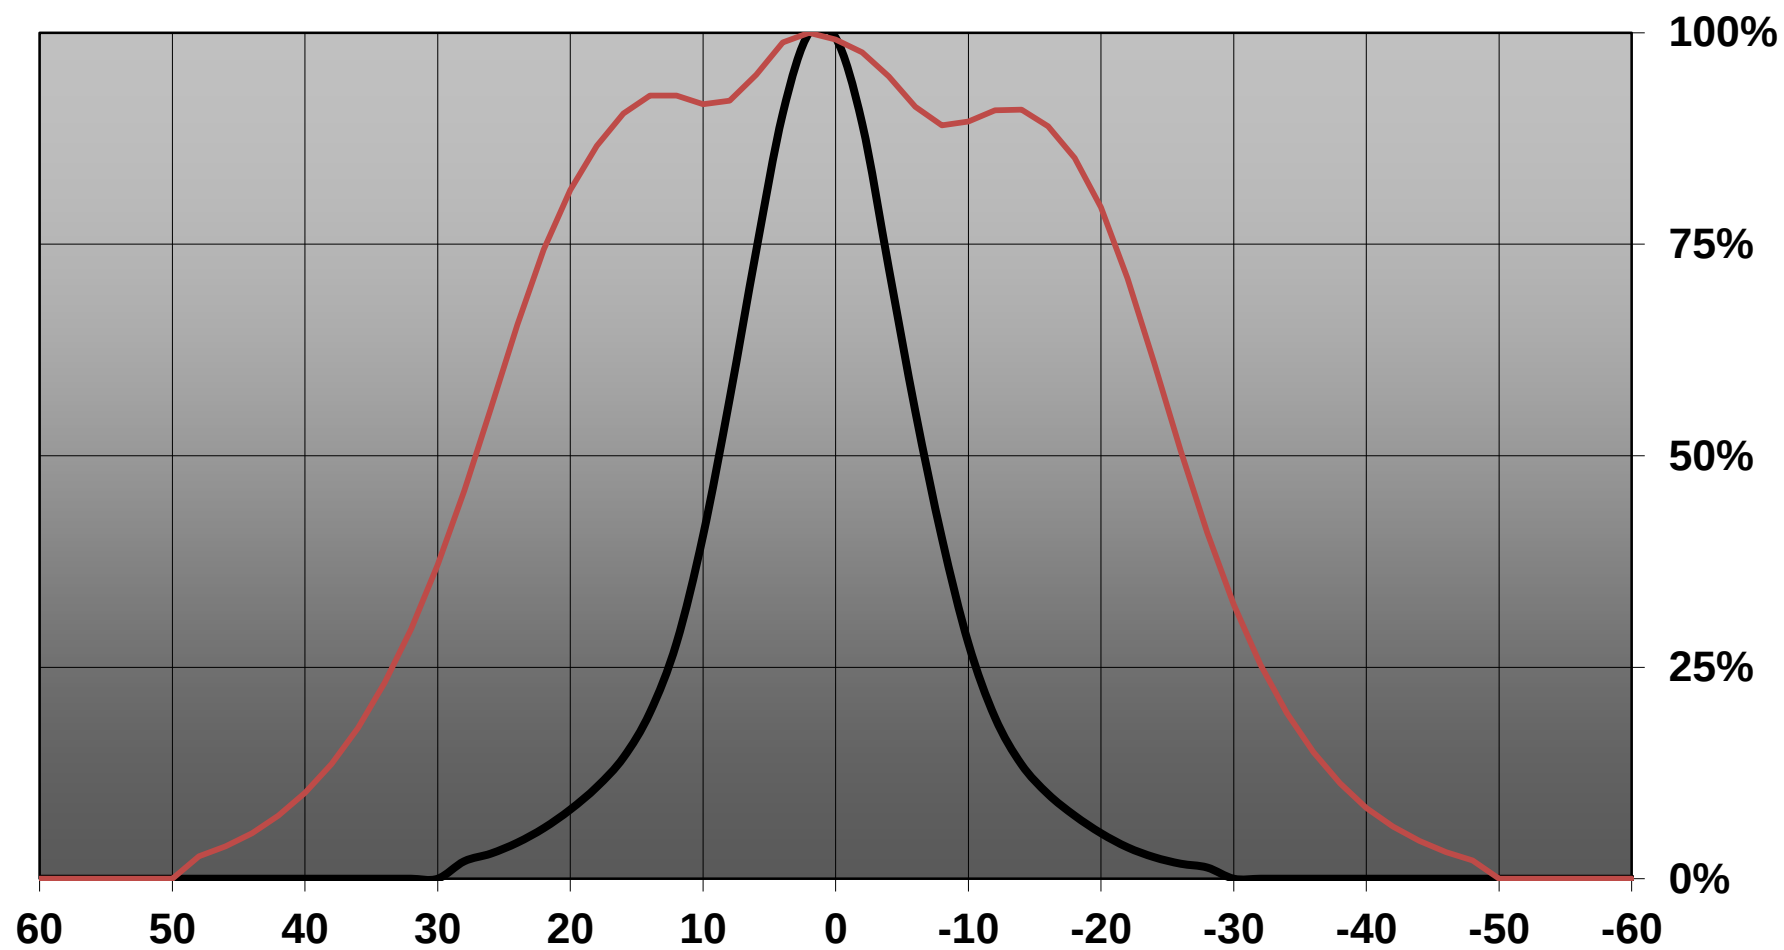


D

C


B

A





Isometric view



Bottom view

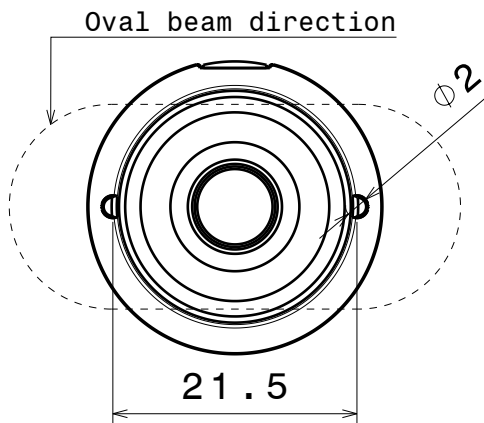

Front view

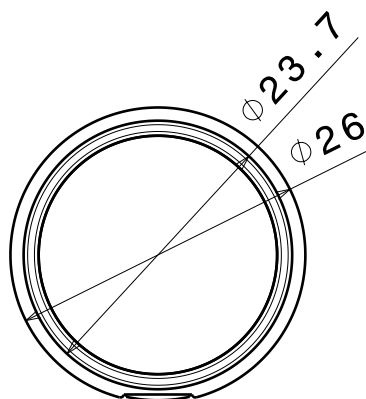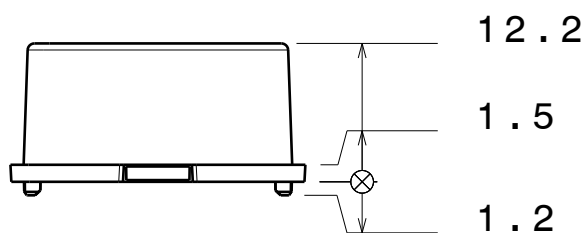

Top view

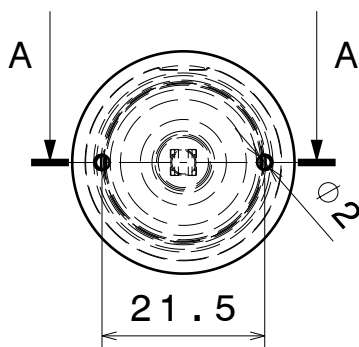

PCB suggestion


INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	-	VERONICA	PMMA	

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class M, otherwise class C.
According to DIN ISO 2768-2
Form and position: class L

LEDiL

Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

THIRD ANGLE PROJECTION:



DRAWING TITLE

VERONICA SERIES

This drawing is the property
of LEDiL Oy. It may not be
reproduced, copied or
communicated without a written
agreement with LEDiL Oy."

SIZE PART NUMBER

A4

-


SCALE 1:1 WEIGHT

SHEET 1/1


D

A


Luminaire: LEDil Oy C13529_VERONICA-O_(MK-R) Efficiency=80%
Lamps: 1 x Cree MK-R (353lm @ 250mA) CCT=3300K P=2.8W I=250mA

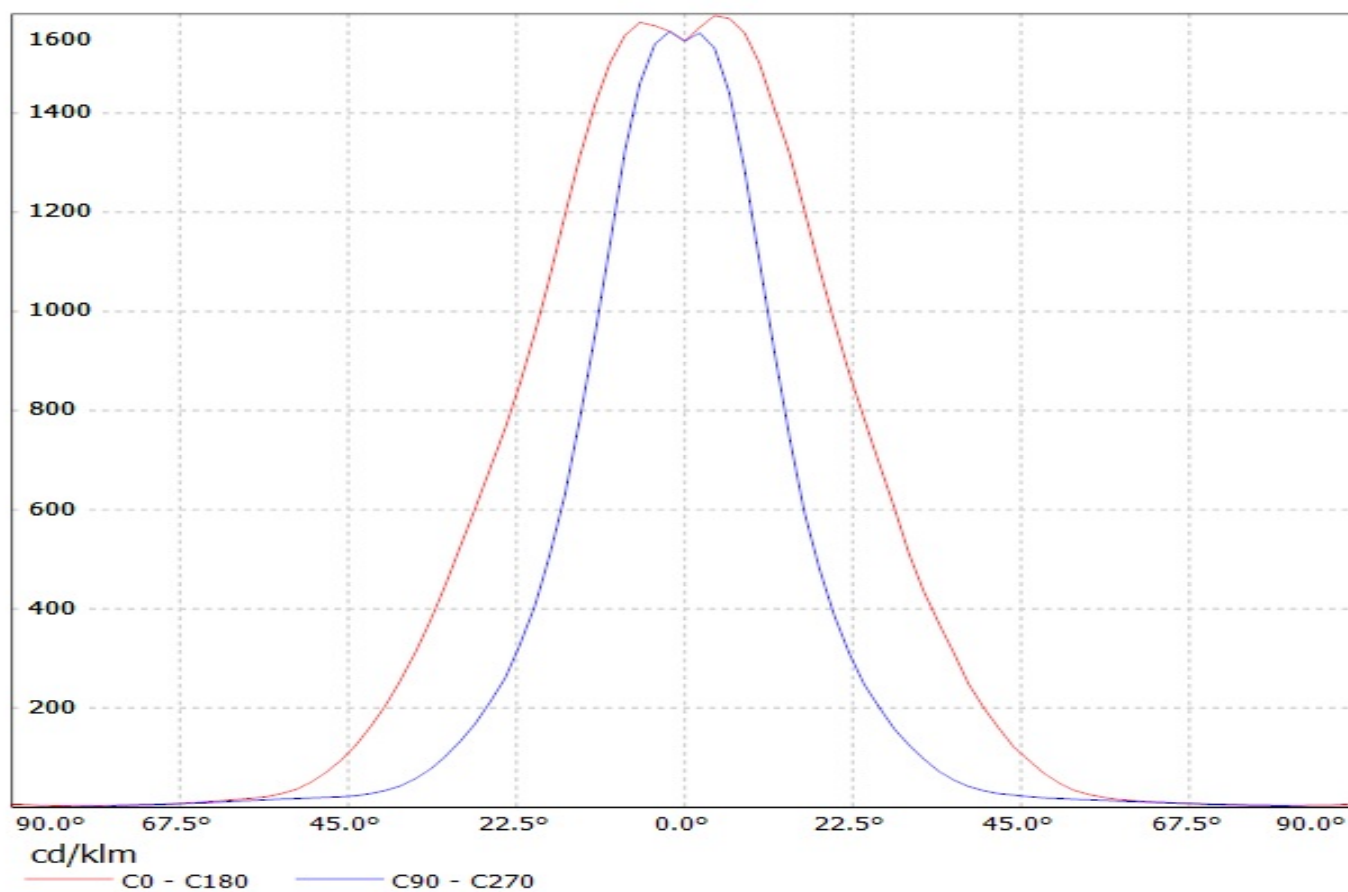


Luminaire: LEDil Oy C13529_Veronica-O_(Luxeon M) Efficiency=79%
Lamps: 1 x Luxeon M (LXR7-SW30) 368lm @ 250mA CCT=3100K P=2.8W I=250mA

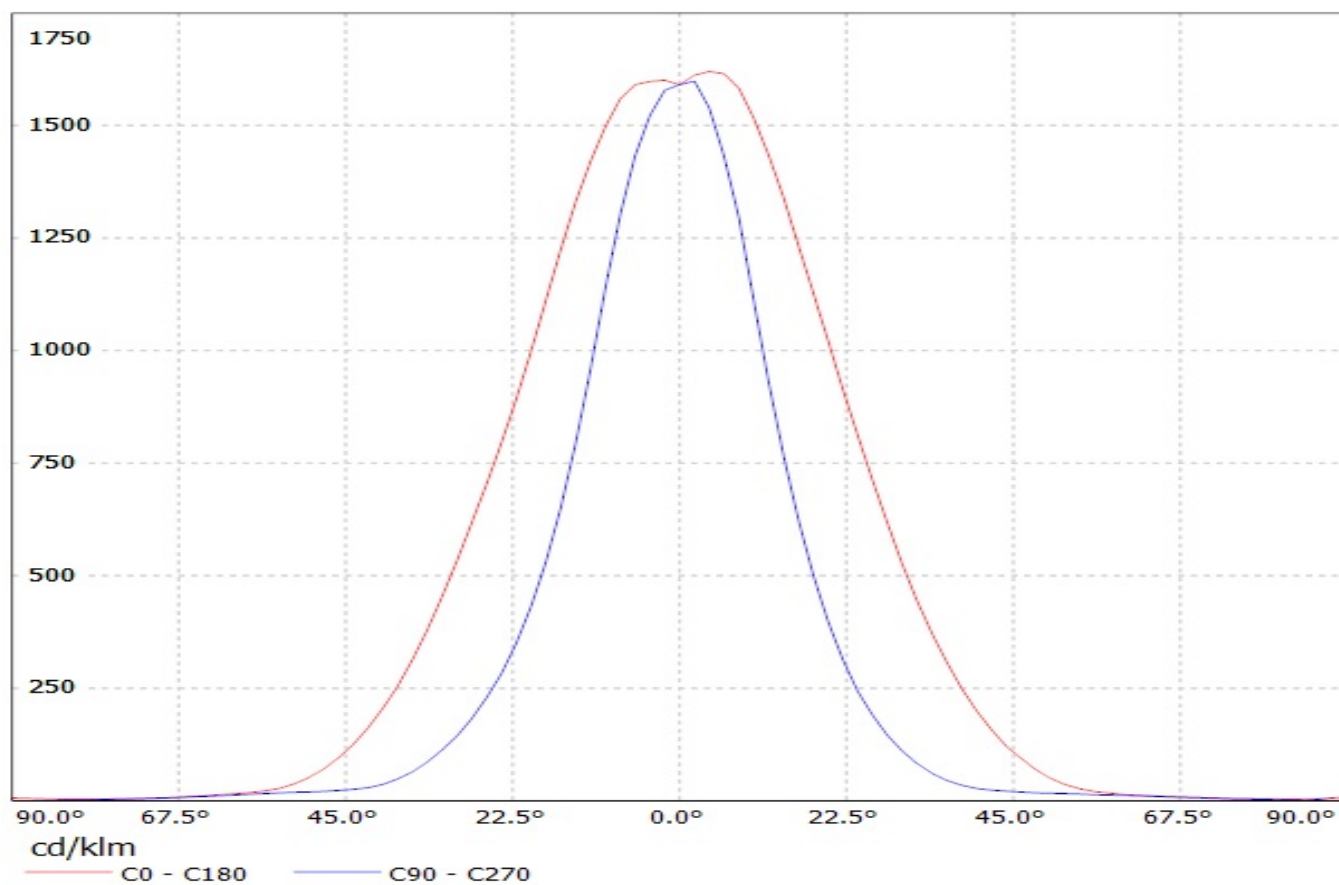


Luminaire: LEDil Oy C13529_VERONICA-O_(NVSxx19A) Efficiency=79%
Lamps: 1 x Nichia NVSxx19A (NVSW219ATE) 93lm @ 250mA CCT=5010K P=0.7W I=250mA

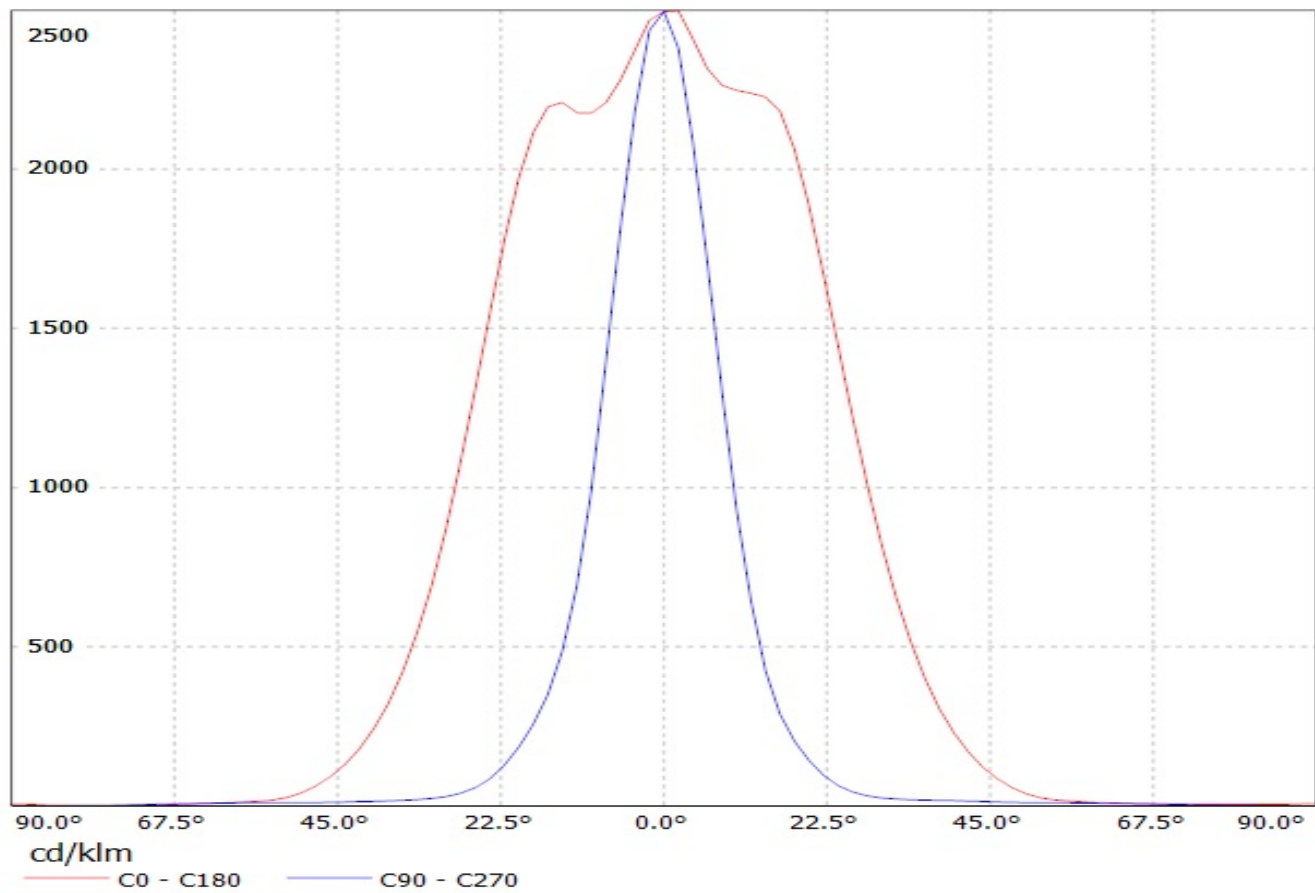


Luminaire: LEDil Oy C13529_Veronica-O_(XP-E2) Efficiency=84%
Lamps: 1 x Cree XP-E2 (XPEBWT-L1-7B4-Q4-0-01) 84lm @ 250mA CCT=3200K P=0.7W I=250mA

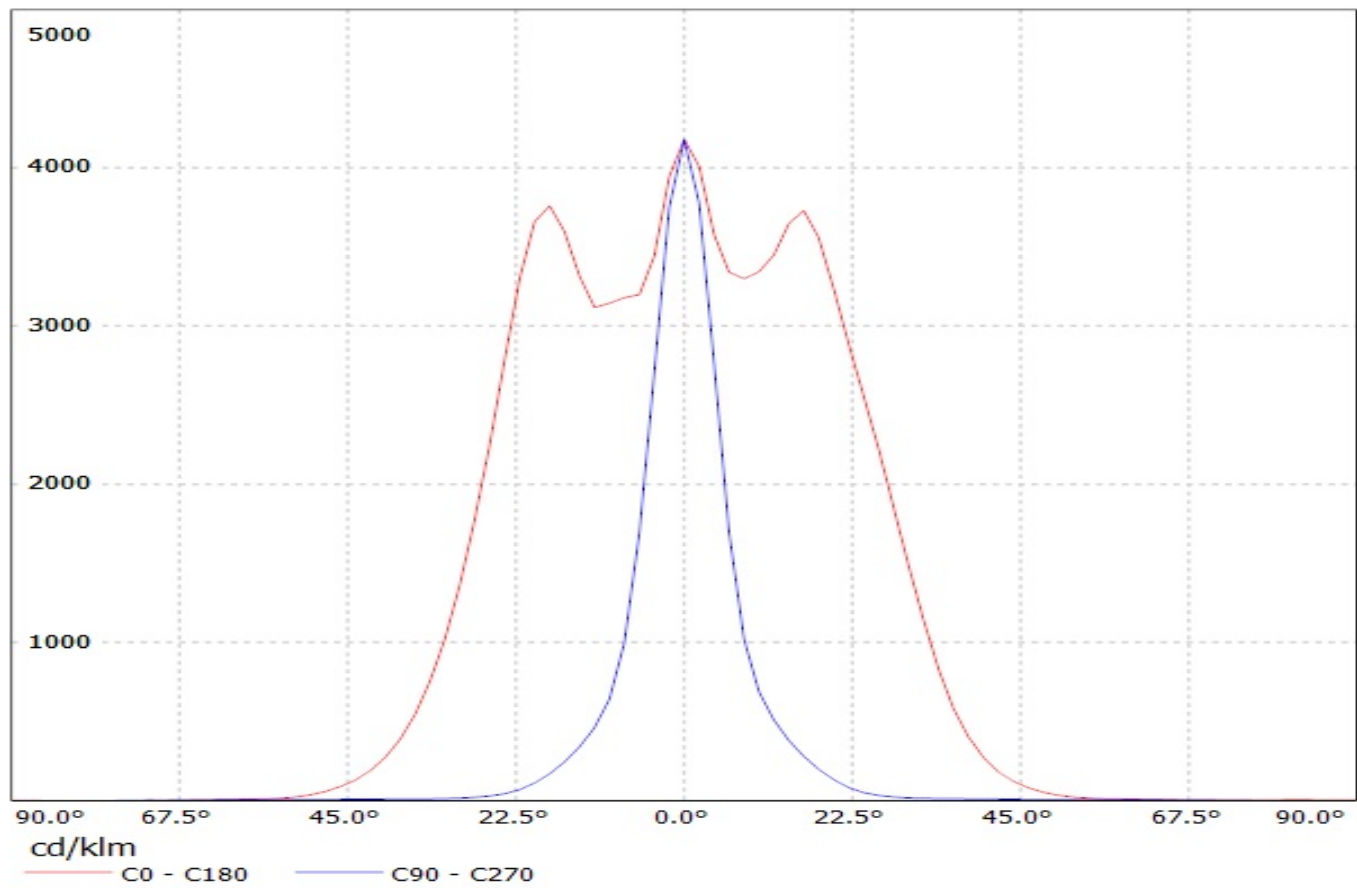


Luminaire: LEDil Oy C13529_Veronica-O_(Luxeon_R) Efficiency=81%
Lamps: 1 x Luxeon R (LXA7-PW30) 73lm @ 250mA CCT=3000K P=0.7W I=250mA

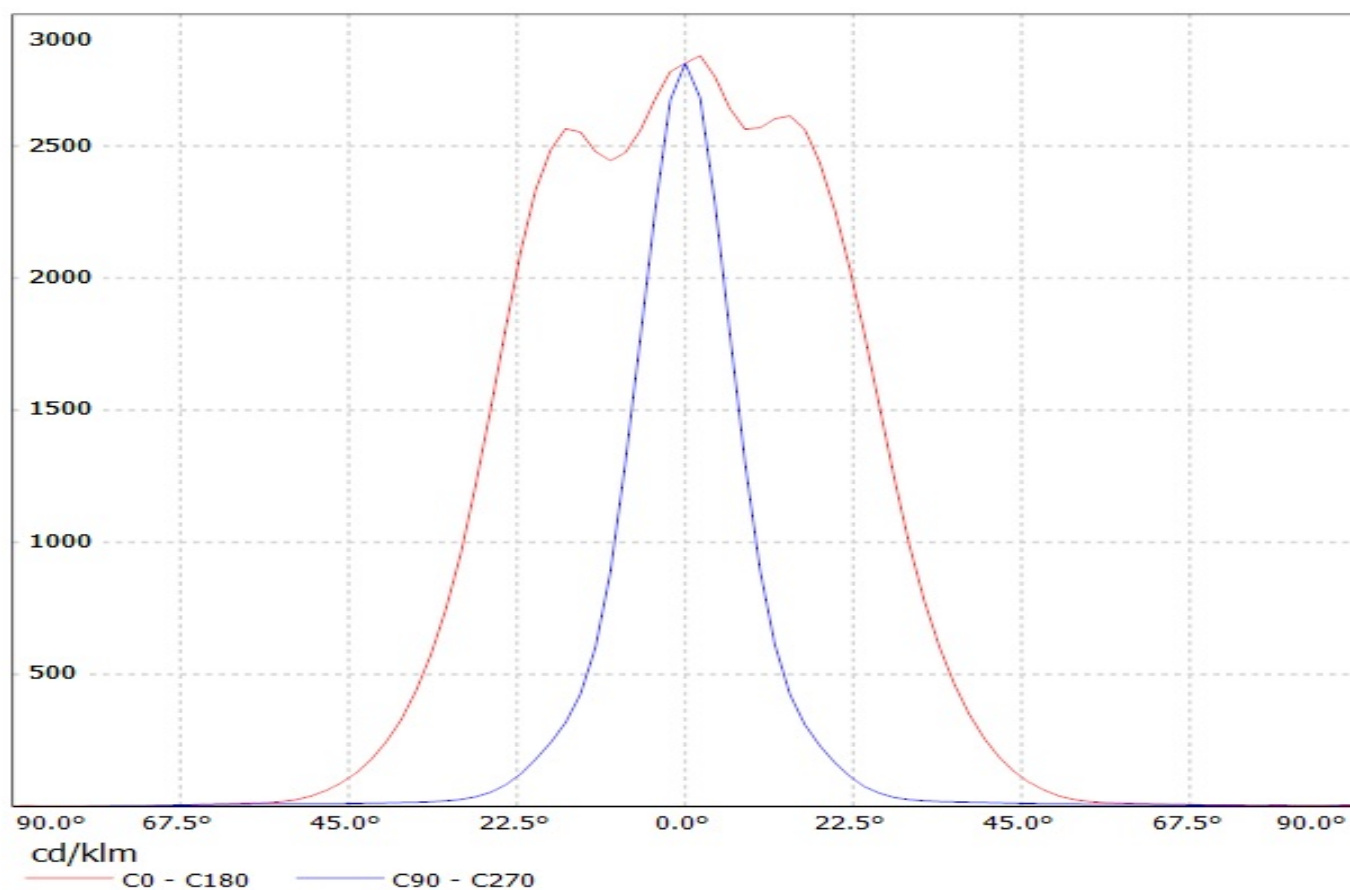


Luminaire: Ledil Oy C13529_VERONICA-O_LED_(Luxeon_A) Efficiency=82%
Lamps: 1 x Luxeon A (66lm @ 250mA) CCT=2900K P=0.8W I=250mA

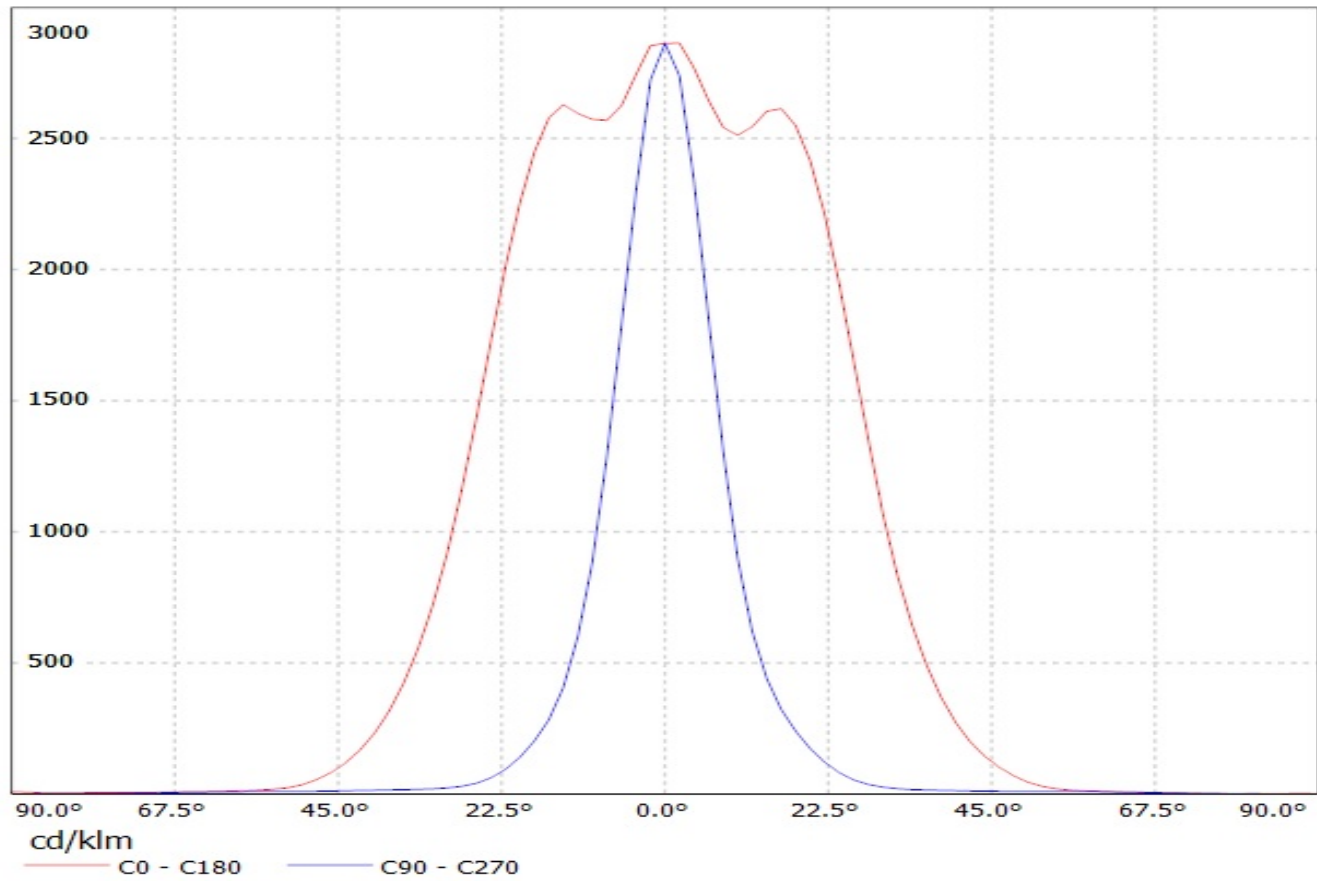


Luminaire: LEDil Oy C13529_Veronica-O_(Luxeon_Rebel) Efficiency=82%
Lamps: 1 x Luxeon Rebel (LXM8-PW30) 61lm @ 250mA CCT=2900K P=0.7W I=250mA

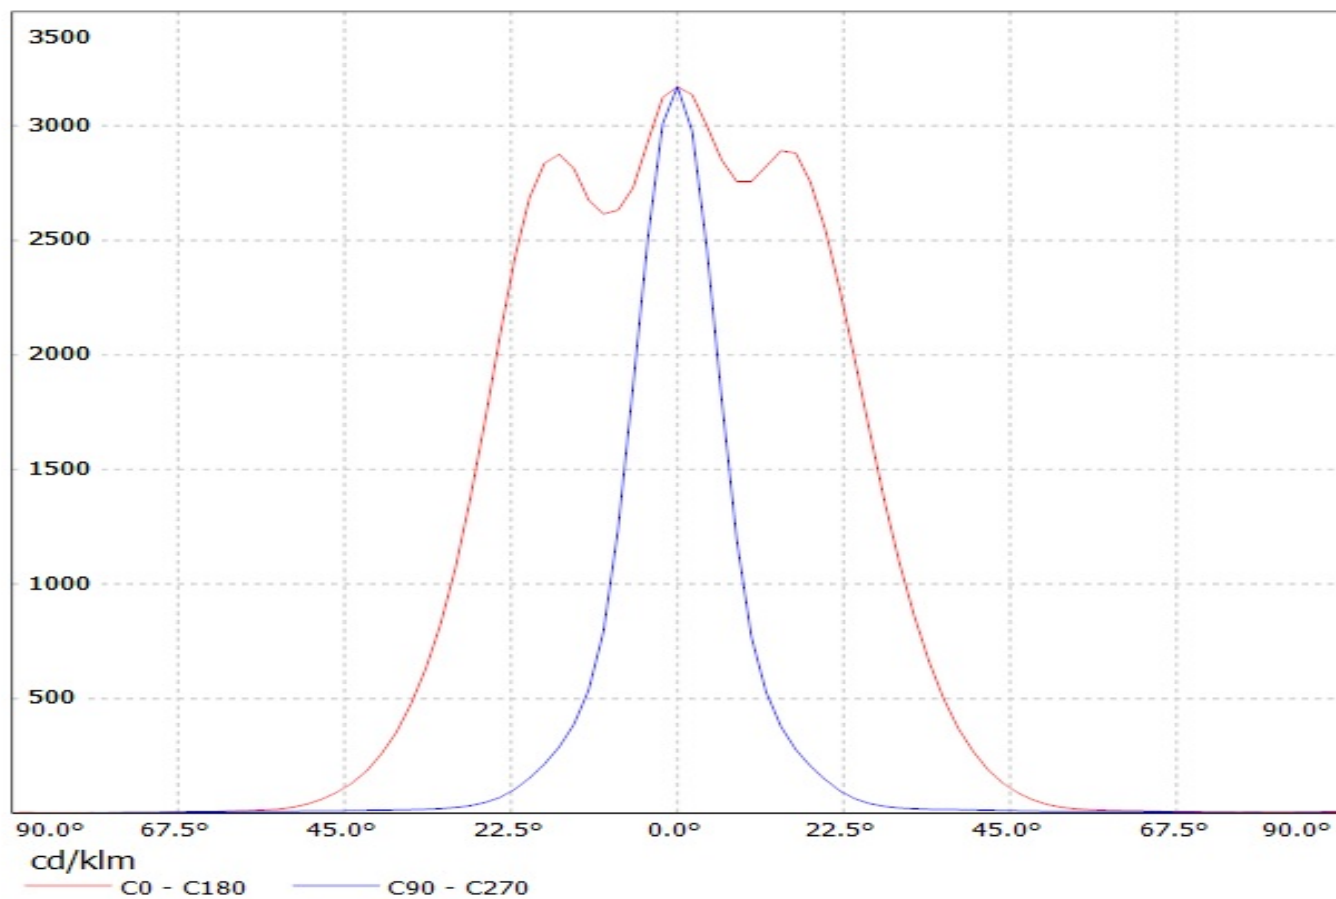


Luminaire: LEDil Oy C13529_Veronica-O_(XM-L2) Efficiency=82%
Lamps: 1 x Cree XM-L2 (XMLBWT-0-7B4-T30-0L-0001) 91lm @ 250mA CCT=3200K P=0.7W I=250mA

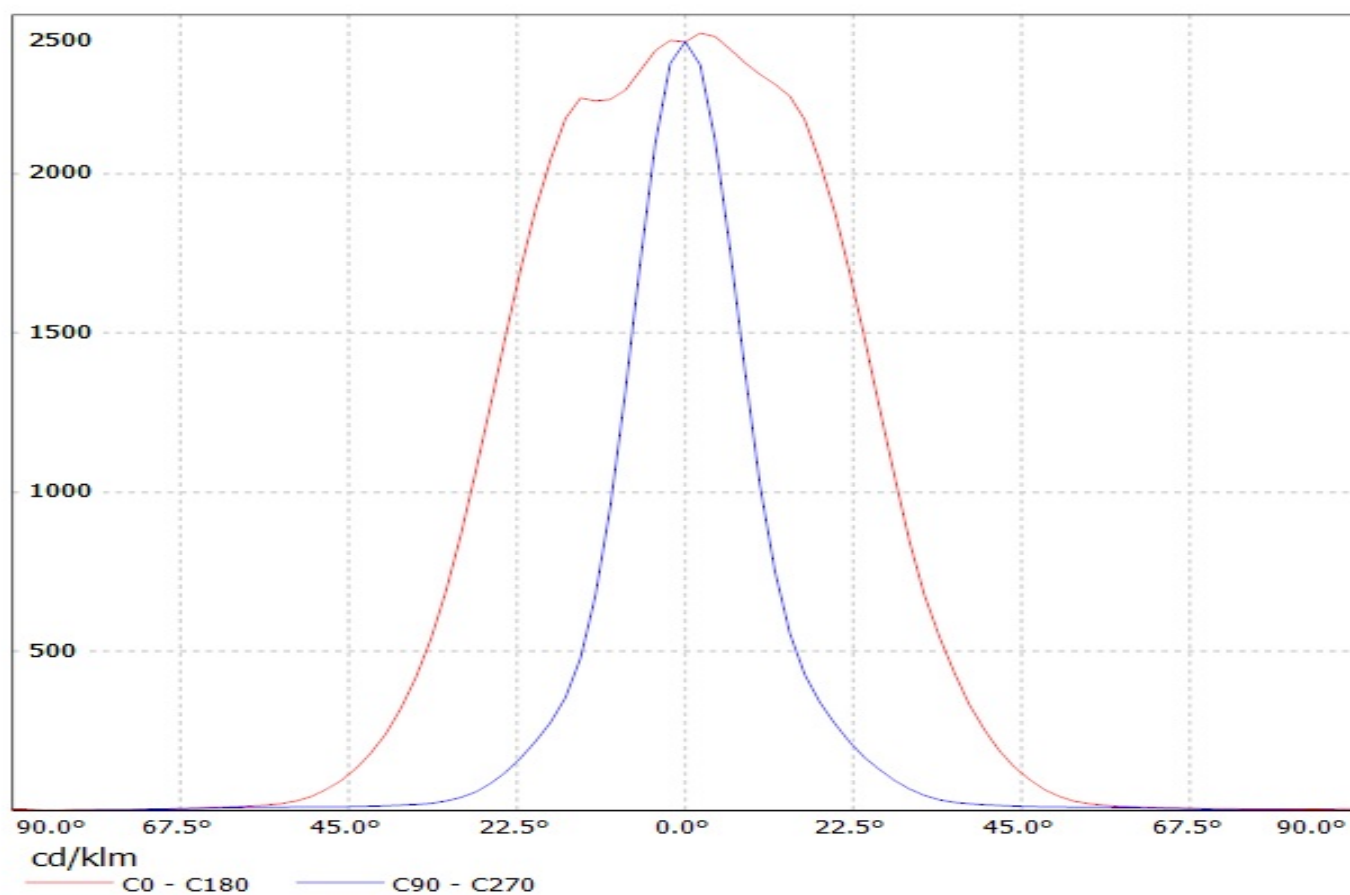


Luminaire: Ledil Oy C13529_VERONICA-O_(Oslon_Square_EC) Efficiency=81%
Lamps: 1 x Osram Oslon Square EC (LCW CQAR-EC-MQMS-5R8T-35) 79lm @ 250mA CCT=3200K P=0.8W I=250mA

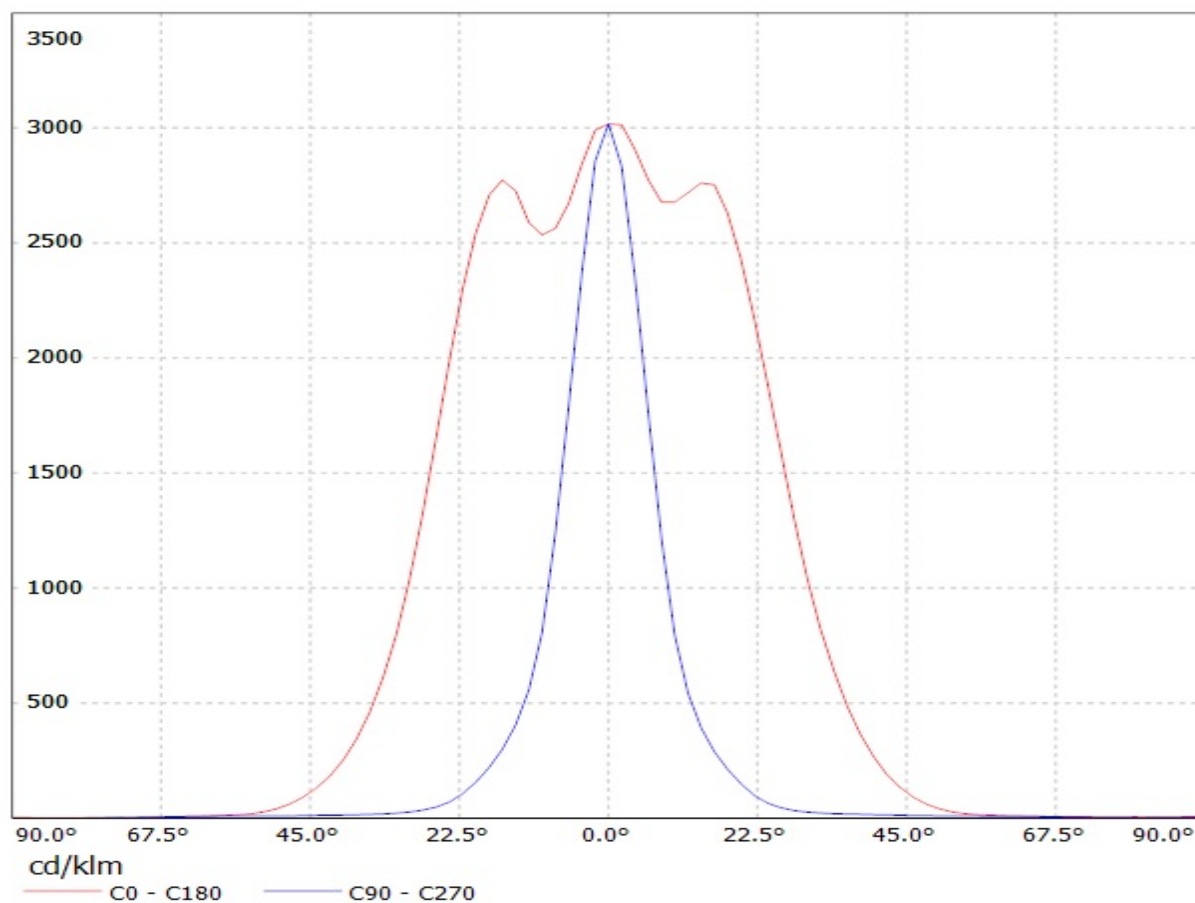


Luminaire: LEDil Oy C13529_VERONICA-O_(Oslon_SSL_150) Efficiency=83%
Lamps: 1 x Osram Oslon SSL 150 (LCW CRUP.EC-KTLP-607Q-1) 79lm @ 250mA CCT=3700K P=0.7W I=250mA

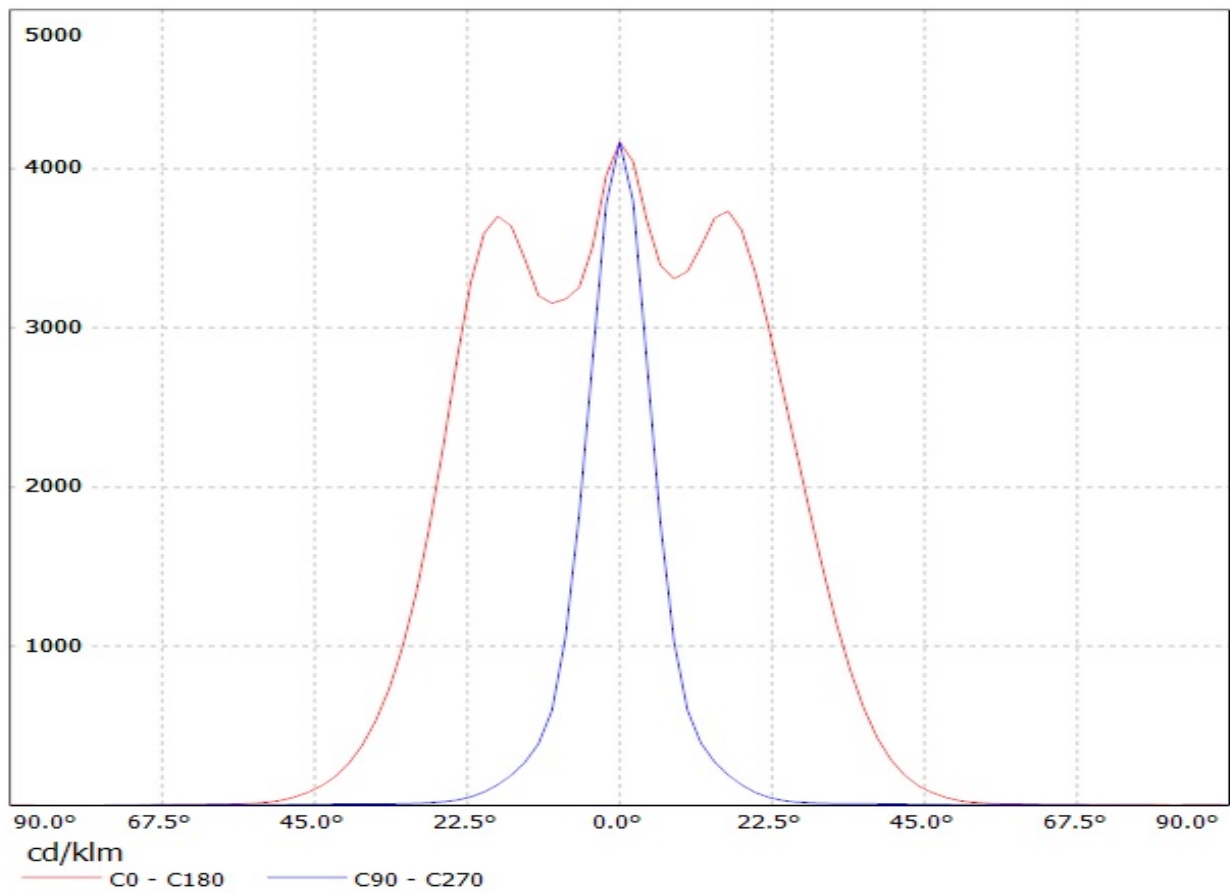


Luminaire: LEDil Oy C13529_Veronica-O_(Oslon_Square_PC) Efficiency=81%
Lamps: 1 x Osram Oslon Square PC (LCW CQAR.PL-MSMV-5H71-1) 101lm @ 250mA CCT=5900K P=0.8W I=250mA

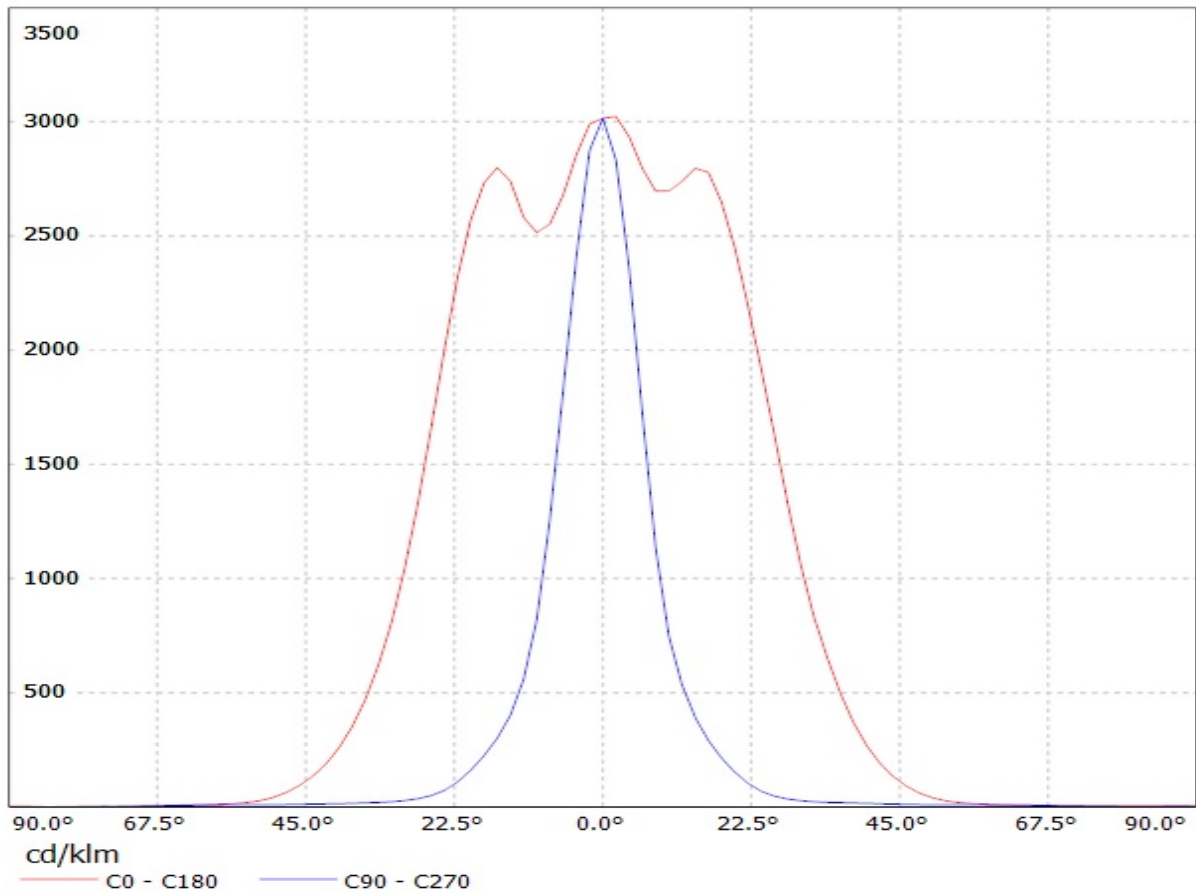


Luminaire: Ledil Oy C13529_VERONICA-O_LED_(Luxeon_Rebel_ES) Efficiency=81%
Lamps: 1 x Luxeon Rebel ES (91lm @ 250mA) CCT=4100K P=0.8W I=250mA

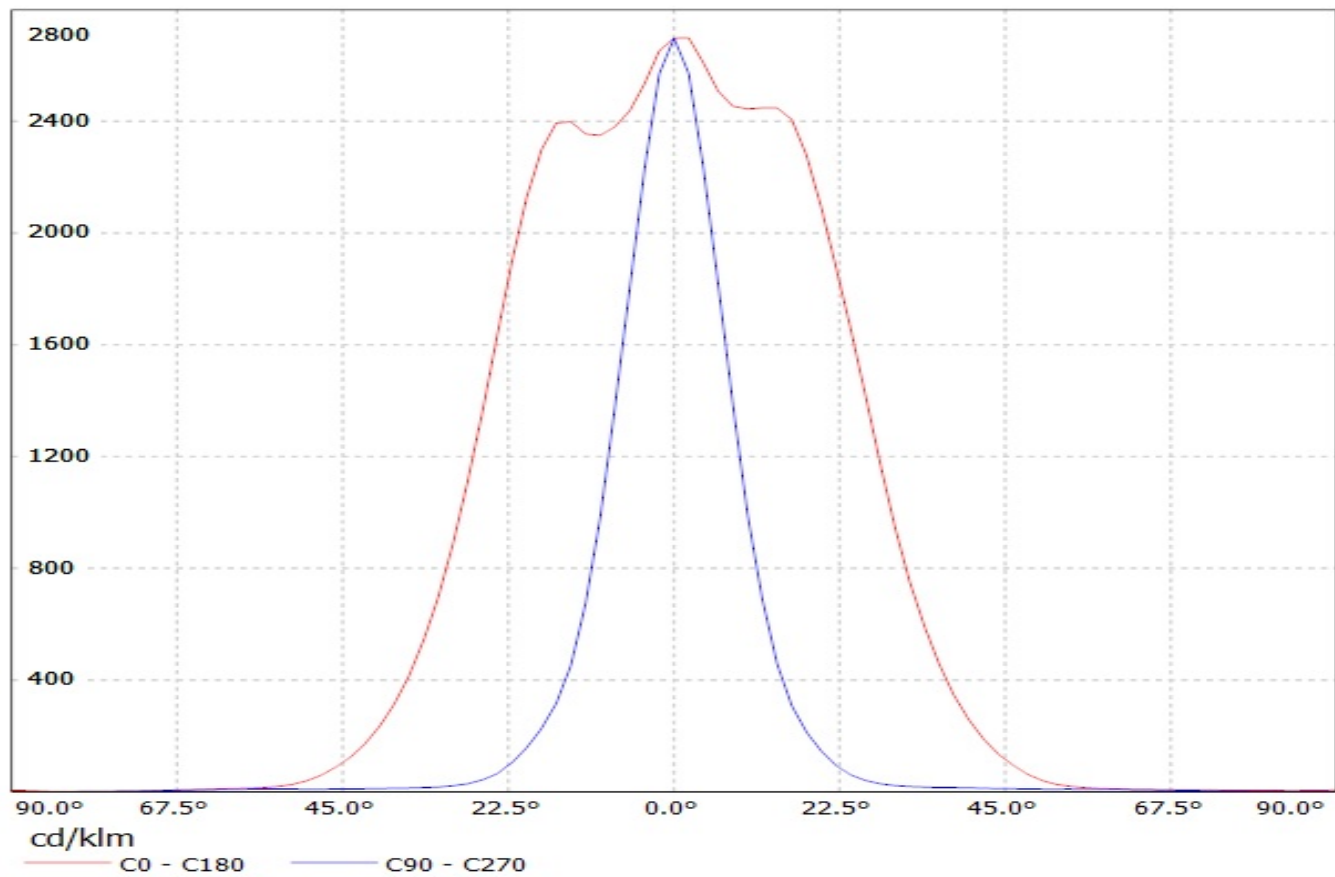


Luminaire: LEDil Oy C13529_VERONICA-O_(Z5M1) Efficiency=83%
Lamps: 1 x Seoul Z5M1 (SZ5M1-W0-C8/W1-A5-G) 108lm @ 250mA CCT=9100K P=0.8W I=250mA

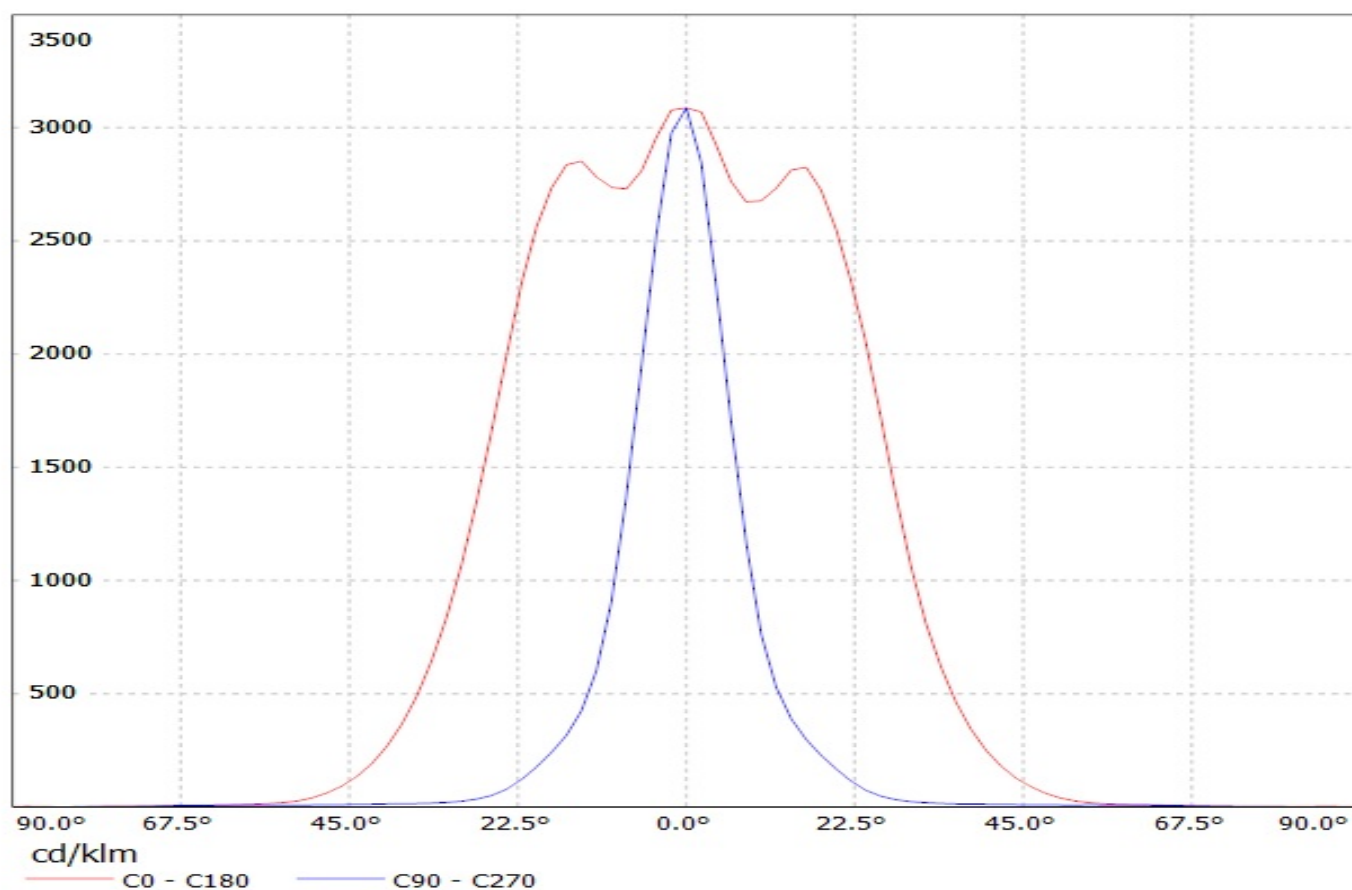


Luminaire: Ledil Oy C13529_VERONICA-O_LED_(Z5) Efficiency=83%
Lamps: 1 x Seoul Z5 (SZW05A0B) 83lm @ 250mA CCT=15070K P=0.8W I=250mA

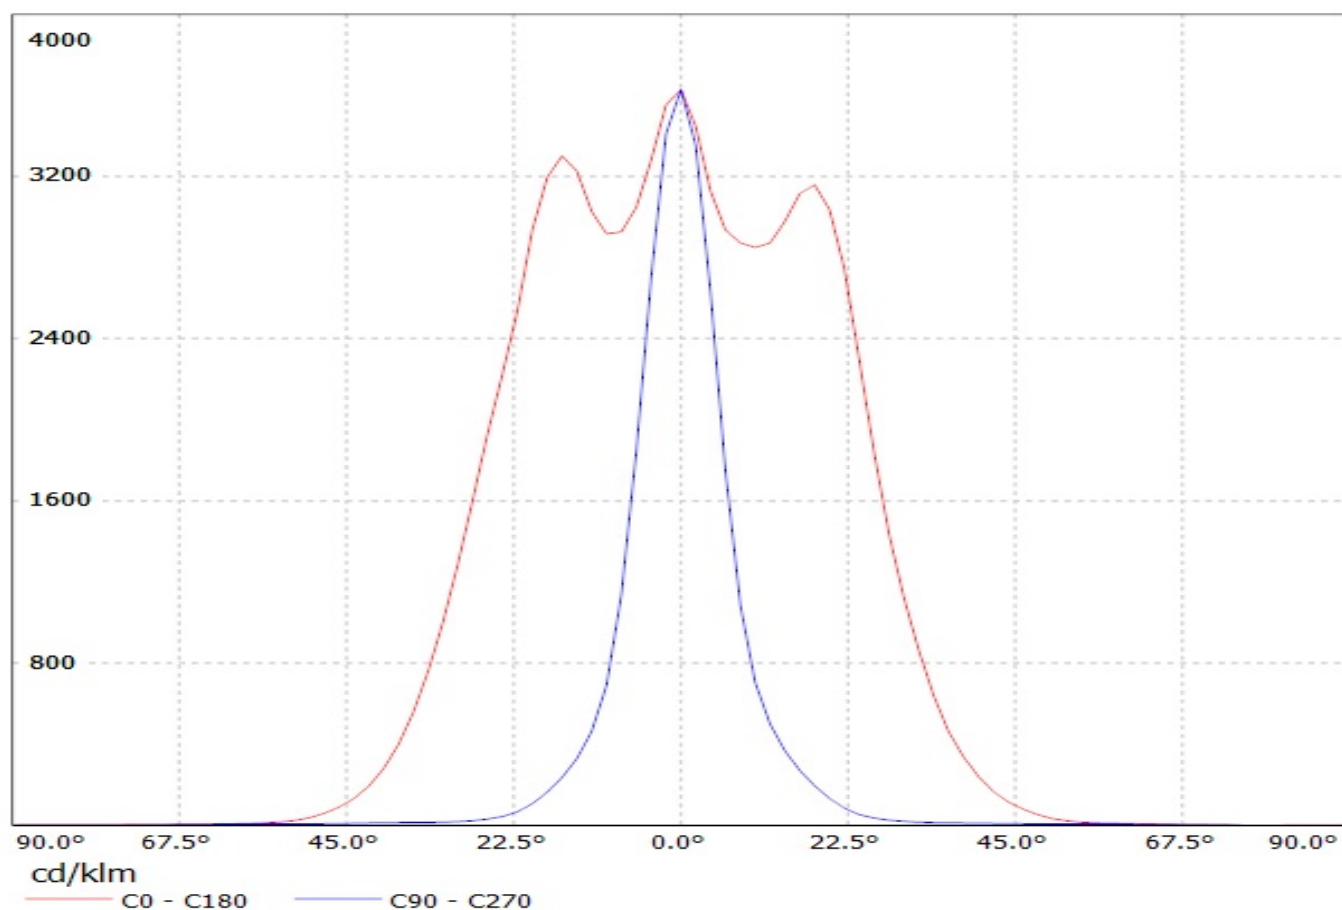


Luminaire: Ledil Oy C13529_VERONICA-O_(NVSxx19B) Efficiency=79%
Lamps: 1 x Nichia NVSxx19B (NVSL219BT) 106lm @ 250mA CCT=4300K P=0.7W I=250mA

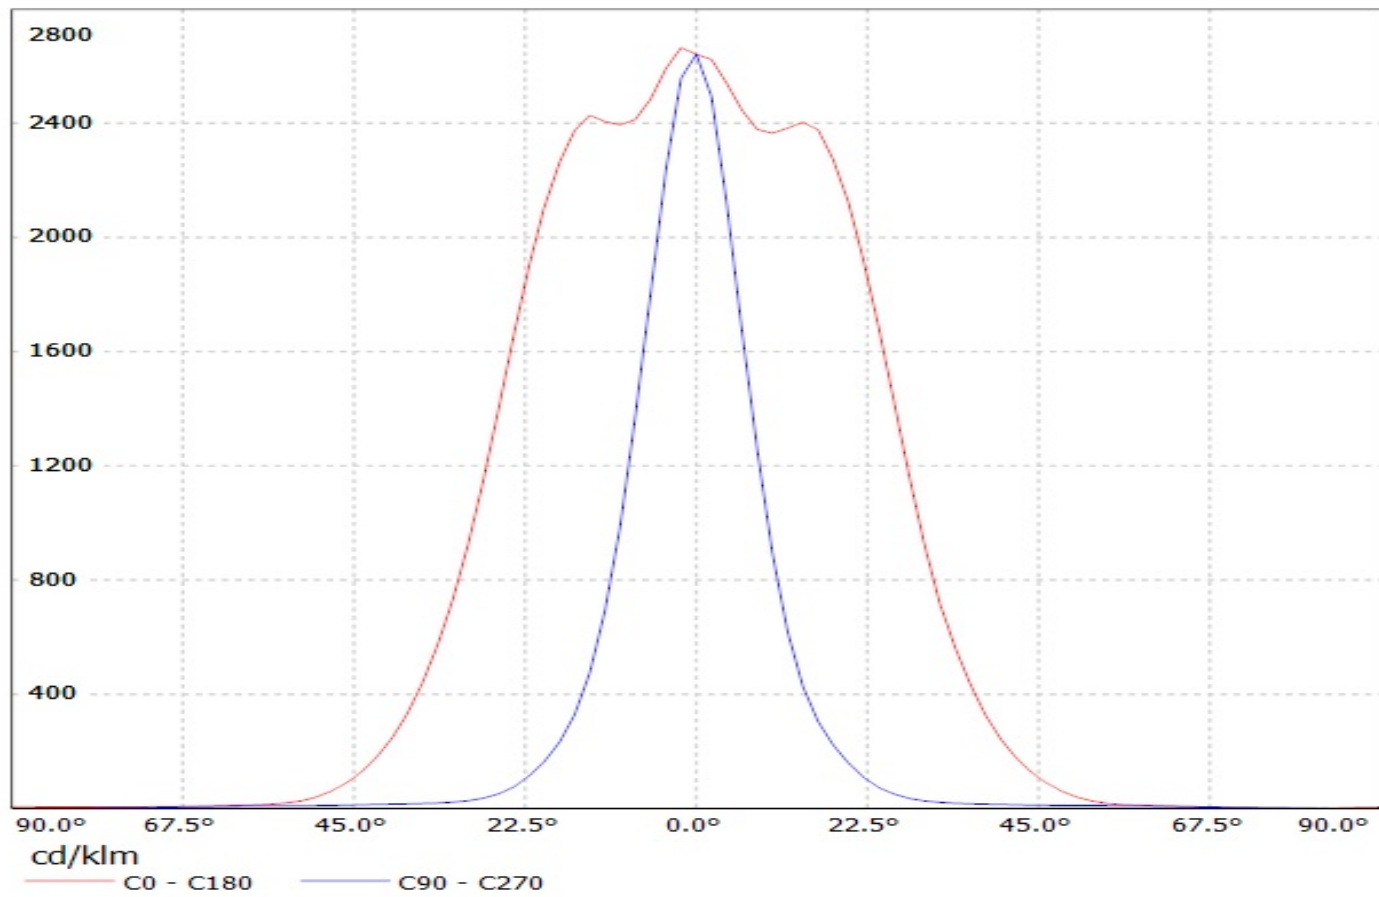


Luminaire: Ledil Oy C13529_VERONICA-O_(XM-L) Efficiency=83%
Lamps: 1 x Cree XM-L (XMLAWT-00-0000-0000T6051) 101lm @ 250mA CCT=8900K P=0.7W I=250mA

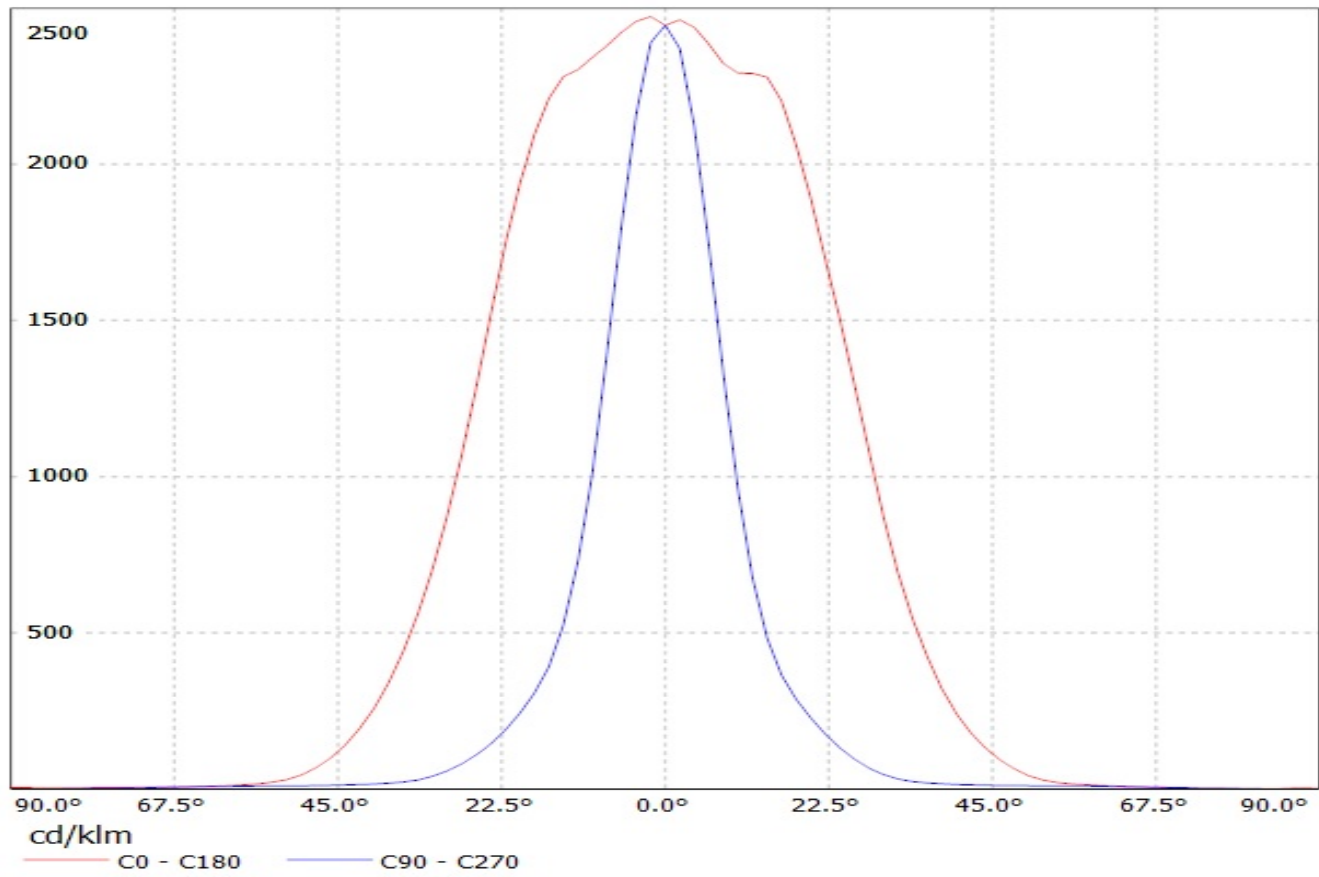


Luminaire: Ledil Oy C13529 VERONICA-O (XT-E) Efficiency=81%
Lamps: 1 x Cree XT-E (XTEAWT-00-0000-00000HBE8) 74lm @ 250mA CCT=2800K P=0.8W I=250mA

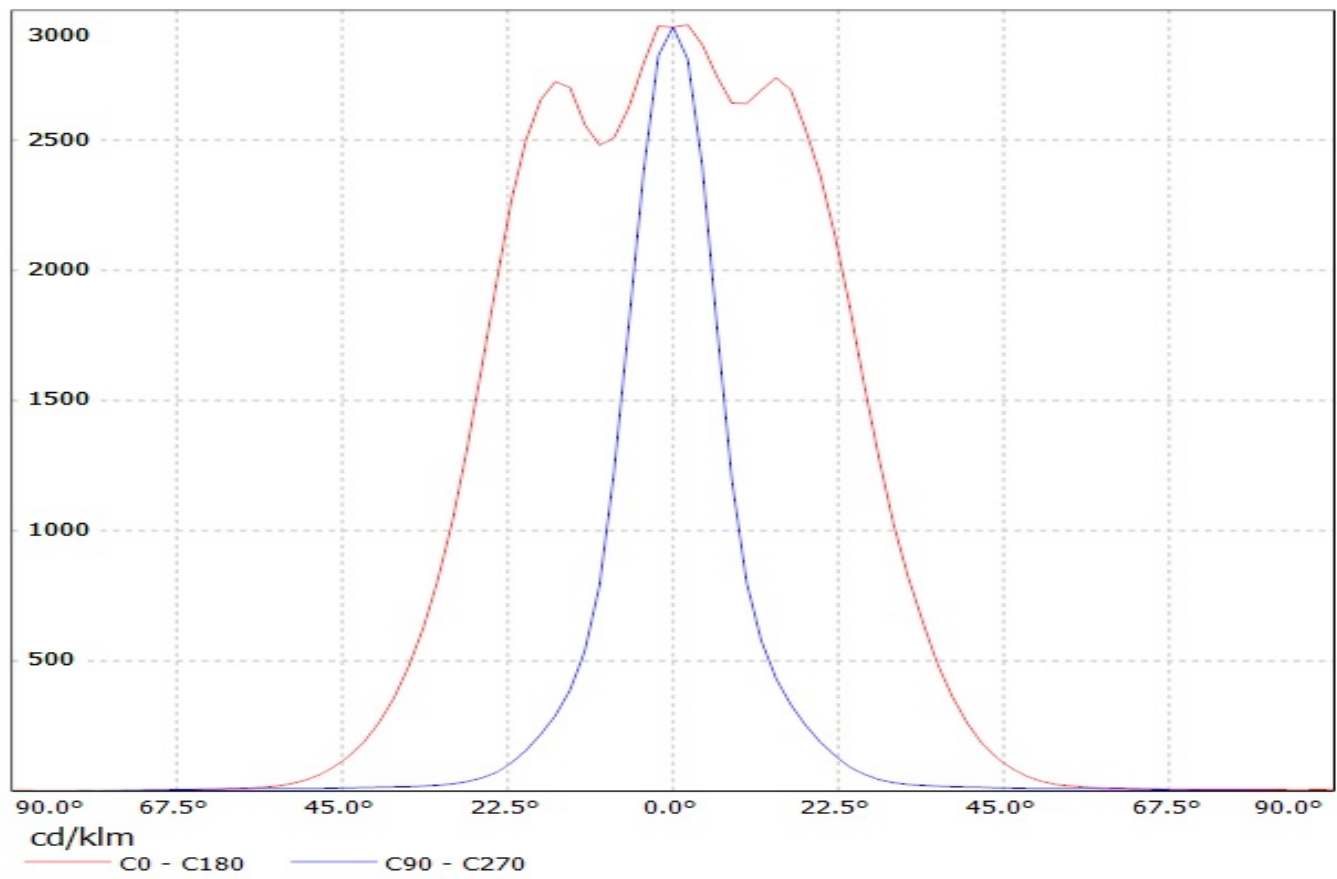

Luminaire: LEDil Oy C13529_VERONICA-O_(XP-E) Efficiency=83%
Lamps: 1 x Cree XP-E (XPEWHT-L1-3C0-Q5-0-06) 78lm @ 250mA CCT=5500K P=0.8W I=250mA

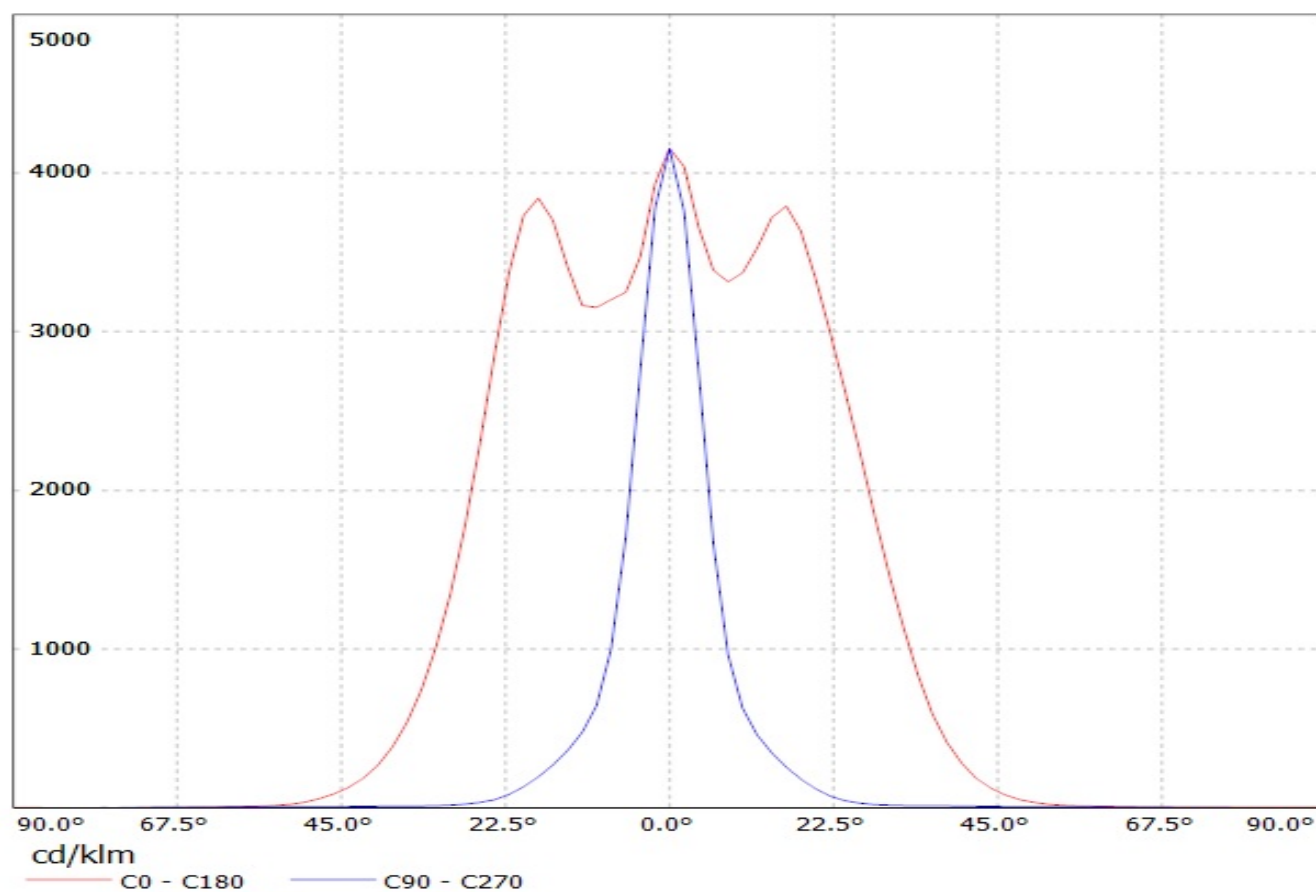


Luminaire: Ledil Oy C13529_VERONICA-O_(LH351Z) Efficiency=83%
Lamps: 1 x Samsung LH351Z (90.14lm @ 250mA) CCT=6500K P=0.7W I=250mA

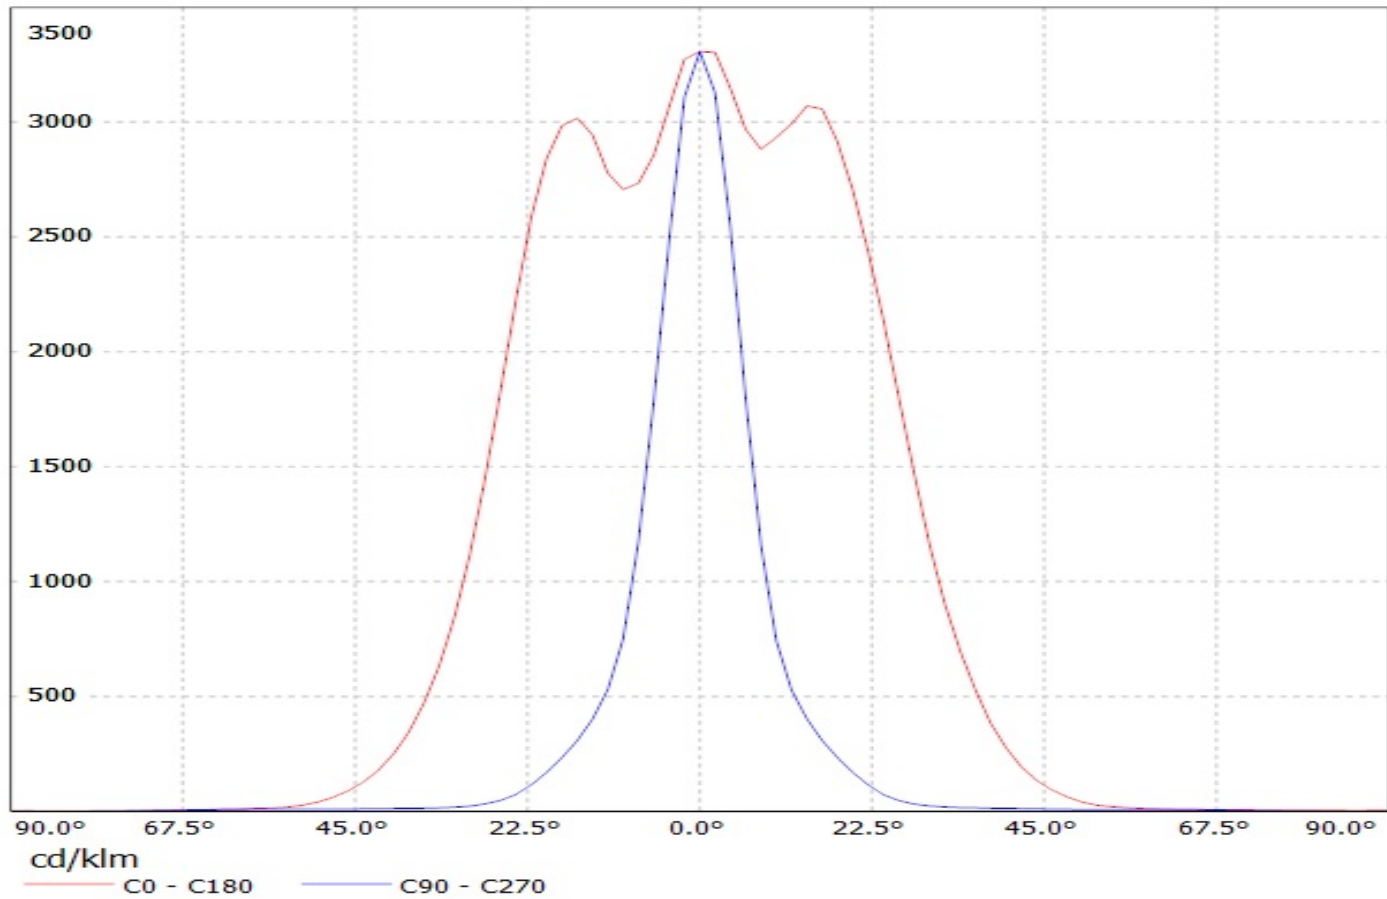


Luminaire: LEDiL Oy C13529_VERONICA-O_(LH351B)


Lamps: 1 x SAMSUNG_LH351B_107.366lm@250mA_P=2.9308W_I=249.9mA

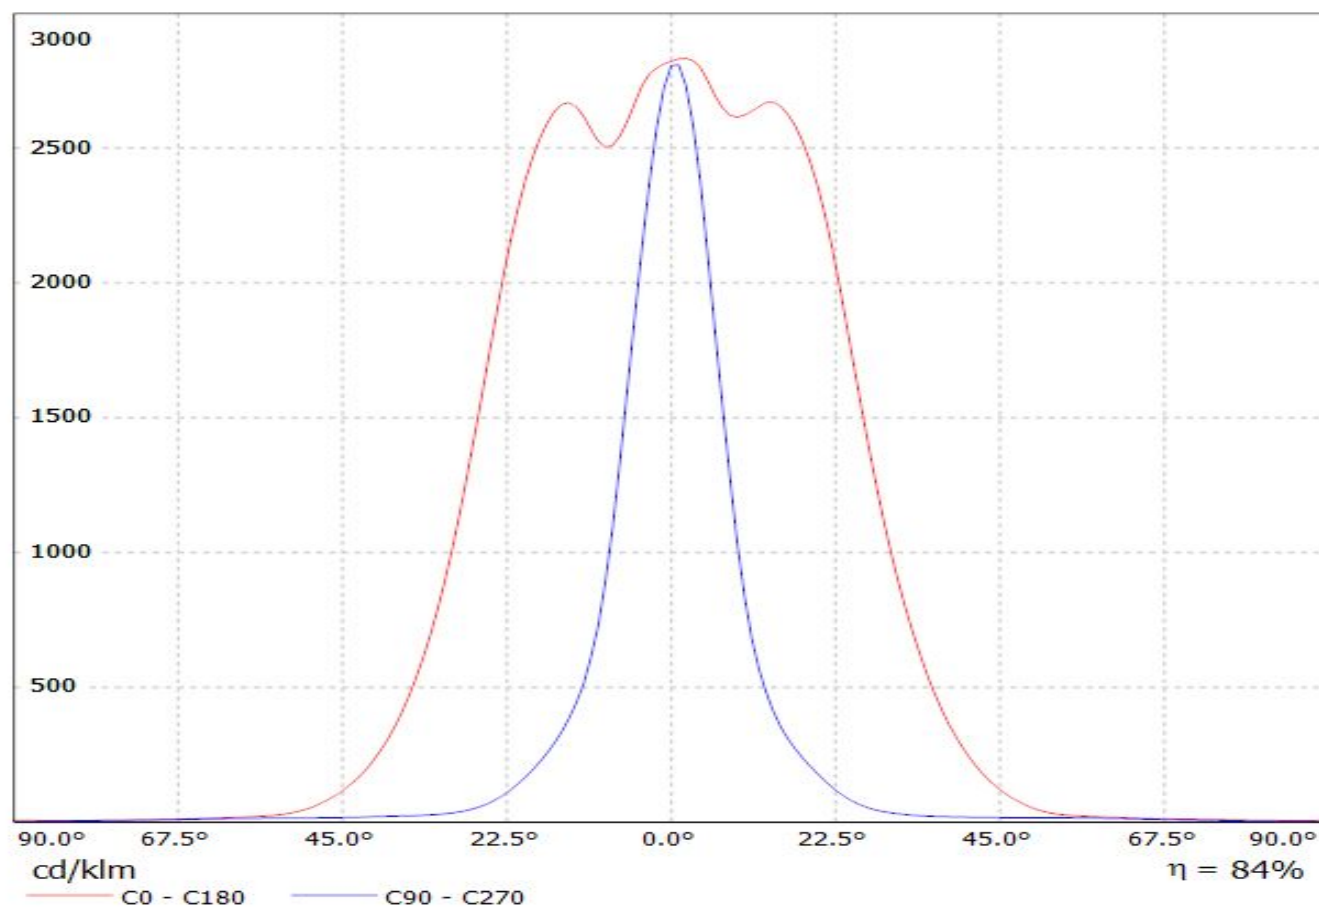


Luminaire: Ledil Oy C13529_VERONICA-O_(3535_Ceramic_3W) Efficiency=81%
Lamps: 1 x LG 3535 Ceramic 3W (LEMWA33) 90lm @ 250mA CCT=6900K P=0.7W I=250mA

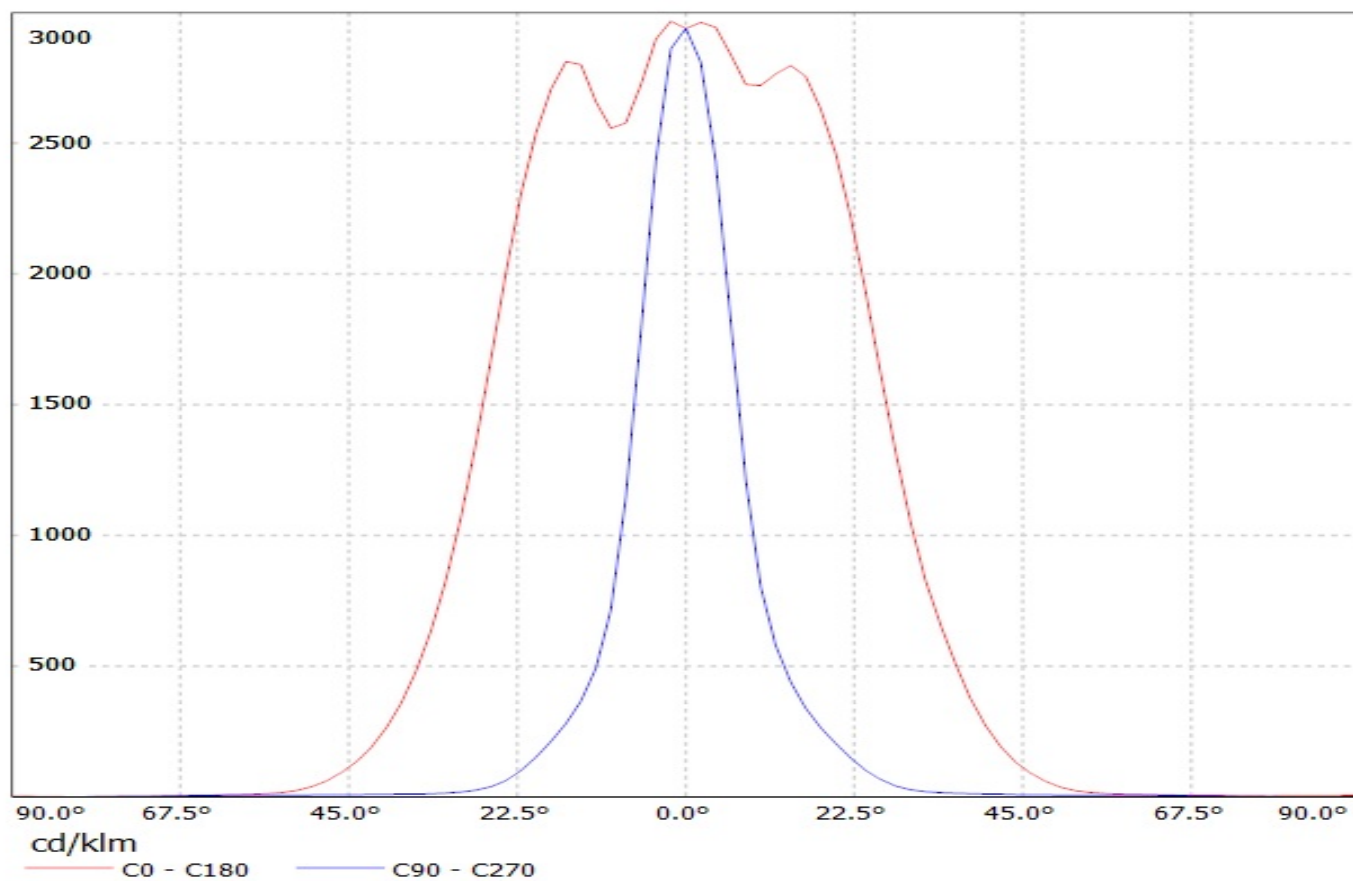


Luminaire: LEDil Oy C13529_VERONICA-O_(XP-G) Efficiency=83%
Lamps: 1 x Cree XP-G (XPGWHT-L1-CWPI-00BE7) 67lm @ 250mA CCT=3100K P=0.8W I=250mA

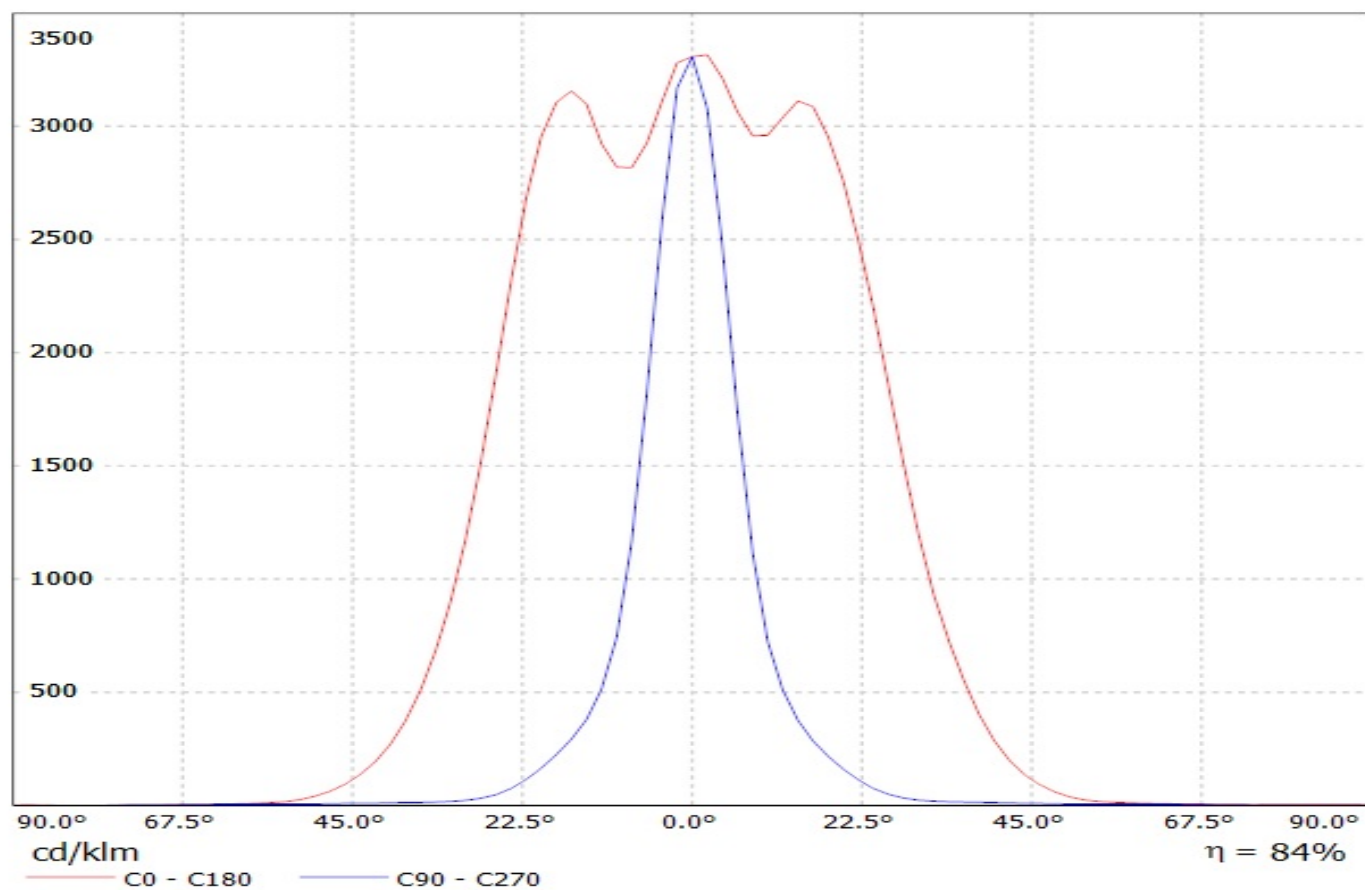


Luminaire: Ledil Oy C13529_VERONICA-O_(XP-G2) Efficiency=82%
Lamps: 1 x Cree Xp-G2 (104lm @ 250mA) CCT=6600K P=0.8W I=250mA

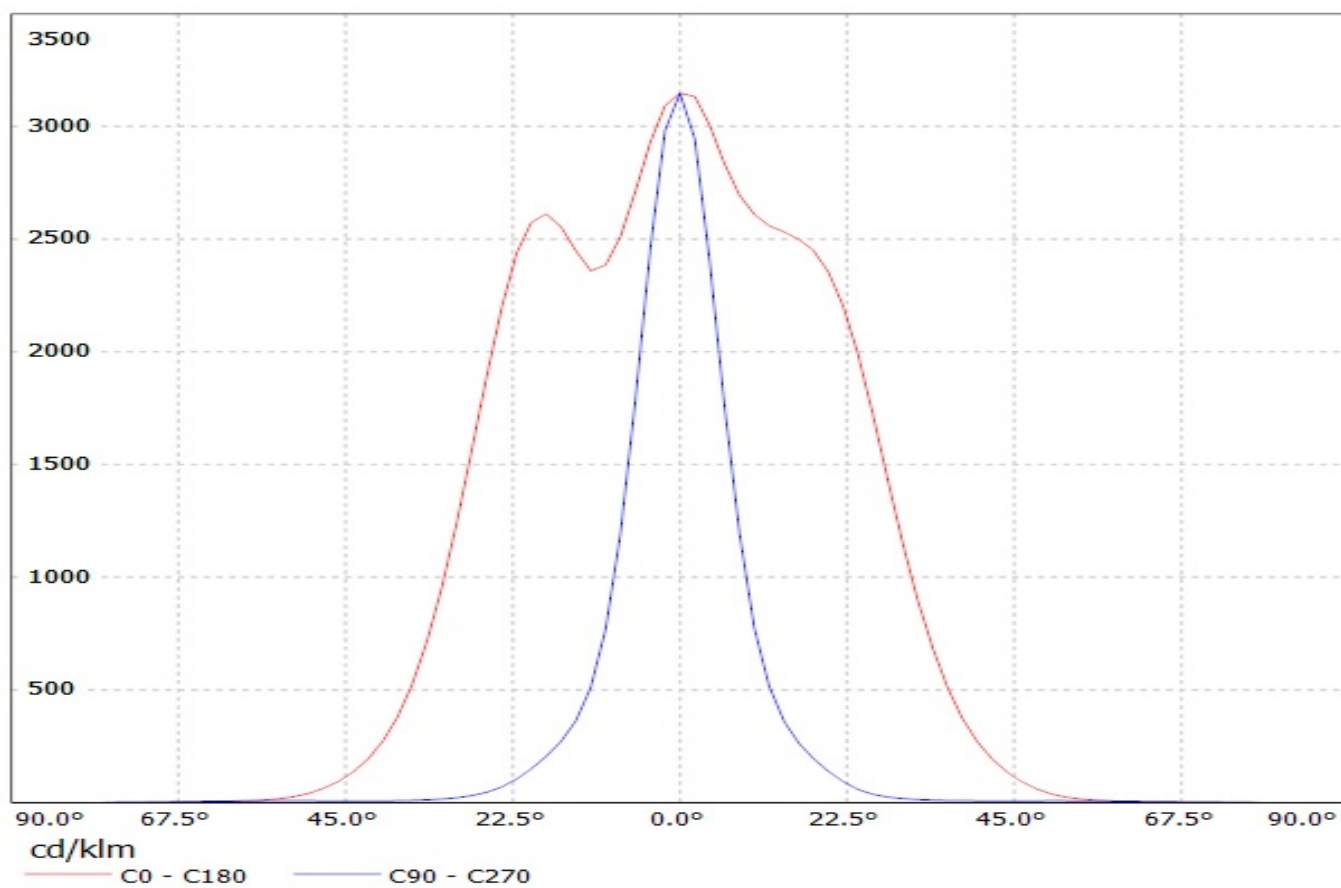

Luminaire: LEDil Oy C13529_VERONICA-O_(MK-R) Efficiency=80%
Lamps: 1 x Cree MK-R (353lm @ 250mA) CCT=3300K P=2.8W I=250mA

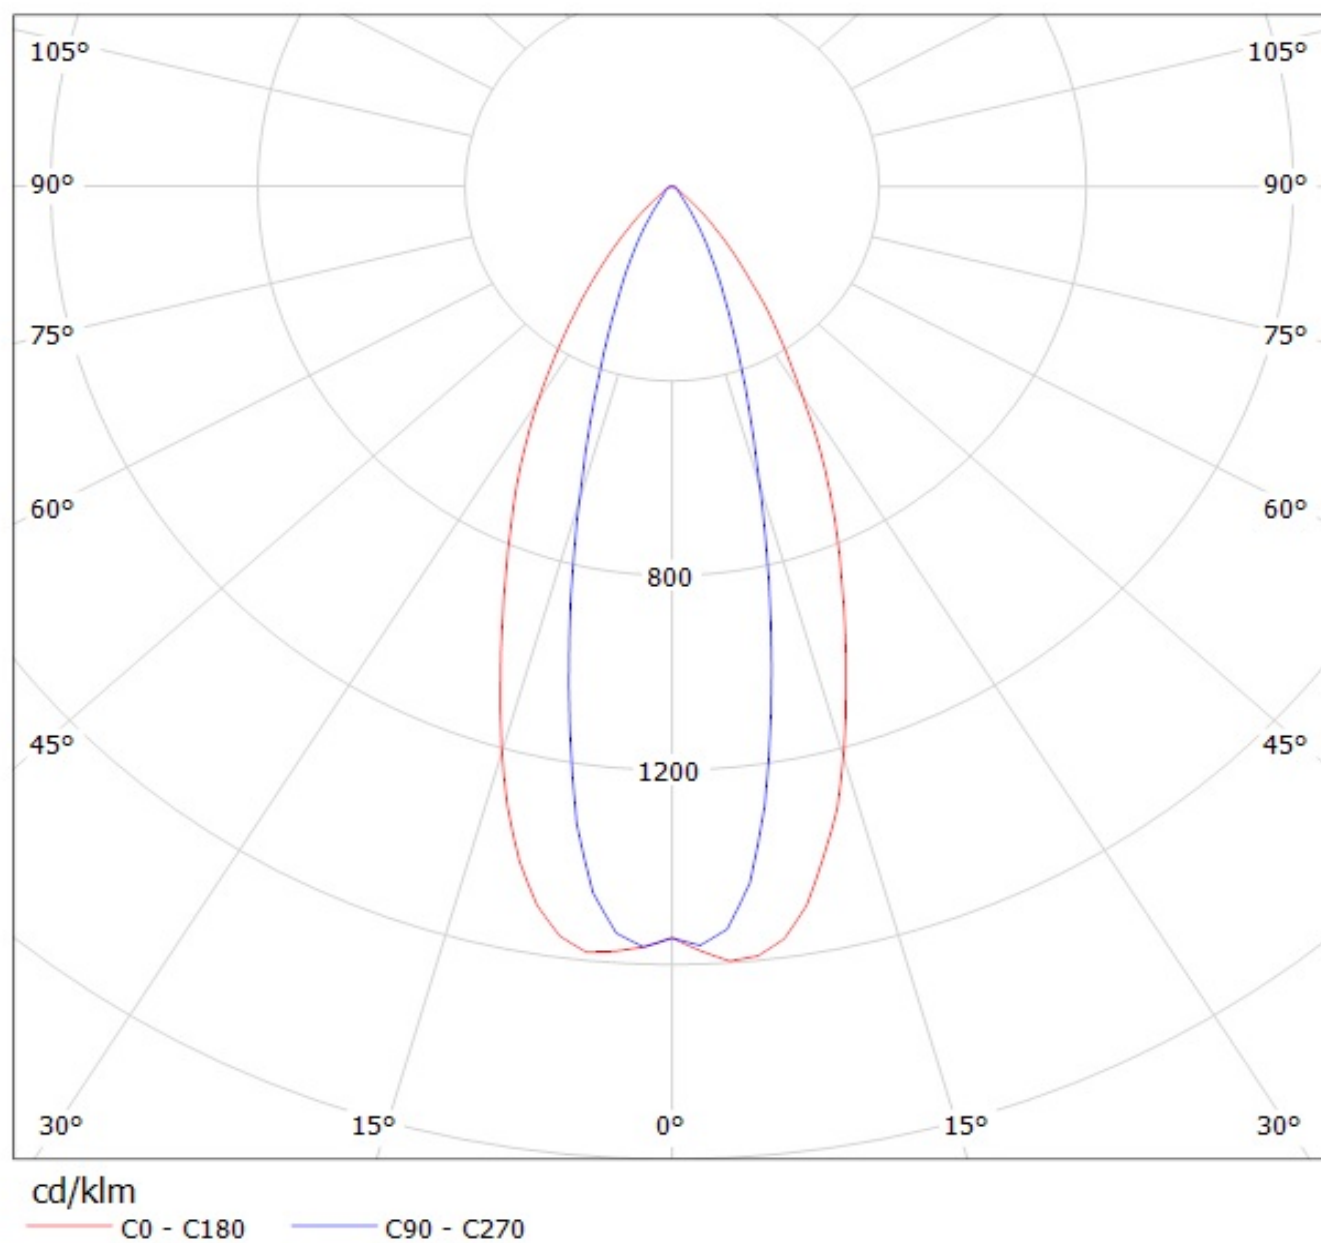


Luminaire: LEDil Oy C13529_Veronica-O_(Luxeon M) Efficiency=79%
Lamps: 1 x Luxeon M (LXR7-SW30) 368lm @ 250mA CCT=3100K P=2.8W I=250mA

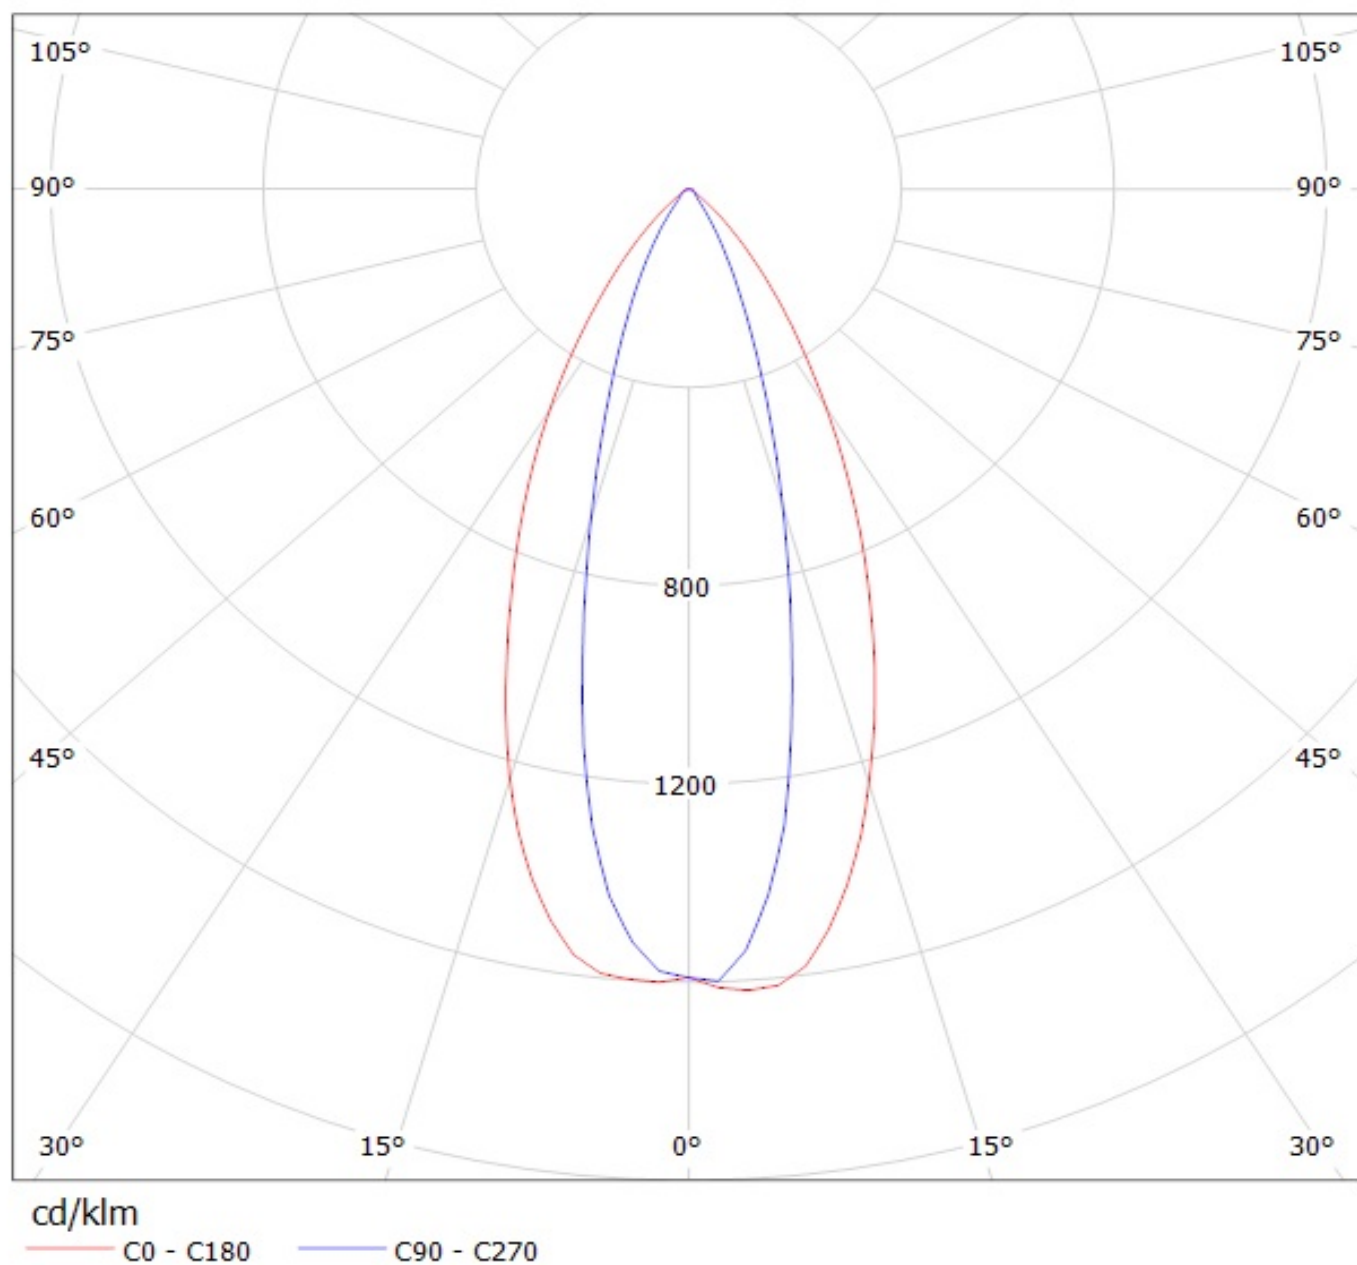


Luminaire: LEDil Oy C13529_VERONICA-O_(NVSxx19A) Efficiency=79%

Lamps: 1 x Nichia NVSxx19A (NVSW219ATE) 93lm @ 250mA CCT=5010K P=0.7W I=250mA

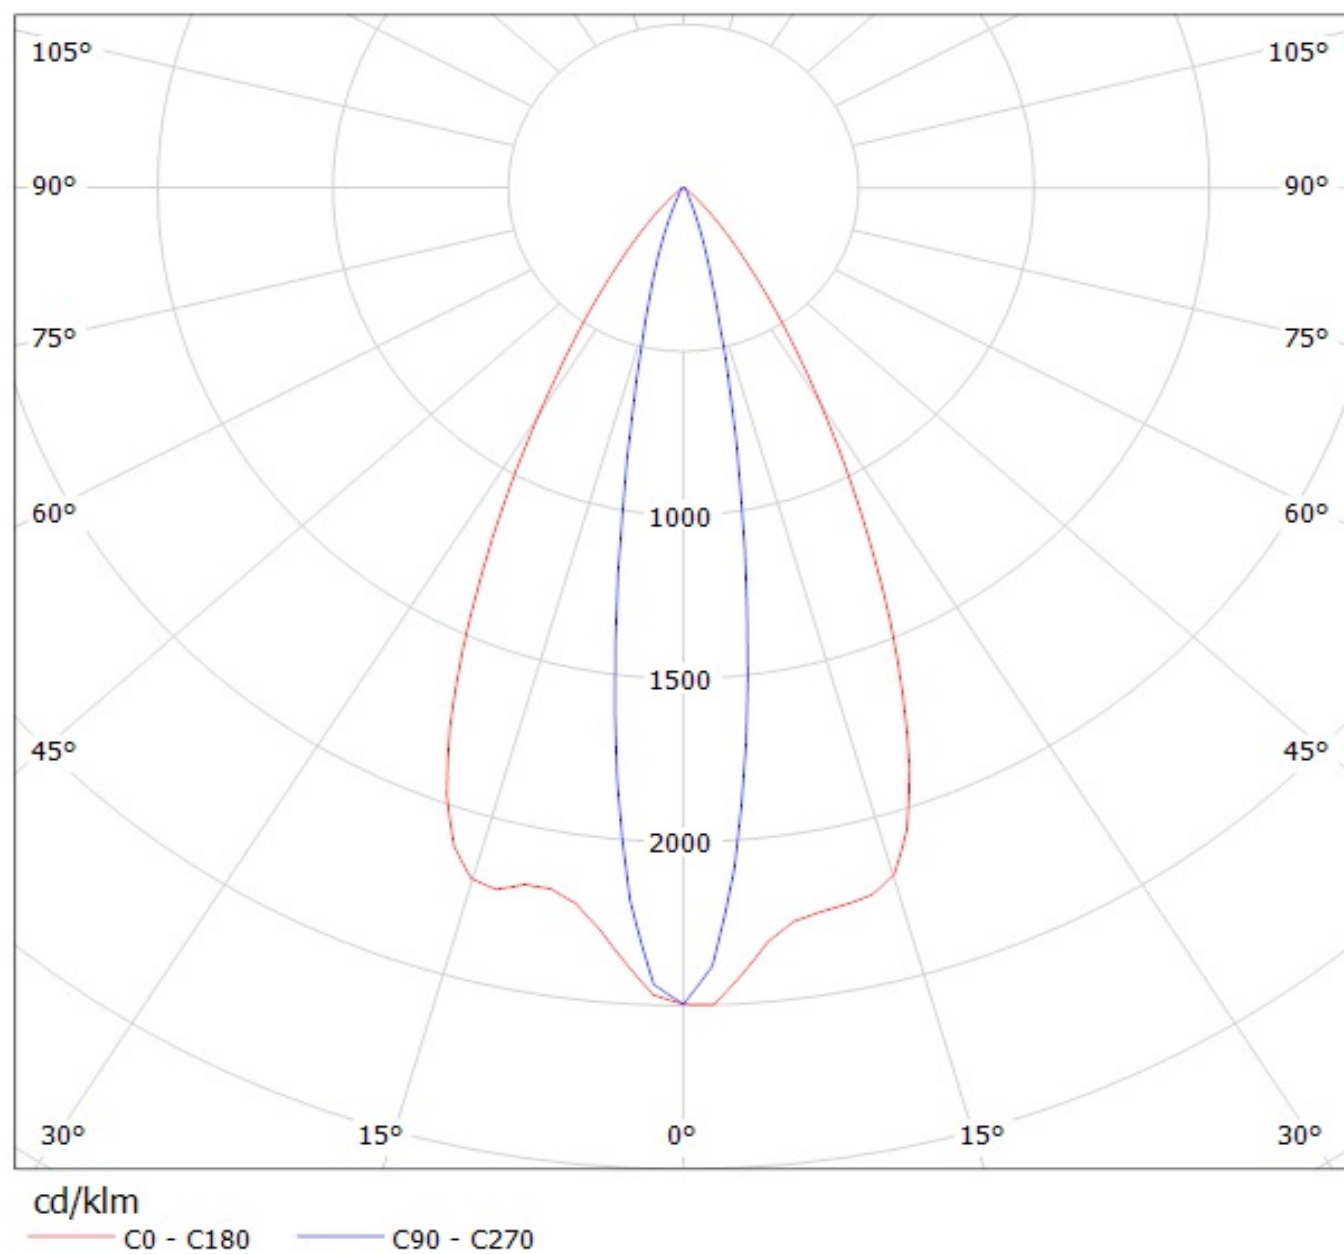


Luminaire: LEDil Oy C13529_Veronica-O_(XP-E2) Efficiency=84%

Lamps: 1 x Cree XP-E2 (XPEBWT-L1-7B4-Q4-0-01) 84lm @ 250mA CCT=3200K P=0.7W I=250mA

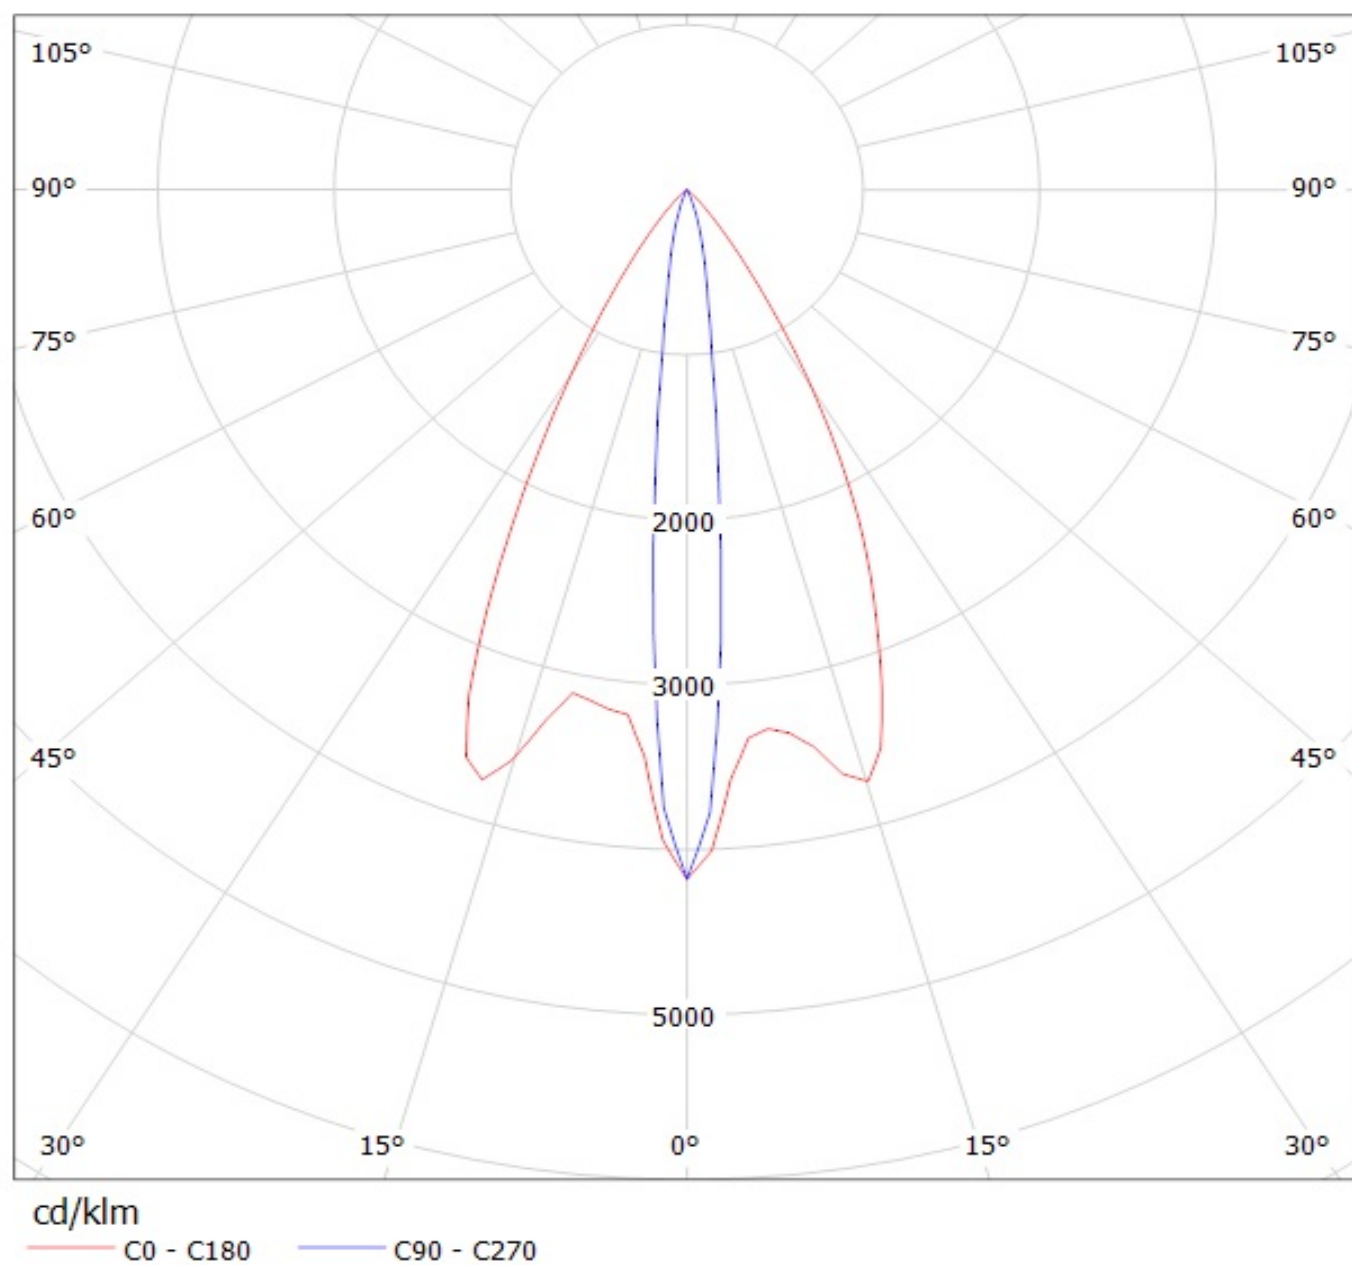


Luminaire: LEDil Oy C13529_Veronica-O_(Luxeon_R) Efficiency=81%
Lamps: 1 x Luxeon R (LXA7-PW30) 73lm @ 250mA CCT=3000K P=0.7W I=250mA

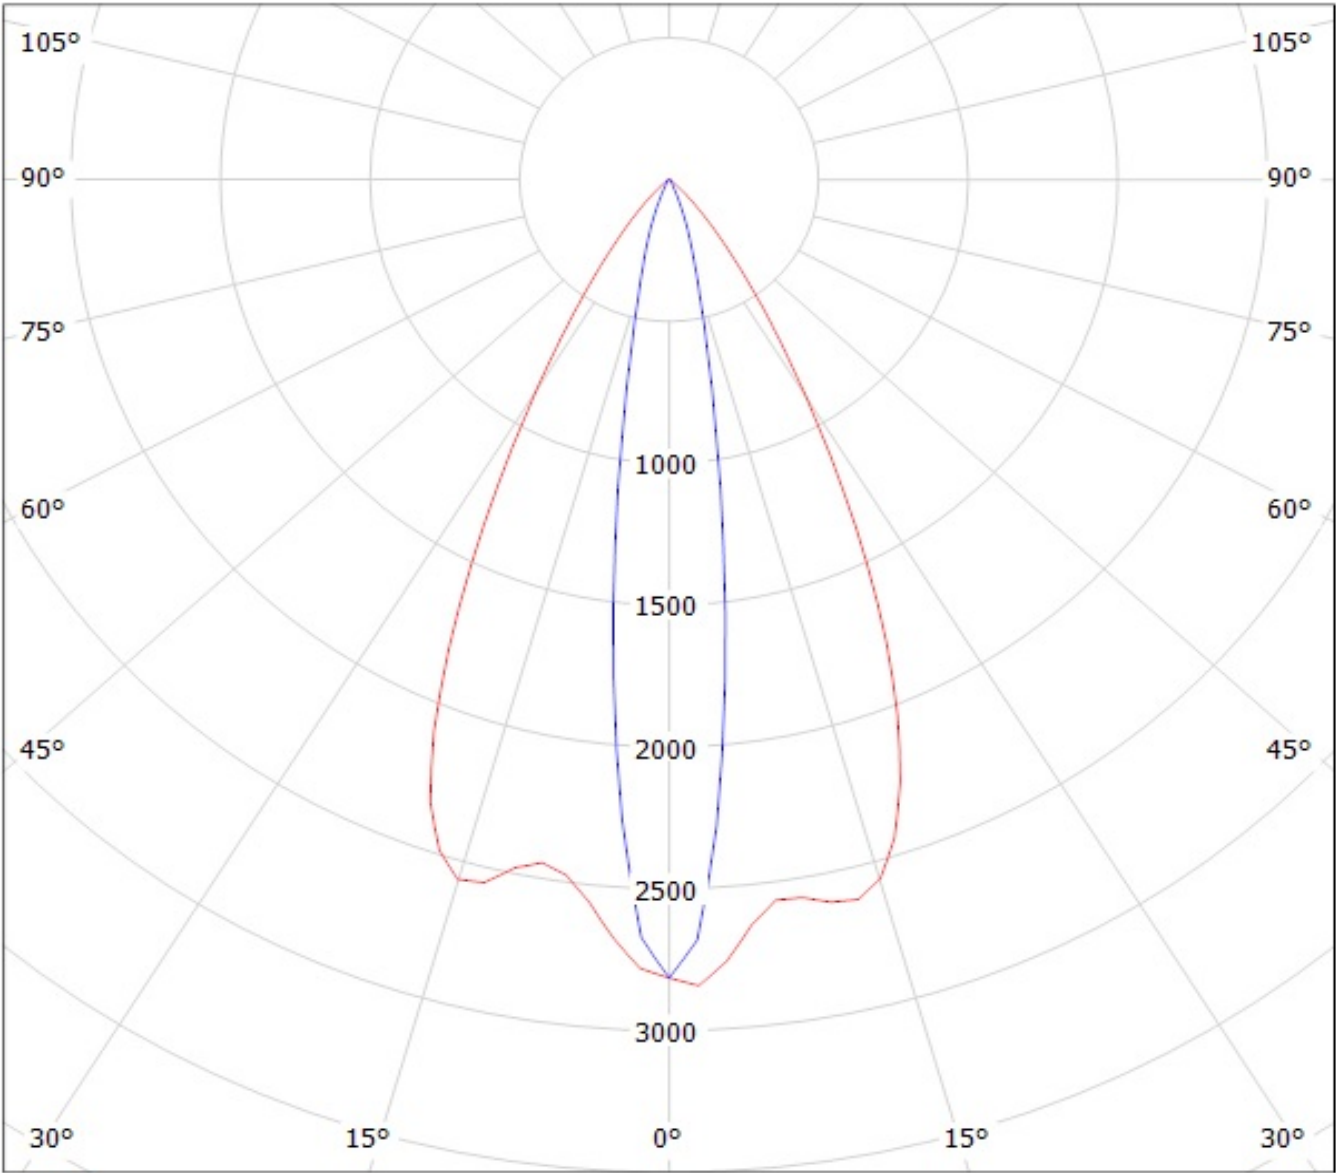


cd/klm
C0 - C180 C90 - C270

Luminaire: Ledil Oy C13529_VERONICA-O_LED_(Luxeon_A) Efficiency=82%
Lamps: 1 x Luxeon A (66lm @ 250mA) CCT=2900K P=0.8W I=250mA

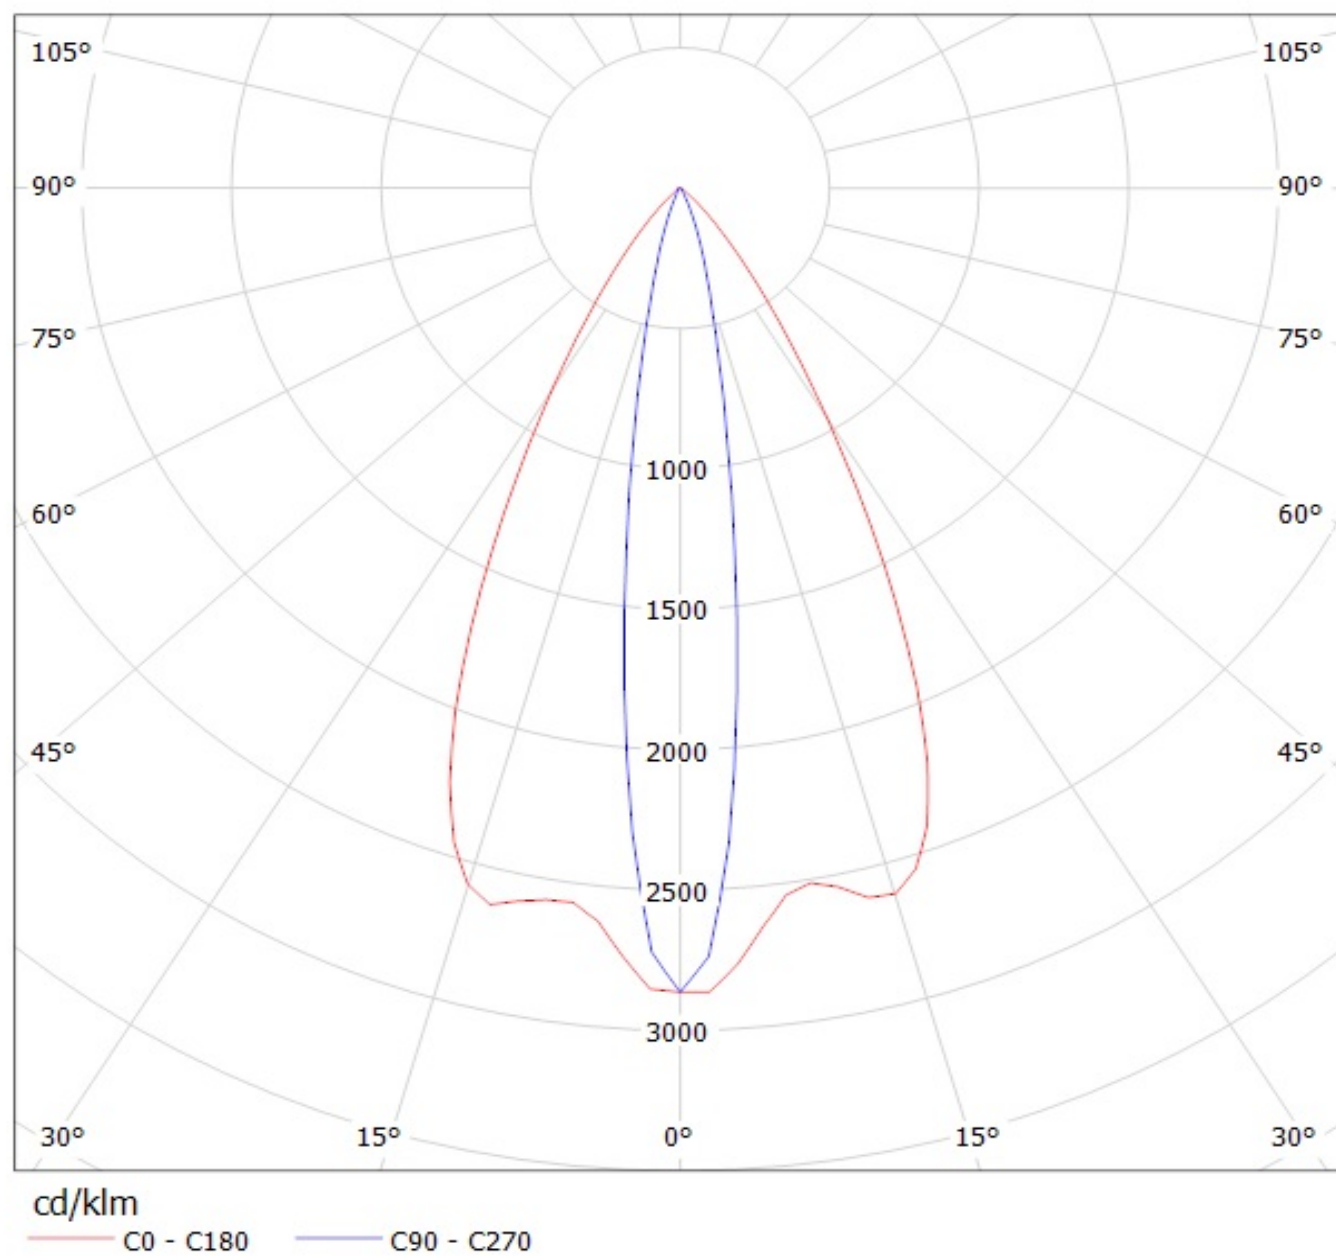


Luminaire: LEDil Oy C13529_Veronica-O_(Luxeon_Rebel) Efficiency=82%
Lamps: 1 x Luxeon Rebel (LXM8-PW30) 61lm @ 250mA CCT=2900K P=0.7W I=250mA

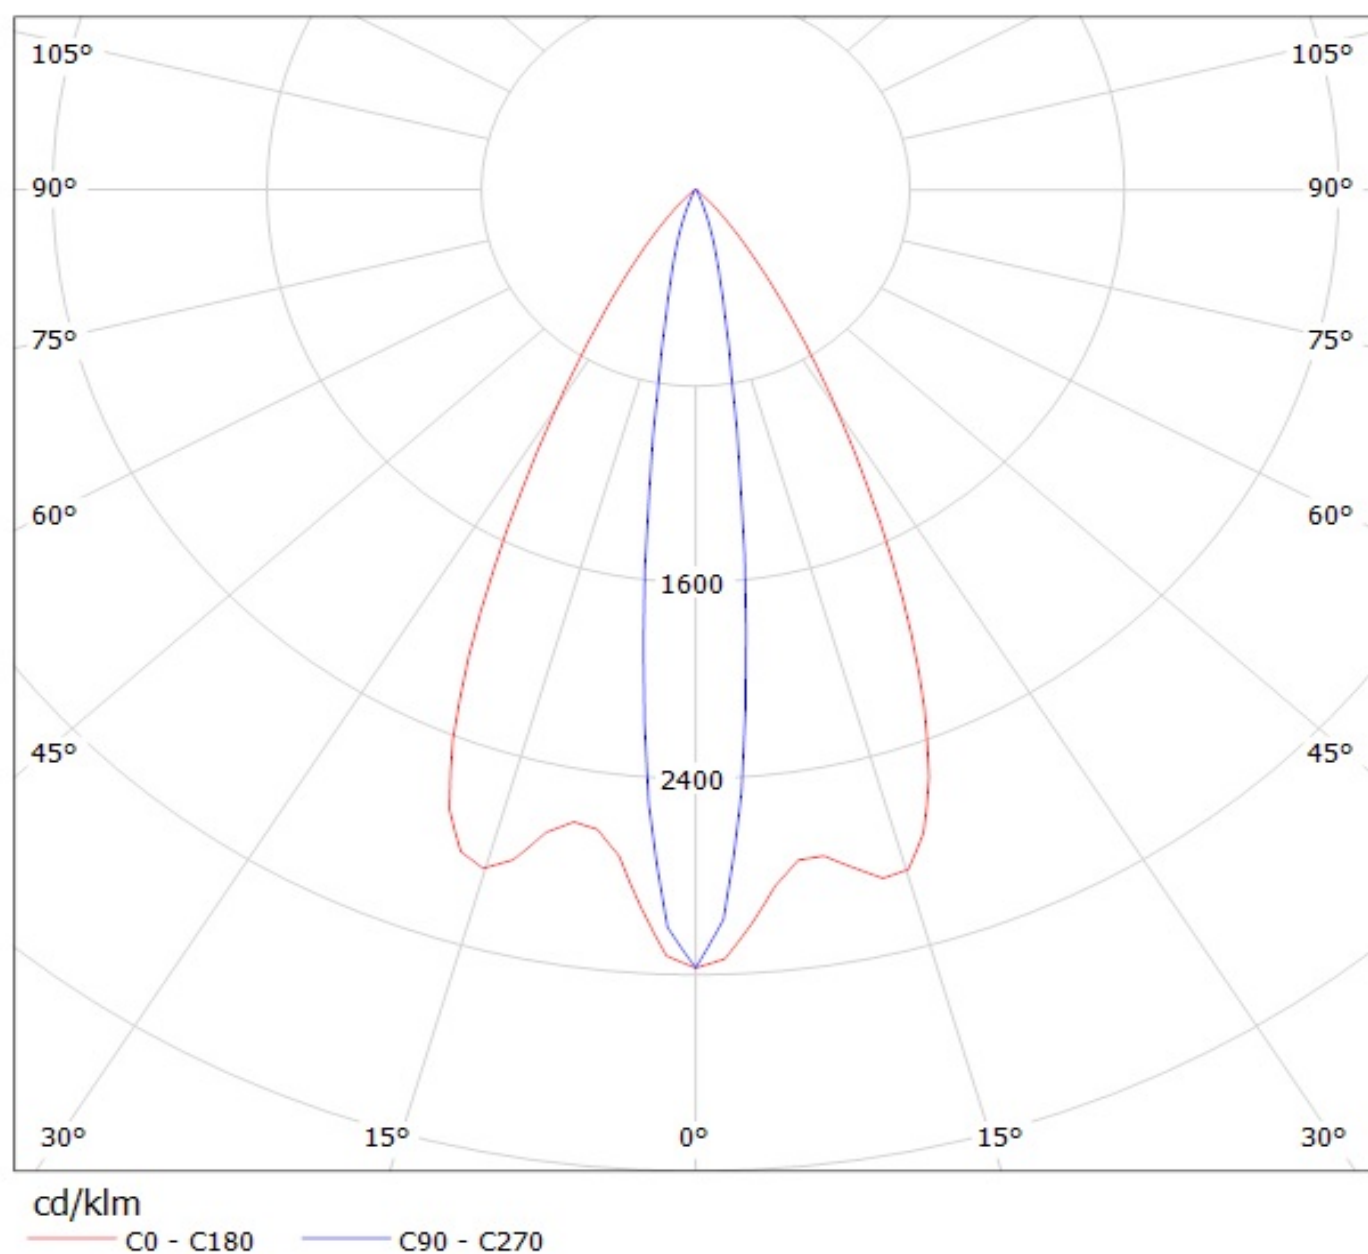

Luminaire: LEDil Oy C13529_Veronica-O_(XM-L2) Efficiency=82%

Lamps: 1 x Cree XM-L2 (XMLBWT-0-7B4-T30-0L-0001) 91lm @ 250mA CCT=3200K P=0.7W I=250mA

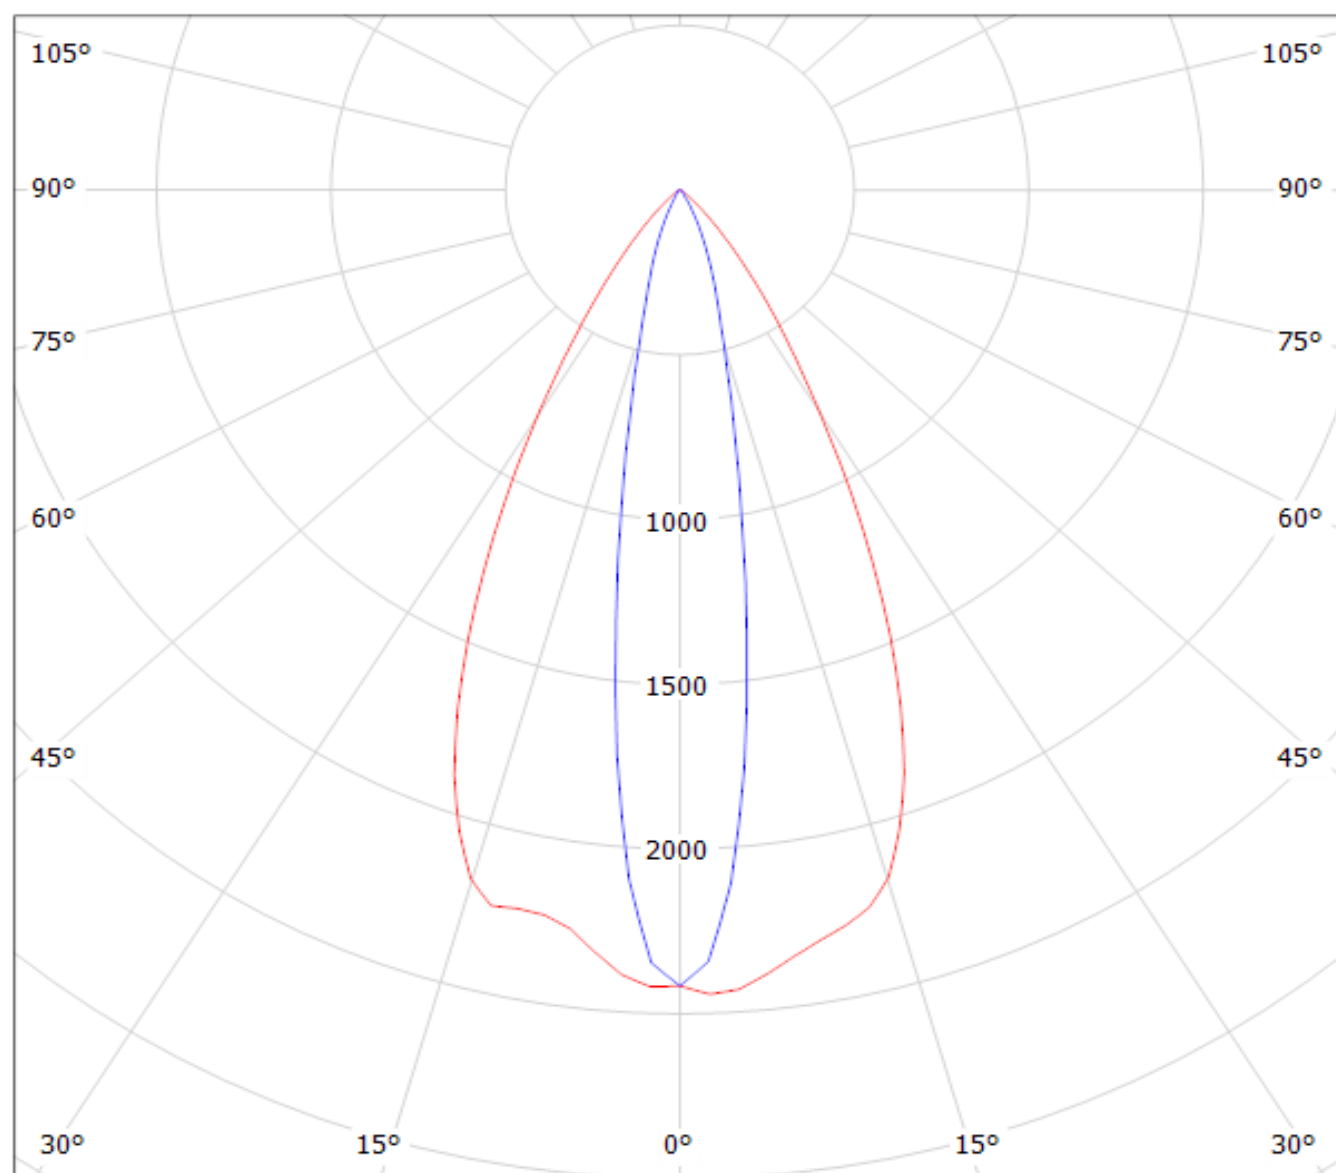


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy C13529_VERONICA-O_(Oslon_Square_EC) Efficiency=81%

Lamps: 1 x Osram Oslon Square EC (LCW CQAR-EC-MQMS-5R8T-35) 79lm @ 250mA CCT=3200K P=0.8W I=250mA

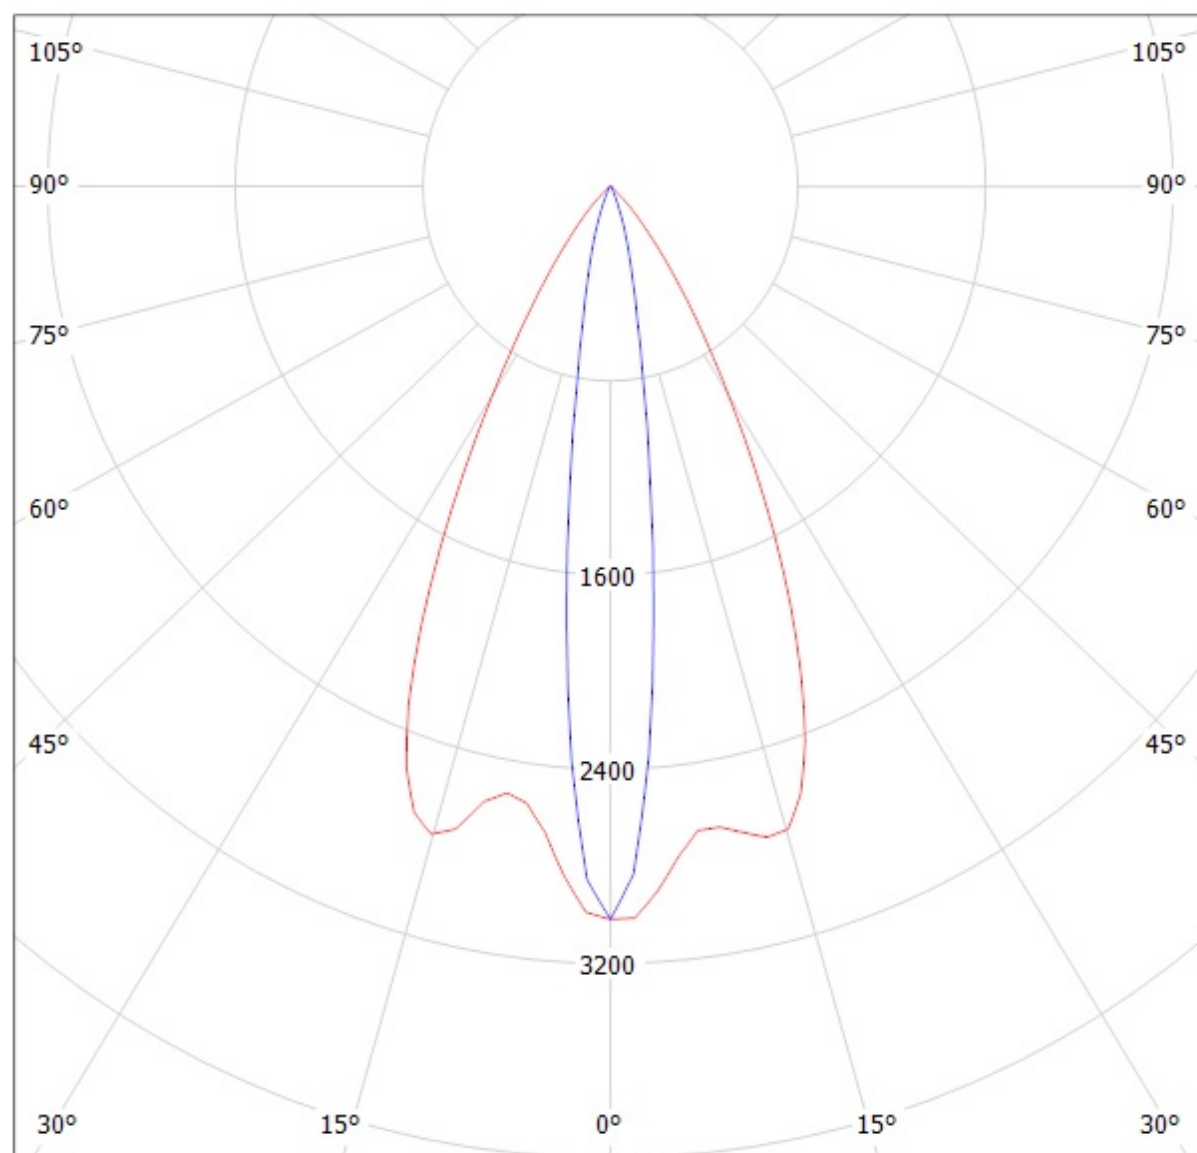


cd/klm

— C0 - C180

— C90 - C270

Luminaire: LEDil Oy C13529_VERONICA-O_(Oslon_SSL_150) Efficiency=83%

Lamps: 1 x Osram Oslon SSL 150 (LCW CRUP.EC-KTLP-607Q-1) 79lm @ 250mA CCT=3700K P=0.7W I=250mA

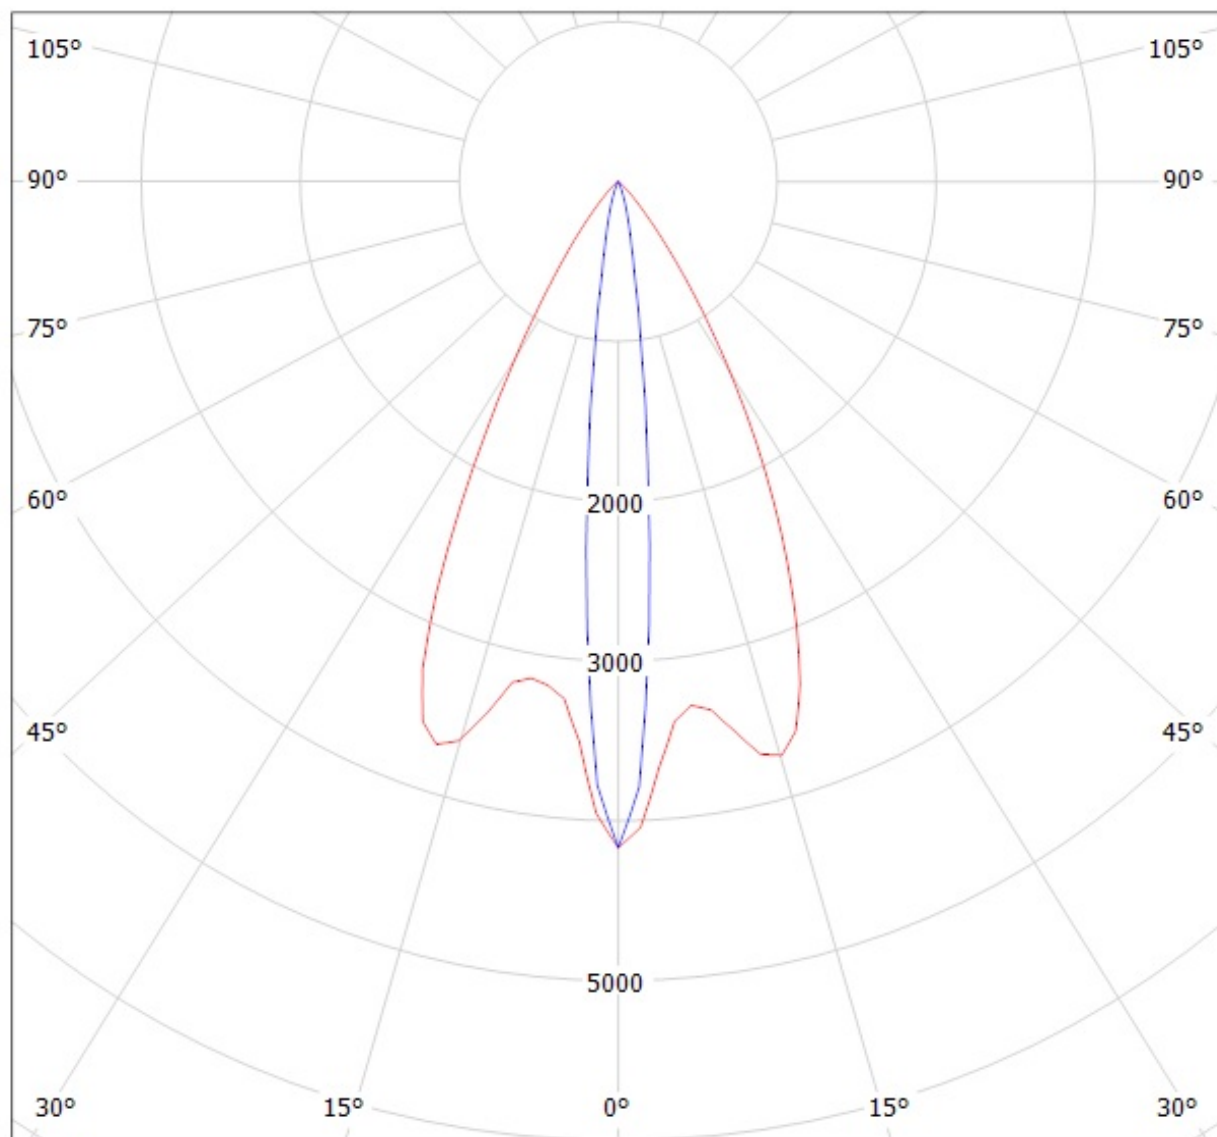


cd/klm


— C0 - C180

— C90 - C270

Luminaire: LEDil Oy C13529_Veronica-O_(Oslon_Square_PC) Efficiency=81%
Lamps: 1 x Osram Oslon Square PC (LCW CQAR.PL-MSMV-5H71-1) 101lm @ 250mA CCT=5900K P=0.8W I=250mA

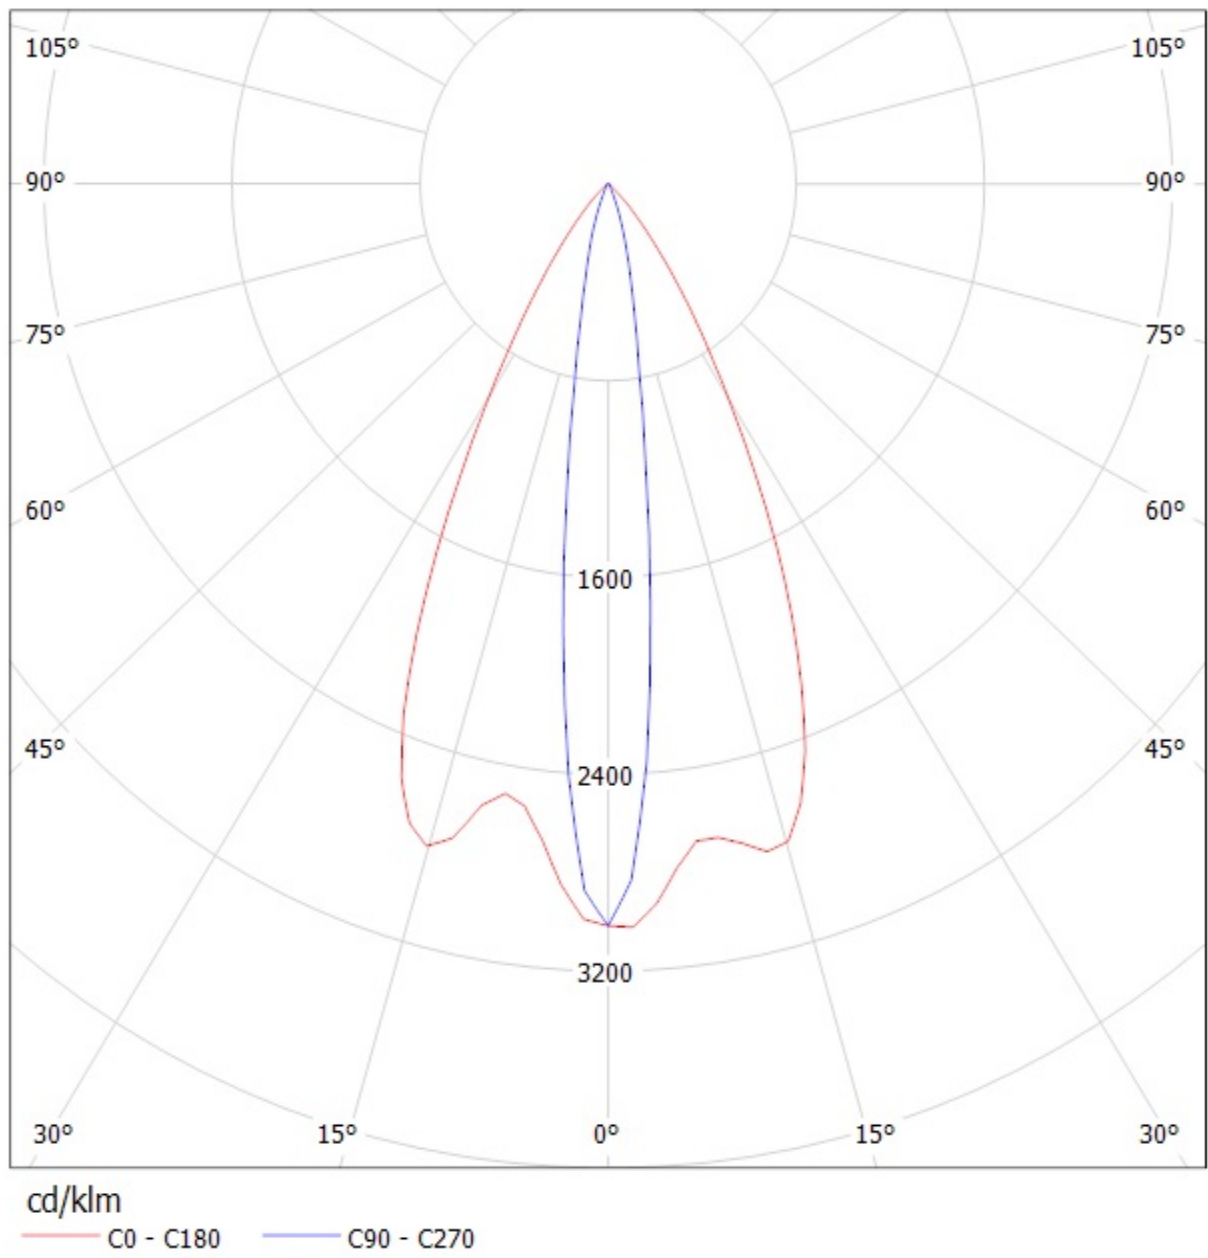


Luminaire: Ledil Oy C13529_VERONICA-O_LED_(Luxeon_Rebel_ES) Efficiency=81%
Lamps: 1 x Luxeon Rebel ES (91lm @ 250mA) CCT=4100K P=0.8W I=250mA

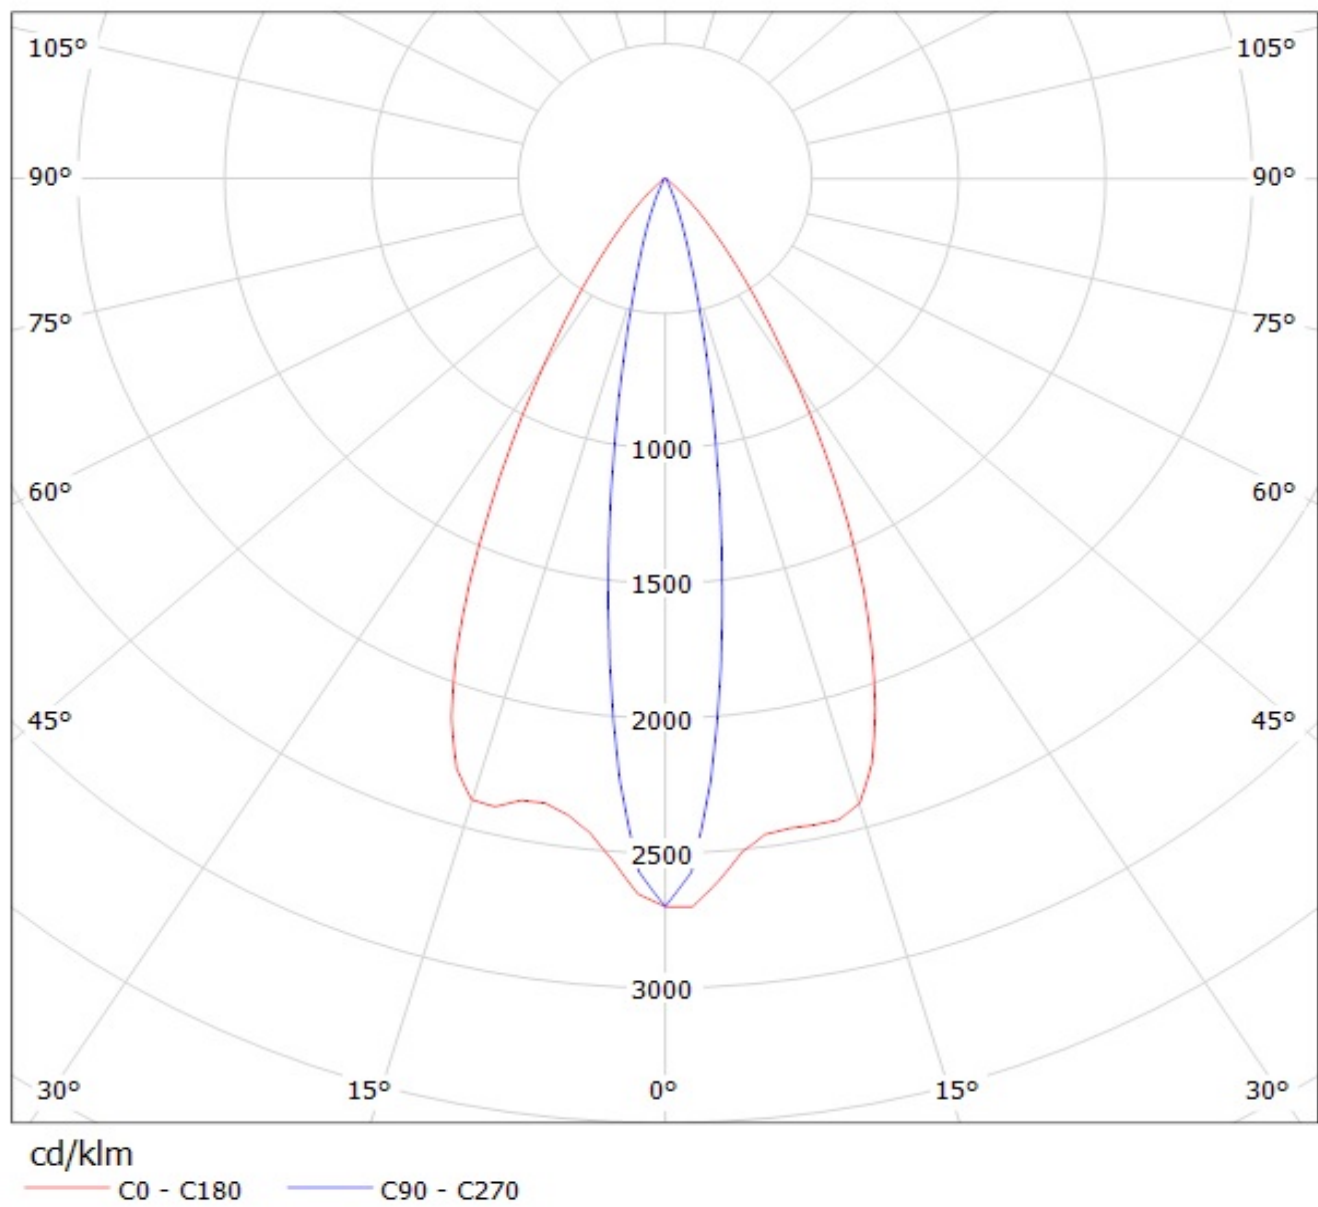

Luminaire: LEDil Oy C13529_VERONICA-O_(Z5M1) Efficiency=83%

Lamps: 1 x Seoul Z5M1 (SZ5M1-W0-C8/W1-A5-G) 108lm @ 250mA CCT=9100K P=0.8W I=250mA

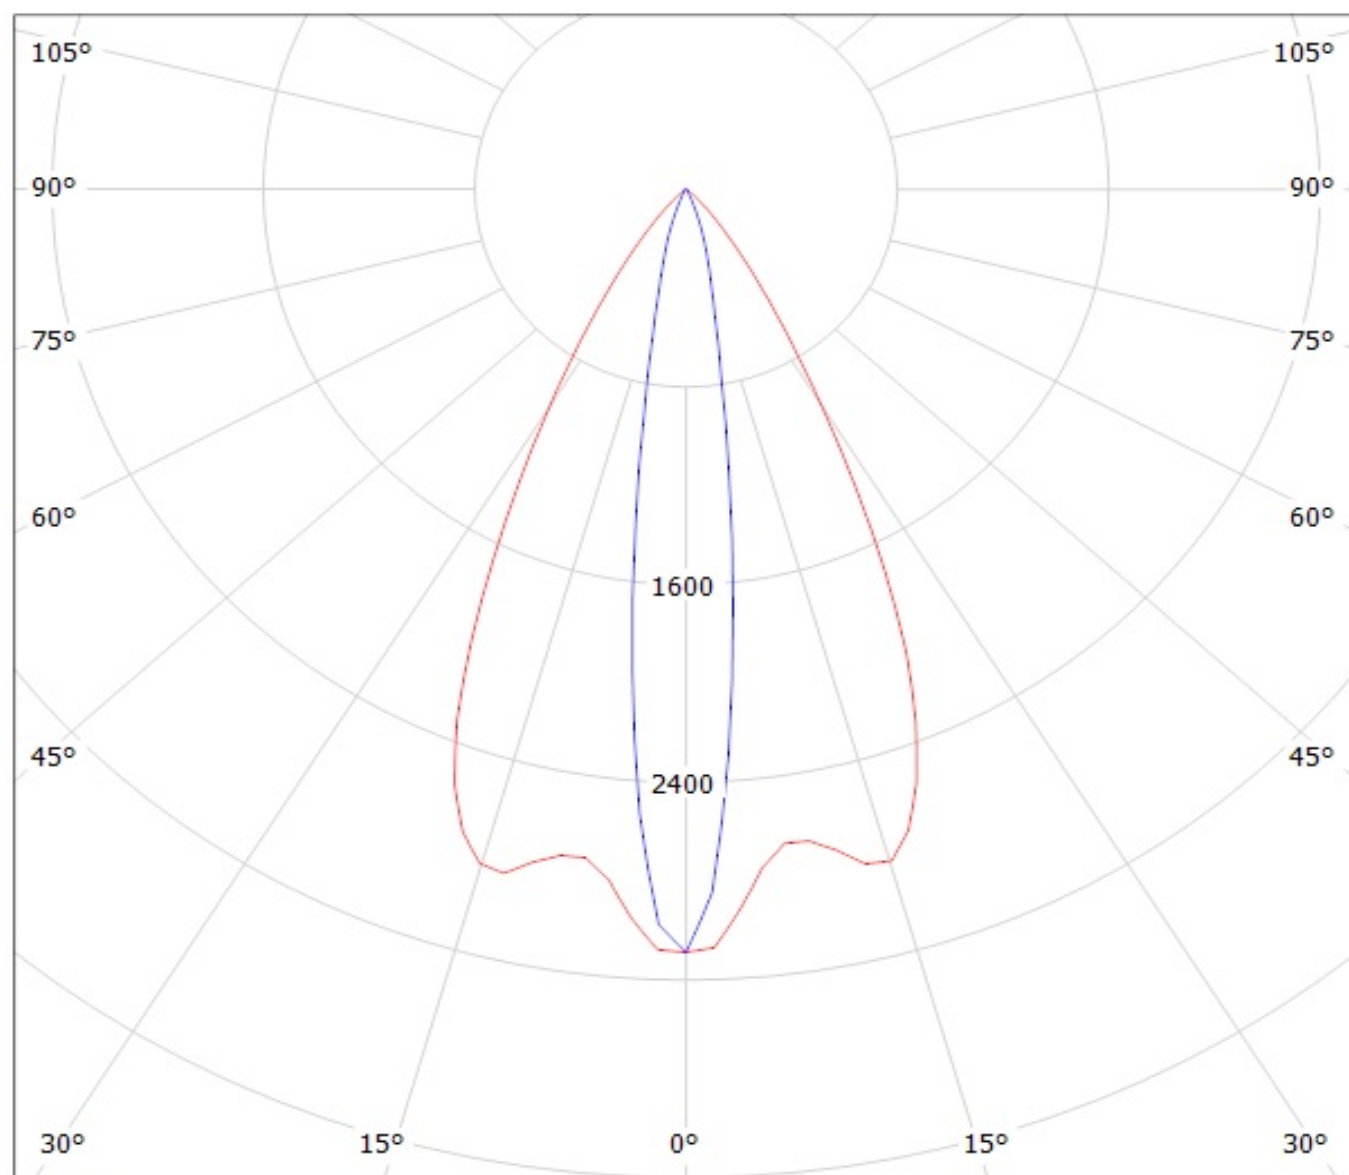


cd/klm

— C0 - C180


— C90 - C270

Luminaire: Ledil Oy C13529_VERONICA-O_LED_(Z5) Efficiency=83%

Lamps: 1 x Seoul Z5 (SZW05A0B) 83lm @ 250mA CCT=15070K P=0.8W I=250mA

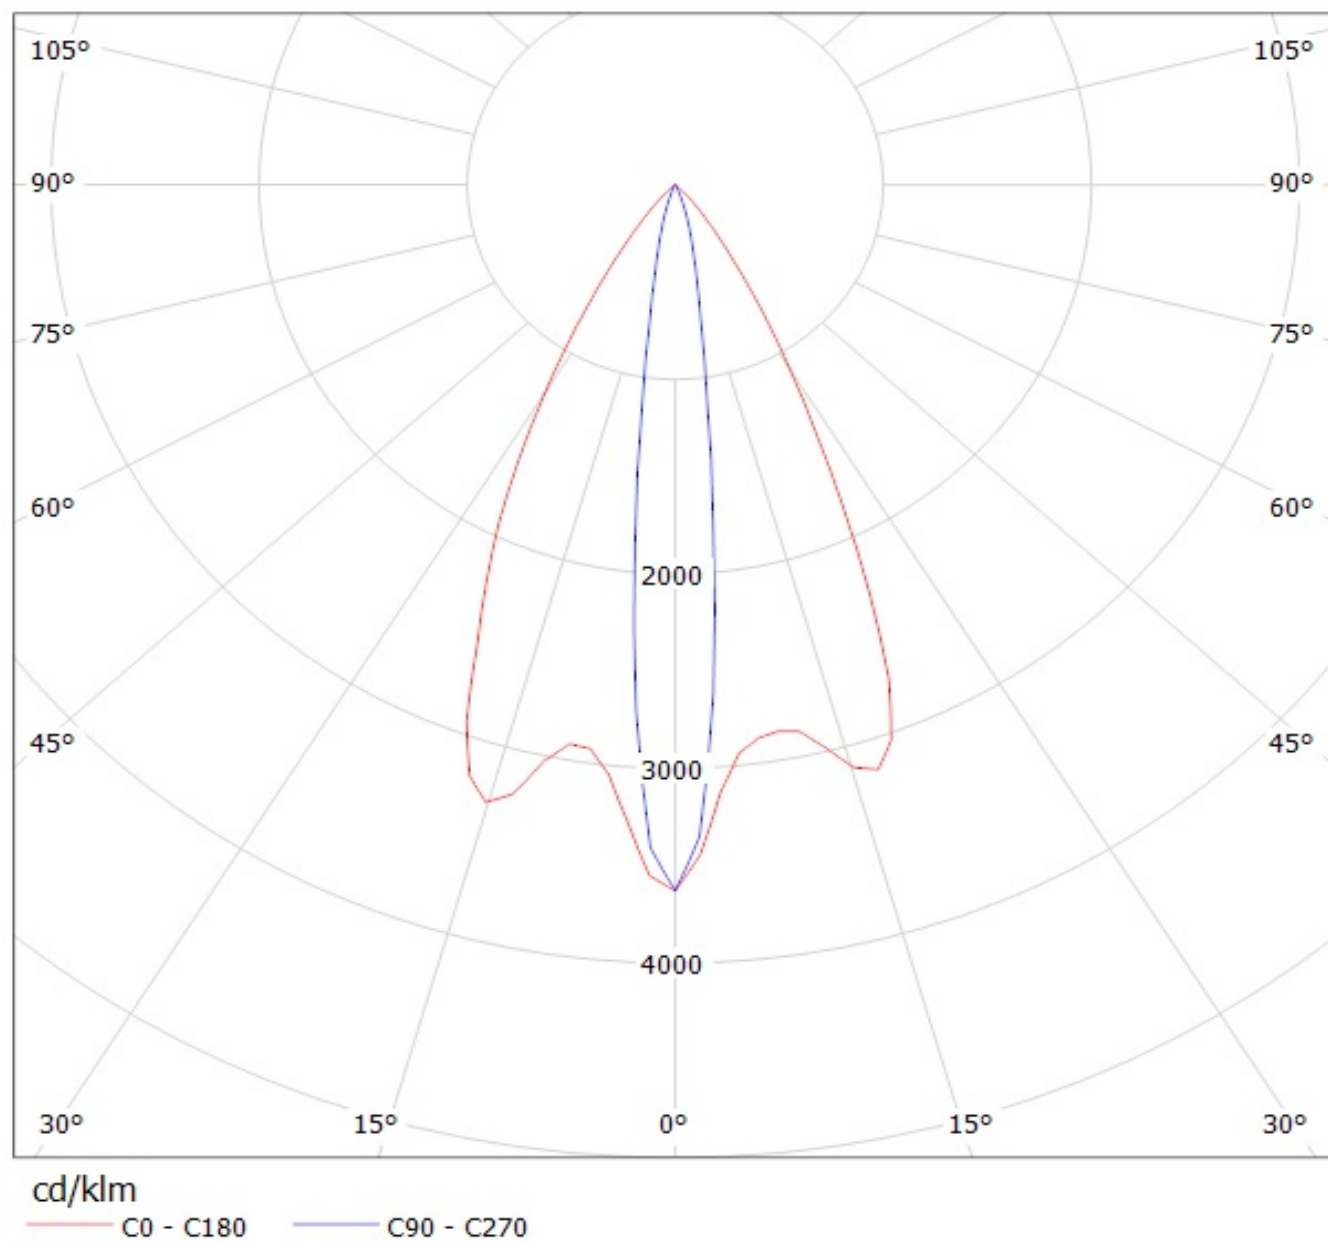


Luminaire: Ledil Oy C13529_VERONICA-O_(NVSxx19B) Efficiency=79%
Lamps: 1 x Nichia NVSxx19B (NVSL219BT) 106lm @ 250mA CCT=4300K P=0.7W I=250mA

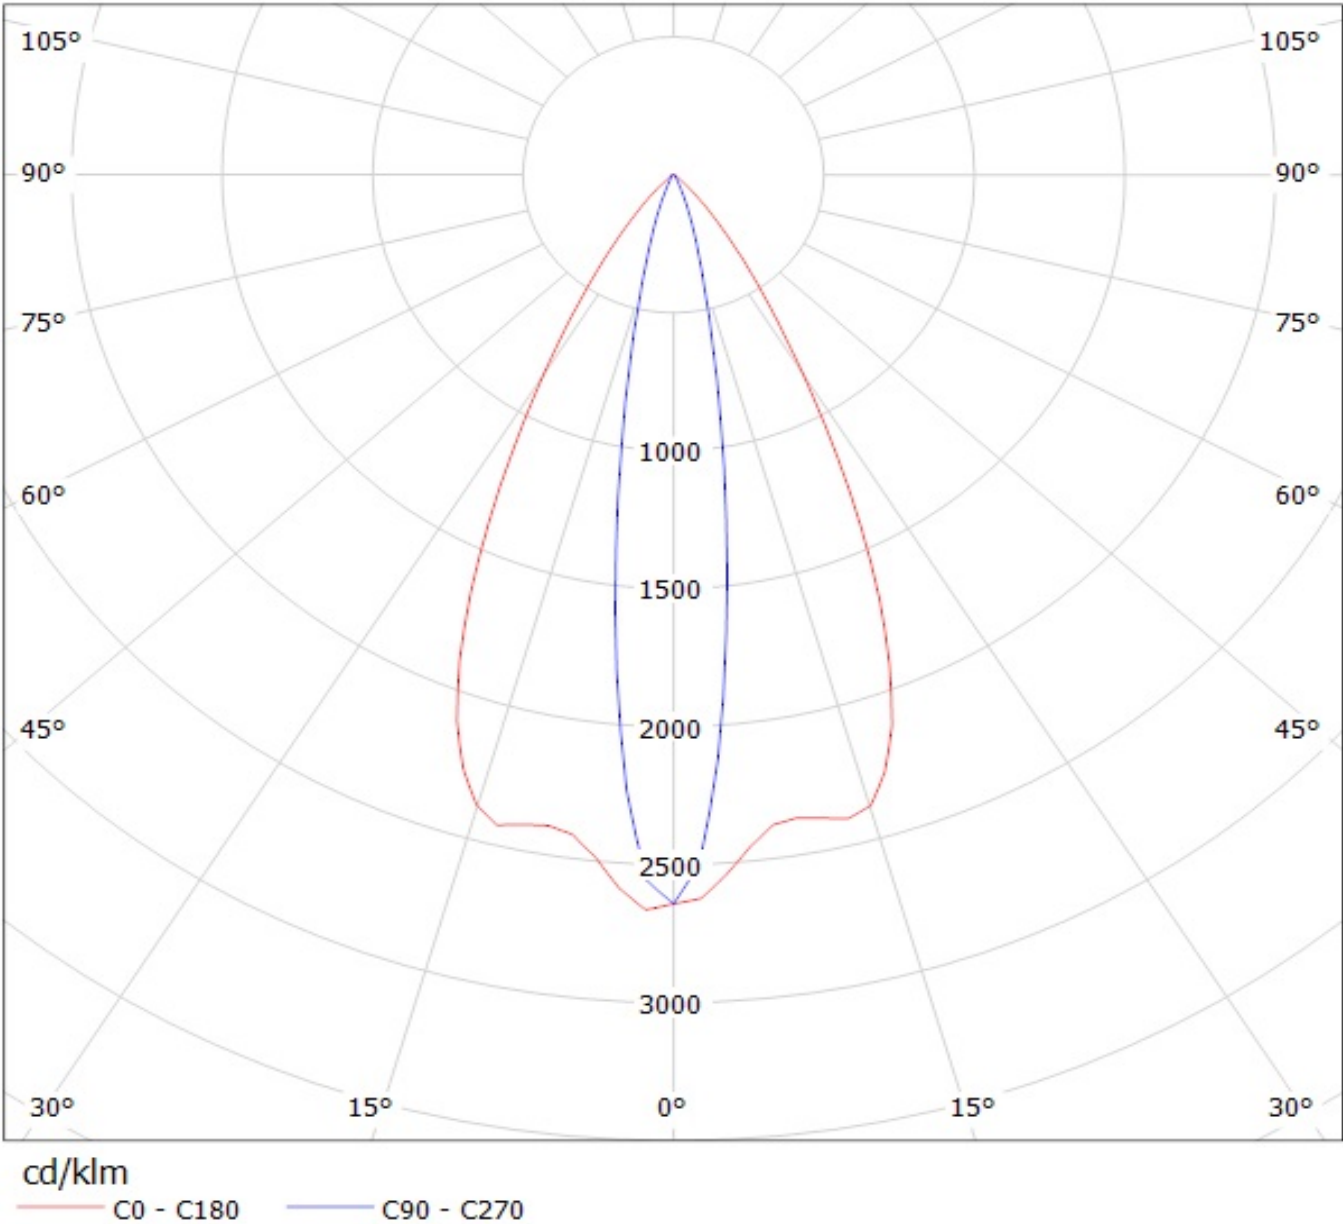

Luminaire: Ledil Oy C13529_VERONICA-O_(XM-L) Efficiency=83%

Lamps: 1 x Cree XM-L (XMLAWT-00-0000-0000T6051) 101lm @ 250mA CCT=8900K P=0.7W I=250mA

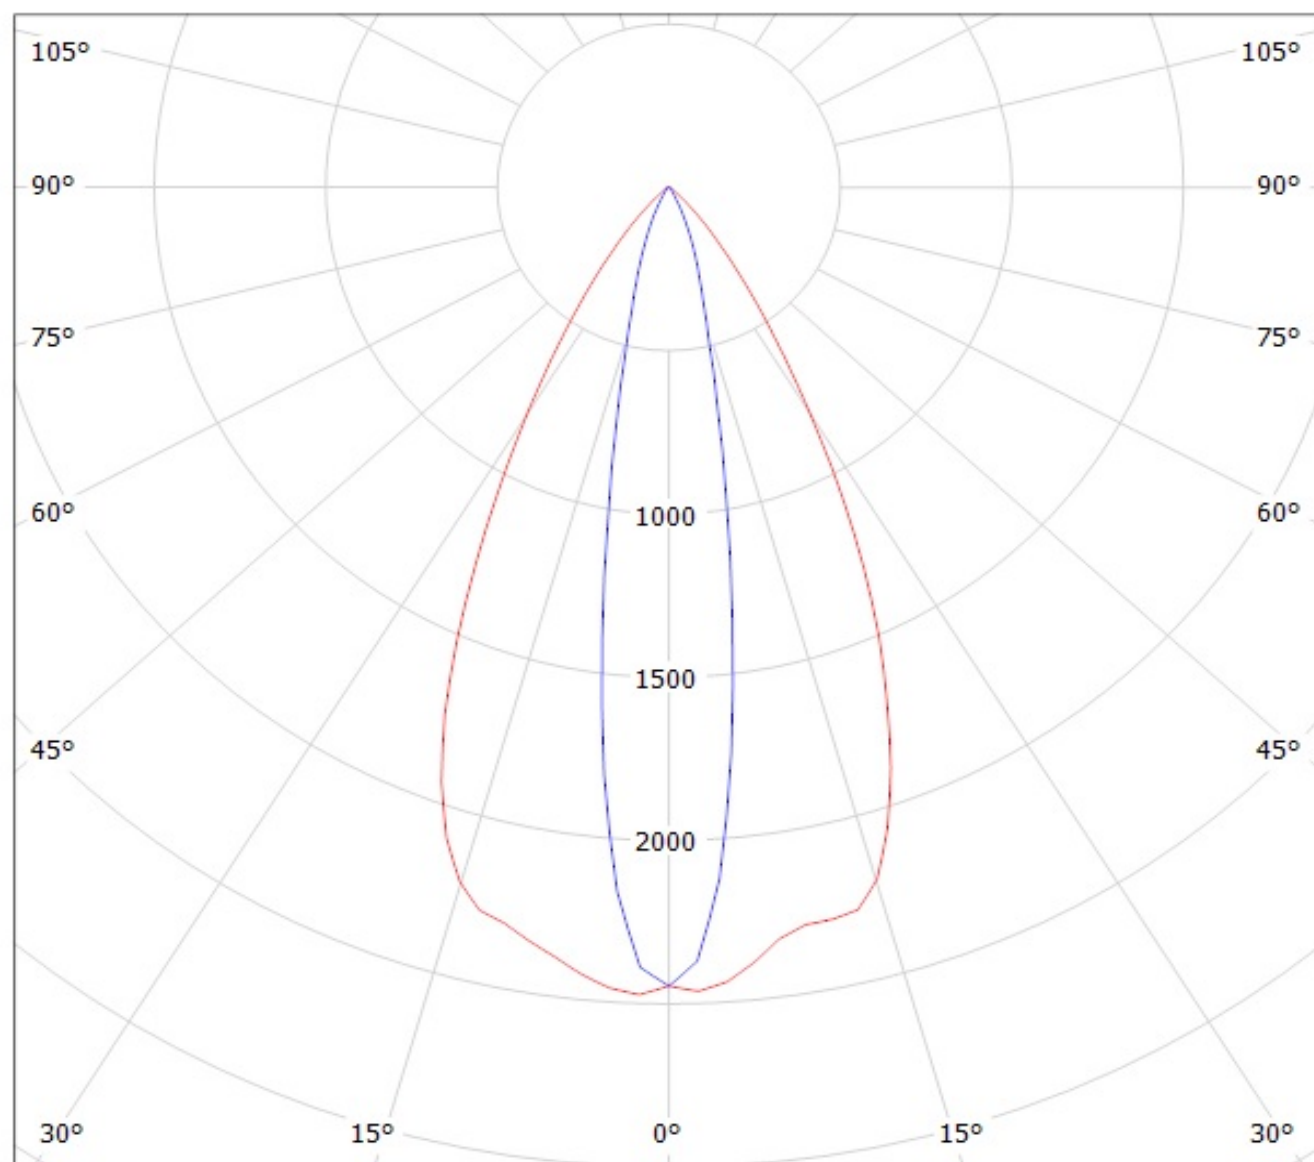


cd/klm

— C0 - C180

— C90 - C270

Luminaire: Ledil Oy C13529_VERONICA-O_(XT-E) Efficiency=81%

Lamps: 1 x Cree XT-E (XTEAWT-00-0000-00000HBE8) 74lm @ 250mA CCT=2800K P=0.8W I=250mA

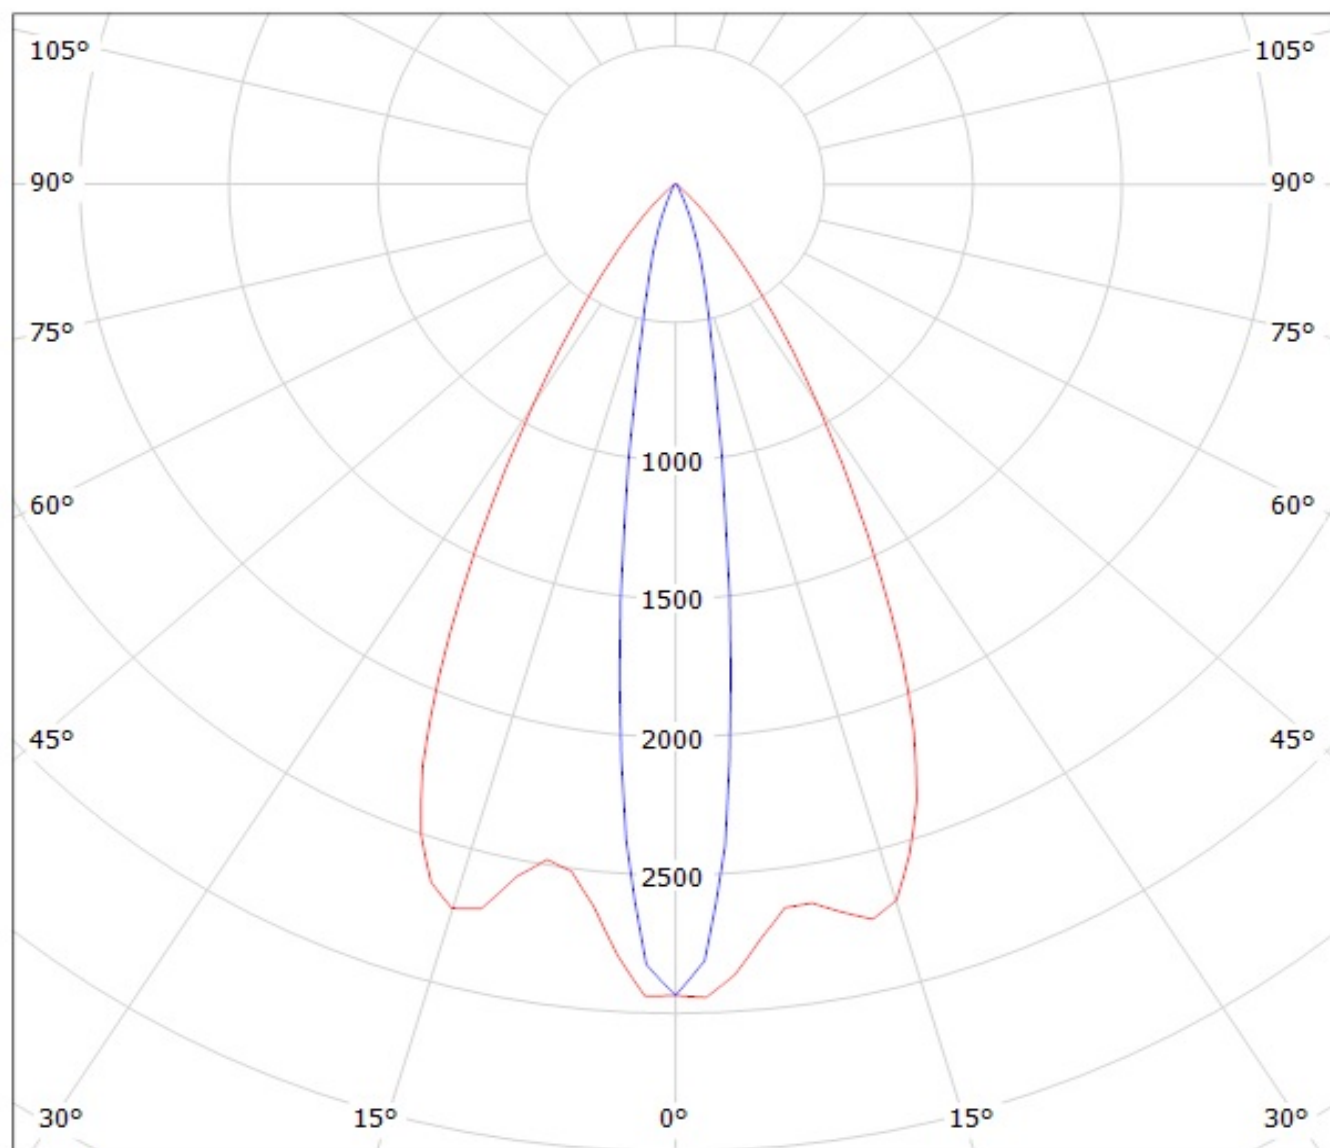


cd/klm

— C0 - C180


— C90 - C270

Luminaire: LEDil Oy C13529_VERONICA-O_(XP-E) Efficiency=83%

Lamps: 1 x Cree XP-E (XPEWHT-L1-3C0-Q5-0-06) 78lm @ 250mA CCT=5500K P=0.8W I=250mA

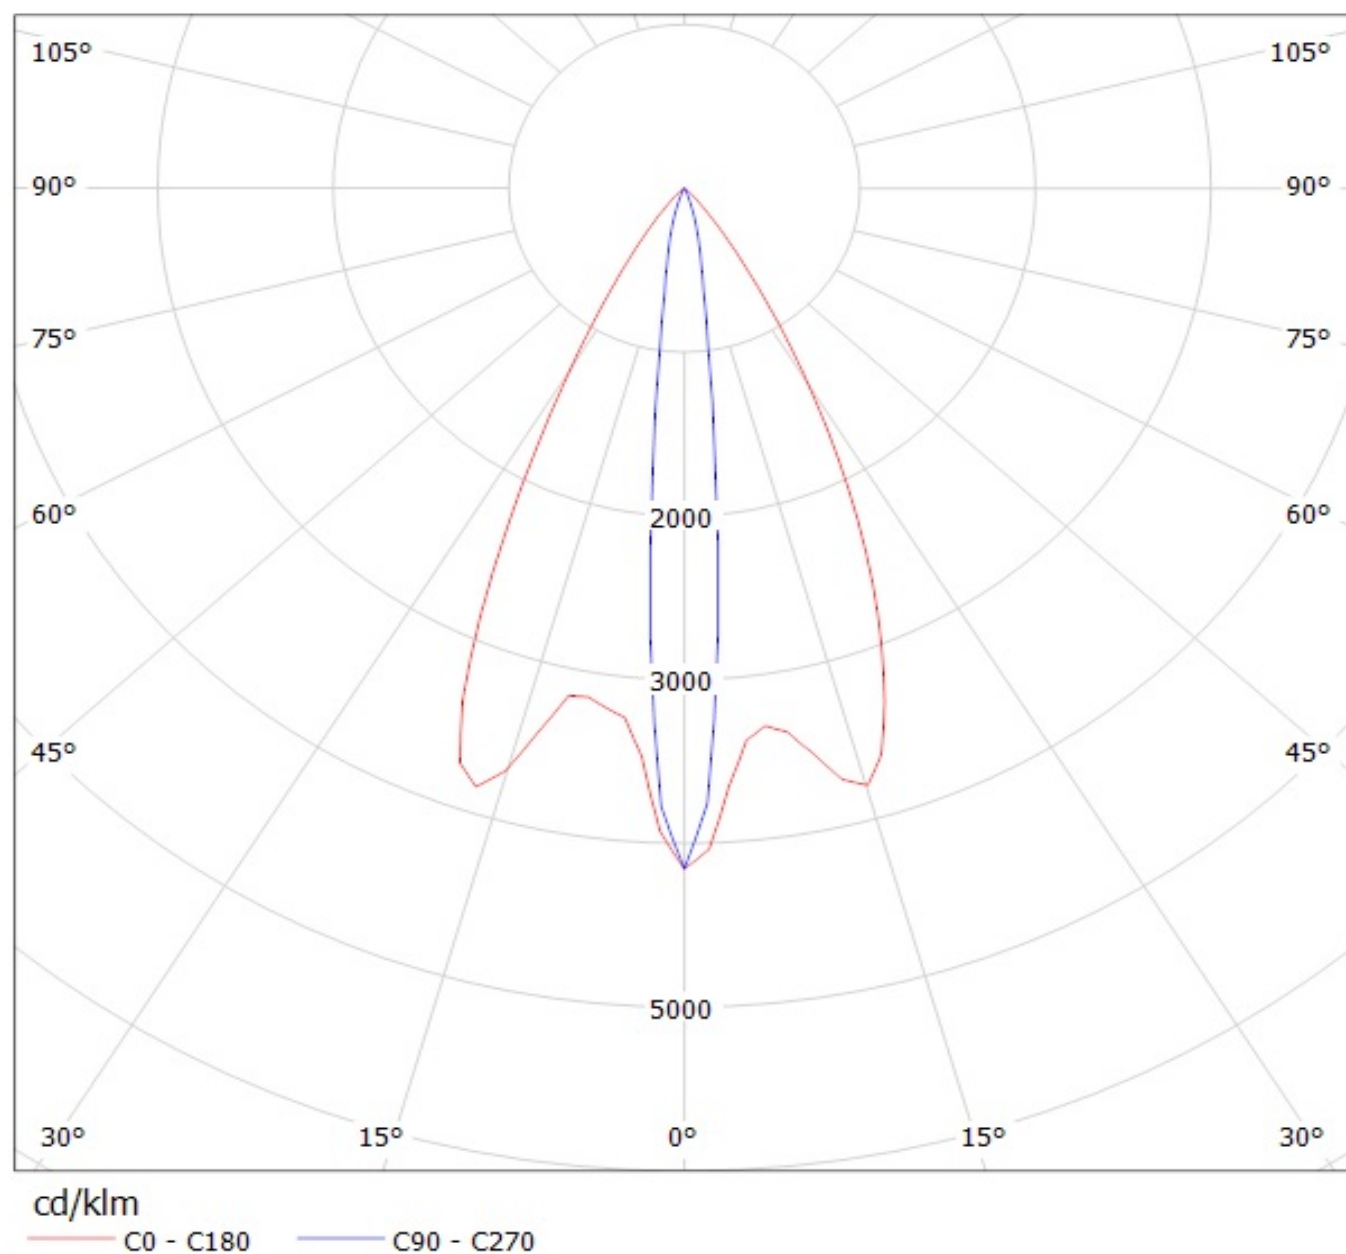


Luminaire: Ledil Oy C13529_VERONICA-O_(LH351Z) Efficiency=83%
Lamps: 1 x Samsung LH351Z (90.14lm @ 250mA) CCT=6500K P=0.7W I=250mA

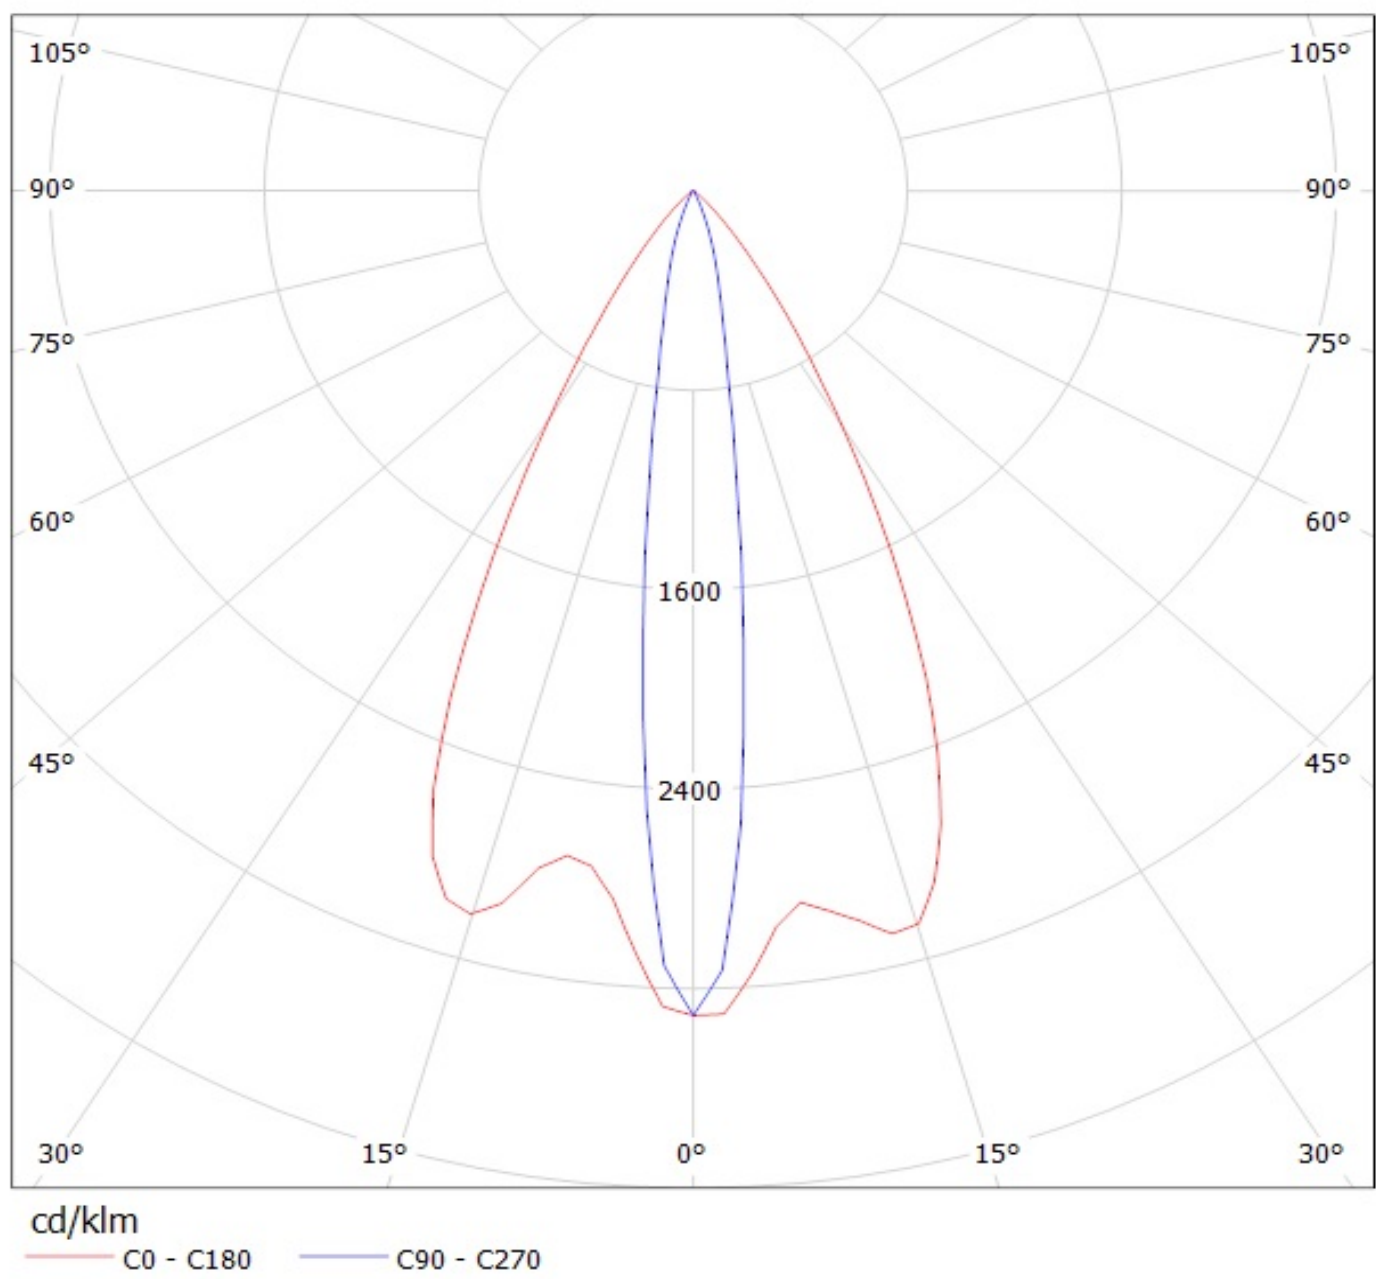


Luminaire: LEDiL Oy C13529_VERONICA-O_(LH351B)


Lamps: 1 x SAMSUNG_LH351B_107.366lm@250mA_P=2.9308W_I=249.9mA

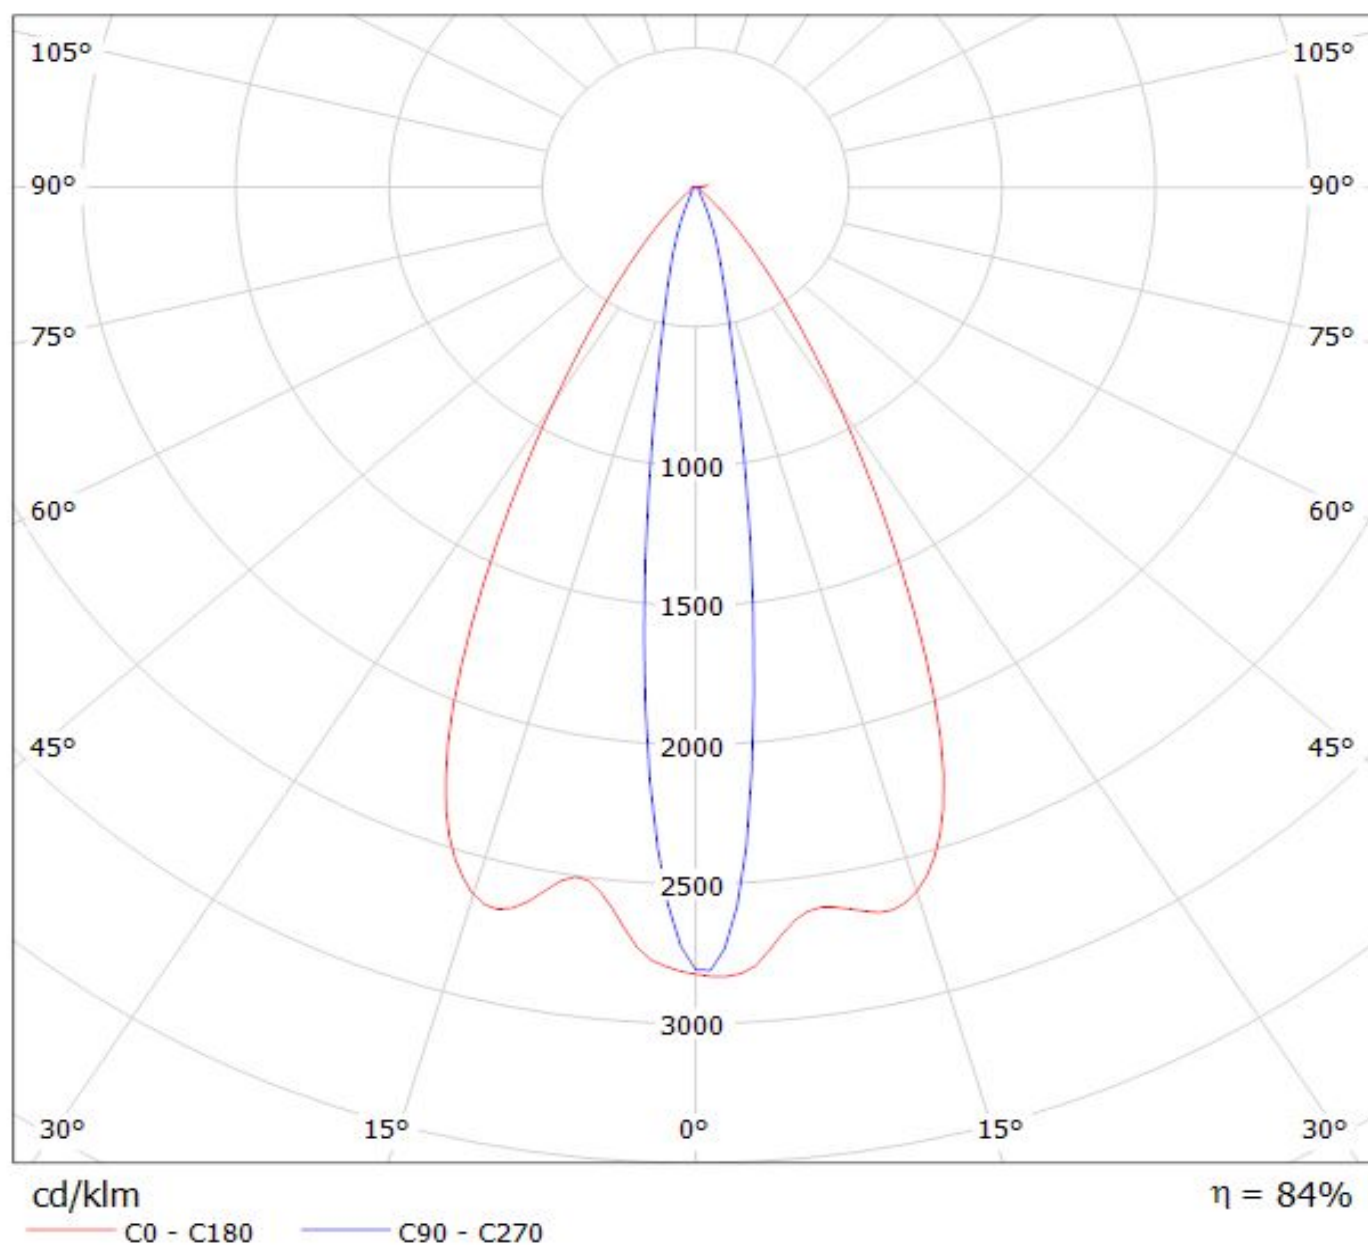


Luminaire: Ledil Oy C13529_VERONICA-O_(3535_Ceramic_3W) Efficiency=81%
Lamps: 1 x LG 3535 Ceramic 3W (LEMWA33) 90lm @ 250mA CCT=6900K P=0.7W I=250mA

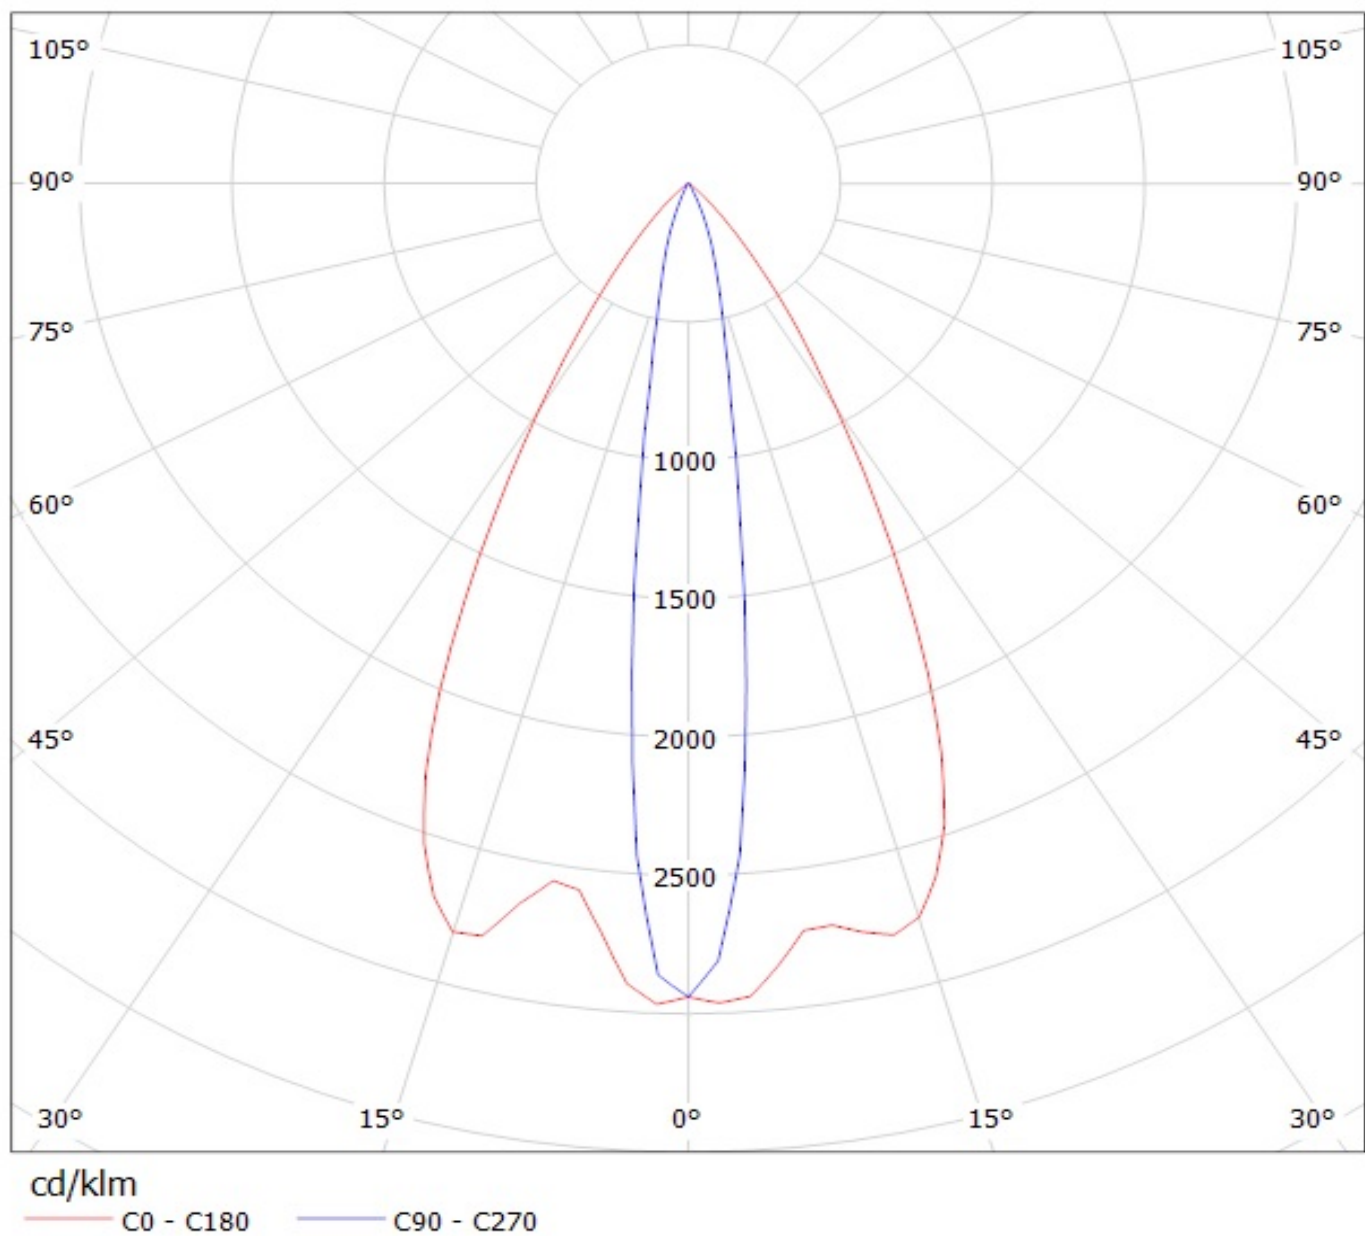

Luminaire: LEDil Oy C13529_VERONICA-O_(XP-G) Efficiency=83%
Lamps: 1 x Cree XP-G (XPGWHT-L1-CWPI-00BE7) 67lm @ 250mA CCT=3100K P=0.8W I=250mA

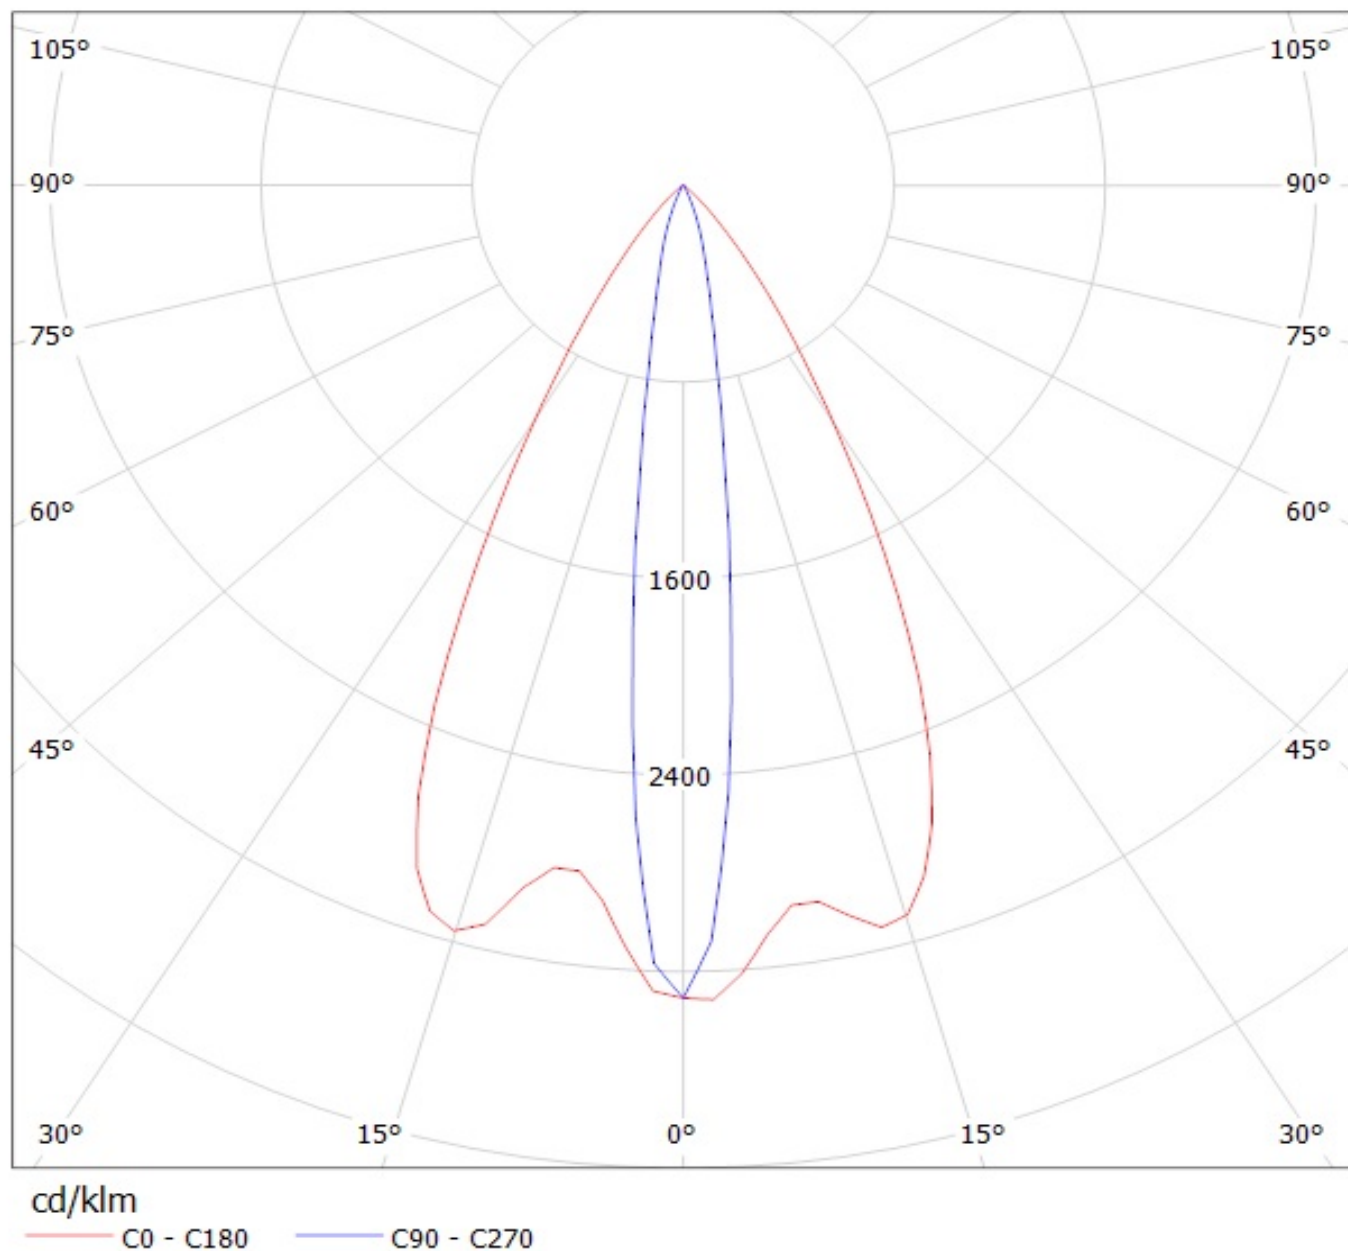

Luminaire: Ledil Oy C13529_VERONICA-O_(XP-G2) Efficiency=82%
Lamps: 1 x Cree Xp-G2 (104lm @ 250mA) CCT=6600K P=0.8W I=250mA

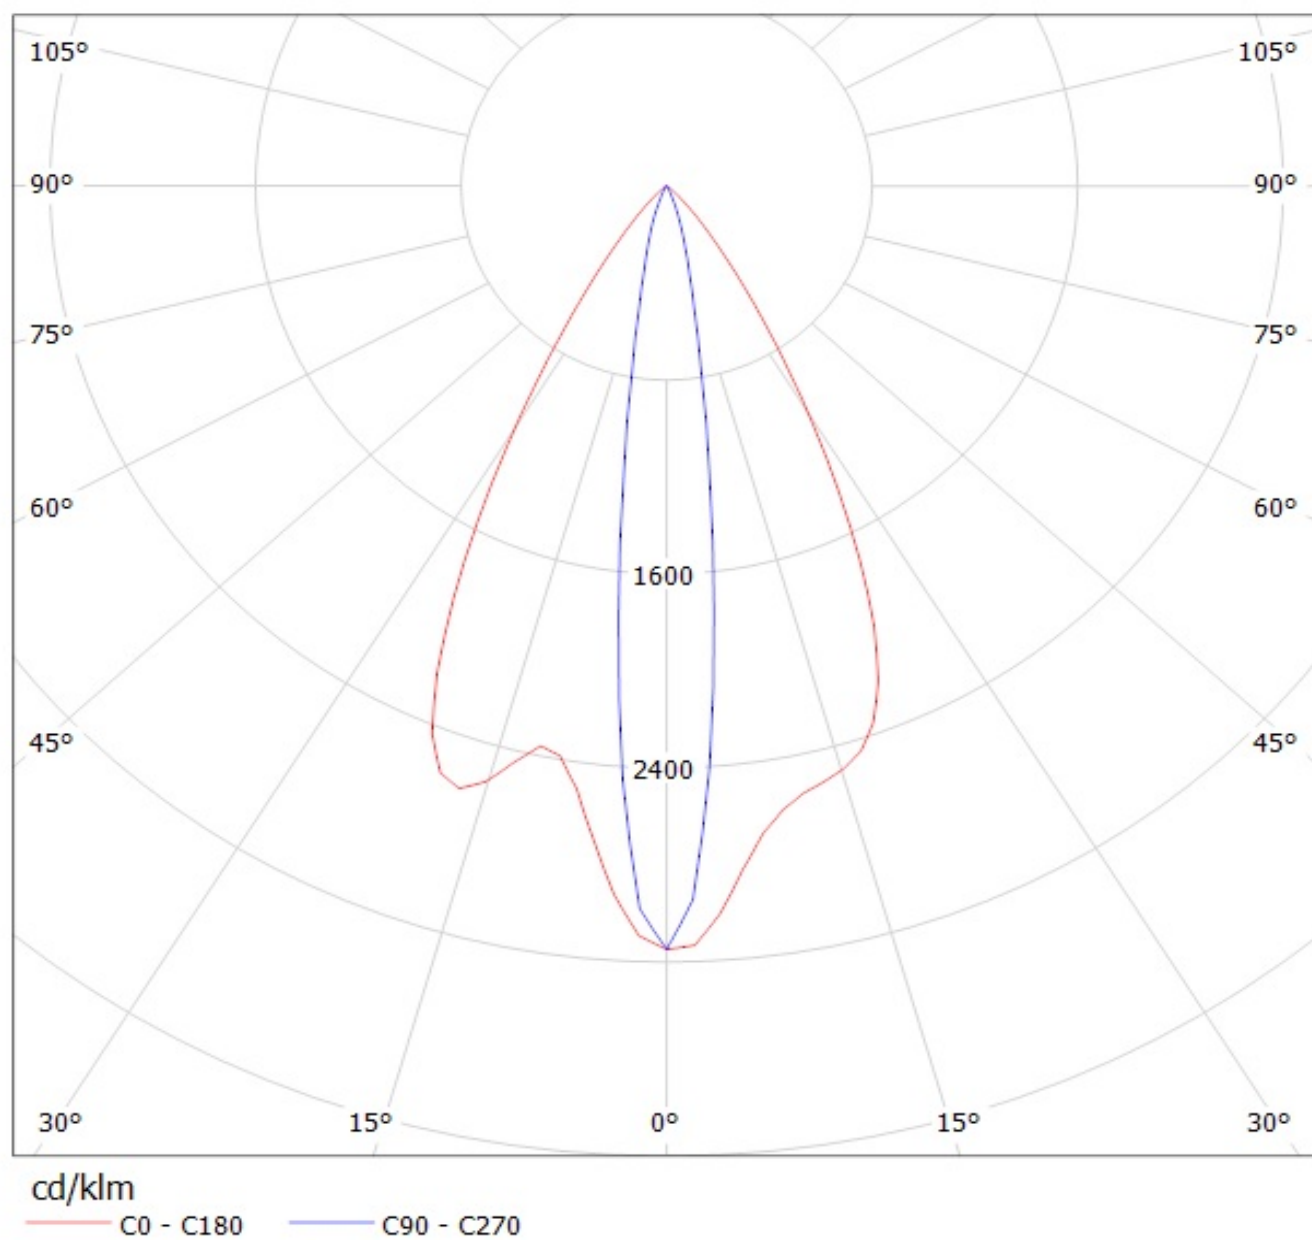

NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331