






ProxSense® Standard Trackpad Module Datasheet

Standard Capacitive Trackpads with Gesture Recognition for Headphones & Audio Equipment with Direct Outputs for BT Connection

The ProxSense® series of standard capacitive trackpads offers best in class sensitivity, signal to noise ratio and power consumption. Automatic tuning for sense electrodes guarantees optimal operation over production and environmental change.

Main Features

- Trackpad with on chip XY coordinate calculation
- 1792 x 1792 resolution
- 170Hz scan rate for gesture recognition
- Adjustable Sensitivity
- Active high or low output
- Proximity wake up from low power
- Automatic drift compensation
- Commonly used Gestures mapped to I/O pins for Audio Adjustment
 - Swipe: Up
Down
Backwards
Forwards
 - Swipe & Hold: Up
Down
Backwards
Forwards
 - Tap
 - Tap & Hold
- Low Power, suitable for battery applications
- Supply voltage: 1.65V to 3.6V
- <40µA active sensing LP mode
- Direct Interface to BT audio IC

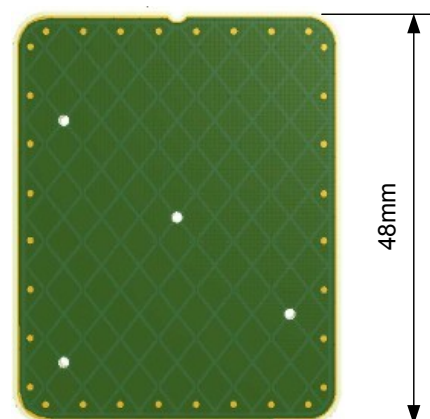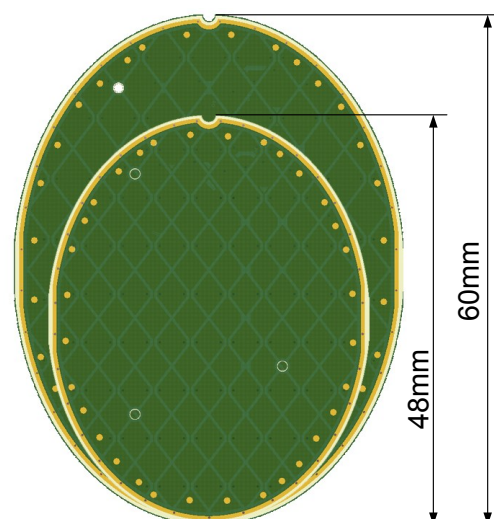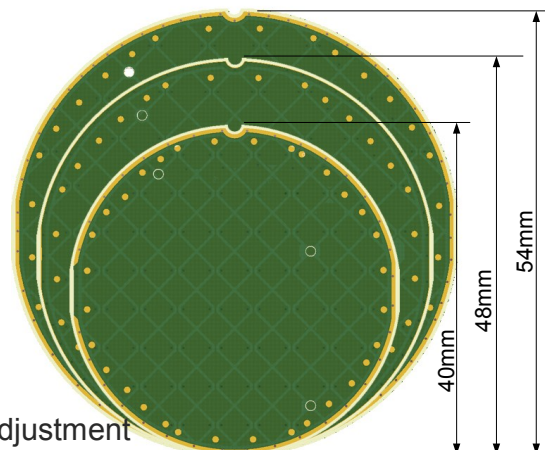

Applications

- Bluetooth Headphones
- Bluetooth Speakers
- Mechanical Push Button Replacement
- Portable Electronics
- Wearable Electronics



Contents

1	HARDWARE DESCRIPTION	3
2	TPR40	7
3	TPR48	8
4	TPR54	9
5	TPE60	10
6	TPE48	11
7	TPS48	12
8	GESTURE IMPLEMENTATION	13
9	SPECIFICATIONS	17
10	ORDERING INFORMATION	19
APPENDIX A. CONTACT INFORMATION		20

Datasheet Revision History

Version	Description	Date
1.00	Preliminary Draft	May 2015
1.01	First Release	June 2015
1.02	Updated ordering Information for Value Line	August 2015
1.03	Update Illustrations	Sept 2015



1 Hardware Description

All trackpad modules are available on RoHS2 and REACH compliant FR4 PCB material. The module PCBs are 1mm thick and have an OSP finish, with tinned pads for the user required solder points. The standard modules are not Halogen free. The trackpad sensing is done with IQS572, connected to an 8x8 diamond grid for 1792 pixel resolution in the X and Y directions. The modules are supplied with 3M double sided adhesive tape. The modules do not include any connector to BT IC.

Table 1.1 Summary of Trackpad Offerings

Module Name	Shape	Size
TPR40	Round	Ø40mm
TPR48	Round	Ø48mm
TPR54	Round	Ø54mm
TPE60	Ellipse	60mm x 46mm
TPE48	Ellipse	48mm x 38mm
TPS48	Rectangle	48mm x 38mm

Two of the trackpad modules (TPR40 and TPR48) are also available in the **Value Line** series. A comparison between the **Performance Line** and **Value Line** can be found in Table 1.2.

Table 1.2 Performance Line vs. Value Line.

	PCB	Sensor IC	Resolution	RoHS	REACH
Performance Line	FR4	IQS572	1792 x1792	Yes	Yes
Value Line	CEM-1	IQS525	1024 x 1024	Yes	No

1.2 PCB Specification

All 6 modules offered adhere to the following PCB specifications for the **Performance Line**:

- Material: 2-layer, FR4 PCB (non-HF material)
- Conductor: 35µm Copper (1oz. Cu)
- Finish: OSP (tinned)
- Size: Module Specific
- PCB Final Thickness = 1.0mm +/- 10%
- Outline: Precision DIE-CUT Profile

TPR40 and TPR48 are also offered in the **Value Line**:

- Material: 2-layer, CEM-1* PCB (non-HF material)
- Conductor: 35µm Copper (1oz. Cu)
- Finish: OSP (tinned)
- Size: Module Specific
- PCB Final Thickness = 1.0mm +/- 10%
- Outline: Precision DIE-CUT Profile

*Please note that the Value Line module does not come with REACH certification.

1.3 Module Orientation

All the modules have a cut in the PCB indicating the top of the module, which could also be used to align the module on the application overlay. This Notch can be seen in Figure 1.2

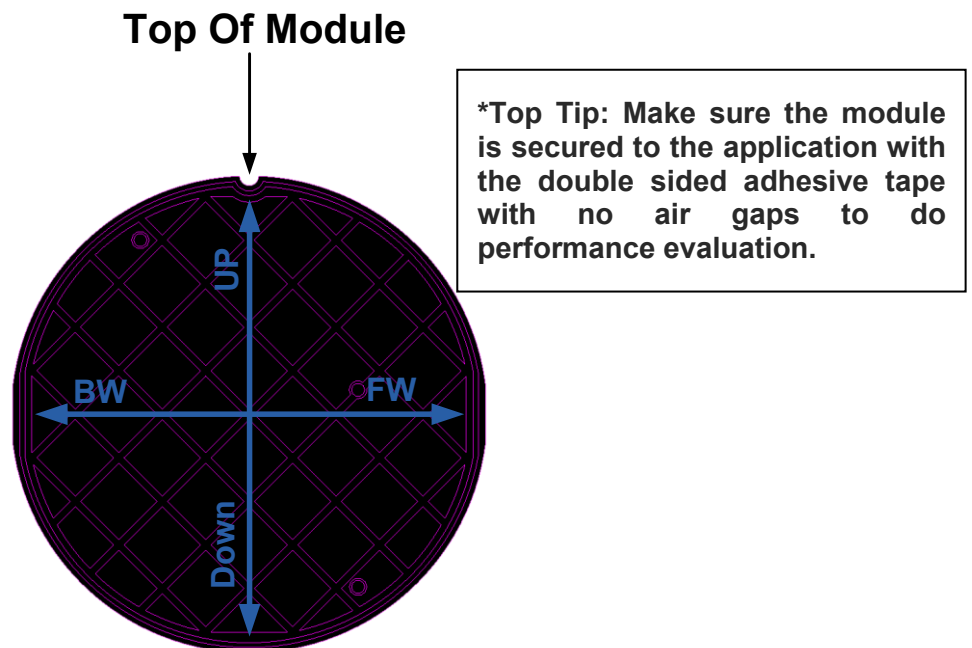


Figure 1.1 Top Notch Illustrating Module Orientation.

1.4 Adhesive Specification

All 6 modules offered are supplied with double sided adhesive applied on the trackpad for ease of integration. The adhesive is kept with the liner kept in place, with a pull tab for easy removal without tearing:

- Type: 3M 468 200MP
- Thickness = 0.13mm
- Liner = Polycoated Kraft Paper
- Liner w/ Pull-Tab (No glue on Pull-Tab)
- Adhesive sized to fit entire tracking area (module specific)



1.5 Total Thickness

The total thickness given in Figure 1.2 does not include the protective liner on the adhesive, as this liner needs to be removed when the module is assembled into the application. The highest part (thickest part of the module) of the assembly is located at the 0603 capacitor – C2.

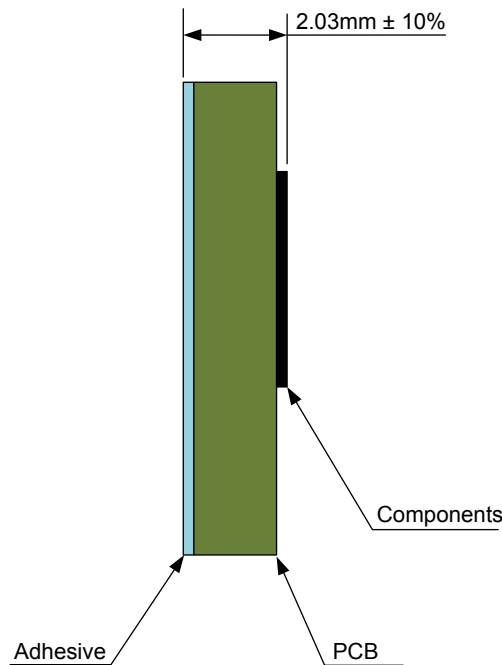


Figure 1.2 Maximum Module Thickness.

1.6 Compatible Overlay Thickness

The compatible overlay thicknesses are shown in Table 1.3 below. The modules have a solder link, S1, which can select one of two sensitivity settings tuned for different overlay thicknesses.

Table 1.3 Module Overlay Compatibility¹.

Solder link S1	Overlay Range
Open	1mm – 2mm
Closed	2mm – 3mm

For non-uniform overlays, the maximum curve in the overlay is limited to a 1mm height difference over the trackpad surface as shown in Figure 1.3.

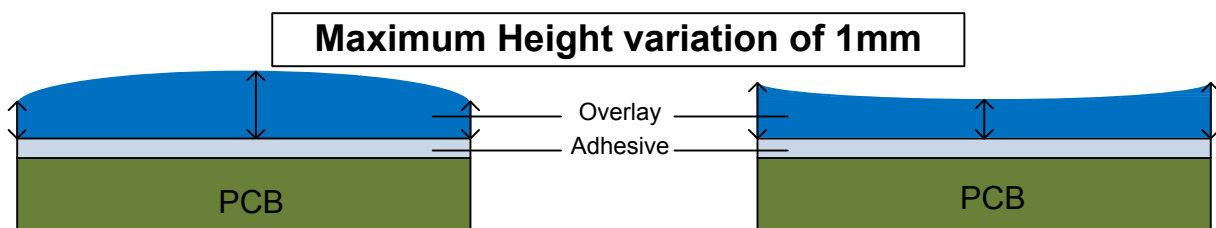


Figure 1.3 Maximum height variation in the overlay.

1.7 Output Level

The output level of the output pins can be changed from active high (default) to active low. This change is accomplished by connecting solder link S2 on the module during module integration into the application. The same output level is applicable on all 5 output pins.

¹ Note: Pilot Built 1 (PB1) modules only support the 1-2mm setting. Contact Azoteq for updated FW.



Table 1.4 Module Output Pin Level.

Solder link S2	Output Level
Open	Active High
Closed	Active Low

1.8 Finger Sizes

Because the modules are different physical sizes, but keep the same resolution, the trackpad pitch is different between the modules. Therefore a small variation in minimum finger size is expected. The smallest and largest finger sizes allowed for valid gestures on each module are shown in Table 1.5 below.

Table 1.5 Module Compatible Finger Sizes.

Module	Min Finger Diameter
<u>TPR40</u>	6.7 mm
<u>TPR48</u>	8.0 mm
<u>TPR54</u>	9.0 mm
<u>TPE60</u>	9.0 mm
<u>TPE48</u>	7.2 mm
<u>TPS48</u>	7.2 mm

2 TPR40

The TPR40 is a $\varnothing 40\text{mm}$ round trackpad. A representation of the module can be found in Figure 2.1.

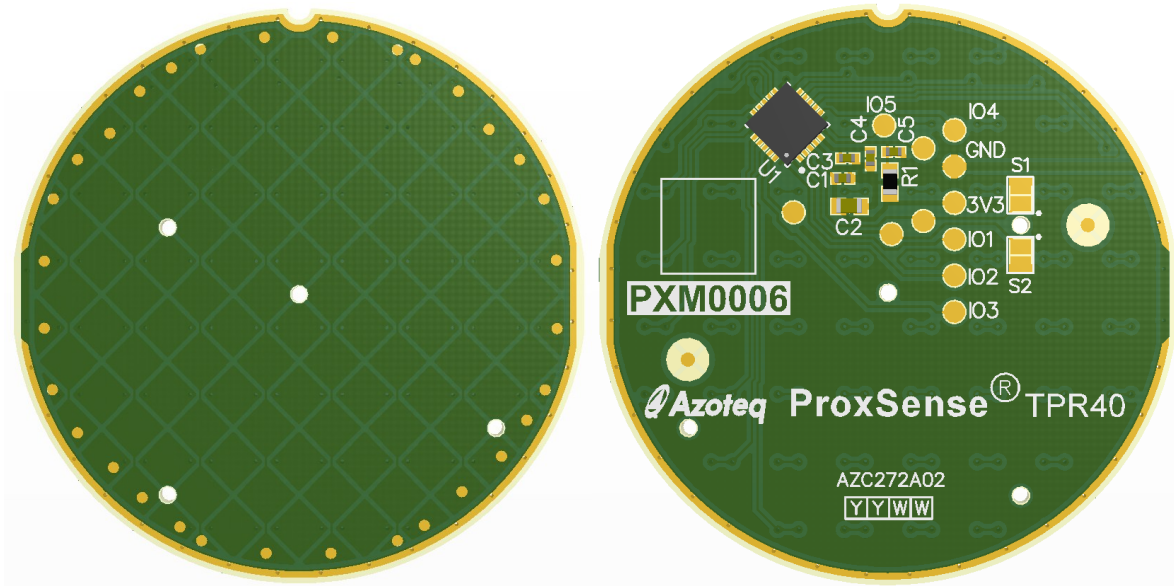


Figure 2.1 TPR40 – Module Representation.

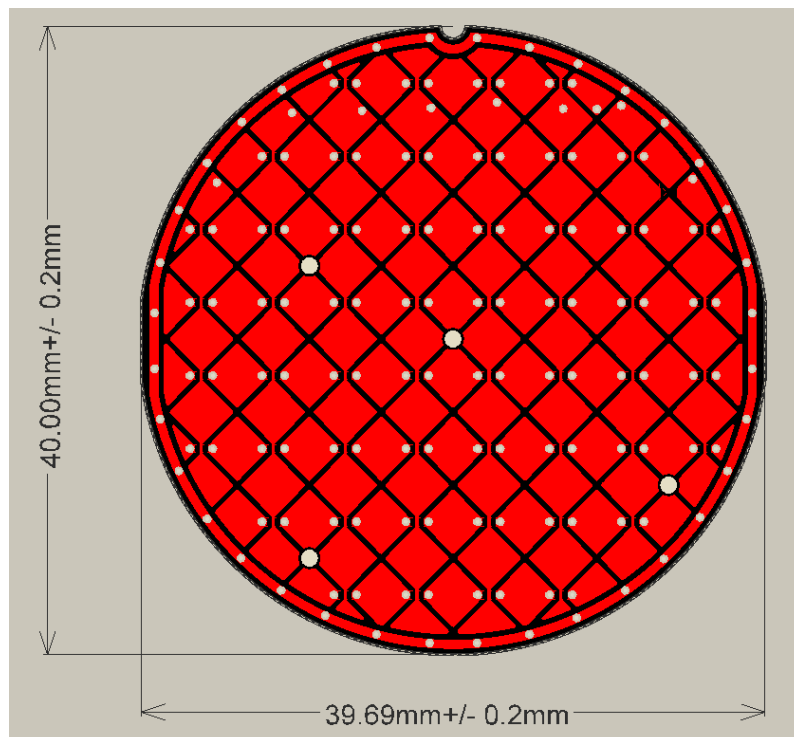


Figure 2.2 TPR40 PCB Dimensions.



3 TPR48

The TPR48 is an $\varnothing 48\text{mm}$ round trackpad. A representation of the module can be found in Figure 3.1.

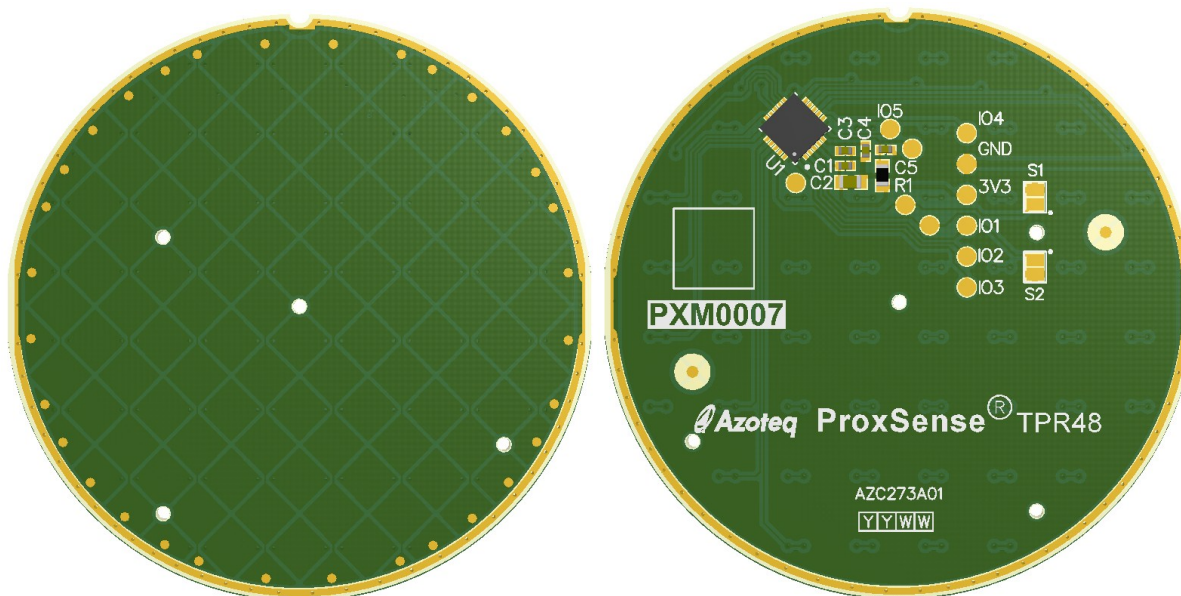


Figure 3.1 TPR48 – Module Representation.

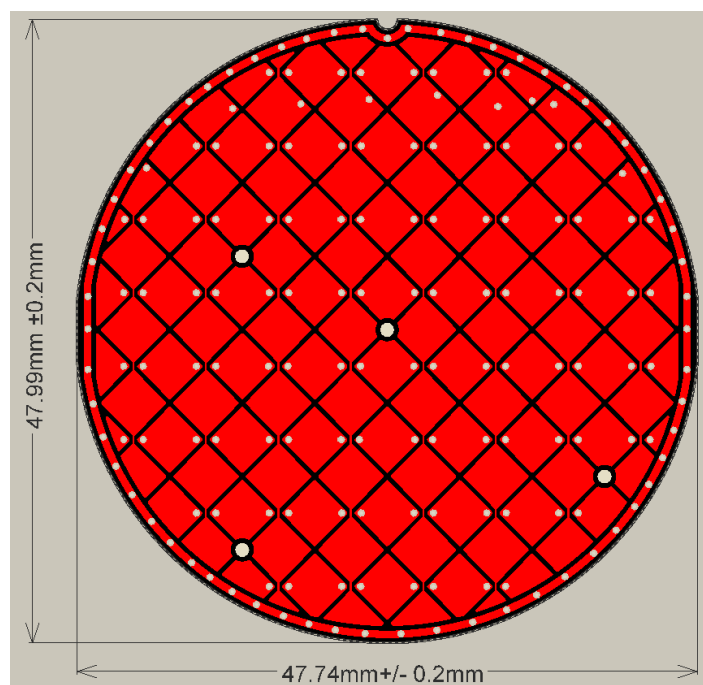


Figure 3.2 TPR48 PCB Dimensions.



4 TPR54

The TPR54 is an $\varnothing 54\text{mm}$ round trackpad. A representation of the module can be found in Figure 4.1.

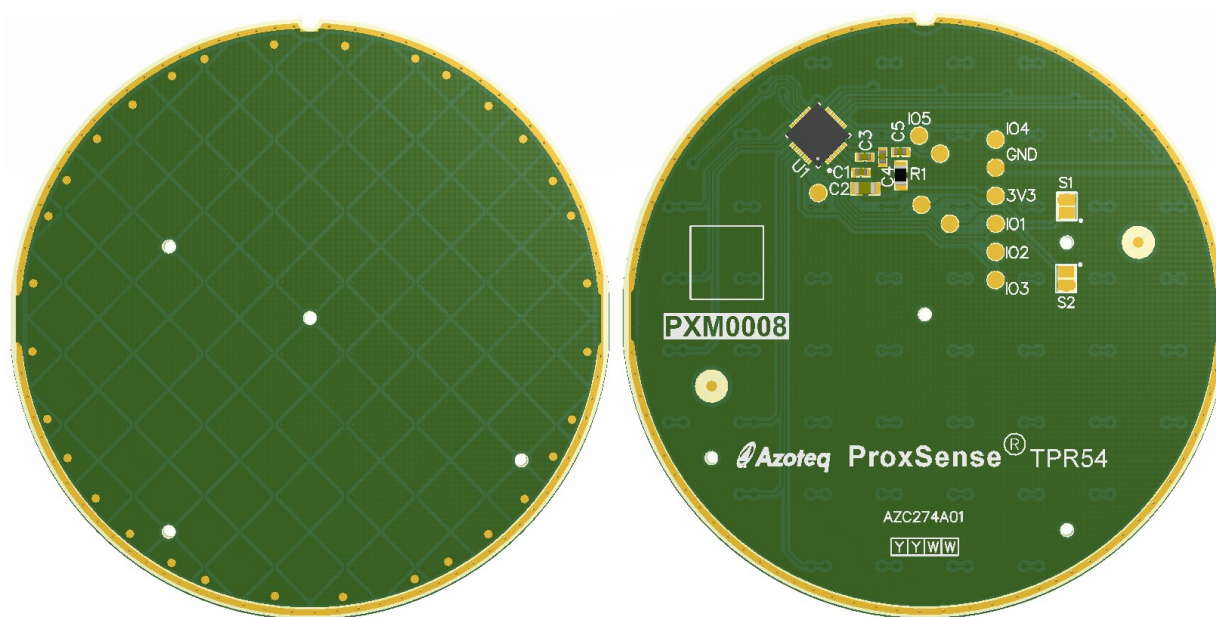


Figure 4.1 TPR54 – Module Representation.

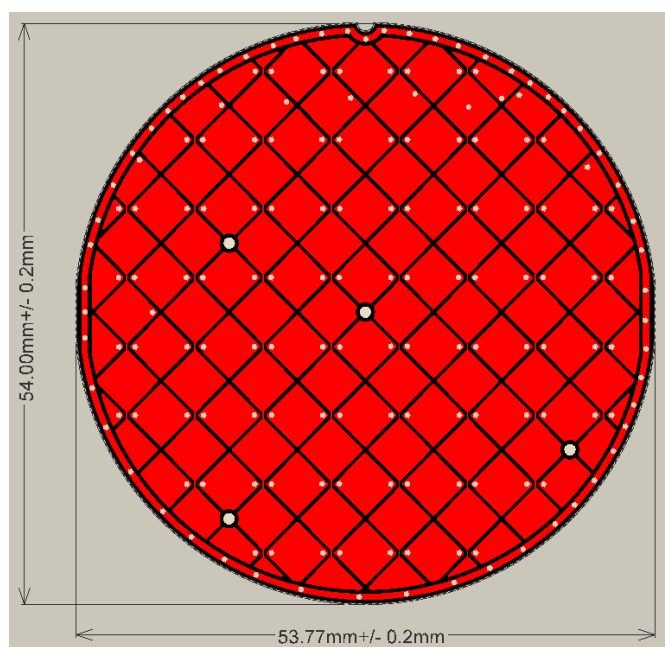


Figure 4.2 TPR54 PCB Dimensions.



5 TPE60

The TPE60 is a 60mm x 46mm ellipsoid shaped trackpad. A representation of the module can be found in Figure 5.1.

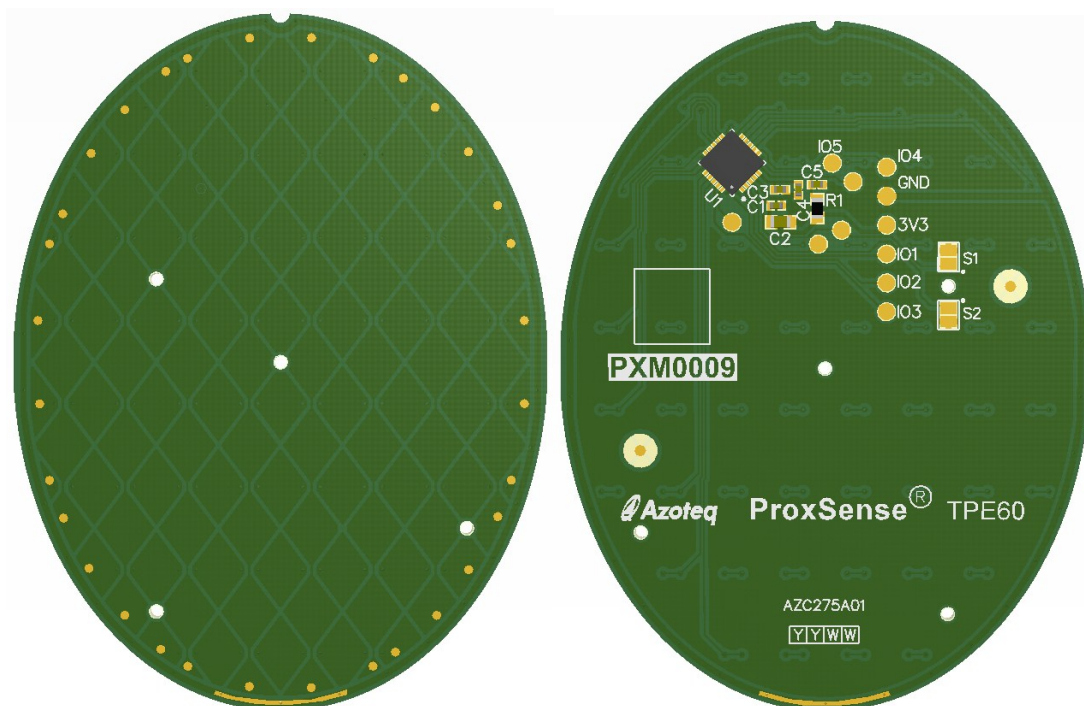


Figure 5.1 TPE60 – Module Representation.

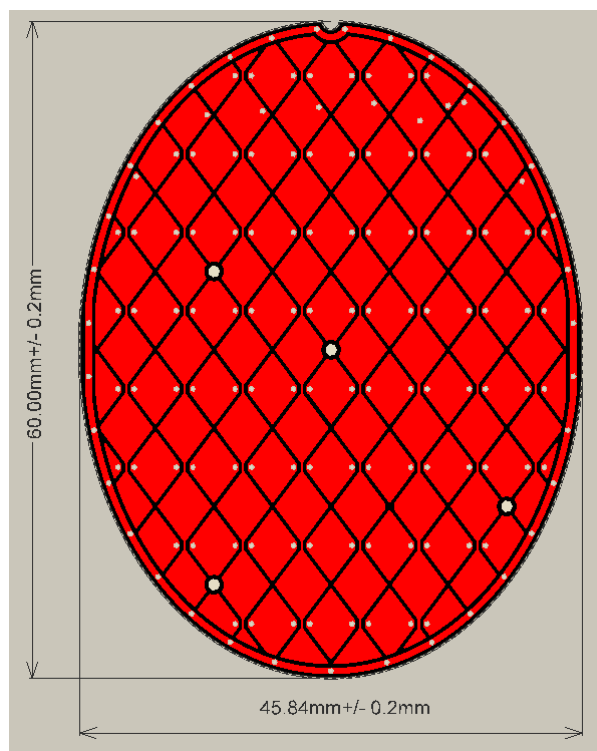


Figure 5.2 TPE60 PCB Dimensions.



6 TPE48

The TPE48 is a 48mm x 38mm ellipsoid shaped trackpad. A representation of the module can be found in Figure 6.1.

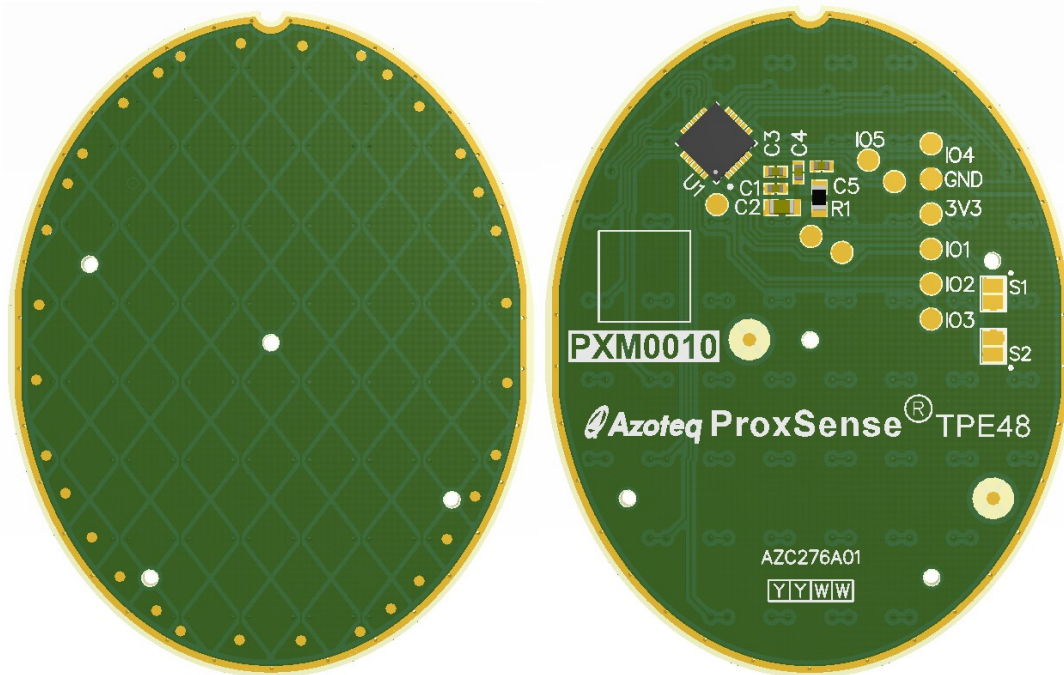


Figure 6.1 TPE48 – Module Representation.

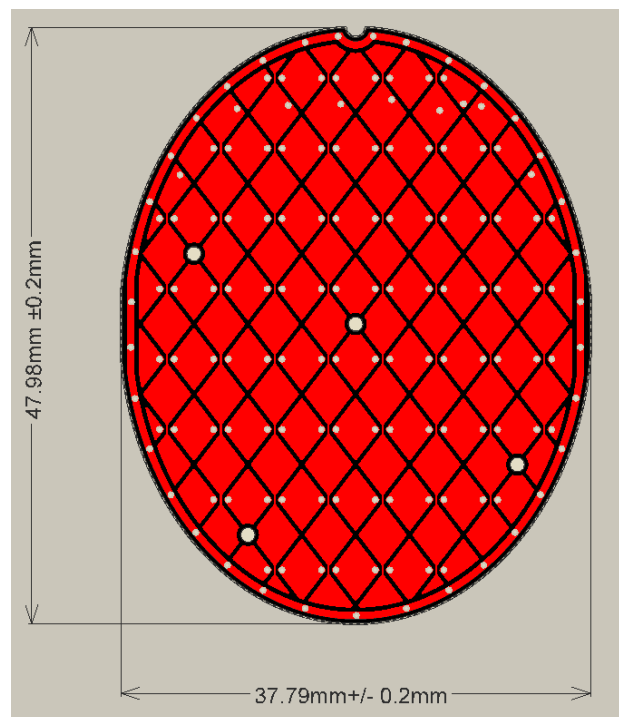


Figure 6.2 TPE48 PCB Dimensions.

7 TPS48

The TPS48 is a 48mm x 38mm rectangular trackpad with rounded corners. A representation of the module can be found in Figure 7.1.

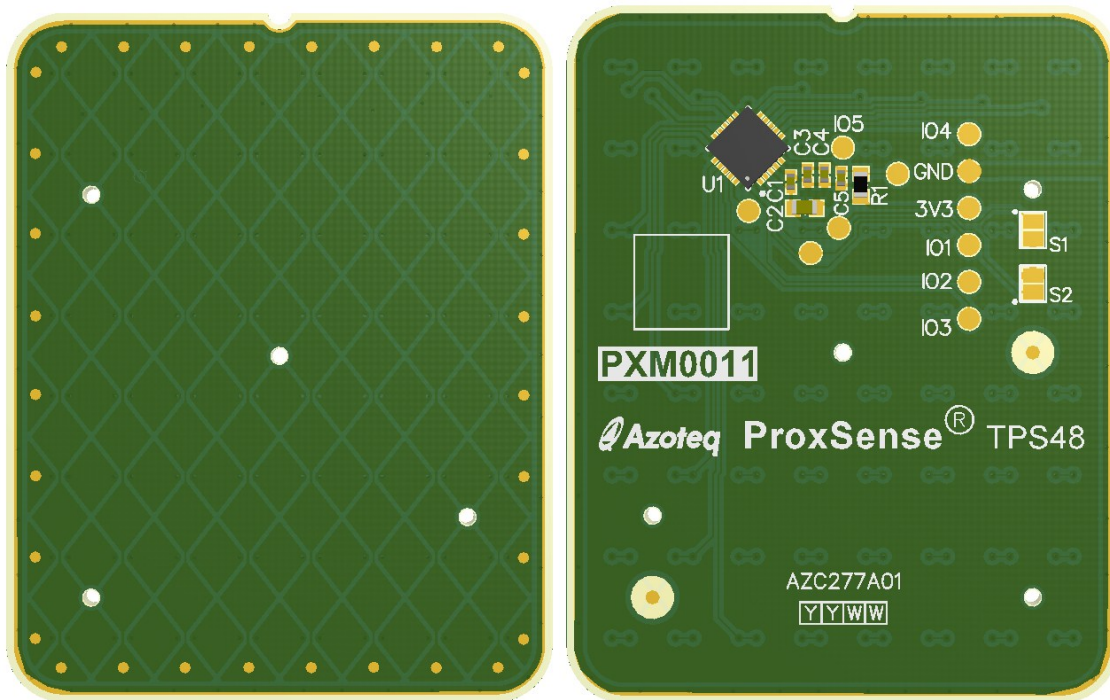


Figure 7.1 TPS48 – Module Representation.

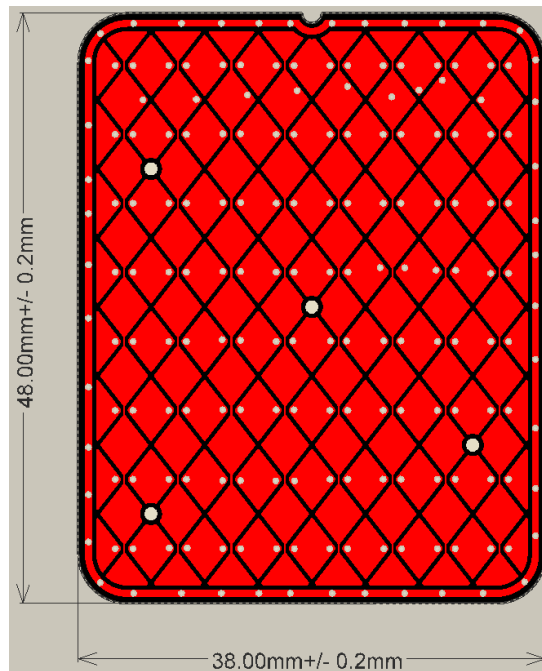


Figure 7.2 TPS48 PCB Dimensions.

8 Gesture Implementation

8.1 Swipe Gestures

There are four swipe gestures that can be detected by the trackpad modules, as shown in Figure 8.1 below.

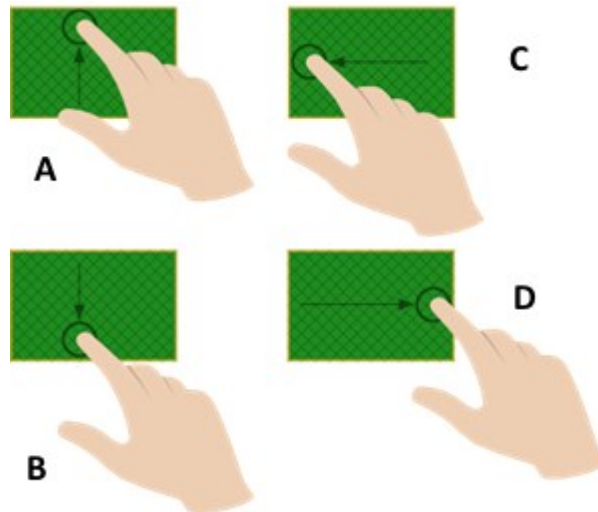


Figure 8.1 Illustrations of the 4 swipe gestures that can be detected by the trackpad modules.

Each time any of the swipe gestures are performed correctly (correct finger action within a 18ms to 1 second window), the corresponding I/O pin of the trackpad will output a single 200ms pulse to the Bluetooth IC. The user has the option to select a high (default) or low (by adding a solder link on the module) pulse. The high level as indicated on the figure below will correspond to the input voltage supplied to the trackpad module.

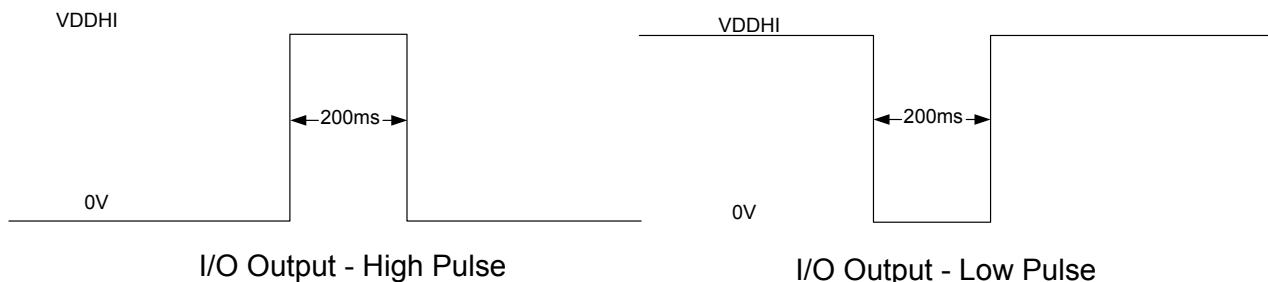


Figure 8.2 High output pulse shown on the left; Low output pulse shown on the right.

8.1.1 Swipe Upward (A)

A single finger action as shown in Figure 8.1 part A, place anywhere on the trackpad surface, and moved more than 14mm from the bottom to the top within 1s and then lifted off the trackpad will generate a 200ms pulse on I/O_1. The swipe gesture is limited to finger movement < +45 degrees from the vertical, and dependent on the finger not lifting off the trackpad during the finger movement stage.

8.1.2 Swipe Downward (B)

A single finger action as shown in Figure 8.1 part B, place anywhere on the trackpad surface, and moved more than 14mm from the top to the bottom within 1s and then lifted off the trackpad will generate a 200ms pulse on I/O_3. The swipe gesture is limited to finger

movement < +45 degrees from the vertical, and dependent on the finger not lifting off the trackpad during the finger movement stage.

8.1.3 Swipe Backward (C)

A single finger action as shown in Figure 8.1 part C, place anywhere on the trackpad surface, and moved more than 14mm from right to left within 1s and then lifted off the trackpad will generate a 200ms pulse on I/O_4. The swipe gesture is limited to finger movement < +45 degrees from the horizontal, and dependent on the finger not lifting off the trackpad during the finger movement stage.

8.1.4 Swipe Forward (D)

A single finger action as shown in Figure 8.1 part D, placed anywhere on the trackpad surface, and moved more than 14mm from left to right within 1s and then lifted off the trackpad will generate a 200ms pulse on I/O_5. The swipe gesture is limited to finger movement < +45 degrees from the horizontal, and dependent on the finger not lifting off the trackpad during the finger movement stage.

8.2 Tap Gesture

The trackpad modules can recognize a tap gesture, from a single finger, at any point on the trackpad surface. A valid tap gesture is recognized if a touch is made by moving less than 4mm on the overlay surface and release within 600ms but not faster than 18ms. When a valid tap is detected, the modules will output a 200ms pulse on I/O_2 as shown in Figure 8.2.




Figure 8.3 Tap Gesture.

8.3 Tap and Hold Gesture

The trackpad modules can recognize a tap & hold gesture, from a single finger, at any point on the trackpad surface. A valid tap & hold gesture is recognized if a touch is made and the finger does not release the touch for more than 600ms without moving more than 4mm on the trackpad overlay surface.



Figure 8.4 Tap & Hold Gesture.

When a valid tap & hold is detected, the modules will output a continuous pulse (continuous high level of the output, or low if solder link is made) on I/O_2 until the finger is lifted off the trackpad.

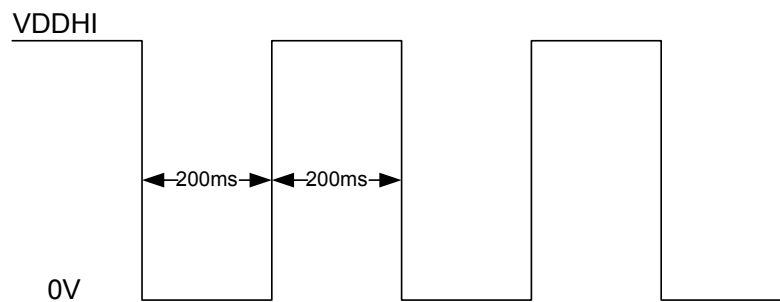


Figure 8.5 Continuous output of 200ms pulses for swipe and hold gesture.

8.4 Swipe and Hold Gestures

There are four swipe & hold gestures that can be detected by the trackpad modules, as shown in Figure 8.6 below.

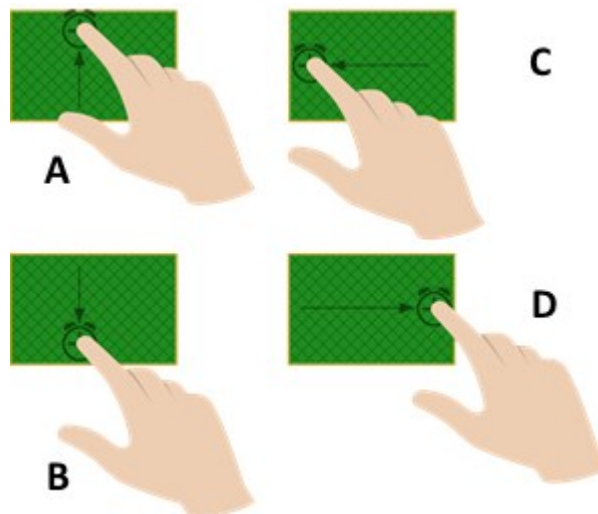


Figure 8.6 Illustrations off the 4 swipe & hold gestures that can be detected by the trackpad modules.

Each time any of the swipe & hold gestures are performed correctly, the corresponding I/O pin of the trackpad will continuously output 200ms pulses to the Bluetooth IC. The user has the option to select a high (default) or low (by adding a solder link on the module) pulse. The high level as indicated on the figure below will correspond to the input voltage supplied to the trackpad module.

8.4.2 Swipe Upward & Hold (A)

A single finger action as shown in Figure 8.6 part A, placed anywhere on the trackpad surface, and moved more than 14mm from the bottom to the top within 1s and then kept stationary on the trackpad for 600ms or more will generate continuous 200ms pulses on I/O_1. The swipe gesture is limited to < +45 degrees from the vertical, and dependent on the finger not lifting off the trackpad during the finger movement stage. The output pulses will stop once the finger is lifted off the trackpad.



8.4.3 Swipe Downward & Hold (B)

A single finger action as shown in Figure 8.6 part B, placed anywhere on the trackpad surface, and moved more than 14mm from the top to the bottom within 1s and then kept stationary on the trackpad for 600ms or more will generate continuous 200ms pulses on I/O_3. The swipe gesture is limited to < +45 degrees from the vertical, and dependent on the finger not lifting off the trackpad during the finger movement stage. The output pulses will stop once the finger is lifted off the trackpad.

8.4.4 Swipe Backward & Hold (C)

A single finger action as shown in Figure 8.6 part C, placed anywhere on the trackpad surface, and moved more than 14mm from right to left within and then kept stationary on the trackpad for 600ms or more will generate continuous 200ms pulses on I/O_4. The swipe gesture is limited to < +45 degrees from the vertical, and dependent on the finger not lifting off the trackpad during the finger movement stage. The output pulses will stop once the finger is lifted off the trackpad.

8.4.5 Swipe Forward & Hold (D)

A single finger action as shown in Figure 8.6 part D, place anywhere on the trackpad surface, and moved more than 14mm from left to right within 1s and then kept stationary on the trackpad for 600ms or more will generate continuous 200ms pulses on I/O_5. The swipe gesture is limited to < +45 degrees from the vertical, and dependent on the finger not lifting off the trackpad during the finger movement stage. The output pulses will stop once the finger is lifted off the trackpad.

8.5 Gesture I/O Mapping

The pin mapping for the modules for gesture output is shown in below.

Table 8.1 Module Gesture Output Pin Mapping.

Gesture	Output Pin	Output Type	Typical Feature
Swipe Upward	I/O_1	Single Pulse	Volume Increase
Swipe Upward & Hold	I/O_1	Multiple Pulses	Continuous Volume Increase
Swipe Downward	I/O_3	Single Pulse	Volume Decrease
Swipe Downward & Hold	I/O_3	Multiple Pulses	Continuous Volume Decrease
Swipe Forward	I/O_5	Single Pulse	Skip / Next Track
Swipe Forward & Hold	I/O_5	Multiple Pulses	Fast Forward
Swipe Backward	I/O_4	Single Pulse	Skip / Previous Track
Swipe Backward & Hold	I/O_4	Multiple Pulses	Reverse/Rewind
Tap	I/O_2	Single Pulse	Play/Pause (Call Answer)
Tap & Hold	I/O_2	Continuous Pulse	Start/STOP



9 Specifications

9.1 Absolute Maximum Specifications

The following absolute maximum parameters are specified for the device:

Exceeding these maximum specifications may cause damage to the device.

- Operating temperature -40°C to 85°C
- Supply Voltage (VDDHI – GND) 3.6V
- Minimum power-on slope 100V/s
- ESD protection ±2kV (Human body model)

9.2 Application Level Tests

According to the module design, with proper application system design implementation a 16kV IEC air discharge and 1Vp-p Conducted Immunity level should be possible to achieve.

9.3 Power Consumption

Table 9.1 Trackpad Module General Operating Conditions

DESCRIPTION	MIN	TYP	MAX	UNIT
Supply voltage	1.65	3.3V	3.6	V
Tracking Mode Current	-	4		mA
Low Power Current	-	35	TBD	μA

9.4 Output Pin Voltage

Table 9.2 Output Pin Characteristics

Symbol	Parameter Conditions	Conditions	Min.	Max.	Unit
$V_{OL}^{(1)}$	Output low level voltage for an I/O pin	$I_{IO} = +2mA,$ $V_{DDHI} = 1.8V$	-	0.45	V
		$I_{IO} = +2mA,$ $V_{DDHI} = 3.0V$	-	0.45	
$V_{OH}^{(2)}$	Output high level voltage for an I/O pin	$I_{IO} = -1mA,$ $V_{DDHI} = 1.8V$	V_{DDHI} -0.45	-	
		$I_{IO} = -1mA,$ $V_{DDHI} = 3.0V$	V_{DDHI} -0.45	-	



Table 9.3 Start-up and shut-down slope Characteristics


DESCRIPTION	Conditions	PARAMETER	MIN	MAX	UNIT
Power On Reset	V_{DDHI} Slope $\geq 100V/s$ @25°C	V_{POR}	1.44	1.65	V
Power Down Reset	V_{DDHI} Slope $\geq 100V/s$ @25°C	V_{PDR}	1.30	1.60	V



10 Ordering Information

Order quantities will be subject to MOQ of 5k pcs. Contact the official distributor for sample quantities. A list of the distributors can be found under the “Distributors” section of www.azoteq.com.

10.1 Stand Alone Track Pads

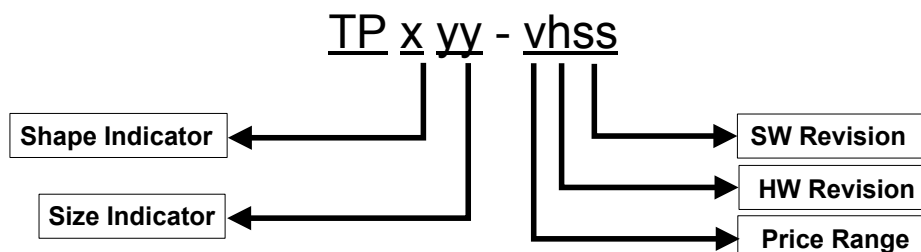

Trackpad Module	TP	=	Trackpad
Shape Indicator (x)	R	=	Round
	E	=	Ellipsoid
	S	=	Square/Rectangular
Size Indicator (yy)	40	=	40mm
	48	=	48mm
	54	=	54mm
	60	=	60mm
Price Range (v)	V	=	Value Line (low cost)
	P	=	Performance Line (high performance)
Hardware Revision (h)	1	=	Standard BT Headphone Module
Software Revision (ss)	01	=	Standard Gestures
Example: TPR40-P101 – is a round 40mm trackpad from the high performance line, 1 st revision HW and SW			

Note: For non-standard versions please contact Azoteq direct.



Appendix A. Contact Information

	USA	Asia	South Africa
Physical Address	6507 Jester Blvd Bldg 5, suite 510G Austin TX 78750 USA	Rm2125, Glittery City Shennan Rd Futian District Shenzhen, 518033 China	109 Main Street Paarl 7646 South Africa
Postal Address	6507 Jester Blvd Bldg 5, suite 510G Austin TX 78750 USA	Rm2125, Glittery City Shennan Rd Futian District Shenzhen, 518033 China	PO Box 3534 Paarl 7620 South Africa
Tel	+1 512 538 1995	+86 755 8303 5294 ext 808	+27 21 863 0033
Fax	+1 512 672 8442		+27 21 863 1512
Email	kobusm@azoteq.com	linayu@azoteq.com.cn	info@azoteq.com

Please visit www.azoteq.com for a list of distributors and worldwide representation.

The following patents relate to the device or usage of the device: US 6,249,089 B1; US 6,621,225 B2; US 6,650,066 B2; US 6,952,084 B2; US 6,984,900 B1; US 7,084,526 B2; US 7,084,531 B2; US 7,265,494 B2; US 7,291,940 B2; US 7,329,970 B2; US 7,336,037 B2; US 7,443,101 B2; US 7,466,040 B2 ; US 7,498,749 B2; US 7,528,508 B2; US 7,755,219 B2; US 7,772,781 B2; US 7,781,980 B2; US 7,915,765 B2; US 7,994,726 B2; US 8,035,623 B2; US RE43,606 E; US 8,288,952 B2; US 8,395,395 B2; US 8,531,120 B2; US 8,659,306 B2; US 8,823,273 B2 B2; EP 1 120 018 B2; EP 1 206 168 B1; EP 1 308 913 B1; EP 1 530 178 A1; EP 2 351 220 B1; EP 2 559 164 B1; CN 1330853; CN 1783573; AUS 761094; HK 104 1401

IQ Switch®, SwipeSwitch™, ProxSense®, LightSense™, AirButton™ and the  logo are trademarks of Azoteq.

The information in this Datasheet is believed to be accurate at the time of publication. Azoteq uses reasonable effort to maintain the information up-to-date and accurate, but does not warrant the accuracy, completeness or reliability of the information contained herein. All content and information are provided on an "as is" basis only, without any representations or warranties, express or implied, of any kind, including representations about the suitability of these products or information for any purpose. Azoteq disclaims all warranties and conditions with regard to these products and information, including but not limited to all implied warranties and conditions of merchantability, fitness for a particular purpose, title and non-infringement of any third party intellectual property rights. Azoteq assumes no liability for any damages or injury arising from any use of the information or the product or caused by, without limitation, failure of performance, error, omission, interruption, defect, delay in operation or transmission, even if Azoteq has been advised of the possibility of such damages. The applications mentioned herein are used solely for the purpose of illustration and Azoteq makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Azoteq products are not authorized for use as critical components in life support devices or systems. No licenses to patents are granted, implicitly, express or implied, by estoppel or otherwise, under any intellectual property rights. In the event that any of the abovementioned limitations or exclusions does not apply, it is agreed that Azoteq's total liability for all losses, damages and causes of action (in contract, tort (including without limitation, negligence) or otherwise) will not exceed the amount already paid by the customer for the products. Azoteq reserves the right to alter its products, to make corrections, deletions, modifications, enhancements, improvements and other changes to the content and information, its products, programs and services at any time or to move or discontinue any contents, products, programs or services without prior notification. For the most up-to-date information and binding Terms and Conditions please refer to www.azoteq.com.

WWW.AZOTEQ.COM

info@azoteq.com



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331