



Is Now Part of



ON Semiconductor®

**To learn more about ON Semiconductor, please visit our website at
www.onsemi.com**

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



FLS6617

Primary-Side-Regulation PWM with POWER MOSFET Integrated

Features

- Low Standby Power under 30 mW
- High-Voltage Startup
- Fewest External Component Counts
- Constant-Voltage (CV) and Constant-Current (CC) Control without Secondary-Feedback Circuitry
- Green-Mode: Linearly Decreasing PWM Frequency with Cycle Skipping
- Fixed PWM Frequency at 50 kHz with Proprietary Frequency Hopping to Solve EMI Problem
- Peak-Current-Mode Control in CV Mode
- Cycle-by-Cycle Current Limiting
- V_{DD} Over-Voltage Protection with Auto Restart
- V_{DD} Under-Voltage Lockout (UVLO)
- Gate Output Maximum Voltage Clamped at 15 V
- Fixed Over-Temperature Protection with Auto Restart
- Available in the 7-Lead SOP Package

Applications

- Battery chargers for cellular phones, cordless phones, PDA, digital cameras, power tools, etc.
- Replaces linear transformers and RCC SMPS

Related Resources

- [Fairchild Power Supply WebDesigner — Flyback Design & Simulation - In Minutes at No Expense](#)

Description

This third-generation Primary Side Regulation (PSR) and highly integrated PWM controller provides several features to enhance the performance of low-power flyback converters. The proprietary TRUECURRENT® technology of FLS6617 enables precise CC regulation and simplified circuit design for battery-charger applications leading to lower-cost, smaller, and lighter chargers, compared to a conventional design or a linear transformer.

To minimize standby power consumption, the proprietary green mode provides off-time modulation to linearly decrease PWM frequency under light-load conditions. Green mode assists the power supply in meeting power conservation requirements.

By using the FLS6617, a charger can be implemented with few external components and minimized cost. A typical output CV/CC characteristic envelope is shown in Figure 1.


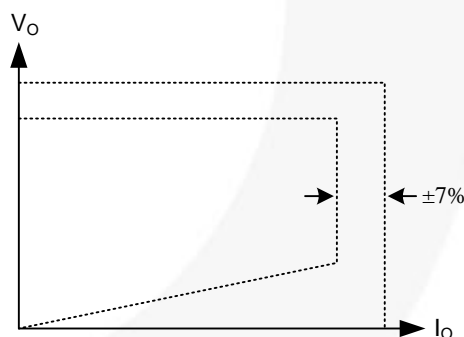


Figure 1. Typical Output V-I Characteristic

Ordering Information

| Part Number | Operating Temperature Range | Package | Packing Method |
|-------------|-----------------------------|---------------------------------------|----------------|
| FLS6617MX | -40°C to +125°C | 7-Lead, Small Outline Package (SOP-7) | Tape & Reel |

Marking Information



F: Fairchild Logo
 Z: Plant Code
 X: 1-Digit Year Code
 Y: 1-Digit Week Code
 TT: 2-Digit Die Run Code
 T: Package Type (M=SOP)
 M: Manufacture Flow Code

Figure 4. Top Mark

Pin Configuration

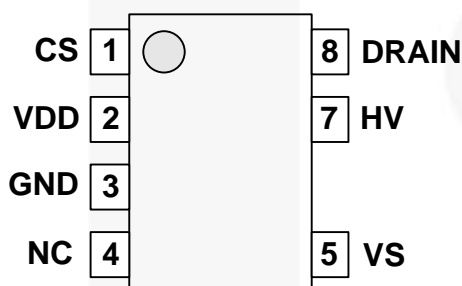


Figure 5. Pin Configuration

Pin Definitions

| Pin # | Name | Description |
|-------|-------|--|
| 1 | CS | Current Sense. This pin connects to current-sense resistor. Detect the MOSFET current for peak-current-mode control in CV mode and provide the output-current regulation in CC mode. |
| 2 | VDD | Power Supply. IC operating current and MOSFET driving current are supplied through this pin. This pin is connected to an external V_{DD} capacitor of typically 10 μ F. The threshold voltages for startup and turn-off are 16 V and 5 V, respectively. The operating current is lower than 5 mA. |
| 3 | GND | Ground |
| 4 | NC | No Connection |
| 5 | VS | Voltage Sense. This pin detects the output voltage information and discharge time based on voltage of auxiliary winding. |
| 7 | HV | High Voltage. This pin connects to bulk capacitor for high-voltage startup. |
| 8 | DRAIN | Driver Output. Power MOSFET drain. This pin is the high-voltage power MOSFET drain. |

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol | Parameter | | Min. | Max. | Units |
|-------------------|---|---|------|------|-------|
| V _{HV} | HV Pin Input Voltage | | | 500 | V |
| V _{VDD} | DC Supply Voltage ^(1,2) | | | 30 | V |
| V _{VS} | VS Pin Input Voltage | | -0.3 | 6.0 | V |
| V _{CS} | CS Pin Input Voltage | | -0.3 | 6.0 | V |
| V _{COMV} | Voltage Error Amplifier Output Voltage | | -0.3 | 6.0 | V |
| V _{COMI} | Current Error Amplifier Output Voltage | | -0.3 | 6.0 | V |
| V _{DS} | Drain-Source Voltage | | | 700 | V |
| I _D | Continuous Drain Current | T _A =25°C | | 1 | A |
| | | T _A =100°C | | 0.6 | A |
| I _{DM} | Pulsed Drain Current | | | 4 | A |
| E _{AS} | Single Pulse Avalanche Energy | | | 50 | mJ |
| I _{AR} | Avalanche Current | | | 1 | A |
| P _D | Power Dissipation (T _A <50°C) | | | 660 | mW |
| θ _{JA} | Thermal Resistance (Junction-to-Air) | | | 147 | °C/W |
| Ψ _{JT} | Thermal Resistance (Junction-to-Case) | | | 11 | °C/W |
| T _J | Operating Junction Temperature | | -40 | +150 | °C |
| T _{STG} | Storage Temperature Range | | -55 | +150 | °C |
| T _L | Lead Temperature (Wave Soldering or IR, 10 Seconds) | | | +260 | °C |
| ESD | Electrostatic Discharge Capability (Except HV Pin) | Human Body Model, JEDEC-JESD22_A114 | 4.0 | | kV |
| | | Charged Device Model, JEDEC-JESD22_C101 | 2.0 | | |

Notes:

1. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device.
2. All voltage values, except differential voltages, are given with respect to the GND pin.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

| Symbol | Parameter | Min. | Max. | Units |
|----------------|-------------------------------|------|------|-------|
| T _A | Operating Ambient Temperature | -40 | +125 | °C |

Electrical Characteristics

Unless otherwise specified, $V_{DD}=15\text{ V}$ and $T_A=25^\circ\text{C}$.

| Symbol | Parameter | Condition | Min. | Typ. | Max. | Unit |
|--|---|--|-------------|-----------|-----------|---------------|
| V_{DD} Section | | | | | | |
| V_{OP} | Continuously Operating Voltage | | | | 23 | V |
| V_{DD-ON} | Turn-On Threshold Voltage | | 15 | 16 | 17 | V |
| V_{DD-OFF} | Turn-Off Threshold Voltage | | 4.5 | 5.0 | 5.5 | V |
| I_{DD-OP} | Operating Current | | | 2.5 | 5.0 | mA |
| $I_{DD-GREEN}$ | Green-Mode Operating Supply Current | | | 0.95 | 1.2 | mA |
| V_{DD-OVP} | V_{DD} Over-Voltage-Protection Level (OVP) | | | 24 | | V |
| $t_{D-VDDOVP}$ | V_{DD} Over-Voltage-Protection Debounce Time | | 90 | 200 | 350 | μs |
| HV Startup Current Source Section | | | | | | |
| V_{HV-MIN} | Minimum Startup Voltage on HV Pin ⁽³⁾ | | | | 50 | V |
| I_{HV} | Supply Current Drawn from HV Pin | $V_{AC}=90\text{ V}$ ($V_{DC}=100\text{ V}$), $V_{DD}=0\text{ V}$ | 1 | 2.0 | 5.0 | mA |
| I_{HV-LC} | Leakage Current after Startup | $HV=500\text{ V}$, $V_{DD}=V_{DD-OFF}+1\text{ V}$ | | 0.5 | 3.0 | μA |
| Oscillator Section | | | | | | |
| f_{OSC} | Normal Frequency 1 | Center Frequency | 44 | 50 | 56 | kHz |
| | | Frequency Hopping Range | $>V_o*0.78$ | ± 1.6 | ± 3.4 | |
| | Normal Frequency 2 | Center Frequency | | 36 | | |
| | | Frequency Hopping Range | $<V_o*0.78$ | | ± 2.5 | |
| $V_{F-JUM-53}$ | Frequency Jumping Point | 50 kHz \rightarrow 36 kHz, V_s | 1.75 | 1.95 | 2.15 | V |
| $V_{F-JUM-35}$ | | 36 kHz \rightarrow 50 kHz, V_s | 2.05 | 2.25 | 2.45 | V |
| $f_{OSC-N-MIN}$ | Minimum Frequency at No-Load | | 270 | 395 | 520 | Hz |
| $f_{OSC-CM-MIN}$ | Minimum Frequency at CCM | | | 13 | | kHz |
| $V_{S-F-SKIPH}$ | COMV Level for High Cycle Skipping Period Change ⁽³⁾ | | | 1.14 | | V |
| $V_{S^*F-SKIPL}$ | COMV Level for Low Cycle Skipping Period Change ⁽³⁾ | | | 0.80 | | V |
| $T_{SKIP-CV}$ | Cycle skipping period ⁽³⁾ | $V_{S-F-SKIPH}<COMV<V_N$ | | 240 | | ms |
| | | $V_{S^*F-SKIPL}>COMV$ | | 160 | | ms |
| f_{DV} | Frequency Variation vs. V_{DD} Deviation | $V_{DD}=10\text{ V}, 25\text{ V}$ | | 1 | 2 | % |
| f_{DT} | Frequency Variation vs. Temperature Deviation | $T_A=-40^\circ\text{C}$ to 105°C | | | 15 | % |
| Voltage-Sense Section | | | | | | |
| I_{tc} | IC Bias Current | | | 10 | | μA |
| $V_{BIAS-COMV}$ | Adaptive Bias Voltage Dominated by V_{COMV} | $R_{VS}=20\text{ k}\Omega$ | | 1.4 | | V |

Continued on the following page...

Electrical Characteristics

Unless otherwise specified, $V_{DD}=15\text{ V}$ and $T_A=25^\circ\text{C}$.

| Symbol | Parameter | Condition | Min. | Typ. | Max. | Unit |
|---|---|---|-------|-------|-------|---------------------|
| Current-Sense Section | | | | | | |
| t_{PD} | Propagation Delay to GATE Output | | | 90 | 200 | ns |
| t_{MIN-N} | Minimum On Time at No-Load | | 700 | 850 | 1050 | ns |
| V_{TH} | Threshold Voltage for Current Limit | | | 0.8 | | V |
| Voltage Error Amplifier Section | | | | | | |
| V_{VR} | Reference Voltage | | 2.475 | 2.500 | 2.525 | V |
| V_N | Green-Mode Starting Voltage on EA_V | $f_{OSC}=\text{Normal Frequency1} - 2\text{ kHz}$ | | 2.5 | | V |
| V_G | Green-Mode Ending Voltage on EA_V | $f_{OSC}=1\text{ kHz}$ | | 0.5 | | V |
| Current Error Amplifier Section | | | | | | |
| V_{IR} | Reference Voltage | | 2.475 | 2.500 | 2.525 | V |
| Internal MOSFET Section ⁽⁴⁾ | | | | | | |
| DCY_{MAX} | Maximum Duty Cycle | | 60 | 75 | 85 | % |
| BV_{DSS} | Drain-Source Breakdown Voltage | $I_D=250\text{ }\mu\text{A}$, $V_{GS}=0\text{ V}$ | 700 | | 900 | V |
| $\Delta BV_{DSS}/\Delta T_J$ | Breakdown Voltage Temperature Coefficient | $I_D=250\text{ }\mu\text{A}$, Referenced to $T_A=25^\circ\text{C}$ | | 0.53 | | V/ $^\circ\text{C}$ |
| $R_{DS(ON)}$ | Static Drain-Source On-Resistance | $I_D=0.5\text{ A}$, $V_{GS}=10\text{ V}$ | | 13 | 16 | Ω |
| I_S | Maximum Continuous Drain-Source Diode Forward Current | | | | 1 | A |
| I_{DSS} | Drain-Source Leakage Current | $V_{DS}=700\text{ V}$, $T_A=25^\circ\text{C}$ | | | 10 | μA |
| | | $V_{DS}=560\text{ V}$, $T_A=100^\circ\text{C}$ | | | 100 | μA |
| t_{D-ON} | Turn-On Delay Time | $V_{DS}=350\text{ V}$, $I_D=1\text{ A}$, $R_G=25\text{ }\Omega$ ⁽⁵⁾ | | 10 | 30 | ns |
| t_{D-OFF} | Turn-Off Delay Time | | | 20 | 50 | ns |
| C_{ISS} | Input Capacitance | $V_{GS}=0\text{ V}$, $V_{DS}=25\text{ V}$, $f_s=1\text{ MHz}$ | | 175 | 200 | pF |
| C_{OSS} | Output Capacitance | | | 23 | 25 | pF |
| Over-Temperature-Protection Section | | | | | | |
| T_{OTP} | Threshold Temperature for OTP ⁽⁶⁾ | | | +140 | | $^\circ\text{C}$ |

Notes:

- Guaranteed by design.
- These parameters, although guaranteed, are not 100% tested in production.
- Pulse test: pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.
- When the over-temperature protection is activated, the power system enter auto-restart mode and output is disabled.

Typical Performance Characteristics

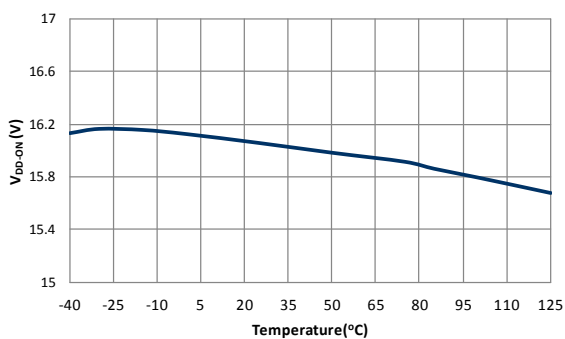


Figure 6. Turn-on Threshold Voltage (V_{DD-ON}) vs. Temperature

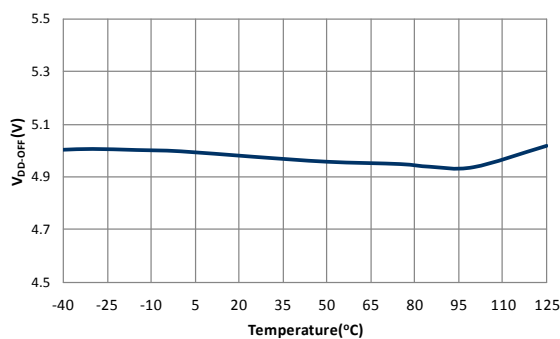


Figure 7. Turn-off Threshold Voltage (V_{DD-OFF}) vs. Temperature

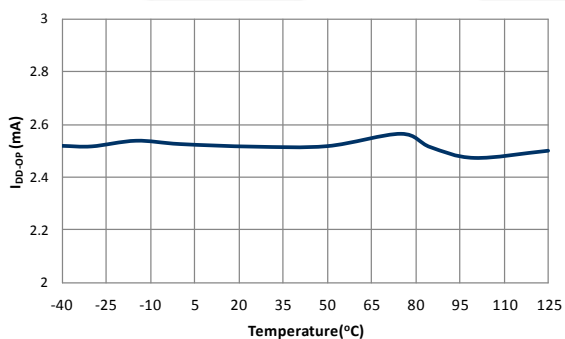


Figure 8. Operating Current (I_{DD-OP}) vs. Temperature

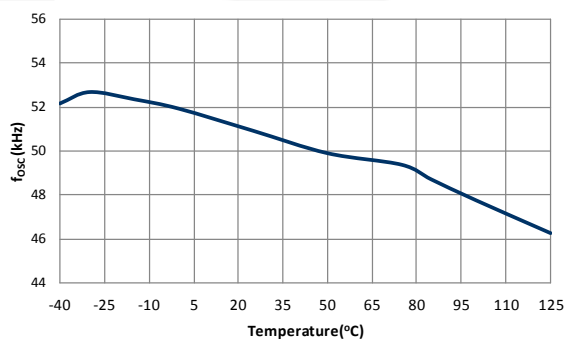


Figure 9. Normal Frequency 1 (f_{OSC}) vs. Temperature

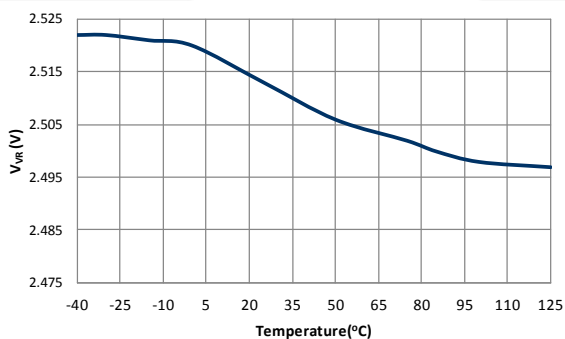


Figure 10. Reference Voltage (V_{VR}) vs. Temperature

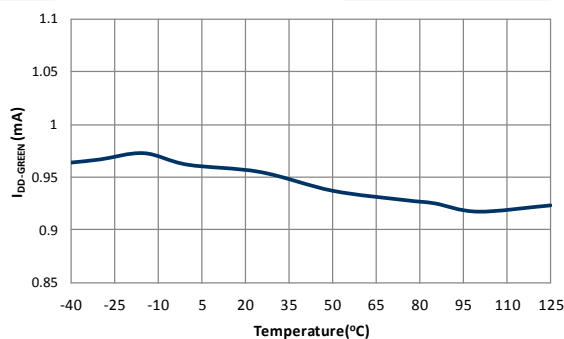


Figure 11. Green Mode Operating Supply Current ($I_{DD-GREEN}$) vs. Temperature

Typical Performance Characteristics

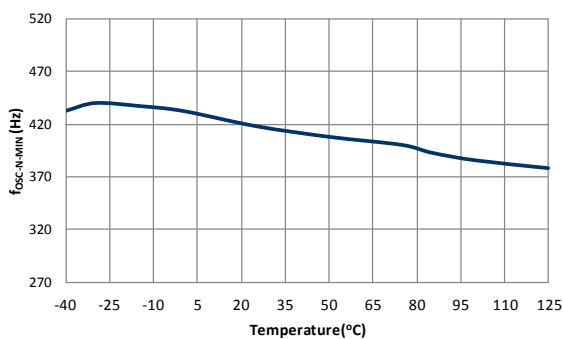


Figure 12. Minimum Frequency at No Load ($f_{OSC-N-MIN}$) vs. Temperature

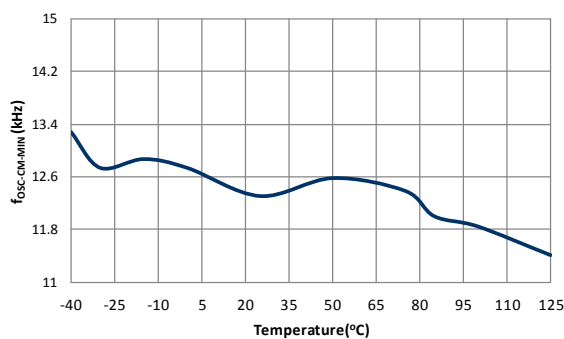


Figure 13. Minimum Frequency at CCM ($f_{OSC-CM-MIN}$) vs. Temperature

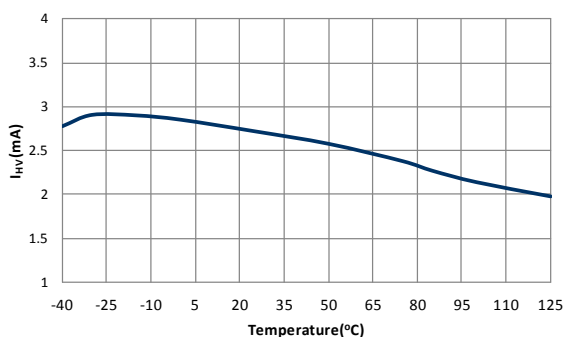


Figure 14. Supply Current Drawn from HV Pin (I_{HV}) vs. Temperature

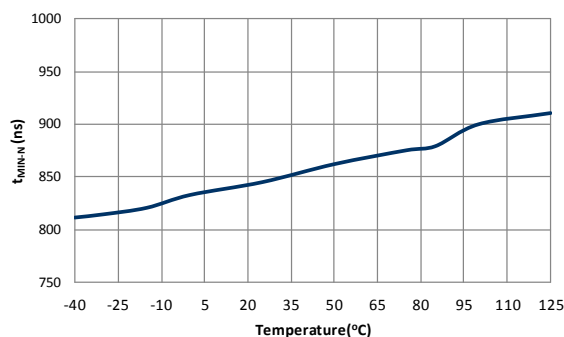


Figure 15. Minimum On Time at No Load (t_{MIN-N}) vs. Temperature

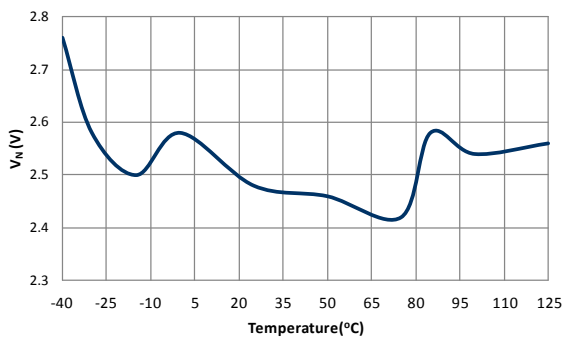


Figure 16. Green Mode Starting Voltage on EA_V (V_N) vs. Temperature

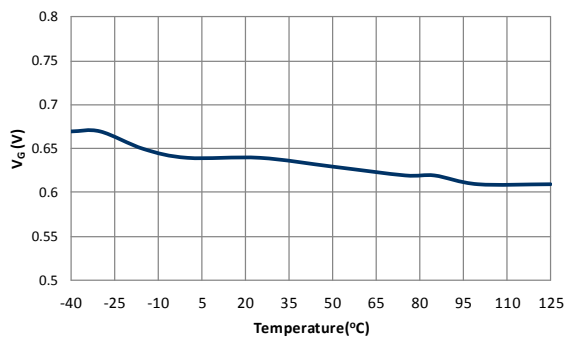


Figure 17. Green Mode Ending Voltage on EA_V (V_G) vs. Temperature

Typical Performance Characteristics

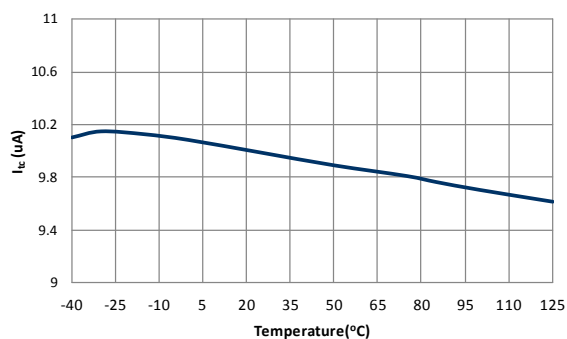


Figure 18. IC Bias Current (I_{ic}) vs. Temperature

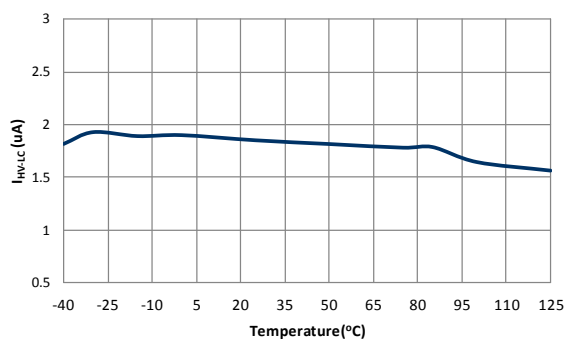


Figure 19. Leakage Current after Startup (I_{HV-LC}) vs. Temperature

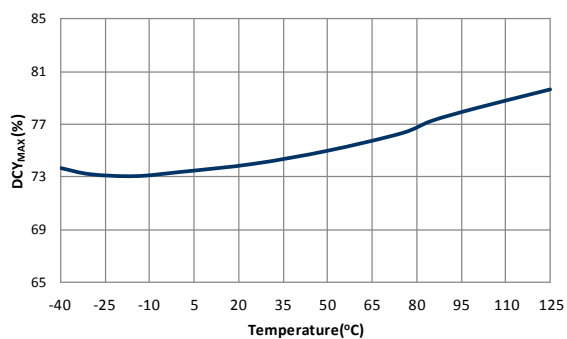


Figure 20. Maximum Duty Cycle (DCY_{MAX}) vs. Temperature

Functional Description

Figure 21 shows the basic circuit diagram of primary-side regulated flyback converter, with typical waveforms shown in Figure 22. Generally, Discontinuous Conduction Mode (DCM) operation is preferred for primary-side regulation because it allows better output regulation. The operation principles of DCM flyback converter are as follows:

During the MOSFET on time (t_{ON}), input voltage (V_{DL}) is applied across the primary-side inductor (L_m). Then MOSFET current (I_{ds}) increases linearly from zero to the peak value (I_{pk}). During this time, the energy is drawn from the input and stored in the inductor.

When the MOSFET is turned off, the energy stored in the inductor forces the rectifier diode (D) to be turned on. While the diode is conducting, the output voltage (V_o), together with diode forward-voltage drop (V_F), is applied across the secondary-side inductor ($L_m \times N_s^2 / N_p^2$) and the diode current (I_D) decreases linearly from the peak value ($I_{pk} \times N_p / N_s$) to zero. At the end of inductor current discharge time (t_{DIS}), all the energy stored in the inductor has been delivered to the output.

When the diode current reaches zero, the transformer auxiliary winding voltage (V_w) begins to oscillate by the resonance between the primary-side inductor (L_m) and the effective capacitor loaded across the MOSFET.

During the inductor current discharge time, the sum of output voltage and diode forward-voltage drop is reflected to the auxiliary winding side as $(V_o + V_F) \times N_a / N_s$. Since the diode forward-voltage drop decreases as current decreases, the auxiliary winding voltage reflects the output voltage best at the end of diode conduction time where the diode current diminishes to zero. Thus, by sampling the winding voltage at the end of the diode conduction time, the output voltage information can be obtained. The internal error amplifier for output voltage regulation (EA_V) compares the sampled voltage with internal precise reference to generate error voltage (V_{COMV}), which determines the duty cycle of the MOSFET in CV mode.

Meanwhile, the output current can be estimated using the peak drain current and inductor current discharge time because output current is same as the average of the diode current in steady state.

The output current estimator identifies the highest value of the drain current with a peak detection circuit and calculates the output current using the inductor discharge time (t_{DIS}) and switching period (t_s). This output information is compared with an internal precise reference to generate error voltage (V_{COMI}), which determines the duty cycle of the MOSFET in CC Mode. With Fairchild's innovative TRUECURRENT® technique, constant current (CC) output can be precisely controlled.

Among the two error voltages, V_{COMV} and V_{COMI} , the smaller one determines the duty cycle. Therefore, during constant voltage regulation mode, V_{COMV} determines the duty cycle while V_{COMI} is saturated to HIGH. During

constant current regulation mode, V_{COMI} determines the duty cycle while V_{COMV} is saturated to HIGH.

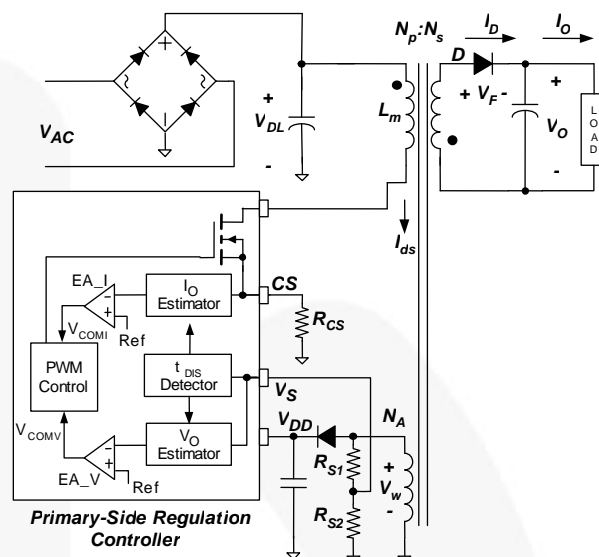


Figure 21. Simplified PSR Flyback Converter Circuit

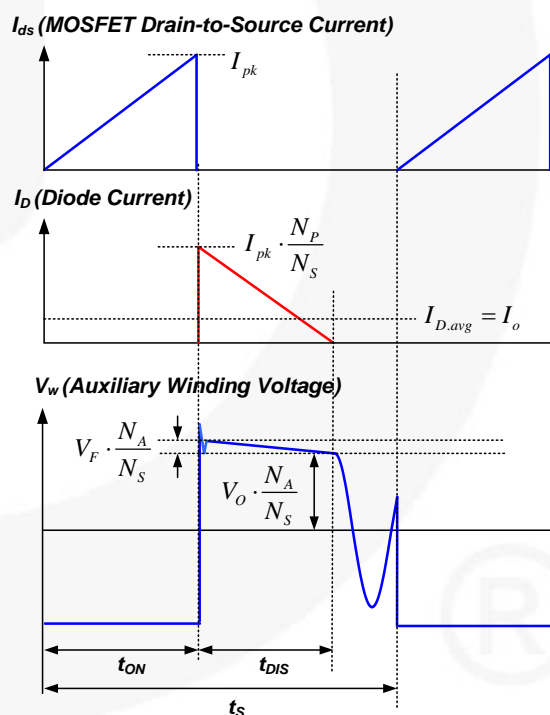


Figure 22. Key Waveforms of DCM Flyback Converter

Operating Current

The FLS6617 operating current is as small as 2.5 mA, which results in higher efficiency and reduces the V_{DD} hold-up capacitance requirement. Once FLS6617 enters “deep” green mode, the operating current is reduced to 0.95 mA, assisting the power supply in meeting power conservation requirements.

Green-Mode Operation

The FLS6617 uses voltage regulation error amplifier output (V_{COMV}) as an indicator of the output load and modulates the PWM frequency as shown in Figure 23. The switching frequency decreases with cycle skipping as the load decreases. In heavy load conditions, the switching frequency is fixed at 50 kHz. Once V_{COMV} decreases below V_N , the PWM frequency linearly decreases with cycle skipping from 50 kHz to reduce switching losses.

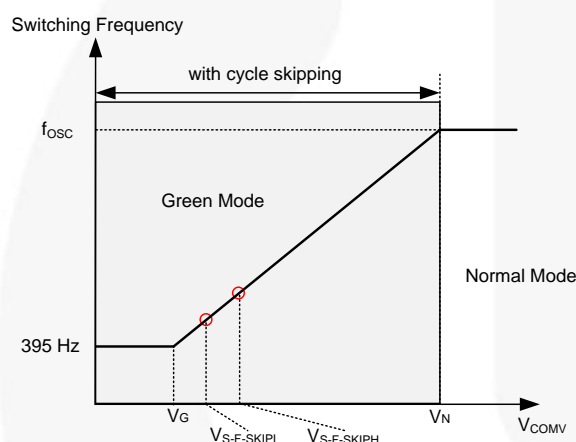


Figure 23. Switching Frequency in Green Mode

Frequency Hopping

EMI reduction is accomplished by frequency hopping, which spreads the energy over a wider frequency range than the bandwidth measured by the EMI test equipment. FLS6617 has a proprietary internal frequency hopping circuit that changes the switching frequency between 44 kHz and 56 kHz.

High-Voltage Startup

Figure 24 shows the HV-startup circuit for FLS6617 applications. The HV pin is connected to the line input or bulk capacitor through a resistor, R_{START} (100 k Ω recommended). During startup status, the internal startup circuit is enabled. Meanwhile, line input supplies the current, $I_{STARTUP}$, to charge the hold-up capacitor, C_{DD} , through R_{START} . When the V_{DD} voltage reaches V_{DD-ON} , the internal startup circuit is disabled, blocking $I_{STARTUP}$ from flowing into the HV pin. Once the IC turns on, C_{DD} is the only energy source to supply the IC consumption current before the PWM starts to switch. Thus, C_{DD} must be large enough to prevent V_{DD} from dropping down to V_{DD-OFF} before the power can be delivered from the auxiliary winding.

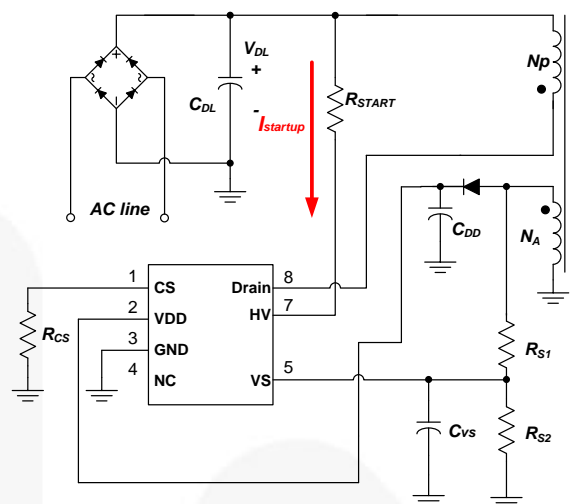


Figure 24. HV Startup Circuit

Under-Voltage Lockout (UVLO)

The turn-on and turn-off thresholds are fixed internally at 16 V and 5 V, respectively. During startup, the hold-up capacitor must be charged to 16 V through the startup resistor to enable the FLS6617. The hold-up capacitor continues to supply V_{DD} until power can be delivered from the auxiliary winding of the main transformer. V_{DD} is not allowed to drop below 5 V during this startup process. This UVLO hysteresis window ensures that hold-up capacitor properly supplies V_{DD} during startup.

Protections

The FLS6617 has several self-protection functions, such as Over-Voltage Protection (OVP), Over-Temperature Protection (OTP), and pulse-by-pulse current limit. All the protections are implemented as auto-restart mode. Once the abnormal condition occurs, the switching is terminated and the MOSFET remains off, causing V_{DD} to drop. When V_{DD} drops to the V_{DD} turn-off voltage of 5 V, internal startup circuit is enabled again and the supply current drawn from the HV pin charges the hold-up capacitor. When V_{DD} reaches the turn-on voltage of 16 V, normal operation resumes. In this manner, the auto-restart alternately enables and disables the switching of the MOSFET until the abnormal condition is eliminated (see Figure 25).

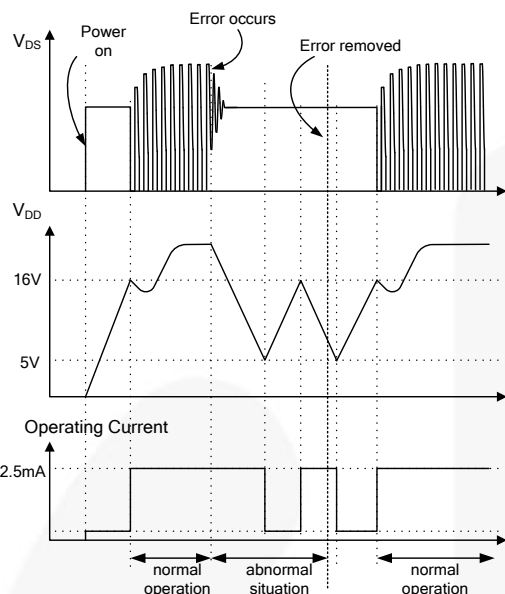


Figure 25. Auto-Restart Operation

V_{DD} Over-Voltage Protection (OVP)

V_{DD} over-voltage protection prevents damage from over-voltage conditions. If the V_{DD} voltage exceeds 24 V at open-loop feedback condition, OVP is triggered and the PWM switching is disabled. The OVP has a debounce time (typically 200 μ s) to prevent false triggering due to switching noises.

Over-Temperature Protection (OTP)

The built-in temperature-sensing circuit shuts down PWM output if the junction temperature exceeds 140°C.

Pulse-by-pulse Current Limit

When the sensing voltage across the current-sense resistor exceeds the internal threshold of 0.8 V, the MOSFET is turned off for the remainder of switching cycle. In normal operation, the pulse-by-pulse current limit is not triggered since the peak current is limited by the control loop.

Leading-Edge Blanking (LEB)

Each time the power MOSFET switches on, a turn-on spike occurs at the sense resistor. To avoid premature termination of the switching pulse, a leading-edge blanking time is built in. During this blanking period, the current-limit comparator is disabled and cannot switch off the gate driver. As a result conventional RC filtering can be omitted.

Gate Output

The FLS6617 output stage is a fast totem-pole gate driver. Cross conduction has been avoided to minimize heat dissipation, increase efficiency, and enhance reliability. The output driver is clamped by an internal 15 V Zener diode to protect the power MOSFET transistors against undesired over-voltage gate signals.

Built-In Slope Compensation

The sensed voltage across the current-sense resistor is used for current mode control and pulse-by-pulse current limiting. Built-in slope compensation improves stability and prevents sub-harmonic oscillations due to peak-current mode control. The FLS6617 has a synchronized, positive-slope ramp built-in at each switching cycle.

Noise Immunity

Noise from the current sense or the control signal can cause significant pulse width jitter, particularly in continuous-conduction mode. While slope compensation helps alleviate these problems, further precautions should still be taken. Good placement and layout practices should be followed. Avoiding long PCB traces and component leads, locating compensation and filter components near the FLS6617, and increasing the power MOS gate resistance are advised.

Operation Area

Figure 26 shows operation area. FLS6617 has two switching frequency (f_s) in constant current mode. In order to ensure IC can normally work at DCM under constant current mode, frequency will jump to lower level(36 kHz) when system is operated at low output voltage.






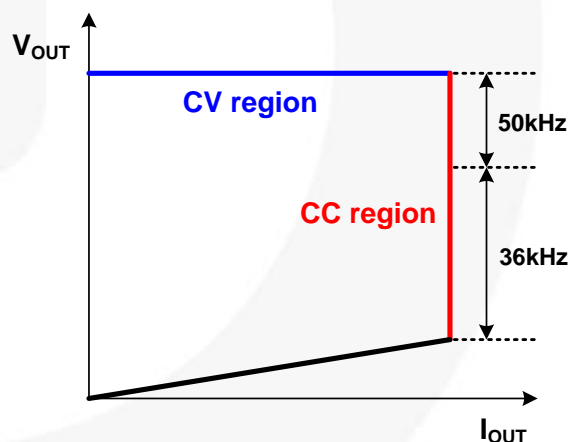


Figure 26. Operation Area

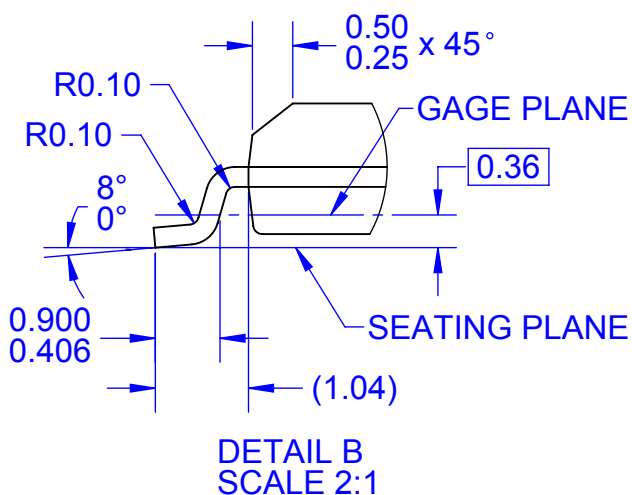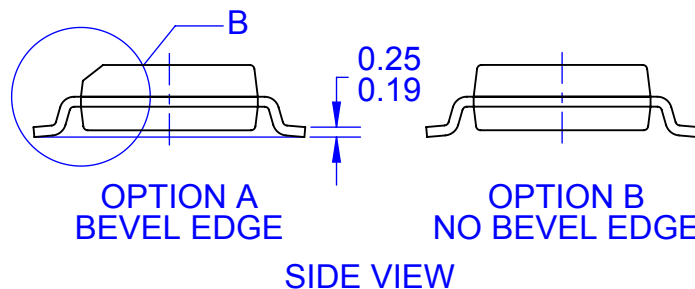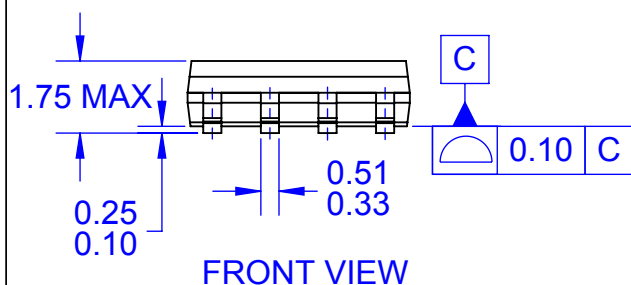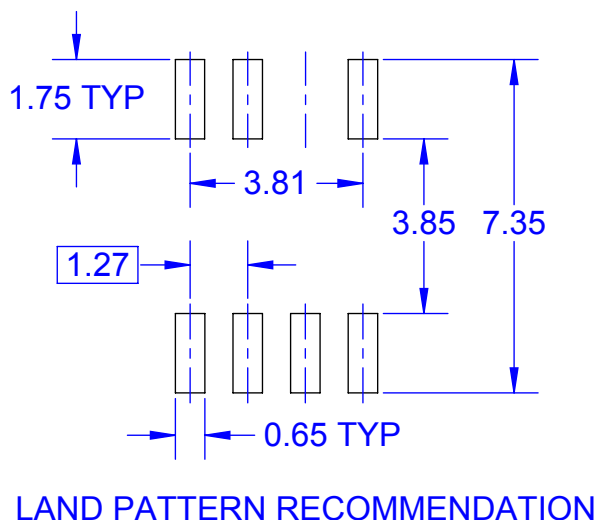

NOTES:

- A. THIS PACKAGE DOES NOT FULLY CONFORM TO JEDEC MS-012, VARIATION AA
- B. ALL DIMENSIONS ARE IN MILLIMETERS
- C. DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS
- D. DRAWING FILENAME: MKT-M07Brev4

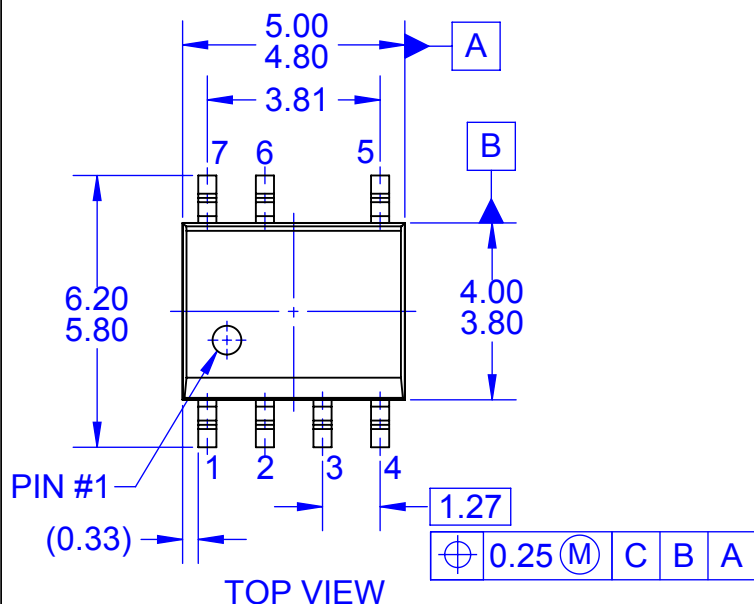

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910

Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local
Sales Representative

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[FLS6617MX](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331