# PI31xx-xx-EVAL1 Cool-Power® ZVS Isolated DC-DC Converter Evaluation Board

Chris Swartz
Principal Applications Engineer
May 2013

PICOR

Contents Page

*Introduction* 1
*Product Description* 2
*Board Connections* 2
*Thermal Considerations* 3
*Max I/O Ratings* 5
*Schematic*
*BOMs* 6
*Test Setup* 11
*PCB Artwork* 12
*Mechanical Outline* 14
*Ordering Information* 14

## Introduction

The PI31xx-xx-EVAL1 evaluation board allows the user to test the basic operating principles of the PI31xx series of high density DC-DC power converters and experience the performance and value of this solution compared to alternate conventional solutions. Each evaluation board is populated with the components that could be used in a final design. It is not designed or intended to be used in end product applications. Please read this document prior to the connection of test equipment and refer to the product datasheet for device specifications, descriptions and characteristics. Remember to follow good lab safety practices and use safety glasses at all times.

The PI31xx-xx-EVAL1 is configured to support one single input and one single output. Each board offers pin strap options for trimming the output voltage up and down, turning the converter on and off and adding EMI system "Y" capacitors. Additional parts are included to compensate for line impedance associated with long leads from the bench power supply to the converter. Additional component footprints are made available to allow the user to test different design configurations that may be required to meet their end needs. Kelvin type test points are included to allow for easy and convenient connections of testing instruments for evaluation of efficiency, line/load regulation and transient response. A low impedance oscilloscope connection using a Johnson jack is included for ripple measurement and evaluation of the output voltage during transient events. Each demo board is equipped with a heatsink to allow high power operation with a small amount of air flow and to allow operation of the board over various temperature extremes.

Figure 1.
PI31xx-xx-EVAL1 Evaluation Board

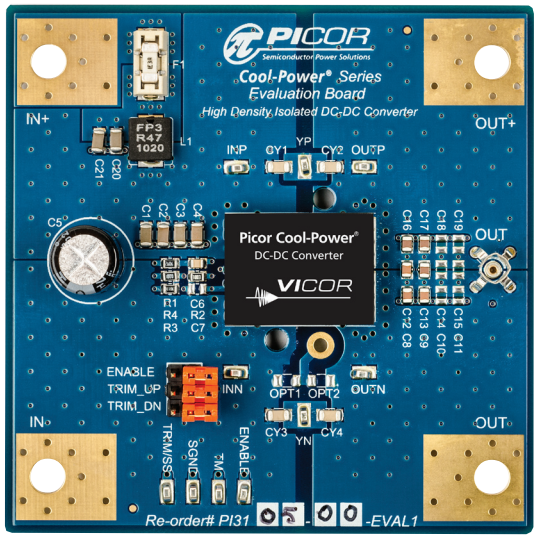

## Cool-Power® PI31xx Series Product Description

The PI31xx operates over a wide range input, delivering 50 W or 60 W output power depending on the individual model number. The PI31xx Series is available in a space saving surface mountable 0.87″ x 0.65″ x 0.265″ Power –System –in – a – Package (PSiP), achieving ~50% space reduction versus alternative solutions.

The switching frequency of 900kHz allows for small input and output filter components which further reduces the total size and cost of the overall system solution. The output voltage is sensed and fed back to the internal controller using a proprietary isolated magnetic feedback scheme which allows for high bandwidth and good common mode noise immunity.

The PI31xx Series requires no external feedback compensation and offers a total solution with a minimum number of external components. A rich feature set is offered, including + 10%, -20% output voltage trim capability (depending on the model number), remote enable, over-voltage protection, adjustable soft-start, over-current protection with auto-restart to protect against both short circuit and overload and over and under input voltage lockout. A unique temperature monitor and protection circuit is included that provides an analog voltage proportional to the internal die temperature, as well as over temperature shutdown, restart and over temperature fault alarm signal.

## Board Connections

1. **Connect Test Equipment**
   - **a.** Connect the input DC power supply to the target board as shown in Figure 6. The negative terminal should be wired to –IN and the positive terminal should connect to the positive terminal of the DMM wired as a DC Ammeter. Be sure that the proper sized wires are used to allow minimum voltage drop for a maximum input current of up to 4 A. Use ring lugs mated to the included fasteners on the evaluation board. If your input power supply has remote sense capability, it can be wired to the INN and INP test points if desired. Connect the positive terminal of the DMM to the +IN lug on the evaluation board.
   - **b.** Connect the primary side DMM (for measuring the input voltage) to INN and INP respectively.
   - **c.** Connect the oscilloscope as shown in Figure 6 if you are planning to measure both primary and secondary signals at the same time. If you do not have an isolated differential amplifier, it is important to note that simultaneous measurement of both primary and secondary referenced signals using an oscilloscope with a grounded chassis is not recommended, as it will short circuit the primary to secondary isolation barrier. Floating the oscilloscope is also not recommended due to the large capacitance introduced by this long standing practice. The best practice is to use an isolated differential amplifier or use an oscilloscope with isolated channels. That is, the input returns are isolated from each other and earth ground.
   - **d.** Connect the output DC DMM to the test points OUTN and OUTP. These test points are done in a Kelvin type manner so that they have no high current flowing in them.
   - **e.** Connect the DC Load to the output lugs OUT+ and OUT-. It is critical for this connection to be low inductance.

2. **Default Pin Strap Configuration**
   a. Ensure the pin straps are in the following default locations before proceeding:
      - ENABLE = Not Used (enabled)
      - TRIM_UP = Not Used
      - TRIM_DN = Not Used
      - OPT1 = Not Used
      - OPT2 = Not Used

3. **Pin Strap Functions**
   a. ENABLE – adding a strap on this pin will cause the converter to shut down.
   b. TRIM_UP – Adding a strap in this location will adjust the output voltage up by 10%.
   c. TRIM_DN – Adding a strap in this location will adjust the output voltage down by 10%. Only one strap can be connected at a time. If both trim straps are out, the output voltage should be set to the model's nominal output.

4. **Trimming And Soft Start**
   a. For those customers who wish to trim to another voltage by changing the preset trim resistors to another value, the trim equation shown in Figure 2 can be used:

Figure 2.
PI31xx Trim Equation

$$R_{low} = (-V_{desired}) \bullet \frac{R_{INT}}{(-Vout_{nom}) + V_{desired}}$$

$$R_{high} = (-RSS) \bullet \frac{(-Vout_{nom}) \bullet V_{ERO} + V_{desired} \bullet V_{ref}}{V_{ref}\left[(-Vout_{nom}) + V_{desired}\right]}$$

Where: R1 = Rlow R3 = Rhigh VERO = 4.9 and Vref can be found in the appropriate model datasheet.

Figure 3 shows an equation for soft start configuration where C7 = $C_{REF}$

Figure 3.
PI31xx Soft Start Equation

$$C_{REF} = \frac{T_{ssdesired} - 230 \bullet 10^{-6}}{23000}$$

Figure 4.
PI31xx Trimming Equivalent Circuit

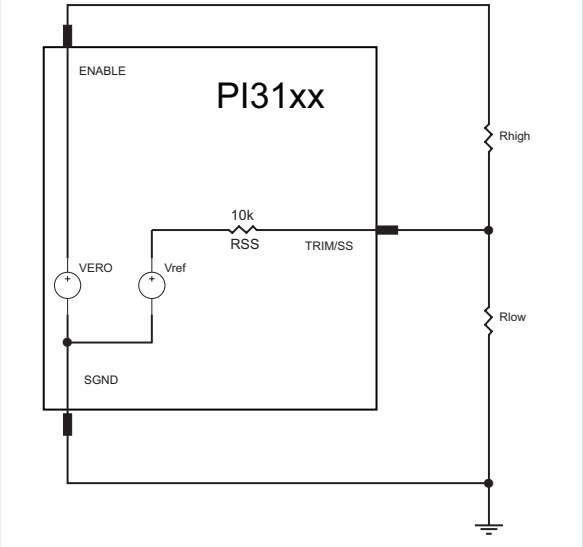

## Thermal Considerations

The PI31xx-xx-EVAL1 is supplied with optional heat sinks. At present, Picor offers four different heat sink options to accommodate the customers space and cooling needs. Heatsinks are available in two sizes, one with 6.3mm fins and the other with 11mm fins. Each of those heatsinks can be ordered with a specific air flow direction in mind, both cross flow and longitudinal are supported. Please refer to the product website www.vicorpower.com for more information.

Table 1.
PI31xx-xx-EVAL1
Input-Output Pin Description

| Pin Name | Type | Description |
|---|---|---|
| IN+ | Input/Lug | Primary side positive input voltage terminal. |
| IN- | Input/Lug | Primary side negative input voltage terminal. |
| OUT+ | Output/Lug | Isolated secondary DC output voltage positive terminal. |
| OUT- | Output/Lug | Isolated secondary DC output voltage negative terminal. |
| TM | Test/Pin | Temperature measurement output pin with respect to SGND. 3V=300°K 10mV/°K |
| SGND | Test/Pin | Signal ground, primary side referenced. |
| TRIM/SS | Test/Pin | Monitor pin for the soft start voltage and trim voltage reference with respect to SGND. |
| ENABLE | Test/Pin | Allows for monitoring of the ENABLE signal with respect to SGND. |
| INN | Test/Pin | Kelvin sense connection for input supply (-) and input voltage measurement test point. |
| INP | Test/Pin | Kelvin sense connection for input supply (+) and input voltage measurement test point. |
| YN | Output/Pad | Optional test pad for connection of optional "YN" capacitor to external system ground. |
| YP | Output/Pad | Optional test pad for connection of optional "YP" capacitor to external system ground. |
| OUTP | Test/Pin | Kelvin sense connection for output voltage (+) and output voltage measurement test point. |
| OUTN | Test/Pin | Kelvin sense connection for output voltage (-) and output voltage measurement test point. |
| OUT | Test/PIn | PCB test jack for low noise measurement of the output voltage. |

Table 2.
PI31xx-xx-EVAL1
Evaluation Board
Pin Strap and Jumper
Description

| Name | Description |
|---|---|
| ENABLE | If strap is installed, unit is turned off. If strap is removed, unit will be enabled. |
| TRIM_UP | If strap is installed, PI3105 trims output voltage up 10% |
| TRIM_DN | If strap is installed, PI3105 trims output voltage down 10% |
| OPT1 | Allows optional connection of heat sink assembly to secondary return (-IN) |
| OPT2 | Allows optional connection of heat sink assembly to secondary return (-OUT) |

Table 3.

PI31xx-xx-EVAL1 Evaluation Board Maximum I/O Ratings

| Name | Max Voltage | Max Current |
|---|---|---|
| IN+ | 100 V | 20 A |
| IN- | 100 V | 20 A |
| OUT+ | 20 V | 20 A |
| OUT- | 20 V | 20 A |
| TRIM_DN | 10 V | 100 mA |
| OPT1 | 10 V | 100 mA |
| OPT2 | 10 V | 100 mA |
| OUT | 10 V | 100 mA |
| INP | 10 V | 100 mA |
| INN | 10 V | 100 mA |
| ENABLE | 10 V | 100 mA |
| TRIM/SS | 10 V | 100 mA |
| SGND | 10 V | 100 mA |
| TM | 10 V | 100 mA |
| OUTP | 20 V | 100 mA |
| OUTN | 20 V | 100 mA |

Figure 5.
Schematic Diagram

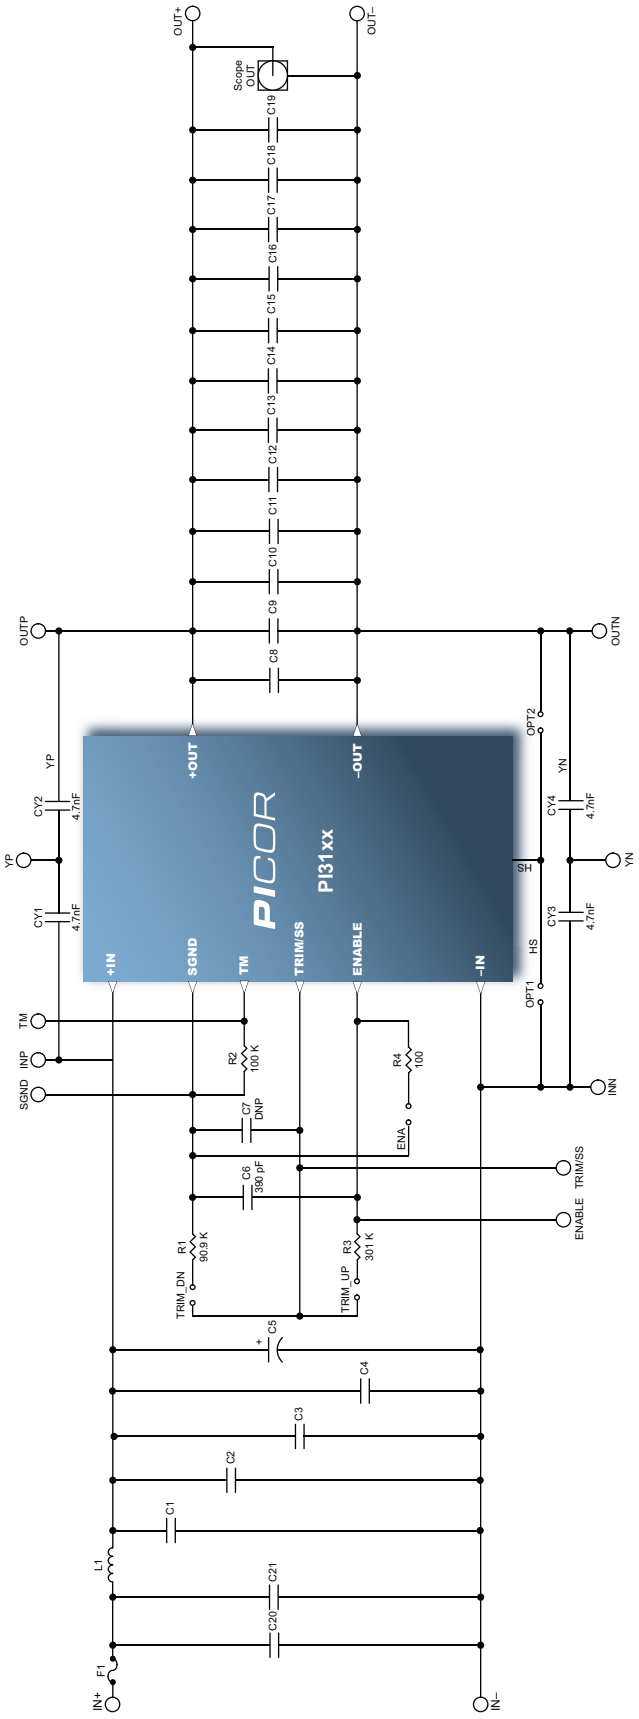

Table 4.

PI3101-00-EVAL1
Evaluation Board BOM

| Item | Qty | Ref Design | Part # | Value | U/M | Description |
|---|---|---|---|---|---|---|
| 1. | 1 | U1 | PI3101-00-HVIZ | NA | EA | Picor PI3101-00 High Density PSiP |
| 2. | 12 | C8-C19 | GRM-21BR71A106KE5 | 10u | F | Murata X7R Ceramic Capacitor 10 V or equiv. |
| 3. | 6 | C1-C4, C20-C21 | GRM-31CR72A105KE1 | 1u | F | Murata X7R Ceramic Capacitor 100V or equiv. |
| 4. | 4 | CY1-CY4 | GRM-31BR73A472K | 4700p | F | Murata X7R Ceramic Capacitor 1kV or equiv.. |
| 5. | 1 | L1 | FP3-4R7-R | 4.7u | H | Coilcraft Inductor |
| 6. | 1 | C6 | 08055C391K-AT2A | 390p | F | Kemet X7R Ceramic Capacitor 50V 0805 |
| 7. | 1 | C5 | EEU-FC2A470 | 47u | F | Panasonic Electrolytic Capacitor 100V |
| 8. | 1 | R1 | MCR10EZPF9092 | 90.9k | Ohm | Rohm Resistor 0805 1% or equiv |
| 9. | 1 | R3 | MCR10EZPF3013 | 301k | Ohm | Rohm Resistor 0805 1% or equiv |
| 10. | 1 | R2 | MCR10EZPF1003 | 100k | Ohm | Rohm Resistor 0805 1% or equiv |
| 11. | 1 | R4 | MCR10EZPF1000 | 100 | Ohm | Rohm Resistor 0805 1% or equiv |
| 12. | 1 | F1 | 0154003DR | 3 | A | Littlefuse Fuseblock 3A SMT |
| 13. | 8 | | 5015KCT-ND | N/A | N/A | Digi-Key SMT PC Test Point |
| 14. | 1 | OUT | 131503100 | N/A | N/A | Tektronix Test Jack Assembly |
| 15. | 6 | ENABLE, TRIM UP, TRIM_DN | TSW-148-07-F-S | N/A | N/A | J,Header 0.1" |

Table 5.

PI3105-00-EVAL1
Evaluation Board BOM

| Item | Qty | Ref Design | Part # | Value | U/M | Description |
|---|---|---|---|---|---|---|
| 1. | 1 | U1 | PI3105-00-HVIZ | NA | EA | Picor PI3105-00 High Density PSiP |
| 2. | 6 | C8-C19 | GRM-21BR71A475KE5 | 4.7u | F | Murata X7R Ceramic Capacitor 16V or equiv. |
| 3. | 6 | C1-C4, C20-C21 | GRM-31CR72A105KE1 | 1u | F | Murata X7R Ceramic Capacitor 100V or equiv. |
| 4. | 4 | CY1-CY4 | GRM-31BR73A472K | 4700p | F | Murata X7R Ceramic Capacitor 1kV or equiv.. |
| 5. | 1 | L1 | FP3-R47-R | 470n | H | Coilcraft Inductor |
| 6. | 1 | C6 | 08055C391K-AT2A | 390p | F | Kemet X7R Ceramic Capacitor 50V 0805 |
| 7. | 1 | C5 | EEU-FC2A470 | 47u | F | Panasonic Electrolytic Capacitor 100V |
| 8. | 1 | R1 | MCR10EZPF9092 | 90.9k | Ohm | Rohm Resistor 0805 1% or equiv |
| 9. | 1 | R3 | MCR10EZPF3013 | 301k | Ohm | Rohm Resistor 0805 1% or equiv |
| 10. | 1 | R2 | MCR10EZPF1003 | 100k | Ohm | Rohm Resistor 0805 1% or equiv |
| 11. | 1 | R4 | MCR10EZPF1000 | 100 | Ohm | Rohm Resistor 0805 1% or equiv |
| 12. | 1 | F1 | 0154003DR | 3 | A | Littlefuse Fuseblock 3A SMT |
| 13. | 8 | | 5015KCT-ND | N/A | N/A | Digi-Key SMT PC Test Point |
| 14. | 1 | OUT | 131503100 | N/A | N/A | Tektronix Test Jack Assembly |
| 15. | 6 | ENABLE, TRIM UP, TRIM_DN | TSW-148-07-F-S | N/A | N/A | J,Header 0.1" |

Table 6.

PI3106-00-EVAL1 Evaluation Board BOM

| Item | Qty | Ref Design | Part # | Value | U/M | Description |
|---|---|---|---|---|---|---|
| 1. | 1 | U1 | PI3106-00-HVMZ | NA | EA | Picor PI3106-00 High Density PSiP |
| 2. | 6 | C8-C19 | GRM21BR71E-225KA73L | 2.2u | F | Murata X7R Ceramic Capacitor 25V or equiv. |
| 3. | 6 | C1-C4, C20-C21 | GRM31CR71H-475KA12K | 4.7u | F | Murata X7R Ceramic Capacitor 50V or equiv. |
| 4. | 4 | CY1-CY4 | GRM-31BR73A472K | 4700p | F | Murata X7R Ceramic Capacitor 1kV or equiv.. |
| 5. | 1 | L1 | FP3-R47-R | 470n | H | Coilcraft Inductor |
| 6. | 1 | C6 | 08055C391K-AT2A | 390p | F | Kemet X7R Ceramic Capacitor 50V 0805 |
| 7. | 1 | C5 | EEU-FC1J101L | 100u | F | Panasonic Electrolytic Capacitor 63V |
| 8. | 1 | R1 | MCR10EZPF9092 | 90.9k | Ohm | Rohm Resistor 0805 1% or equiv |
| 9. | 1 | R3 | MCR10EZPF3013 | 301k | Ohm | Rohm Resistor 0805 1% or equiv |
| 10. | 1 | R2 | MCR10EZPF1003 | 100k | Ohm | Rohm Resistor 0805 1% or equiv |
| 11. | 1 | R4 | MCR10EZPF1000 | 100 | Ohm | Rohm Resistor 0805 1% or equiv |
| 12. | 1 | F1 | 0154008DR | 8 | A | Littlefuse Fuseblock 8A SMT |
| 13. | 8 | | 5015KCT-ND | N/A | N/A | Digi-Key SMT PC Test Point |
| 14. | 1 | OUT | 131503100 | N/A | N/A | Tektronix Test Jack Assembly |
| 15. | 6 | ENABLE, TRIM UP, TRIM_DN | TSW-148-07-F-S | N/A | N/A | J,Header 0.1" |

Table 7.

PI3106-01-EVAL1 Evaluation Board BOM

| Item | Qty | Ref Design | Part # | Value | U/M | Description |
|---|---|---|---|---|---|---|
| 1. | 1 | U1 | PI3106-01-HVIZ | NA | EA | Picor PI3106-01 High Density PSiP |
| 2. | 6 | C8-C19 | GRM21BR71E-225KA73L | 2.2u | F | Murata X7R Ceramic Capacitor 25V or equiv. |
| 3. | 6 | C1-C4, C20-C21 | GRM31CR71H-475KA12K | 4.7u | F | Murata X7R Ceramic Capacitor 50V or equiv. |
| 4. | 4 | CY1-CY4 | GRM-31BR73A472K | 4700p | F | Murata X7R Ceramic Capacitor 1kV or equiv.. |
| 5. | 1 | L1 | FP3-R47-R | 470n | H | Coilcraft Inductor |
| 6. | 1 | C6 | 08055C391K-AT2A | 390p | F | Kemet X7R Ceramic Capacitor 50V 0805 |
| 7. | 1 | C5 | EEU-FC1J101L | 100u | F | Panasonic Electrolytic Capacitor 63V |
| 8. | 1 | R1 | MCR10EZPF9092 | 90.9k | Ohm | Rohm Resistor 0805 1% or equiv |
| 9. | 1 | R3 | MCR10EZPF3013 | 301k | Ohm | Rohm Resistor 0805 1% or equiv |
| 10. | 1 | R2 | MCR10EZPF1003 | 100k | Ohm | Rohm Resistor 0805 1% or equiv |
| 11. | 1 | R4 | MCR10EZPF1000 | 100 | Ohm | Rohm Resistor 0805 1% or equiv |
| 12. | 1 | F1 | 0154008DR | 8 | A | Littlefuse Fuseblock 8A SMT |
| 13. | 8 | | 5015KCT-ND | N/A | N/A | Digi-Key SMT PC Test Point |
| 14. | 1 | OUT | 131503100 | N/A | N/A | Tektronix Test Jack Assembly |
| 15. | 6 | ENABLE, TRIM UP, TRIM_DN | TSW-148-07-F-S | N/A | N/A | J,Header 0.1" |

Table 8.

PI3109-00-EVAL1
Evaluation Board BOM

| Item | Qty | Ref Design | Part # | Value | U/M | Description |
|---|---|---|---|---|---|---|
| 1. | 1 | U1 | PI3109-00-HVMZ | NA | EA | Picor PI3109-00 High Density PSiP |
| 2. | 6 | C8-C19 | GRM21BR71A-106KE5 | 10u | F | Murata X7R Ceramic Capacitor 10V or equiv. |
| 3. | 6 | C1-C4, C20-C21 | GRM31CR71H-475KA12K | 4.7u | F | Murata X7R Ceramic Capacitor 50V or equiv. |
| 4. | 4 | CY1-CY4 | GRM-31BR73A472K | 4700p | F | Murata X7R Ceramic Capacitor 1kV or equiv.. |
| 5. | 1 | L1 | FP3-R47-R | 470n | H | Coilcraft Inductor |
| 6. | 1 | C6 | 08055C391K-AT2A | 390p | F | Kemet X7R Ceramic Capacitor 50V 0805 |
| 7. | 1 | C5 | EEU-FC1J101L | 100u | F | Panasonic Electrolytic Capacitor 63V |
| 8. | 1 | R1 | MCR10EZPF9092 | 90.9k | Ohm | Rohm Resistor 0805 1% or equiv |
| 9. | 1 | R3 | MCR10EZPF3013 | 301k | Ohm | Rohm Resistor 0805 1% or equiv |
| 10. | 1 | R2 | MCR10EZPF1003 | 100k | Ohm | Rohm Resistor 0805 1% or equiv |
| 11. | 1 | R4 | MCR10EZPF1000 | 100 | Ohm | Rohm Resistor 0805 1% or equiv |
| 12. | 1 | F1 | 0154008DR | 8 | A | Littlefuse Fuseblock 8A SMT |
| 13. | 8 | | 5015KCT-ND | N/A | N/A | Digi-Key SMT PC Test Point |
| 14. | 1 | OUT | 131503100 | N/A | N/A | Tektronix Test Jack Assembly |
| 15. | 6 | ENABLE, TRIM UP, TRIM_DN | TSW-148-07-F-S | N/A | N/A | J,Header 0.1" |

Table 9.

PI3109-01-EVAL1
Evaluation Board BOM

| Item | Qty | Ref Design | Part # | Value | U/M | Description |
|---|---|---|---|---|---|---|
| 1. | 1 | U1 | PI3109-01-HVIZ | NA | EA | Picor PI3109-01 High Density PSiP |
| 2. | 6 | C8-C19 | GRM21BR71A-106KE5 | 2.2u | F | Murata X7R Ceramic Capacitor 25V or equiv. |
| 3. | 6 | C1-C4, C20-C21 | GRM31CR71H-475KA12K | 4.7u | F | Murata X7R Ceramic Capacitor 50V or equiv. |
| 4. | 4 | CY1-CY4 | GRM-31BR73A472K | 4700p | F | Murata X7R Ceramic Capacitor 1kV or equiv.. |
| 5. | 1 | L1 | FP3-R47-R | 470n | H | Coilcraft Inductor |
| 6. | 1 | C6 | 08055C391K-AT2A | 390p | F | Kemet X7R Ceramic Capacitor 50V 0805 |
| 7. | 1 | C5 | EEU-FC1J101L | 100u | F | Panasonic Electrolytic Capacitor 63V |
| 8. | 1 | R1 | MCR10EZPF9092 | 90.9k | Ohm | Rohm Resistor 0805 1% or equiv |
| 9. | 1 | R3 | MCR10EZPF3013 | 301k | Ohm | Rohm Resistor 0805 1% or equiv |
| 10. | 1 | R2 | MCR10EZPF1003 | 100k | Ohm | Rohm Resistor 0805 1% or equiv |
| 11. | 1 | R4 | MCR10EZPF1000 | 100 | Ohm | Rohm Resistor 0805 1% or equiv |
| 12. | 1 | F1 | 0154008DR | 8 | A | Littlefuse Fuseblock 8A SMT |
| 13. | 8 | | 5015KCT-ND | N/A | N/A | Digi-Key SMT PC Test Point |
| 14. | 1 | OUT | 131503100 | N/A | N/A | Tektronix Test Jack Assembly |
| 15. | 6 | ENABLE, TRIM UP, TRIM_DN | TSW-148-07-F-S | N/A | N/A | J,Header 0.1" |

Table 10.

PI3110-01-EVAL1
Evaluation Board BOM

| Item | Qty | Ref Design | Part # | Value | U/M | Description |
|---|---|---|---|---|---|---|
| 1. | 1 | U1 | PI3110-01-HVIZ | NA | EA | Picor PI3110-01 High Density PSiP |
| 2. | 6 | C8-C19 | GRM21BR71E-225KA73L | 2.2u | F | Murata X7R Ceramic Capacitor 25V or equiv. |
| 3. | 6 | C1-C4, C20-C21 | GRM31CR71H-475KA12K | 4.7u | F | Murata X7R Ceramic Capacitor 50V or equiv. |
| 4. | 4 | CY1-CY4 | GRM-31BR73A472K | 4700p | F | Murata X7R Ceramic Capacitor 1kV or equiv.. |
| 5. | 1 | L1 | FP3-4R7-R | 4.7n | H | Coilcraft Inductor |
| 6. | 1 | C6 | 08055C391K-AT2A | 390p | F | Kemet X7R Ceramic Capacitor 50V 0805 |
| 7. | 1 | C5 | EEU-FC2A470 | 47u | F | Panasonic Electrolytic Capacitor 100V |
| 8. | 1 | R1 | MCR10EZPF9092 | 90.9k | Ohm | Rohm Resistor 0805 1% or equiv |
| 9. | 1 | R3 | MCR10EZPF3013 | 301k | Ohm | Rohm Resistor 0805 1% or equiv |
| 10. | 1 | R2 | MCR10EZPF1003 | 100k | Ohm | Rohm Resistor 0805 1% or equiv |
| 11. | 1 | R4 | MCR10EZPF1000 | 100 | Ohm | Rohm Resistor 0805 1% or equiv |
| 12. | 1 | F1 | 0154003DR | 3 | A | Littlefuse Fuseblock 3A SMT |
| 13. | 8 | | 5015KCT-ND | N/A | N/A | Digi-Key SMT PC Test Point |
| 14. | 1 | OUT | 131503100 | N/A | N/A | Tektronix Test Jack Assembly |
| 15. | 6 | ENABLE, TRIM UP, TRIM_DN | TSW-148-07-F-S | N/A | N/A | J,Header 0.1" |

Table 11.

PI3111-00-EVAL1
Evaluation Board BOM

| Item | Qty | Ref Design | Part # | Value | U/M | Description |
|---|---|---|---|---|---|---|
| 1. | 1 | U1 | PI3111-00-HVMZ | NA | EA | Picor PI3111-00 High Density PSiP |
| 2. | 6 | C8-C19 | GRM21BR71E-225KA73L | 2.2u | F | Murata X7R Ceramic Capacitor 25V or equiv. |
| 3. | 6 | C1-C4, C20-C21 | GRM31CR71H-475KA12K | 4.7u | F | Murata X7R Ceramic Capacitor 50V or equiv. |
| 4. | 4 | CY1-CY4 | GRM-31BR73A472K | 4700p | F | Murata X7R Ceramic Capacitor 1kV or equiv. |
| 5. | 1 | L1 | FP3-4R7-R | 4.7n | H | Coilcraft Inductor |
| 6. | 1 | C6 | 08055C391K-AT2A | 390p | F | Kemet X7R Ceramic Capacitor 50V 0805 |
| 7. | 1 | C5 | EEU-FC1J101L | 100u | F | Panasonic Electrolytic Capacitor 63V |
| 8. | 1 | R1 | MCR10EZPF9092 | 90.9k | Ohm | Rohm Resistor 0805 1% or equiv |
| 9. | 1 | R3 | MCR10EZPF3013 | 301k | Ohm | Rohm Resistor 0805 1% or equiv |
| 10. | 1 | R2 | MCR10EZPF1003 | 100k | Ohm | Rohm Resistor 0805 1% or equiv |
| 11. | 1 | R4 | MCR10EZPF1000 | 100 | Ohm | Rohm Resistor 0805 1% or equiv |
| 12. | 1 | F1 | 0154003DR | 3 | A | Littlefuse Fuseblock 3A SMT |
| 13. | 8 | | 5015KCT-ND | N/A | N/A | Digi-Key SMT PC Test Point |
| 14. | 1 | OUT | 131503100 | N/A | N/A | Tektronix Test Jack Assembly |
| 15. | 6 | ENABLE, TRIM UP, TRIM_DN | TSW-148-07-F-S | N/A | N/A | J,Header 0.1" |

Table 12.
PI31xx-xx-EVAL1 Packing List

| Item | Qty | Part # | U/M | Description |
|---|---|---|---|---|
| 1. | 1 | PI31xx-xx-EVAL1 | EA | Evaluation PCB Assembly |
| 2. | 1 | 32786 | EA | 6.3mm Heatsink Assembly |
| 3. | 1 | 32784 | EA | 11mm Heatsink Assembly |
| 4. | 1 | 33855 | EA | Heatsink Grounding Clip |
| 5. | 4 | 32434 | EA | Heatsink Pushpins |
| 6. | 4 | N/A | EA | Screw, 6-32 |
| 7. | 4 | N/A | EA | Nut, 6-32 |

Figure 6.
PI31xx-xx-EVAL1 Test Setup

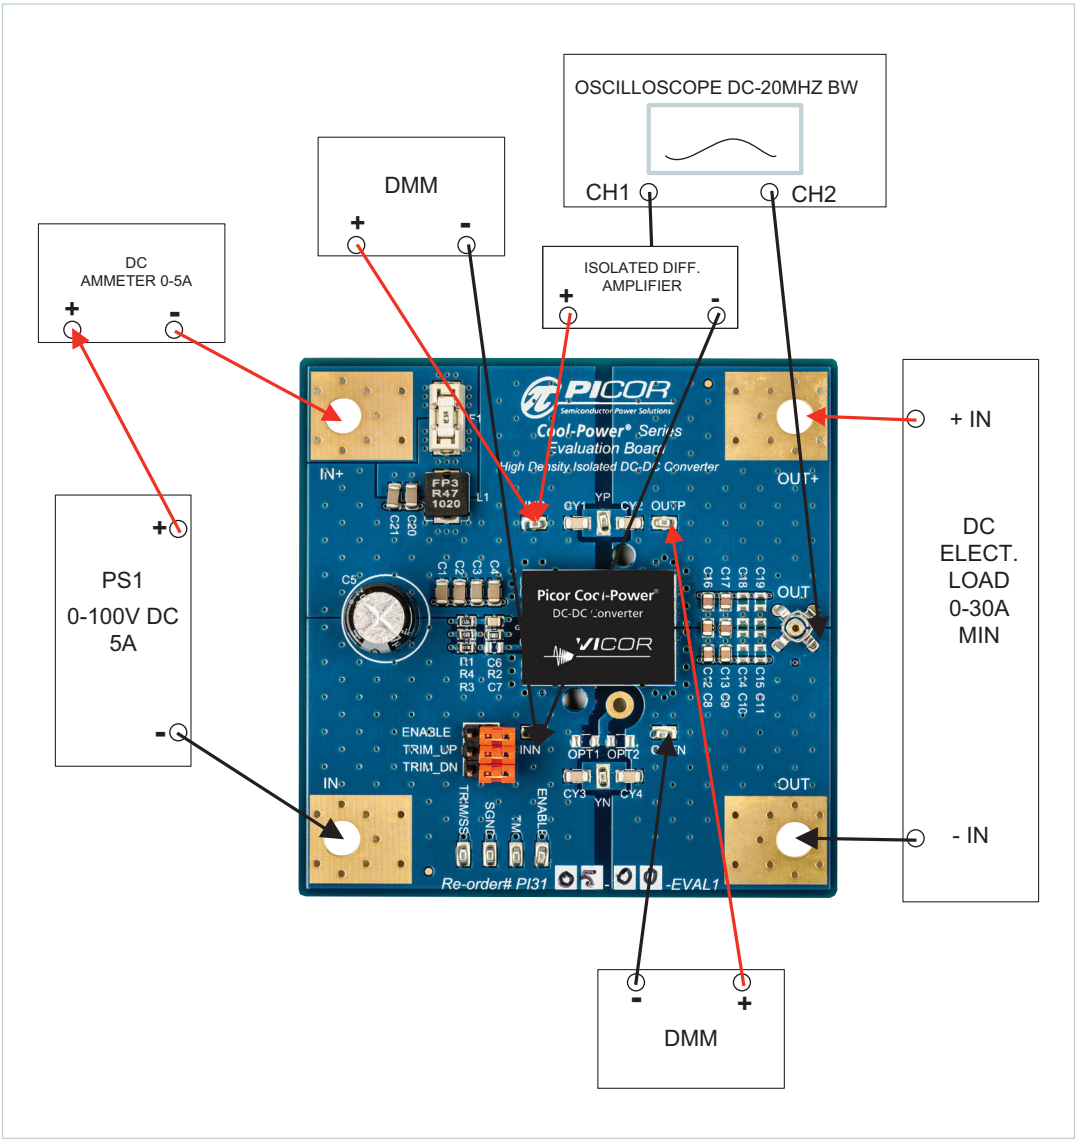

**Figure 7.**

Top Layer
Artwork 3 Oz Copper

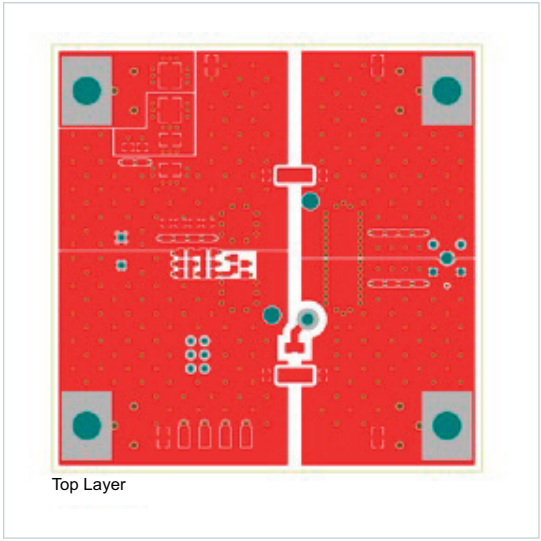


**Figure 8.**

Midlayer 1
Artwork 2 Oz Copper

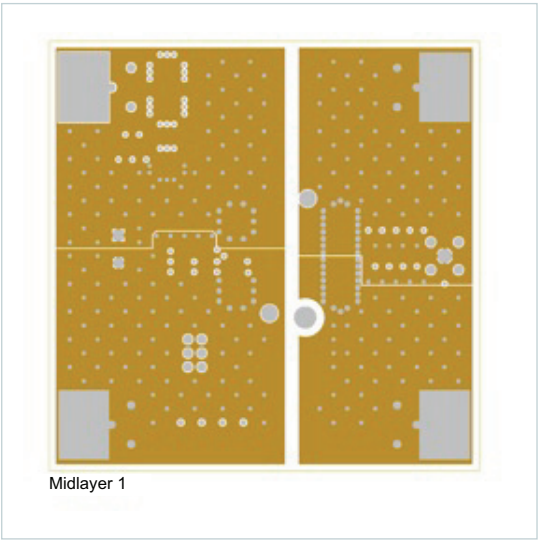


**Figure 9.**

Midlayer 2
Artwork 2 Oz. Copper

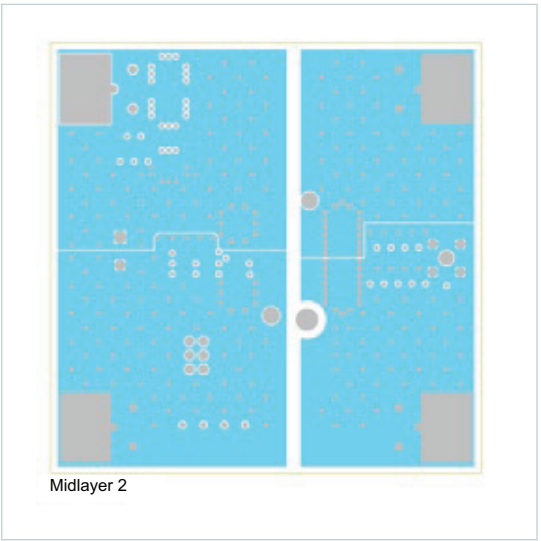

**Figure 10.**

Midlayer 3
Artwork 2 Oz. Copper

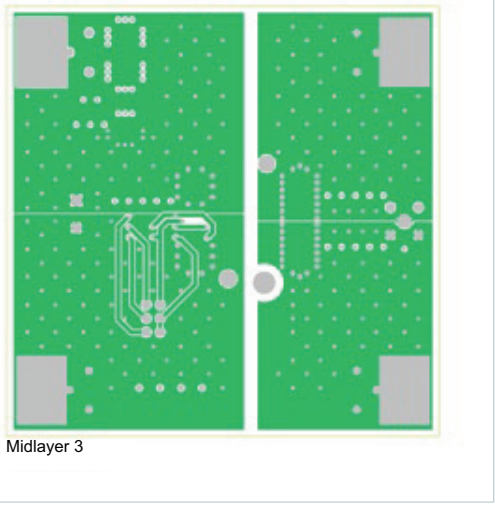


**Figure 11.**

Midlayer 4
Artwork 2 Oz. Copper

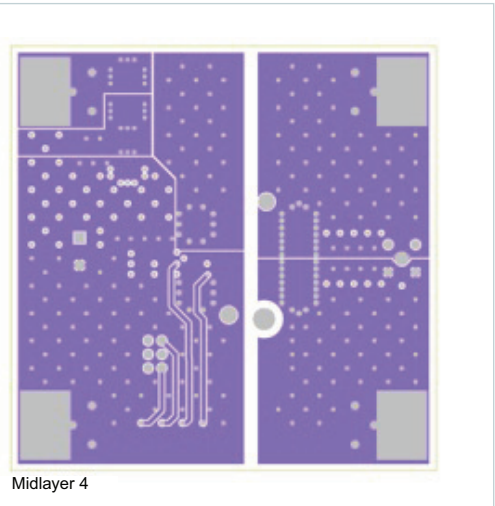


**Figure 12.**

Bottom Layer
Artwork 3 Oz. Copper

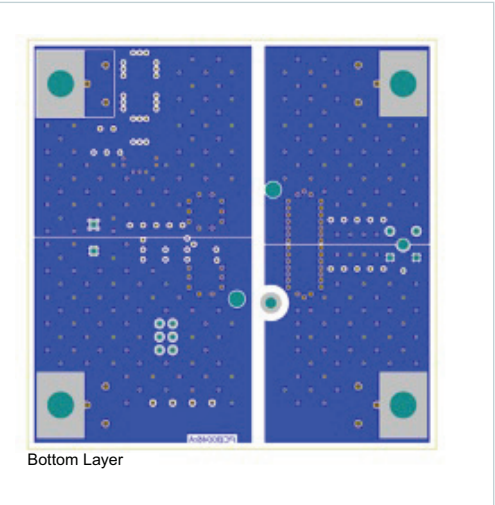

Figure 13.
Mechanical Drawing

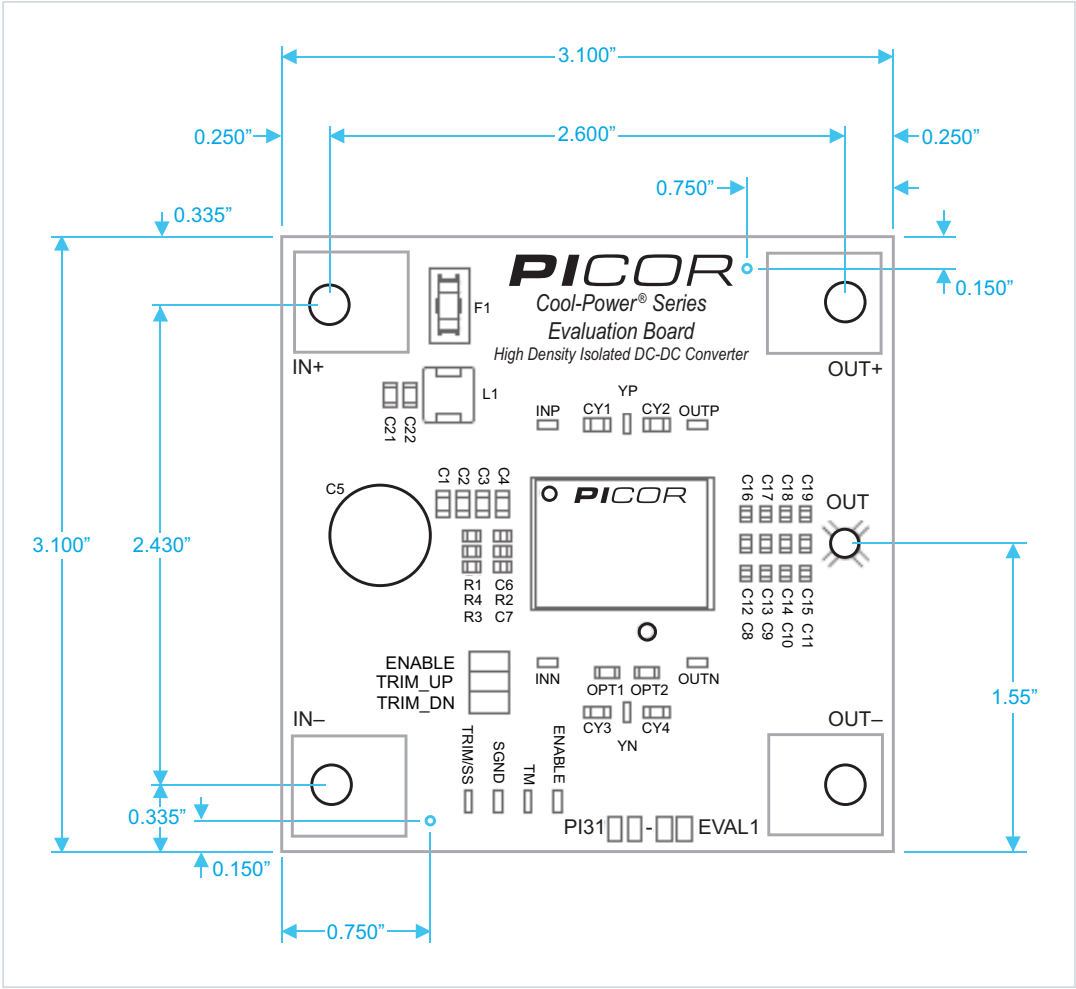


## Ordering Information

The PI31xx Customer Evaluation Boards are specified by adding the suffix “-EVAL1” to the base PI31xx-xx model number.

Go to http://www.vicorpower.com/cms/home/company/contact-us for ordering information.

PICOR
Semiconductor Power Solutions

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** sales@st-electron.ru

**Адрес:** 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331