

## FEATURES

- 12MHz Gain Bandwidth
- 400V/ $\mu$ s Slew Rate
- 1.25mA Maximum Supply Current per Amplifier
- Unity-Gain Stable
- C-Load™ Op Amp Drives All Capacitive Loads
- 10nV/ $\sqrt{\text{Hz}}$  Input Noise Voltage
- 800 $\mu$ V Maximum Input Offset Voltage
- 300nA Maximum Input Bias Current
- 70nA Maximum Input Offset Current
- 12V/mV Minimum DC Gain,  $R_L = 1\text{k}$
- 230ns Settling Time to 0.1%, 10V Step
- 280ns Settling Time to 0.01%, 10V Step
- $\pm 12\text{V}$  Minimum Output Swing into 500 $\Omega$
- $\pm 2.75\text{V}$  Minimum Output Swing into 150 $\Omega$
- Specified at  $\pm 2.5\text{V}$ ,  $\pm 5\text{V}$ , and  $\pm 15\text{V}$

## APPLICATIONS

- Wideband Amplifiers
- Buffers
- Active Filters
- Data Acquisition Systems
- Photodiode Amplifiers

## DESCRIPTION


The LT<sup>®</sup>1355/LT1356 are dual and quad low power high speed operational amplifiers with outstanding AC and DC performance. The amplifiers feature much lower supply current and higher slew rate than devices with comparable bandwidth. The circuit topology is a voltage feedback amplifier with matched high impedance inputs and the slewing performance of a current feedback amplifier. The high slew rate and single stage design provide excellent settling characteristics which make the circuit an ideal choice for data acquisition systems. Each output drives a 500 $\Omega$  load to  $\pm 12\text{V}$  with  $\pm 15\text{V}$  supplies and a 150 $\Omega$  load to  $\pm 2.75\text{V}$  on  $\pm 5\text{V}$  supplies. The amplifiers are stable with any capacitive load making them useful in buffer applications.

The LT1355/LT1356 are members of a family of fast, high performance amplifiers using this unique topology and employing Linear Technology Corporation's advanced bipolar complementary processing. For a single amplifier version of the LT1355/LT1356 see the LT1354 data sheet. For higher bandwidth devices with higher supply currents see the LT1357 through LT1365 data sheets. Bandwidths of 25MHz, 50MHz, and 70MHz are available with 2mA, 4mA, and 6mA of supply current per amplifier. Singles, duals, and quads of each amplifier are available.

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. C-Load is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.


## TYPICAL APPLICATION

100kHz, 4th Order Butterworth Filter

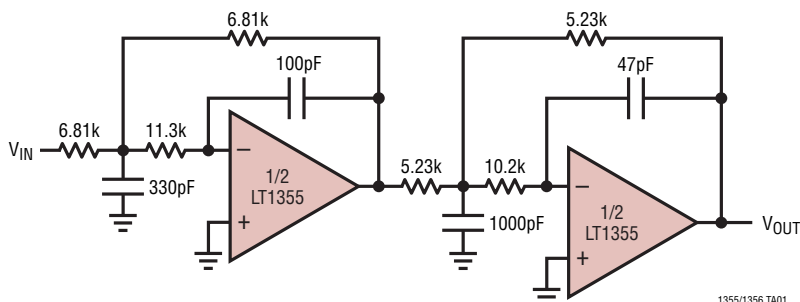

1355/1356 TA01

$A_V = -1$  Large-Signal Response

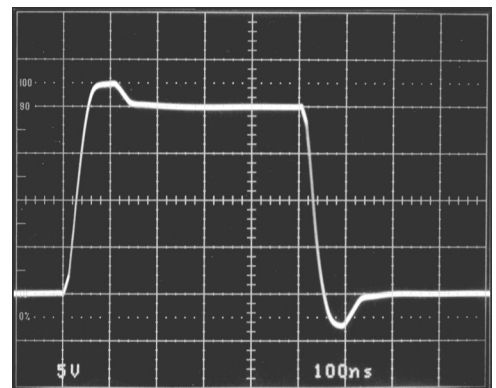

13556 TA01B

13556fc

# LT1355/LT1356

## ABSOLUTE MAXIMUM RATINGS (Note 1)

Total Supply Voltage ( $V^+$  to  $V^-$ ).....36V  
 Differential Input Voltage (Transient Only)  
 (Note 2)..... $\pm 10V$   
 Input Voltage..... $\pm V_S$   
 Output Short-Circuit Duration (Note 3) ..... Indefinite  
 Operating Temperature Range (Note 7)  
 LT1355C/LT1356C/LT1356I..... $-40^\circ\text{C}$  to  $85^\circ\text{C}$   
 LT1356H ( $T_C$ )..... $-40^\circ\text{C}$  to  $125^\circ\text{C}$

Specified Temperature Range (Note 8)  
 LT1355C/LT1356C .....  $0^\circ\text{C}$  to  $70^\circ\text{C}$   
 LT1356I..... $-40^\circ\text{C}$  to  $85^\circ\text{C}$   
 LT1356H ( $T_C$ )..... $-40^\circ\text{C}$  to  $125^\circ\text{C}$   
 Maximum Junction Temperature .....  $150^\circ\text{C}$   
 Storage Temperature Range ..... $-65^\circ\text{C}$  to  $150^\circ\text{C}$   
 Lead Temperature (Soldering, 10 sec)..... $300^\circ\text{C}$

## PIN CONFIGURATION

|                                                                                                                                                  |                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>LT1355</p> <p>N8 PACKAGE<br/>8-LEAD PDIP</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 130^\circ\text{C/W}</math></p> | <p>LT1355</p> <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 190^\circ\text{C/W}</math></p>                                                |
| <p>LT1356</p> <p>N PACKAGE<br/>14-LEAD PDIP</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 110^\circ\text{C/W}</math></p> | <p>LT1356</p> <p>S PACKAGE<br/>16-LEAD PLASTIC SO</p> <p><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 150^\circ\text{C/W}</math>, <math>\theta_{JC} = 30^\circ\text{C/W}</math></p> |

## ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL   | PART MARKING | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE                   |
|------------------|-----------------|--------------|---------------------|-----------------------------------------------|
| LT1355CN8#PBF    | LT1355CN8#TRPBF | LT1355CN8    | 8-Lead PDIP         | $0^\circ\text{C}$ to $70^\circ\text{C}$       |
| LT1355CS8#PBF    | LT1355CS8#TRPBF | 1355         | 8-Lead Plastic SO   | $0^\circ\text{C}$ to $70^\circ\text{C}$       |
| LT1356CN#PBF     | LT1356CN#TRPBF  | LT1356CN     | 14-Lead PDIP        | $0^\circ\text{C}$ to $70^\circ\text{C}$       |
| LT1356CS#PBF     | LT1356CS#TRPBF  | LT1356CS     | 16-Lead Plastic SO  | $0^\circ\text{C}$ to $70^\circ\text{C}$       |
| LT1356IS#PBF     | LT1356IS#TRPBF  | LT1356S      | 16-Lead Plastic SO  | $-40^\circ\text{C}$ to $85^\circ\text{C}$     |
| LT1356HS#PBF     | LT1356HS#TRPBF  | LT1356S      | 16-Lead Plastic SO  | $-40^\circ\text{C} < T_C < 125^\circ\text{C}$ |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

13556fc

# ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ , $V_{CM} = 0\text{V}$ unless otherwise noted.

| SYMBOL        | PARAMETER                        | CONDITIONS                                       | $V_{SUPPLY}$                          | MIN  | TYP   | MAX   | UNITS                        |
|---------------|----------------------------------|--------------------------------------------------|---------------------------------------|------|-------|-------|------------------------------|
| $V_{OS}$      | Input Offset Voltage             |                                                  | $\pm 15\text{V}$                      |      | 0.3   | 0.8   | mV                           |
|               |                                  |                                                  | $\pm 5\text{V}$                       |      | 0.3   | 0.8   | mV                           |
|               |                                  |                                                  | $\pm 2.5\text{V}$                     |      | 0.4   | 1.0   | mV                           |
| $I_{OS}$      | Input Offset Current             |                                                  | $\pm 2.5\text{V}$ to $\pm 15\text{V}$ |      | 20    | 70    | nA                           |
| $I_B$         | Input Bias Current               |                                                  | $\pm 2.5\text{V}$ to $\pm 15\text{V}$ |      | 80    | 300   | nA                           |
| $e_n$         | Input Noise Voltage              | $f = 10\text{kHz}$                               | $\pm 2.5\text{V}$ to $\pm 15\text{V}$ |      | 10    |       | $\text{nV}/\sqrt{\text{Hz}}$ |
| $i_n$         | Input Noise Current              | $f = 10\text{kHz}$                               | $\pm 2.5\text{V}$ to $\pm 15\text{V}$ |      | 0.6   |       | $\text{pA}/\sqrt{\text{Hz}}$ |
| $R_{IN}$      | Input Resistance                 | $V_{CM} = \pm 12\text{V}$                        | $\pm 15\text{V}$                      | 70   | 160   |       | $\text{M}\Omega$             |
|               | Input Resistance                 | Differential                                     | $\pm 15\text{V}$                      |      | 11    |       | $\text{M}\Omega$             |
| $C_{IN}$      | Input Capacitance                |                                                  | $\pm 15\text{V}$                      |      | 3     |       | pF                           |
|               | Input Voltage Range <sup>+</sup> |                                                  | $\pm 15\text{V}$                      | 12.0 | 13.4  |       | V                            |
|               |                                  |                                                  | $\pm 5\text{V}$                       | 2.5  | 3.5   |       | V                            |
|               |                                  |                                                  | $\pm 2.5\text{V}$                     | 0.5  | 1.1   |       | V                            |
|               | Input Voltage Range <sup>-</sup> |                                                  | $\pm 15\text{V}$                      |      | -13.2 | -12.0 | V                            |
|               |                                  |                                                  | $\pm 5\text{V}$                       |      | -3.4  | -2.5  | V                            |
|               |                                  |                                                  | $\pm 2.5\text{V}$                     |      | -0.9  | -0.5  | V                            |
| CMRR          | Common Mode Rejection Ratio      | $V_{CM} = \pm 12\text{V}$                        | $\pm 15\text{V}$                      | 83   | 97    |       | dB                           |
|               |                                  | $V_{CM} = \pm 2.5\text{V}$                       | $\pm 5\text{V}$                       | 78   | 84    |       | dB                           |
|               |                                  | $V_{CM} = \pm 0.5\text{V}$                       | $\pm 2.5\text{V}$                     | 68   | 75    |       | dB                           |
| PSRR          | Power Supply Rejection Ratio     | $V_S = \pm 2.5\text{V}$ to $\pm 15\text{V}$      |                                       | 92   | 106   |       | dB                           |
| $A_{VOL}$     | Large-Signal Voltage Gain        | $V_{OUT} = \pm 12\text{V}$ , $R_L = 1\text{k}$   | $\pm 15\text{V}$                      | 12   | 36    |       | V/mV                         |
|               |                                  | $V_{OUT} = \pm 10\text{V}$ , $R_L = 500\Omega$   | $\pm 15\text{V}$                      | 5    | 15    |       | V/mV                         |
|               |                                  | $V_{OUT} = \pm 2.5\text{V}$ , $R_L = 1\text{k}$  | $\pm 5\text{V}$                       | 12   | 36    |       | V/mV                         |
|               |                                  | $V_{OUT} = \pm 2.5\text{V}$ , $R_L = 500\Omega$  | $\pm 5\text{V}$                       | 5    | 15    |       | V/mV                         |
|               |                                  | $V_{OUT} = \pm 2.5\text{V}$ , $R_L = 150\Omega$  | $\pm 5\text{V}$                       | 1    | 4     |       | V/mV                         |
|               |                                  | $V_{OUT} = \pm 1\text{V}$ , $R_L = 500\Omega$    | $\pm 2.5\text{V}$                     | 5    | 20    |       | V/mV                         |
| $V_{OUT}$     | Output Swing                     | $R_L = 1\text{k}$ , $V_{IN} = \pm 40\text{mV}$   | $\pm 15\text{V}$                      | 13.3 | 13.8  |       | $\pm\text{V}$                |
|               |                                  | $R_L = 500\Omega$ , $V_{IN} = \pm 40\text{mV}$   | $\pm 15\text{V}$                      | 12.0 | 13.0  |       | $\pm\text{V}$                |
|               |                                  | $R_L = 500\Omega$ , $V_{IN} = \pm 40\text{mV}$   | $\pm 5\text{V}$                       | 3.5  | 4.0   |       | $\pm\text{V}$                |
|               |                                  | $R_L = 150\Omega$ , $V_{IN} = \pm 40\text{mV}$   | $\pm 5\text{V}$                       | 2.75 | 3.3   |       | $\pm\text{V}$                |
|               |                                  | $R_L = 500\Omega$ , $V_{IN} = \pm 40\text{mV}$   | $\pm 2.5\text{V}$                     | 1.3  | 1.7   |       | $\pm\text{V}$                |
| $I_{OUT}$     | Output Current                   | $V_{OUT} = \pm 12.0\text{V}$                     | $\pm 15\text{V}$                      | 24.0 | 30    |       | mA                           |
|               |                                  | $V_{OUT} = \pm 2.75\text{V}$                     | $\pm 5\text{V}$                       | 18.3 | 25    |       | mA                           |
| $I_{SC}$      | Short-Circuit Current            | $V_{OUT} = 0\text{V}$ , $V_{IN} = \pm 3\text{V}$ | $\pm 15\text{V}$                      | 30   | 42    |       | mA                           |
| SR            | Slew Rate                        | $A_V = -2$ (Note 4)                              | $\pm 15\text{V}$                      | 200  | 400   |       | $\text{V}/\mu\text{s}$       |
|               |                                  |                                                  | $\pm 5\text{V}$                       | 70   | 120   |       | $\text{V}/\mu\text{s}$       |
|               | Full-Power Bandwidth             | 10V Peak (Note 5)<br>3V Peak (Note 5)            | $\pm 15\text{V}$                      |      | 6.4   |       | MHz                          |
|               |                                  |                                                  | $\pm 5\text{V}$                       |      | 6.4   |       | MHz                          |
| GBW           | Gain Bandwidth                   | $f = 200\text{kHz}$ , $R_L = 2\text{k}$          | $\pm 15\text{V}$                      | 9.0  | 12.0  |       | MHz                          |
|               |                                  |                                                  | $\pm 5\text{V}$                       | 7.5  | 10.5  |       | MHz                          |
|               |                                  |                                                  | $\pm 2.5\text{V}$                     |      | 9.0   |       | MHz                          |
| $t_r$ , $t_f$ | Rise Time, Fall Time             | $A_V = 1$ , 10% to 90%, 0.1V                     | $\pm 15\text{V}$                      |      | 14    |       | ns                           |
|               |                                  |                                                  | $\pm 5\text{V}$                       |      | 17    |       | ns                           |
|               | Overshoot                        | $A_V = 1$ , 0.1V                                 | $\pm 15\text{V}$                      |      | 20    |       | %                            |
|               |                                  |                                                  | $\pm 5\text{V}$                       |      | 18    |       | %                            |
|               | Propagation Delay                | 50% $V_{IN}$ to 50% $V_{OUT}$ , 0.1V             | $\pm 15\text{V}$                      |      | 16    |       | ns                           |
|               |                                  |                                                  | $\pm 5\text{V}$                       |      | 19    |       | ns                           |
| $t_s$         | Settling Time                    | 10V Step, 0.1%, $A_V = -1$                       | $\pm 15\text{V}$                      |      | 230   |       | ns                           |
|               |                                  | 10V Step, 0.01%, $A_V = -1$                      | $\pm 15\text{V}$                      |      | 280   |       | ns                           |
|               |                                  | 5V Step, 0.1%, $A_V = -1$                        | $\pm 5\text{V}$                       |      | 240   |       | ns                           |
|               |                                  | 5V Step, 0.01%, $A_V = -1$                       | $\pm 5\text{V}$                       |      | 380   |       | ns                           |

13556fc

## ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ , $V_{CM} = 0\text{V}$ unless otherwise noted.

| SYMBOL | PARAMETER          | CONDITIONS                                           | $V_{SUPPLY}$                        | MIN | TYP        | MAX          | UNITS      |
|--------|--------------------|------------------------------------------------------|-------------------------------------|-----|------------|--------------|------------|
|        | Differential Gain  | $f = 3.58\text{MHz}$ , $A_V = 2$ , $R_L = 1\text{k}$ | $\pm 15\text{V}$<br>$\pm 5\text{V}$ |     | 2.2<br>2.1 |              | %<br>%     |
|        | Differential Phase | $f = 3.58\text{MHz}$ , $A_V = 2$ , $R_L = 1\text{k}$ | $\pm 15\text{V}$<br>$\pm 5\text{V}$ |     | 3.1<br>3.1 |              | Deg<br>Deg |
| $R_O$  | Output Resistance  | $A_V = 1$ , $f = 100\text{kHz}$                      | $\pm 15\text{V}$                    |     | 0.7        |              | $\Omega$   |
|        | Channel Separation | $V_{OUT} = \pm 10\text{V}$ , $R_L = 500\Omega$       | $\pm 15\text{V}$                    | 100 | 113        |              | dB         |
| $I_S$  | Supply Current     | Each Amplifier<br>Each Amplifier                     | $\pm 15\text{V}$<br>$\pm 5\text{V}$ |     | 1.0<br>0.9 | 1.25<br>1.20 | mA<br>mA   |

The ● denotes the specifications which apply over the temperature range  $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ ,  $V_{CM} = 0\text{V}$ , unless otherwise noted.

| SYMBOL    | PARAMETER                    | CONDITIONS                                                                                                                                                                                                                                                                                                 | $V_{SUPPLY}$                                                                                                       | MIN                        | TYP                                      | MAX               | UNITS                                                                             |
|-----------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------------------------|-------------------|-----------------------------------------------------------------------------------|
| $V_{OS}$  | Input Offset Voltage         |                                                                                                                                                                                                                                                                                                            | $\pm 15\text{V}$<br>$\pm 5\text{V}$<br>$\pm 2.5\text{V}$                                                           | ●<br>●<br>●                |                                          | 1.0<br>1.0<br>1.2 | mV<br>mV<br>mV                                                                    |
|           | Input $V_{OS}$ Drift         | (Note 6)                                                                                                                                                                                                                                                                                                   | $\pm 2.5\text{V}$ to $\pm 15\text{V}$                                                                              | ●                          | 5                                        | 8                 | $\mu\text{V}/^\circ\text{C}$                                                      |
| $I_{OS}$  | Input Offset Current         |                                                                                                                                                                                                                                                                                                            | $\pm 2.5\text{V}$ to $\pm 15\text{V}$                                                                              | ●                          |                                          | 100               | nA                                                                                |
| $I_B$     | Input Bias Current           |                                                                                                                                                                                                                                                                                                            | $\pm 2.5\text{V}$ to $\pm 15\text{V}$                                                                              | ●                          |                                          | 450               | nA                                                                                |
| CMRR      | Common Mode Rejection Ratio  | $V_{CM} = \pm 12\text{V}$<br>$V_{CM} = \pm 2.5\text{V}$<br>$V_{CM} = \pm 0.5\text{V}$                                                                                                                                                                                                                      | $\pm 15\text{V}$<br>$\pm 5\text{V}$<br>$\pm 2.5\text{V}$                                                           | ●<br>●<br>●                | 81<br>77<br>67                           |                   | dB<br>dB<br>dB                                                                    |
| PSRR      | Power Supply Rejection Ratio | $V_S = \pm 2.5\text{V}$ to $\pm 15\text{V}$                                                                                                                                                                                                                                                                |                                                                                                                    | ●                          | 90                                       |                   | dB                                                                                |
| $A_{VOL}$ | Large-Signal Voltage Gain    | $V_{OUT} = \pm 12\text{V}$ , $R_L = 1\text{k}$<br>$V_{OUT} = \pm 10\text{V}$ , $R_L = 500\Omega$<br>$V_{OUT} = \pm 2.5\text{V}$ , $R_L = 1\text{k}$<br>$V_{OUT} = \pm 2.5\text{V}$ , $R_L = 500\Omega$<br>$V_{OUT} = \pm 2.5\text{V}$ , $R_L = 150\Omega$<br>$V_{OUT} = \pm 1\text{V}$ , $R_L = 500\Omega$ | $\pm 15\text{V}$<br>$\pm 15\text{V}$<br>$\pm 5\text{V}$<br>$\pm 5\text{V}$<br>$\pm 5\text{V}$<br>$\pm 2.5\text{V}$ | ●<br>●<br>●<br>●<br>●<br>● | 10.0<br>3.3<br>10.0<br>3.3<br>0.6<br>3.3 |                   | V/mV<br>V/mV<br>V/mV<br>V/mV<br>V/mV<br>V/mV                                      |
| $V_{OUT}$ | Output Swing                 | $R_L = 1\text{k}$ , $V_{IN} = \pm 40\text{mV}$<br>$R_L = 500\Omega$ , $V_{IN} = \pm 40\text{mV}$<br>$R_L = 500\Omega$ , $V_{IN} = \pm 40\text{mV}$<br>$R_L = 150\Omega$ , $V_{IN} = \pm 40\text{mV}$<br>$R_L = 500\Omega$ , $V_{IN} = \pm 40\text{mV}$                                                     | $\pm 15\text{V}$<br>$\pm 15\text{V}$<br>$\pm 5\text{V}$<br>$\pm 5\text{V}$<br>$\pm 2.5\text{V}$                    | ●<br>●<br>●<br>●<br>●      | 13.2<br>11.5<br>3.4<br>2.5<br>1.2        |                   | $\pm\text{V}$<br>$\pm\text{V}$<br>$\pm\text{V}$<br>$\pm\text{V}$<br>$\pm\text{V}$ |
| $I_{OUT}$ | Output Current               | $V_{OUT} = \pm 11.5\text{V}$<br>$V_{OUT} = \pm 2.5\text{V}$                                                                                                                                                                                                                                                | $\pm 15\text{V}$<br>$\pm 5\text{V}$                                                                                | ●<br>●                     | 23.0<br>16.7                             |                   | mA<br>mA                                                                          |
| $I_{SC}$  | Short-Circuit Current        | $V_{OUT} = 0\text{V}$ , $V_{IN} = \pm 3\text{V}$                                                                                                                                                                                                                                                           | $\pm 15\text{V}$                                                                                                   | ●                          | 24                                       |                   | mA                                                                                |
| SR        | Slew Rate                    | $A_V = -2$ , (Note 4)                                                                                                                                                                                                                                                                                      | $\pm 15\text{V}$<br>$\pm 5\text{V}$                                                                                | ●<br>●                     | 150<br>60                                |                   | V/ $\mu\text{s}$<br>V/ $\mu\text{s}$                                              |
| GBW       | Gain Bandwidth               | $f = 200\text{kHz}$ , $R_L = 2\text{k}$                                                                                                                                                                                                                                                                    | $\pm 15\text{V}$<br>$\pm 5\text{V}$                                                                                | ●<br>●                     | 7.5<br>6.0                               |                   | MHz<br>MHz                                                                        |
|           | Channel Separation           | $V_{OUT} = \pm 10\text{V}$ , $R_L = 500\Omega$                                                                                                                                                                                                                                                             | $\pm 15\text{V}$                                                                                                   | ●                          | 98                                       |                   | dB                                                                                |
| $I_S$     | Supply Current               | Each Amplifier<br>Each Amplifier                                                                                                                                                                                                                                                                           | $\pm 15\text{V}$<br>$\pm 5\text{V}$                                                                                | ●<br>●                     |                                          | 1.45<br>1.40      | mA<br>mA                                                                          |

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$  and  $-40^{\circ}\text{C} \leq T_C \leq 125^{\circ}\text{C}$  temperature ranges,  $V_{CM} = 0\text{V}$  unless otherwise noted. (Note 8)

| SYMBOL           | PARAMETER                    | CONDITIONS                                                                                                                                                                                        | V <sub>SUPPLY</sub>         | MIN              | TYP                      | MAX               | UNITS                        |
|------------------|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|------------------|--------------------------|-------------------|------------------------------|
| V <sub>OS</sub>  | Input Offset Voltage         |                                                                                                                                                                                                   | ±15V<br>±5V<br>±2.5V        | ●<br>●<br>●      |                          | 1.8<br>1.8<br>2.0 | mV<br>mV<br>mV               |
| I <sub>OS</sub>  | Input Offset Current         |                                                                                                                                                                                                   | ±2.5V to ±15V               | ●                |                          | 250               | nA                           |
| I <sub>B</sub>   | Input Bias Current           |                                                                                                                                                                                                   | ±2.5V to ±15V               | ●                |                          | 600               | nA                           |
| CMRR             | Common Mode Rejection Ratio  | V <sub>CM</sub> = ±12V<br>V <sub>CM</sub> = ±2.5V<br>V <sub>CM</sub> = ±0.5V                                                                                                                      | ±15V<br>±5V<br>±2.5V        | ●<br>●<br>●      | 80<br>76<br>66           |                   | dB<br>dB<br>dB               |
| PSRR             | Power Supply Rejection Ratio | V <sub>S</sub> = ±2.5V to ±15V                                                                                                                                                                    |                             | ●                | 90                       |                   | dB                           |
| A <sub>VOL</sub> | Large-Signal Voltage Gain    | V <sub>OUT</sub> = ±12V, R <sub>L</sub> = 1k<br>V <sub>OUT</sub> = ±2.5V, R <sub>L</sub> = 1k<br>V <sub>OUT</sub> = ±2.5V, R <sub>L</sub> = 500Ω<br>V <sub>OUT</sub> = ±1V, R <sub>L</sub> = 500Ω | ±15V<br>±5V<br>±5V<br>±2.5V | ●<br>●<br>●<br>● | 6.0<br>4.0<br>1.7<br>1.7 |                   | V/mV<br>V/mV<br>V/mV<br>V/mV |
| V <sub>OUT</sub> | Output Swing                 | R <sub>L</sub> = 1k, V <sub>IN</sub> = ±40mV<br>R <sub>L</sub> = 500Ω, V <sub>IN</sub> = ±40mV<br>R <sub>L</sub> = 500Ω, V <sub>IN</sub> = ±40mV                                                  | ±15V<br>±5V<br>±2.5V        | ●<br>●<br>●      | 12.7<br>3.3<br>1.2       |                   | ±V<br>±V<br>±V               |
| I <sub>OUT</sub> | Output Current               | V <sub>OUT</sub> = ±12.7V<br>V <sub>OUT</sub> = ±3.3V                                                                                                                                             | ±15V<br>±5V                 | ●<br>●           | 12.7<br>6.6              |                   | mA<br>mA                     |
| I <sub>SC</sub>  | Short-Circuit Current        | V <sub>OUT</sub> = 0V, V <sub>IN</sub> = ±3V                                                                                                                                                      | ±15V                        | ●                | 16                       |                   | mA                           |
| SR               | Slew Rate                    | A <sub>V</sub> = -2, (Note 4)                                                                                                                                                                     | ±15V<br>±5V                 | ●<br>●           | 110<br>43                |                   | V/μs<br>V/μs                 |
| GBW              | Gain Bandwidth               | f = 200kHz, R <sub>L</sub> = 2k                                                                                                                                                                   | ±15V<br>±5V                 | ●<br>●           | 6.0<br>4.6               |                   | MHz<br>MHz                   |
|                  | Channel Separation           | V <sub>OUT</sub> = ±10V, R <sub>L</sub> = 500Ω                                                                                                                                                    | ±15V                        | ●                | 96                       |                   | dB                           |
| I <sub>S</sub>   | Supply Current               | Each Amplifier<br>Each Amplifier                                                                                                                                                                  | ±15V<br>±5V                 | ●<br>●           |                          | 1.55<br>1.50      | mA<br>mA                     |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** Differential inputs of ±10V are appropriate for transient operation only, such as during slewing. Large, sustained differential inputs will cause excessive power dissipation and may damage the part. See Input Considerations in the Applications Information section of this data sheet for more details.

**Note 3:** A heat sink may be required to keep the junction temperature below absolute maximum when the output is shorted indefinitely.

**Note 4:** Slew rate is measured between ±10V on the output with ±6V input for ±15V supplies and ±1V on the output with ±1.75V input for ±5V supplies.

**Note 5:** Full power bandwidth is calculated from the slew rate measurement:  $\text{FPBW} = (\text{SR})/2\pi V_p$ .


**Note 6:** This parameter is not 100% tested.

**Note 7:** The LT1355C/LT1356C/LT1356I are guaranteed functional over the operating temperature range of  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ . The LT1356H is guaranteed functional over the operating temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  case temperature ( $T_C$ ).


**Note 8:** The LT1355C/LT1356C are guaranteed to meet specified performance from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ . The LT1355C/LT1356C are designed, characterized and expected to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , but are not tested or QA sampled at these temperatures. The LT1356I is guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ . The LT1356H is guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$  case temperature ( $T_C$ ). The parts are pulse tested at these temperatures. Internal warm-up drift must be taken into account separately. Care must be taken not to exceed the maximum junction temperature.

# TYPICAL PERFORMANCE CHARACTERISTICS


**Supply Current vs Supply Voltage and Temperature**

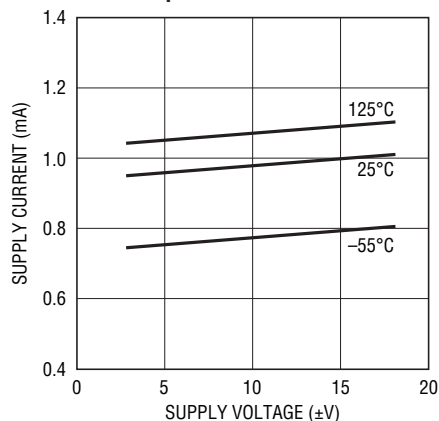


**Input Common Mode Range vs Supply Voltage**

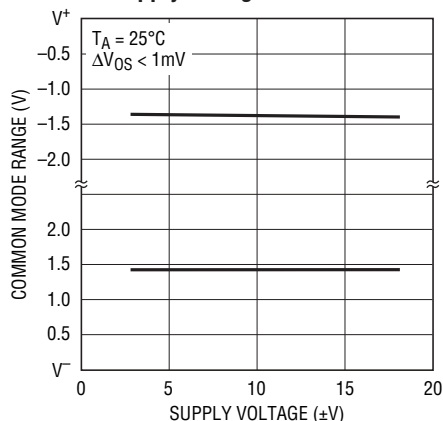


**Input Bias Current vs Input Common Mode Voltage**

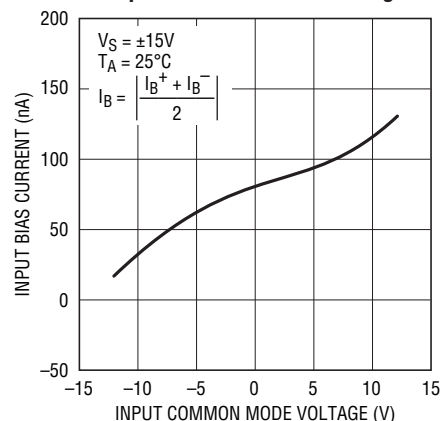


**Input Bias Current vs Temperature**

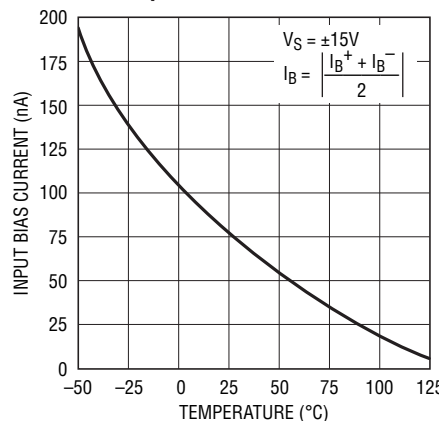


**Input Noise Spectral Density**

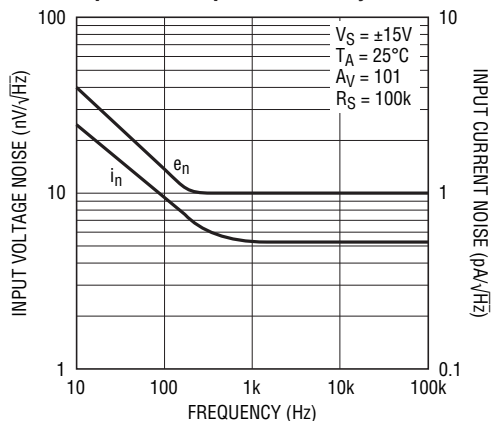


**Open-Loop Gain vs Resistive Load**

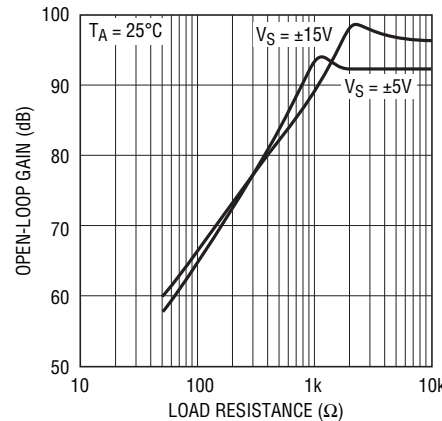


**Open-Loop Gain vs Temperature**

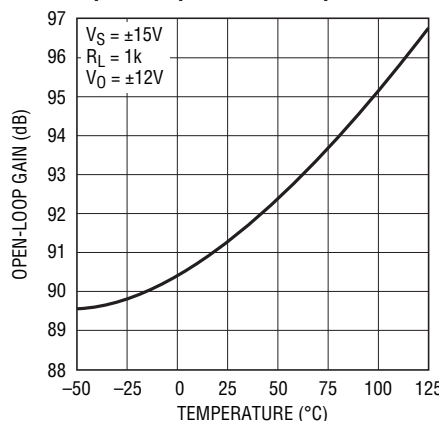

**Output Voltage Swing vs Supply Voltage**

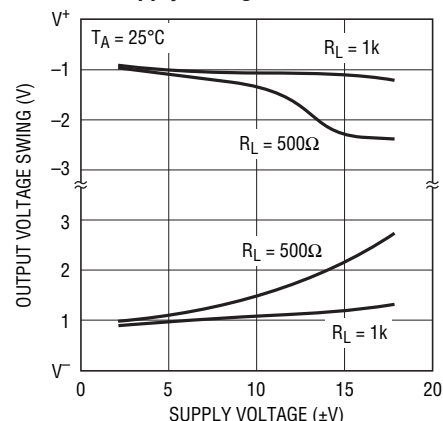


**Output Voltage Swing vs Load Current**

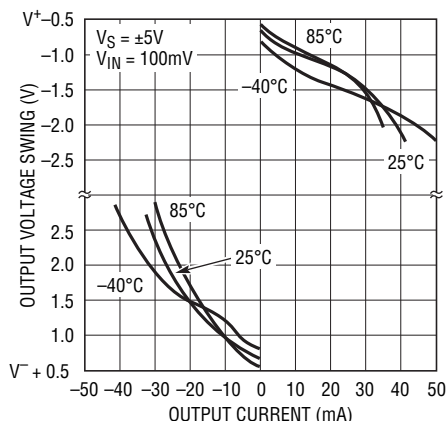


# TYPICAL PERFORMANCE CHARACTERISTICS

**Output Short-Circuit Current vs Temperature**

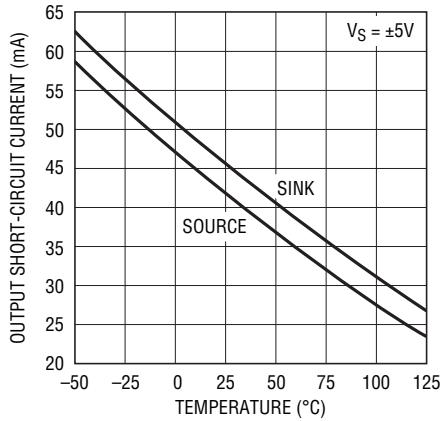


1355/1356 G10

**Settling Time vs Output Step (Noninverting)**

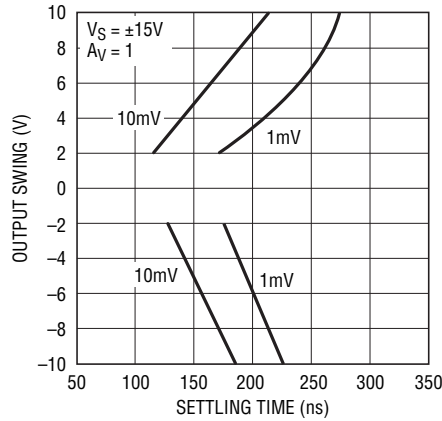


1355/1356 G11

**Settling Time vs Output Step (Inverting)**

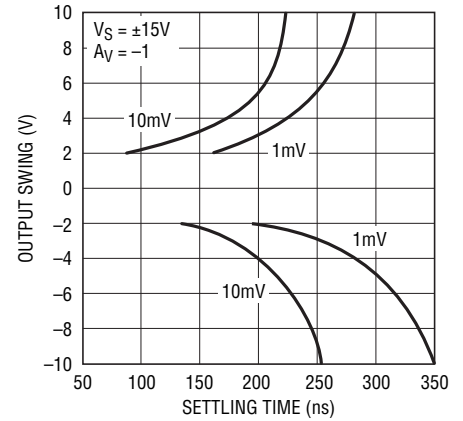


1355/1356 G12

**Output Impedance vs Frequency**

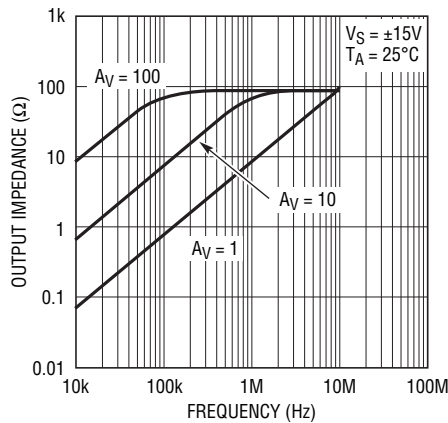


1355/1356 G13

**Frequency Response vs Capacitive Load**

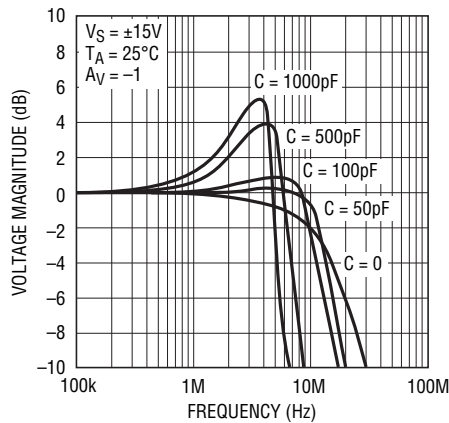


1355/1356 G19

**Gain Bandwidth and Phase Margin vs Supply Voltage**

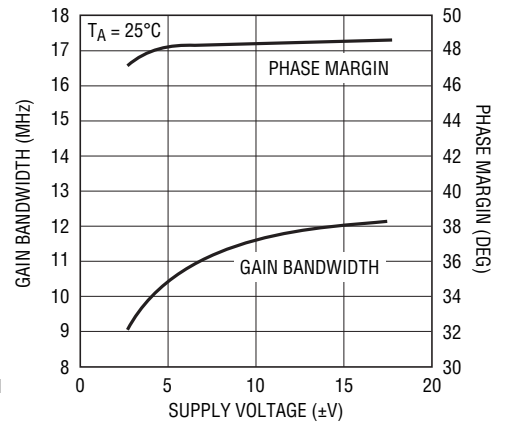


1355/1356 G15

**Gain Bandwidth and Phase Margin vs Temperature**

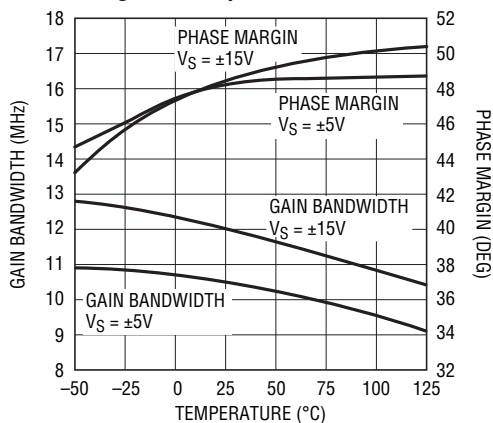


1355/1356 G16

**Frequency Response vs Supply Voltage (A\_V = 1)**

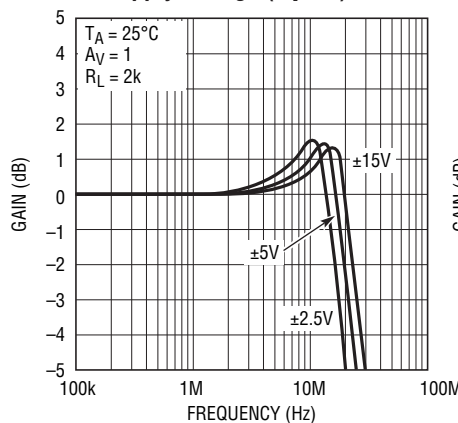

1355/1356 G17


**Frequency Response vs Supply Voltage (A\_V = -1)**

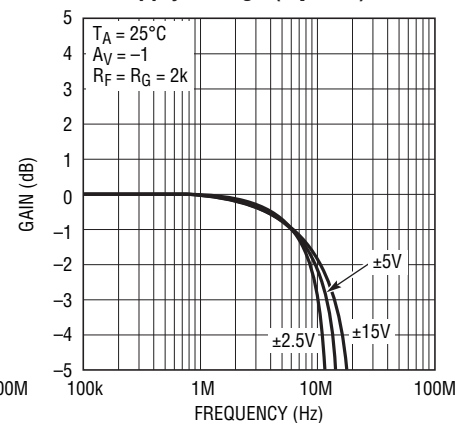

1355/1356 G18


# TYPICAL PERFORMANCE CHARACTERISTICS

## Gain and Phase vs Frequency

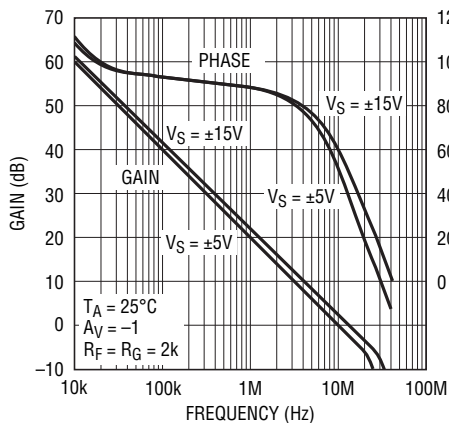


1355/1356 G14

## Power Supply Rejection Ratio vs Frequency

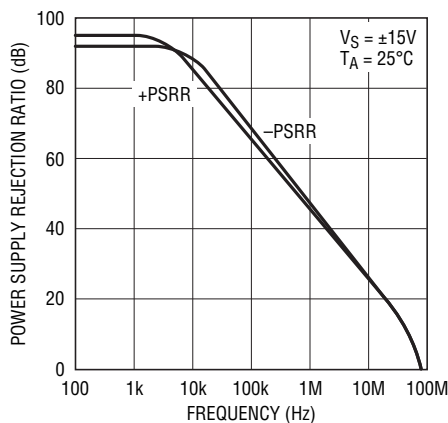


1355/1356 G20

## Common Mode Rejection Ratio vs Frequency

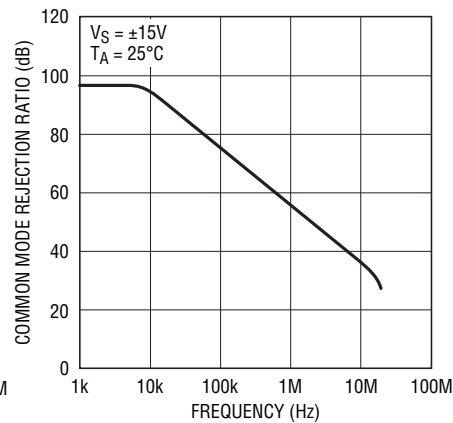


1355/1356 G21

## Slew Rate vs Supply Voltage

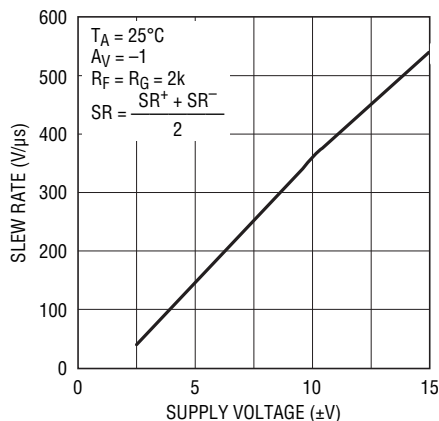


1355/1356 G22

## Slew Rate vs Temperature

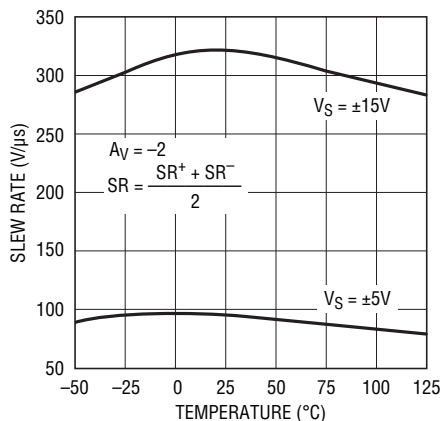


1355/1356 G23

## Slew Rate vs Input Level

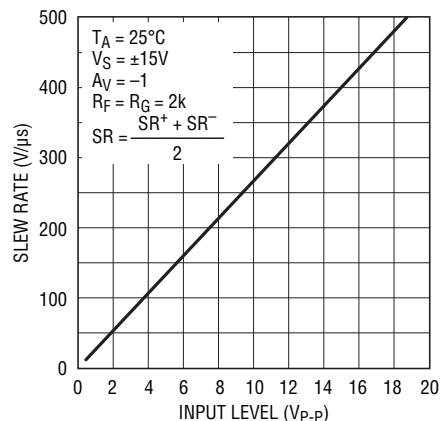


1355/1356 G24

## Total Harmonic Distortion vs Frequency

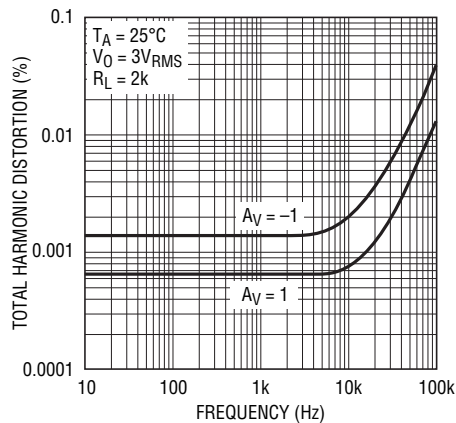


1355/1356 G25

## Undistorted Output Swing vs Frequency (±15V)

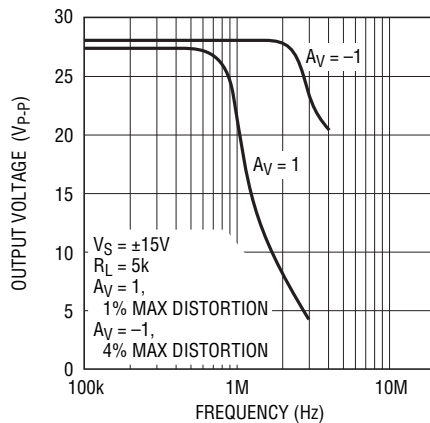

1355/1356 G26


## Undistorted Output Swing vs Frequency (±5V)

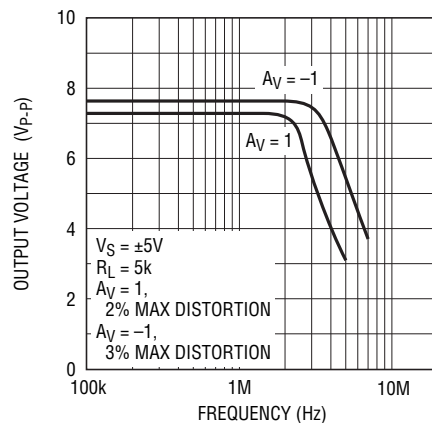

1355/1356 G27


# TYPICAL PERFORMANCE CHARACTERISTICS

**2nd and 3rd Harmonic Distortion vs Frequency**

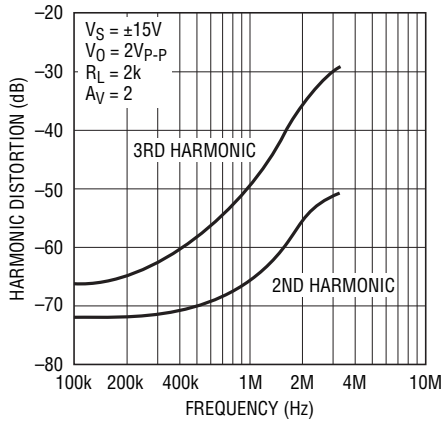


1355/1356 G28

**Crosstalk vs Frequency**

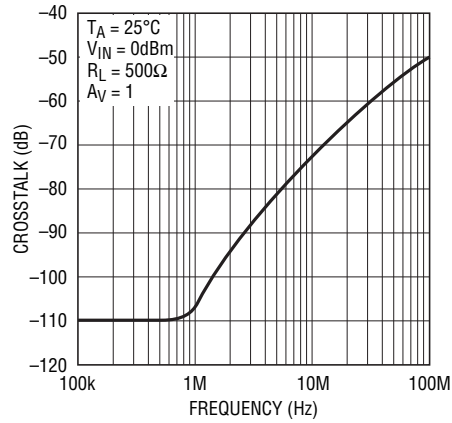


1355/1356 G29

**Capacitive Load Handling**

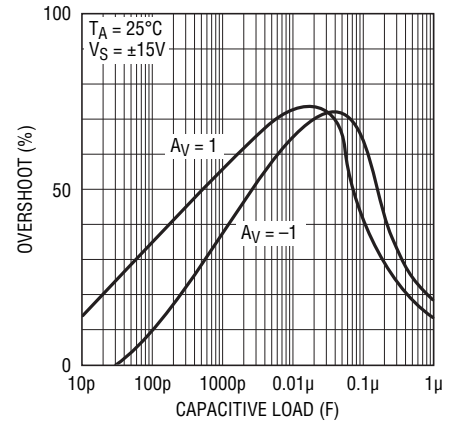


1355/1356 G30

**Small-Signal Transient ( $A_V = 1$ )**

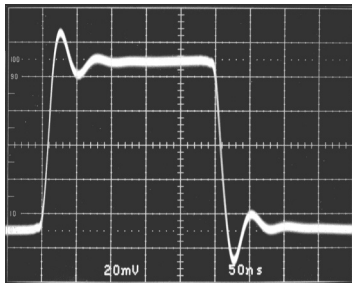


12556 G31

**Small-Signal Transient ( $A_V = -1$ )**

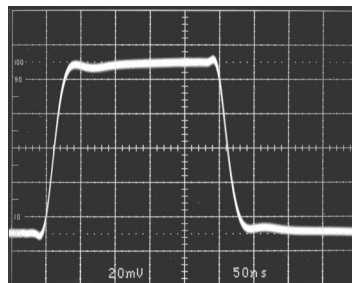


12556 G32

**Small-Signal Transient ( $A_V = -1$ ,  $C_L = 1000pF$ )**

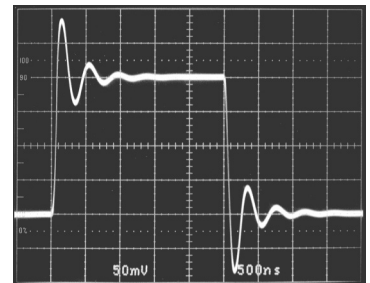


12556 G33

**Large-Signal Transient ( $A_V = 1$ )**

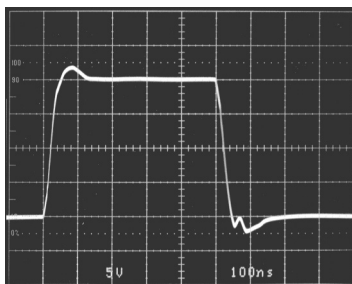


12556 G34

**Large-Signal Transient ( $A_V = -1$ )**

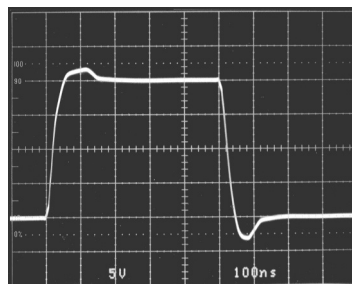

12556 G35

**Large-Signal Transient ( $A_V = 1$ ,  $C_L = 10,000pF$ )**

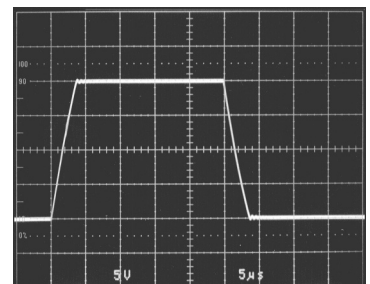

12556 G36

## APPLICATIONS INFORMATION

### Layout and Passive Components

The LT1355/LT1356 amplifiers are easy to use and tolerant of less than ideal layouts. For maximum performance (for example, fast 0.01% settling) use a ground plane, short lead lengths, and RF-quality bypass capacitors (0.01μF to 0.1μF). For high drive current applications use low ESR bypass capacitors (1μF to 10μF tantalum).

The parallel combination of the feedback resistor and gain setting resistor on the inverting input combine with the input capacitance to form a pole which can cause peaking or oscillations. If feedback resistors greater than 5k are used, a parallel capacitor of value:

$$C_F > R_G \times C_{IN}/R_F$$

should be used to cancel the input pole and optimize dynamic performance. For unity-gain applications where a large feedback resistor is used,  $C_F$  should be greater than or equal to  $C_{IN}$ .

### Capacitive Loading

The LT1355/LT1356 are stable with any capacitive load. As the capacitive load increases, both the bandwidth and phase margin decrease so there will be peaking in the frequency domain and in the transient response. Coaxial cable can be driven directly, but for best pulse fidelity a resistor of value equal to the characteristic impedance of the cable (i.e., 75Ω) should be placed in series with the output. The other end of the cable should be terminated with the same value resistor to ground.

### Input Considerations

Each of the LT1355/LT1356 inputs is the base of an NPN and a PNP transistor whose base currents are of opposite polarity and provide first-order bias current cancellation. Because of variation in the matching of NPN and PNP beta, the polarity of the input bias current can be positive or negative. The offset current does not depend on NPN/PNP beta matching and is well controlled. The use of balanced source resistance at each input is recommended for applications where DC accuracy must be maximized.

The inputs can withstand transient differential input voltages up to 10V without damage and need no clamping or source resistance for protection. Differential inputs, however, generate large supply currents (tens of mA) as required for high slew rates. If the device is used with sustained differential inputs, the average supply current will increase, excessive power dissipation will result and the part may be damaged. **The part should not be used as a comparator, peak detector or other open-loop application with large, sustained differential inputs.** Under normal, closed-loop operation, an increase of power dissipation is only noticeable in applications with large slewing outputs and is proportional to the magnitude of the differential input voltage and the percent of the time that the inputs are apart. Measure the average supply current for the application in order to calculate the power dissipation.

### Circuit Operation

The LT1355/LT1356 circuit topology is a true voltage feedback amplifier that has the slewing behavior of a current feedback amplifier. The operation of the circuit can be understood by referring to the simplified schematic. The inputs are buffered by complementary NPN and PNP emitter followers which drive an 800Ω resistor. The input voltage appears across the resistor generating currents which are mirrored into the high impedance node. Complementary followers form an output stage which buffers the gain node from the load. The bandwidth is set by the input resistor and the capacitance on the high impedance node. The slew rate is determined by the current available to charge the gain node capacitance. This current is the differential input voltage divided by  $R_1$ , so the slew rate is proportional to the input. Highest slew rates are therefore seen in the lowest gain configurations. For example, a 10V output step in a gain of 10 has only a 1V input step, whereas the same output step in unity gain has a 10 times greater input step. The curve of Slew Rate vs Input Level illustrates this relationship. The LT1355/LT1356 are tested for slew rate in a gain of -2 so higher slew rates can be expected in gains of 1 and -1, and lower slew rates in higher gain configurations.

## APPLICATIONS INFORMATION

The RC network across the output stage is bootstrapped when the amplifier is driving a light or moderate load and has no effect under normal operation. When driving a capacitive load (or a low value resistive load) the network is incompletely bootstrapped and adds to the compensation at the high impedance node. The added capacitance slows down the amplifier which improves the phase margin by moving the unity-gain frequency away from the pole formed by the output impedance and the capacitive load. The zero created by the RC combination adds phase to ensure that even for very large load capacitances, the total phase lag can never exceed 180 degrees (zero phase margin) and the amplifier remains stable.

### Power Dissipation

The LT1355/LT1356 combine high speed and large output drive in small packages. Because of the wide supply voltage range, it is possible to exceed the maximum junction temperature under certain conditions. Maximum junction

temperature ( $T_J$ ) is calculated from the ambient or case temperature ( $T_A$  or  $T_C$ ) and power dissipation ( $P_D$ ) as follows:

$$\text{LT1355CN8: } T_J = T_A + (P_D \cdot 130^\circ\text{C/W})$$

$$\text{LT1355CS8: } T_J = T_A + (P_D \cdot 190^\circ\text{C/W})$$

$$\text{LT1356CN: } T_J = T_A + (P_D \cdot 110^\circ\text{C/W})$$

$$\text{LT1356CS: } T_J = T_A + (P_D \cdot 150^\circ\text{C/W})$$

$$\text{LT1356HS: } T_J = T_C + (P_D \cdot 30^\circ\text{C/W})$$

Worst-case power dissipation occurs at the maximum supply current and when the output voltage is at 1/2 of either supply voltage (or the maximum swing if less than 1/2 supply voltage). For each amplifier  $P_{D\text{MAX}}$  is:


$$P_{D\text{MAX}} = (V^+ - V^-)(I_{S\text{MAX}}) + (V^+/2)^2/R_L$$

Example: LT1356 in S16 at  $T_A = 70^\circ\text{C}$ ,  $V_S = \pm 15\text{V}$ ,  $R_L = 1\text{k}\Omega$

$$P_{D\text{MAX}} = (30\text{V})(1.45\text{mA}) + (7.5\text{V})^2/1\text{k}\Omega = 99.8\text{mW}$$


$$T_{J\text{MAX}} = 70^\circ\text{C} + (4 \cdot 99.8\text{mW})(150^\circ\text{C/W}) = 130^\circ\text{C}$$

## SIMPLIFIED SCHEMATIC

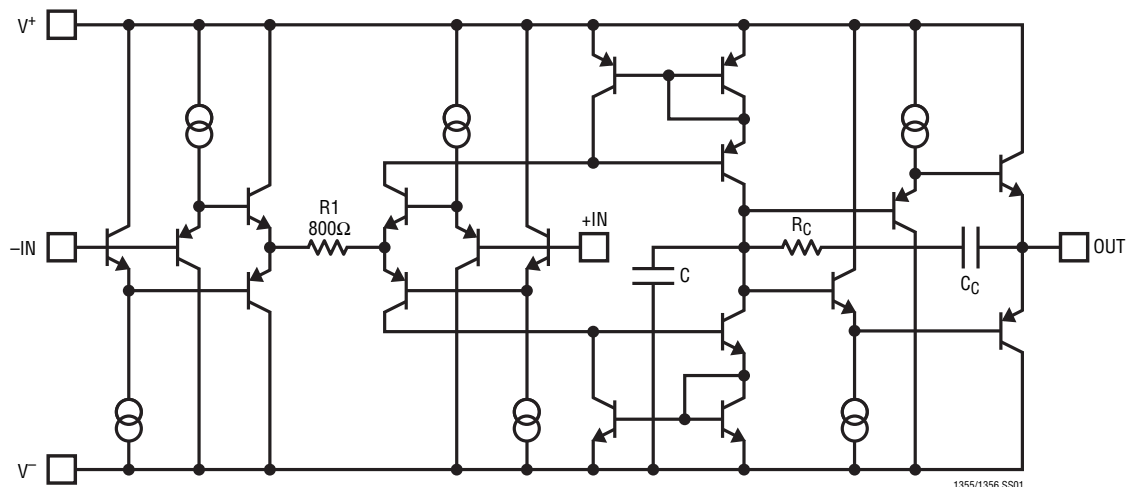

## PACKAGE DESCRIPTION

### N Package 8-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510 Rev I)

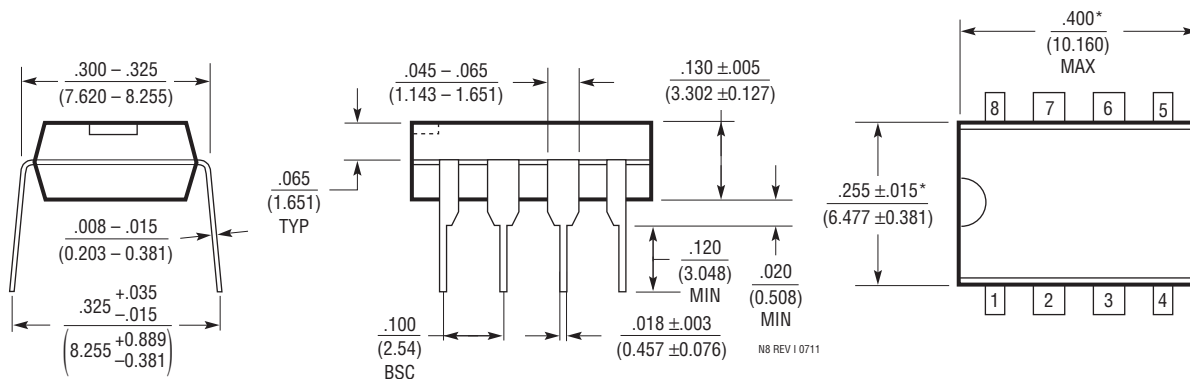


NOTE:

1. DIMENSIONS ARE  $\frac{\text{INCHES}}{\text{MILLIMETERS}}$

\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

### N Package 14-Lead PDIP (Narrow .300 Inch) (Reference LTC DWG # 05-08-1510 Rev I)

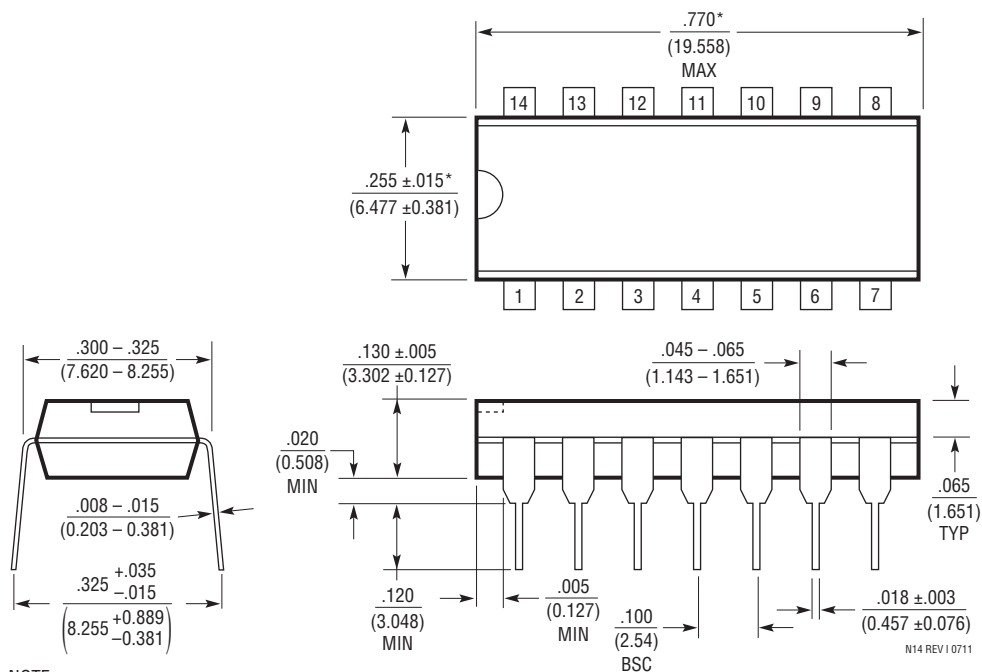


NOTE:

1. DIMENSIONS ARE  $\frac{\text{INCHES}}{\text{MILLIMETERS}}$

\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)


# PACKAGE DESCRIPTION

## S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

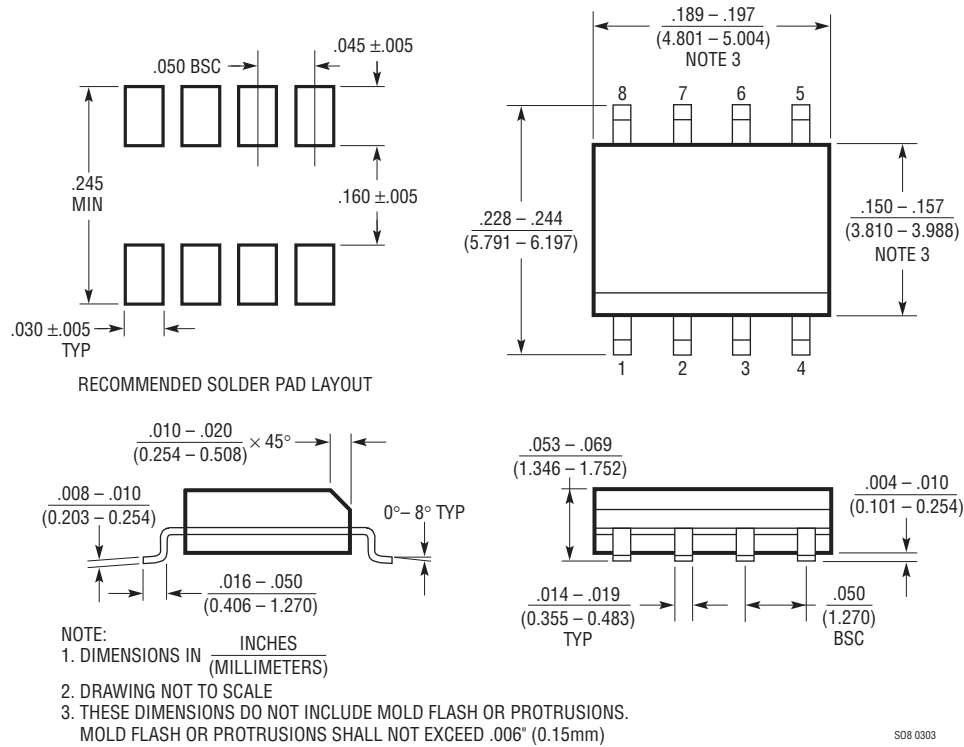

## PACKAGE DESCRIPTION

### S Package 16-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

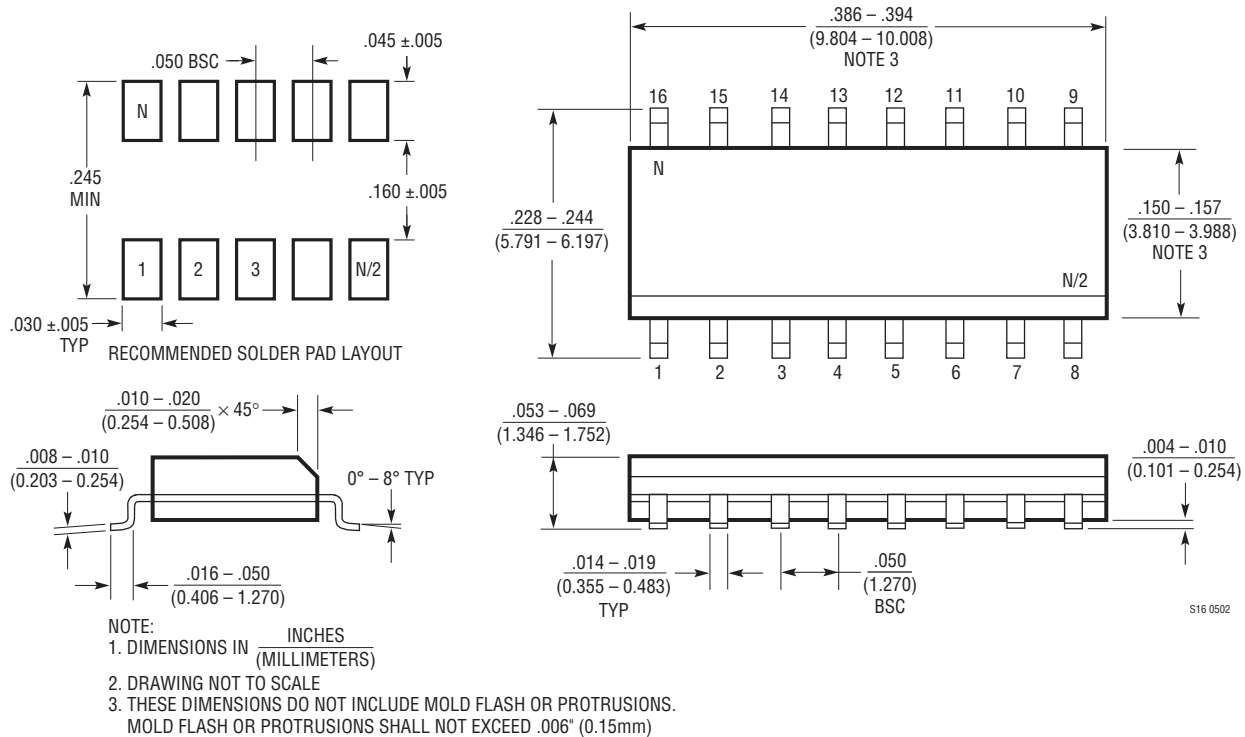


**REVISION HISTORY** (Revision history begins at Rev C)

| REV | DATE  | DESCRIPTION           | PAGE NUMBER |
|-----|-------|-----------------------|-------------|
| C   | 05/12 | Added H- and I-grades | 2, 5, 11    |


# LT1355/LT1356

## TYPICAL APPLICATIONS

Instrumentation Amplifier

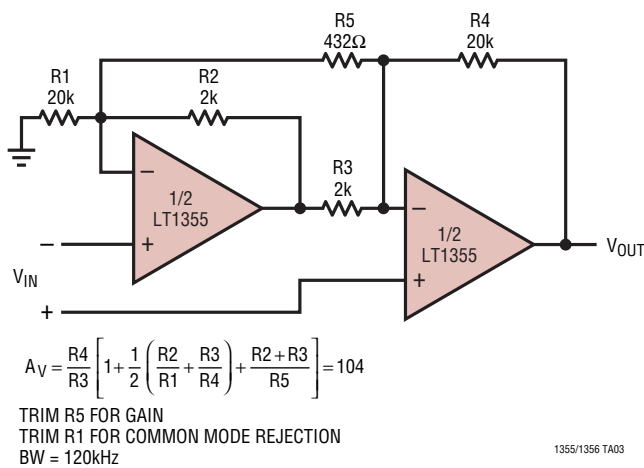

100kHz, 4th Order Butterworth Filter (Sallen-Key)

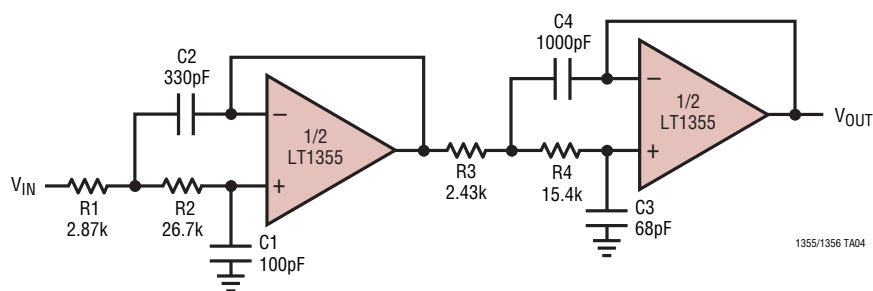

## RELATED PARTS

| PART NUMBER   | DESCRIPTION                                | COMMENTS                                                                                        |
|---------------|--------------------------------------------|-------------------------------------------------------------------------------------------------|
| LT1354        | 12MHz, 400V/μs Op Amp                      | Single Version of LT1355/LT1356                                                                 |
| LT1352/LT1353 | Dual and Quad 250μA, 3MHz, 200V/μs Op Amps | Lower Power Version of LT1355/LT1356, V <sub>OS</sub> = 0.6mV, I <sub>S</sub> = 250μA/Amplifier |
| LT1358/LT1359 | Dual and Quad 25MHz, 600V/μs Op Amps       | Faster Version of LT1355/LT1356, V <sub>OS</sub> = 0.6mV, I <sub>S</sub> = 2mA/Amplifier        |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331