

# NST3906DXV6T1, NST3906DXV6T5

## Dual General Purpose Transistor

The NST3906DXV6T1 device is a spin-off of our popular SOT-23/SOT-323 three-leaded device. It is designed for general purpose amplifier applications and is housed in the SOT-563 six-leaded surface mount package. By putting two discrete devices in one package, this device is ideal for low-power surface mount applications where board space is at a premium.

- $h_{FE}$ , 100-300
- Low  $V_{CE(sat)}$ ,  $\leq 0.4$  V
- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- Lead-Free Solder Plating

### MAXIMUM RATINGS

| Rating                         | Symbol    | Value                 | Unit |
|--------------------------------|-----------|-----------------------|------|
| Collector- Emitter Voltage     | $V_{CEO}$ | -40                   | Vdc  |
| Collector- Base Voltage        | $V_{CBO}$ | -40                   | Vdc  |
| Emitter- Base Voltage          | $V_{EBO}$ | -5.0                  | Vdc  |
| Collector Current - Continuous | $I_C$     | -200                  | mAdc |
| Electrostatic Discharge        | ESD       | HBM>16000,<br>MM>2000 | V    |

### THERMAL CHARACTERISTICS


| Characteristic<br>(One Junction Heated)  | Symbol          | Max                                | Unit                       |
|--|-----------------|------------------------------------|----------------------------|
| Total Device Dissipation $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$           | 357<br>(Note 1)<br>2.9<br>(Note 1) | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance<br>Junction-to-Ambient  | $R_{\theta JA}$ | 350<br>(Note 1)                    | $^\circ\text{C}/\text{W}$  |
| Characteristic<br>(Both Junctions Heated)  | Symbol          | Max                                | Unit                       |
| Total Device Dissipation $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$           | 500<br>(Note 1)<br>4.0<br>(Note 1) | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance<br>Junction-to-Ambient  | $R_{\theta JA}$ | 250<br>(Note 1)                    | $^\circ\text{C}/\text{W}$  |
| Junction and Storage<br>Temperature Range  | $T_J, T_{stg}$  | - 55 to +150                       | $^\circ\text{C}$           |

1. FR-4 @ Minimum Pad




ON Semiconductor®

<http://onsemi.com>

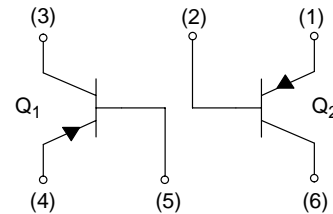

NST3906DXV6T1



SOT-563  
CASE 463A  
PLASTIC

### MARKING DIAGRAM



A2 = Specific Device Code  
D = Date Code

### ORDERING INFORMATION

| Device        | Package | Shipping                       |
|---------------|---------|--------------------------------|
| NST3906DXV6T1 | SOT-563 | 4 mm pitch<br>4000/Tape & Reel |
| NST3906DXV6T5 | SOT-563 | 2 mm pitch<br>8000/Tape & Reel |

# NST3906DXV6T1, NST3906DXV6T5

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

### OFF CHARACTERISTICS

|  |                      |      |     |      |
|--|----------------------|------|-----|------|
| Collector - Emitter Breakdown Voltage (Note 2) | V <sub>(BR)CEO</sub> | -40  | -   | Vdc  |
| Collector - Base Breakdown Voltage             | V <sub>(BR)CBO</sub> | -40  | -   | Vdc  |
| Emitter - Base Breakdown Voltage               | V <sub>(BR)EBO</sub> | -5.0 | -   | Vdc  |
| Base Cutoff Current                            | I <sub>BL</sub>      | -    | -50 | nAdc |
| Collector Cutoff Current                       | I <sub>CEX</sub>     | -    | -50 | nAdc |

### ON CHARACTERISTICS (Note 2)

|   |                      |                             |                         |                       |
|---|----------------------|-----------------------------|-------------------------|-----------------------|
| DC Current Gain<br>(I <sub>C</sub> = -0.1 mAdc, V <sub>CE</sub> = -1.0 Vdc)<br>(I <sub>C</sub> = -1.0 mAdc, V <sub>CE</sub> = -1.0 Vdc)<br>(I <sub>C</sub> = -10 mAdc, V <sub>CE</sub> = -1.0 Vdc)<br>(I <sub>C</sub> = -50 mAdc, V <sub>CE</sub> = -1.0 Vdc)<br>(I <sub>C</sub> = -100 mAdc, V <sub>CE</sub> = -1.0 Vdc) | h <sub>FE</sub>      | 60<br>80<br>100<br>60<br>30 | -<br>-<br>300<br>-<br>- | -<br>-<br>-<br>-<br>- |
| Collector - Emitter Saturation Voltage<br>(I <sub>C</sub> = -10 mAdc, I <sub>B</sub> = -1.0 mAdc)<br>(I <sub>C</sub> = -50 mAdc, I <sub>B</sub> = -5.0 mAdc)  | V <sub>CE(sat)</sub> | -<br>-                      | -0.25<br>-0.4           | Vdc                   |
| Base - Emitter Saturation Voltage<br>(I <sub>C</sub> = -10 mAdc, I <sub>B</sub> = -1.0 mAdc)<br>(I <sub>C</sub> = -50 mAdc, I <sub>B</sub> = -5.0 mAdc)   | V <sub>BE(sat)</sub> | -0.65<br>-                  | -0.85<br>-0.95          | Vdc                   |

### SMALL- SIGNAL CHARACTERISTICS


|   |                  |     |      |                    |
|---|------------------|-----|------|--------------------|
| Current - Gain - Bandwidth Product  | f <sub>T</sub>   | 250 | -    | MHz                |
| Output Capacitance  | C <sub>obo</sub> | -   | 4.5  | pF                 |
| Input Capacitance   | C <sub>ibo</sub> | -   | 10.0 | pF                 |
| Input Impedance<br>(V <sub>CE</sub> = -10 Vdc, I <sub>C</sub> = -1.0 mAdc, f = 1.0 kHz)                         | h <sub>ie</sub>  | 2.0 | 12   | k Ω                |
| Voltage Feedback Ratio<br>(V <sub>CE</sub> = -10 Vdc, I <sub>C</sub> = -1.0 mAdc, f = 1.0 kHz)                  | h <sub>re</sub>  | 0.1 | 10   | X 10 <sup>-4</sup> |
| Small - Signal Current Gain<br>(V <sub>CE</sub> = -10 Vdc, I <sub>C</sub> = -1.0 mAdc, f = 1.0 kHz)             | h <sub>fe</sub>  | 100 | 400  | -                  |
| Output Admittance<br>(V <sub>CE</sub> = -10 Vdc, I <sub>C</sub> = -1.0 mAdc, f = 1.0 kHz)                       | h <sub>oe</sub>  | 3.0 | 60   | μmhos              |
| Noise Figure<br>(V <sub>CE</sub> = -5.0 Vdc, I <sub>C</sub> = -100 μAdc, R <sub>S</sub> = 1.0 k Ω, f = 1.0 kHz) | NF               | -   | 4.0  | dB                 |

### SWITCHING CHARACTERISTICS


|              |  |                |   |     |    |
|--------------|--|----------------|---|-----|----|
| Delay Time   | (V <sub>CC</sub> = -3.0 Vdc, V <sub>BE</sub> = 0.5 Vdc)  | t <sub>d</sub> | - | 35  | ns |
| Rise Time    | (I <sub>C</sub> = -10 mAdc, I <sub>B1</sub> = -1.0 mAdc) | t <sub>r</sub> | - | 35  |    |
| Storage Time | (V <sub>CC</sub> = -3.0 Vdc, I <sub>C</sub> = -10 mAdc)  | t <sub>s</sub> | - | 225 | ns |
| Fall Time    | (I <sub>B1</sub> = I <sub>B2</sub> = -1.0 mAdc)          | t <sub>f</sub> | - | 75  |    |

2. Pulse Test: Pulse Width ≤ 300 μs; Duty Cycle ≤ 2.0%.

# NST3906DXV6T1, NST3906DXV6T5

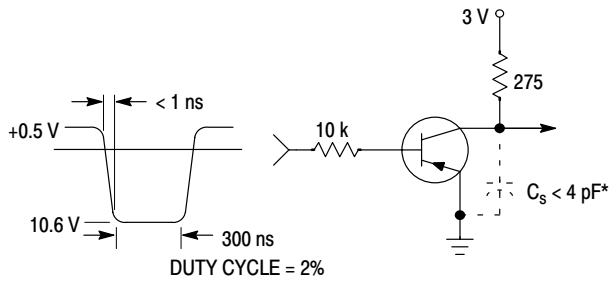


**Figure 1. Delay and Rise Time Equivalent Test Circuit**

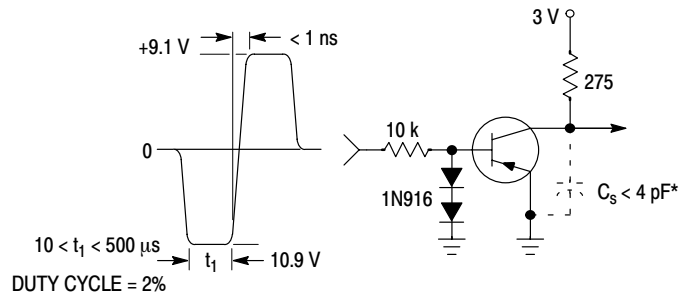


**Figure 2. Storage and Fall Time Equivalent Test Circuit**

\* Total shunt capacitance of test jig and connectors

## TYPICAL TRANSIENT CHARACTERISTICS

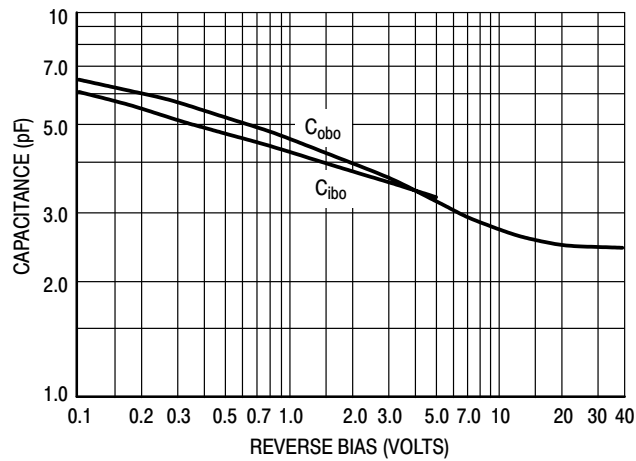


**Figure 3. Capacitance**

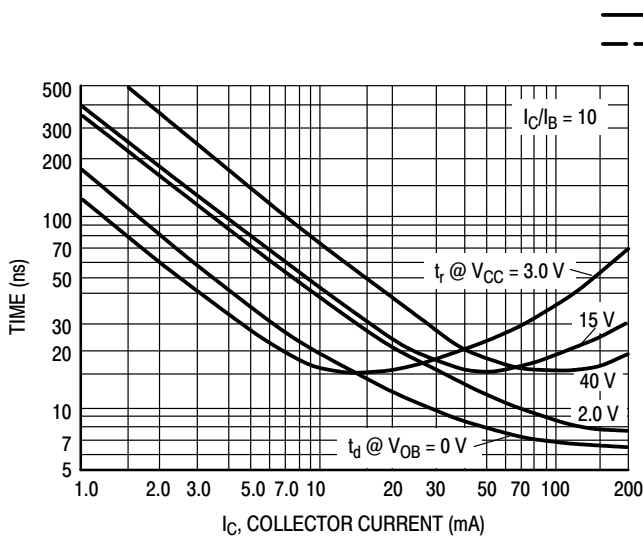

**Figure 4. Turn-On Time**

—  $T_J = 25^\circ\text{C}$   
 - - -  $T_J = 125^\circ\text{C}$

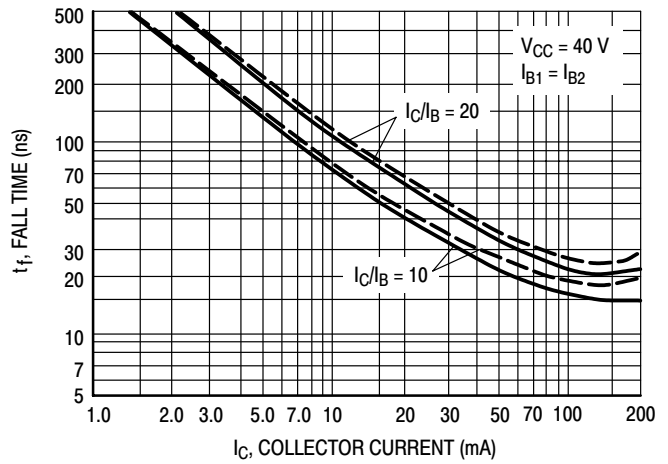

**Figure 5. Fall Time**

# NST3906DXV6T1, NST3906DXV6T5

## TYPICAL AUDIO SMALL-SIGNAL CHARACTERISTICS NOISE FIGURE VARIATIONS

( $V_{CE} = -5.0$  Vdc,  $T_A = 25^\circ\text{C}$ , Bandwidth = 1.0 Hz)

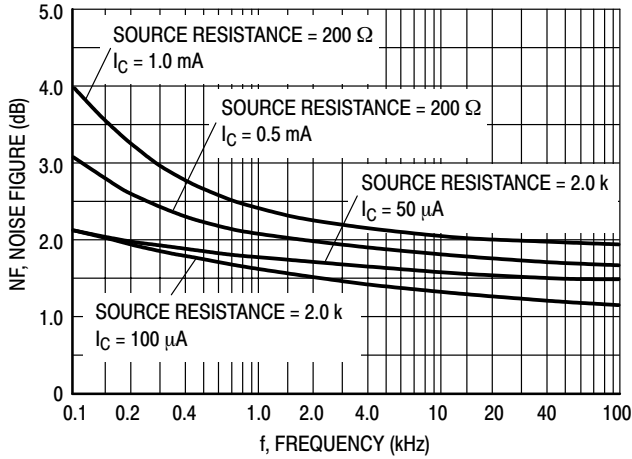


Figure 6.

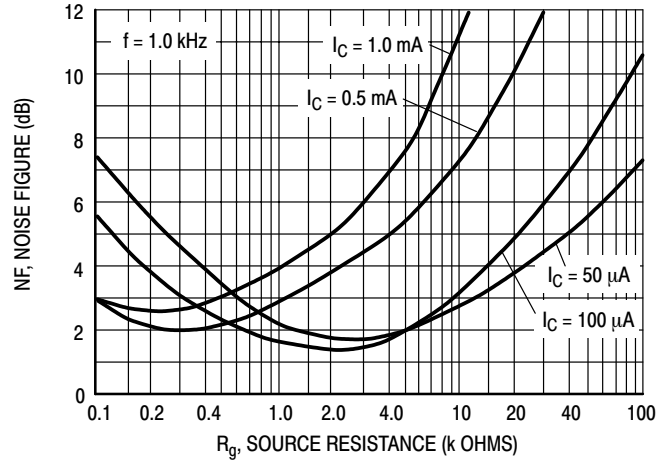


Figure 7.

## h PARAMETERS

( $V_{CE} = -10$  Vdc,  $f = 1.0$  kHz,  $T_A = 25^\circ\text{C}$ )

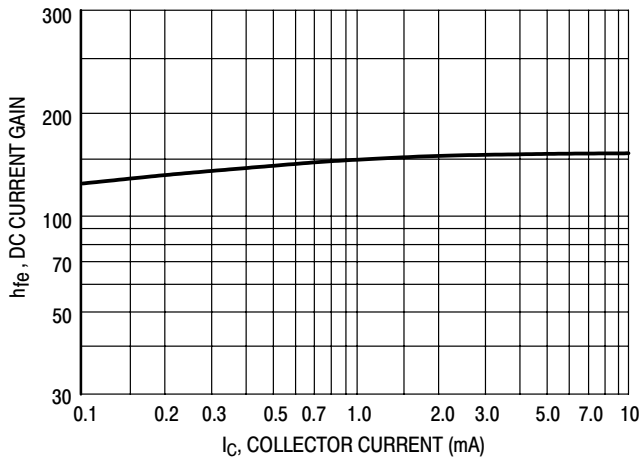


Figure 8. Current Gain

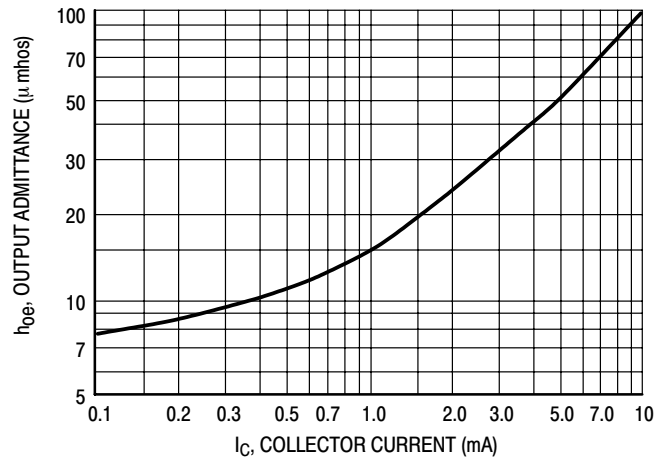


Figure 9. Output Admittance

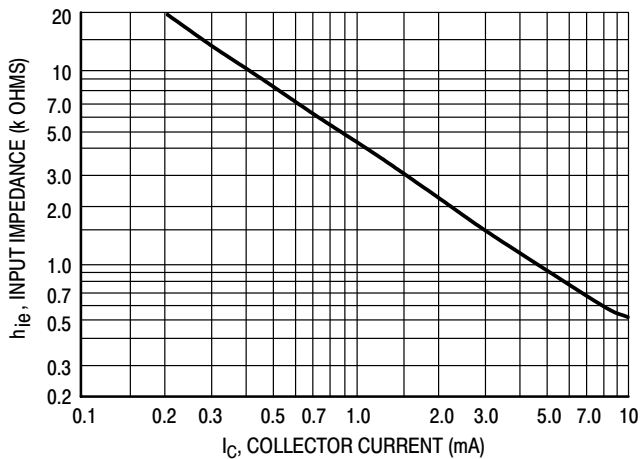


Figure 10. Input Impedance

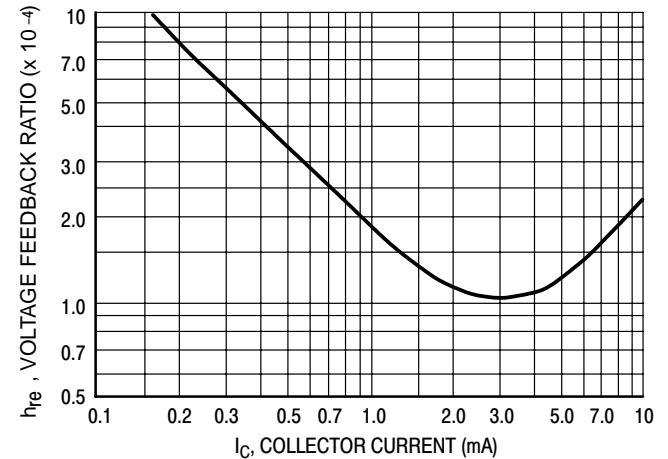


Figure 11. Voltage Feedback Ratio

# NST3906DXV6T1, NST3906DXV6T5

## TYPICAL STATIC CHARACTERISTICS

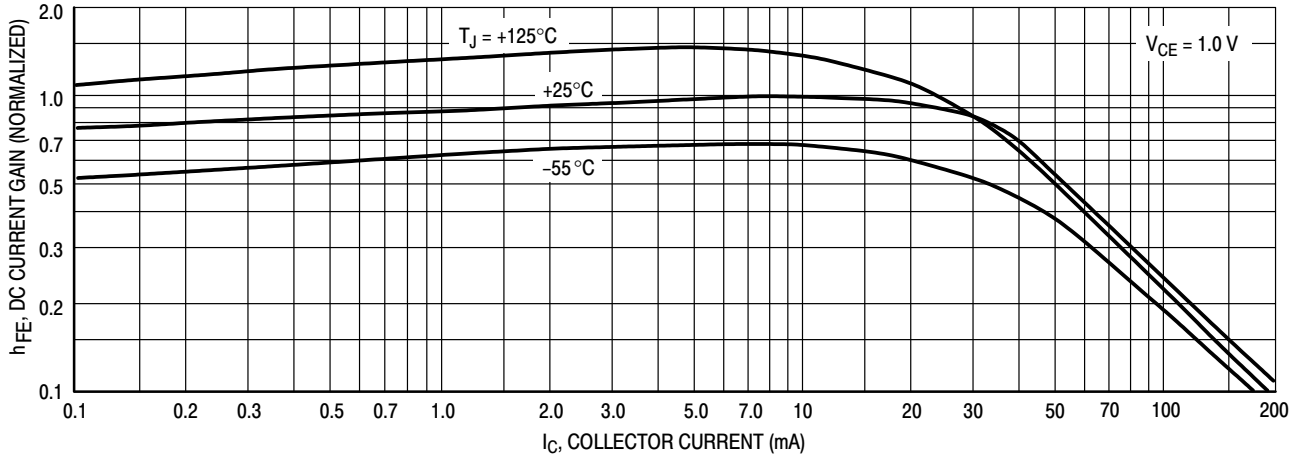


Figure 12. DC Current Gain

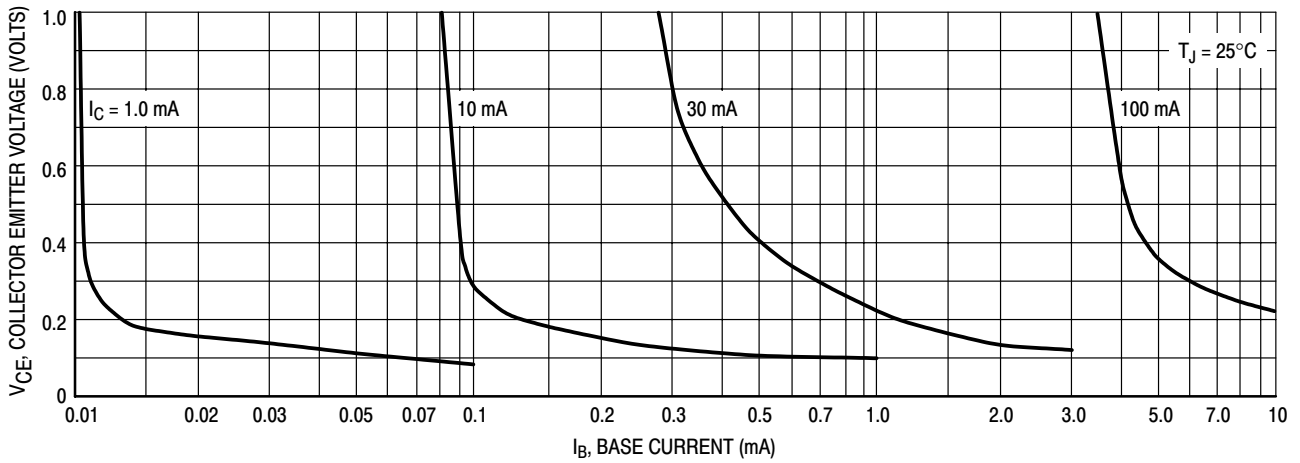


Figure 13. Collector Saturation Region

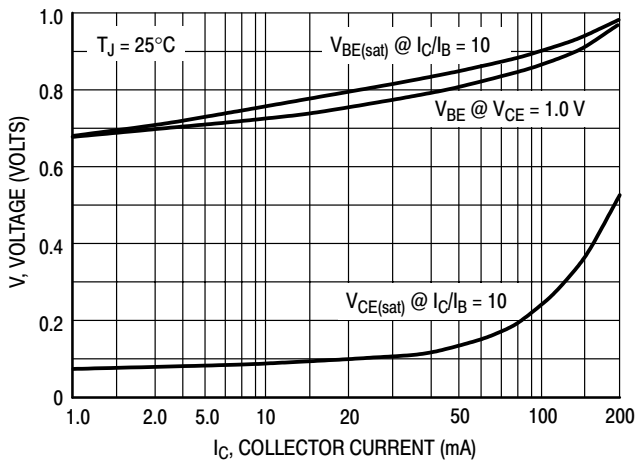


Figure 14. "ON" Voltages


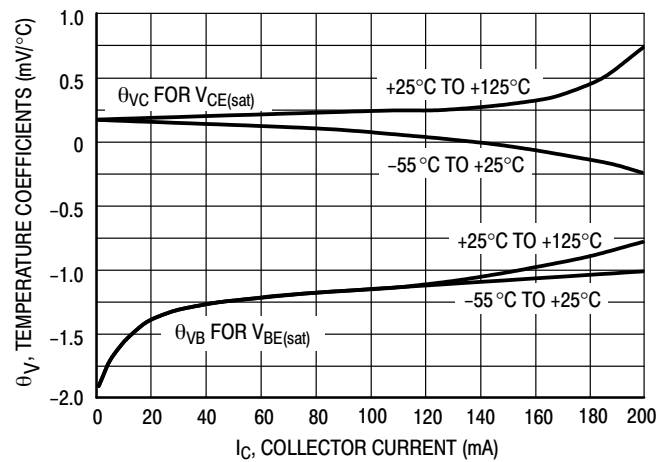


Figure 15. Temperature Coefficients

**INFORMATION FOR USING THE SOT-563 SURFACE MOUNT PACKAGE**  
**MINIMUM RECOMMENDED FOOTPRINT FOR SURFACE MOUNTED APPLICATIONS**

Surface mount board layout is a critical portion of the total design. The footprint for the semiconductor packages must be the correct size to insure proper solder connection

interface between the board and the package. With the correct pad geometry, the packages will self align when subjected to a solder reflow process.

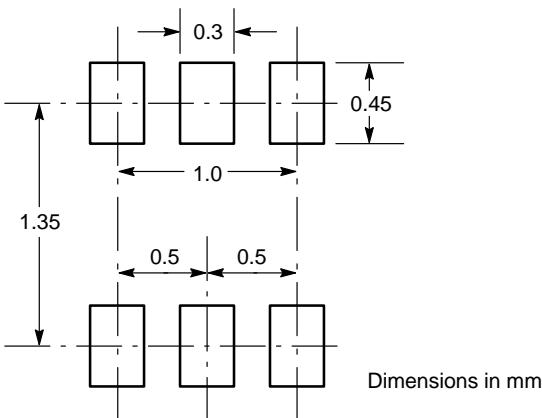

**SOT-563**

**SOT-563 POWER DISSIPATION**

The power dissipation of the SOT-563 is a function of the pad size. This can vary from the minimum pad size for soldering to a pad size given for maximum power dissipation. Power dissipation for a surface mount device is determined by  $T_{J(max)}$ , the maximum rated junction temperature of the die,  $R_{\theta JA}$ , the thermal resistance from the device junction to ambient, and the operating temperature,  $T_A$ . Using the values provided on the data sheet for the SOT-563 package,  $P_D$  can be calculated as follows:

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

The values for the equation are found in the maximum ratings table on the data sheet. Substituting these values into the equation for an ambient temperature  $T_A$  of 25°C, one can calculate the power dissipation of the device which in this case is 150 milliwatts.

$$P_D = \frac{150^\circ\text{C} - 25^\circ\text{C}}{833^\circ\text{C/W}} = 150 \text{ milliwatts}$$

The 833°C/W for the SOT-563 package assumes the use of the recommended footprint on a glass epoxy printed circuit board to achieve a power dissipation of 150 milliwatts. There are other alternatives to achieving higher power dissipation from the SOT-563 package. Another alternative would be to use a ceramic substrate or an aluminum core board such as Thermal Clad®. Using a board material such as Thermal Clad, an aluminum core board, the power dissipation can be doubled using the same footprint.

**SOLDERING PRECAUTIONS**

The melting temperature of solder is higher than the rated temperature of the device. When the entire device is heated to a high temperature, failure to complete soldering within a short time could result in device failure. Therefore, the following items should always be observed in order to minimize the thermal stress to which the devices are subjected.


- Always preheat the device.
- The delta temperature between the preheat and soldering should be 100°C or less.\*
- When preheating and soldering, the temperature of the leads and the case must not exceed the maximum temperature ratings as shown on the data sheet. When using infrared heating with the reflow soldering method, the difference shall be a maximum of 10°C.
- The soldering temperature and time shall not exceed 260°C for more than 10 seconds.
- When shifting from preheating to soldering, the maximum temperature gradient shall be 5°C or less.
- After soldering has been completed, the device should be allowed to cool naturally for at least three minutes. Gradual cooling should be used as the use of forced cooling will increase the temperature gradient and result in latent failure due to mechanical stress.
- Mechanical stress or shock should not be applied during cooling.

\* Soldering a device without preheating can cause excessive thermal shock and stress which can result in damage to the device.

# NST3906DXV6T1, NST3906DXV6T5

## PACKAGE DIMENSIONS

SOT-563, 6 LEAD  
CASE 463A-01  
ISSUE O

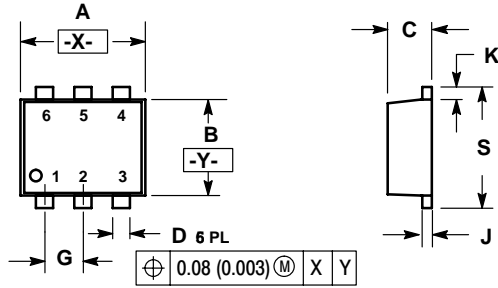

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 1.50        | 1.70 | 0.059     | 0.067 |
| B   | 1.10        | 1.30 | 0.043     | 0.051 |
| C   | 0.50        | 0.60 | 0.020     | 0.024 |
| D   | 0.17        | 0.27 | 0.007     | 0.011 |
| G   | 0.50 BSC    |      | 0.020 BSC |       |
| J   | 0.08        | 0.18 | 0.003     | 0.007 |
| K   | 0.10        | 0.30 | 0.004     | 0.012 |
| S   | 1.50        | 1.70 | 0.059     | 0.067 |

### STYLE 1:

- PIN 1. EMITTER 1  
2. BASE 1  
3. COLLECTOR 2  
4. EMITTER 2  
5. BASE 2  
6. COLLECTOR 1

### STYLE 2:

- PIN 1. EMITTER 1  
2. EMITTER 2  
3. BASE 2  
4. COLLECTOR 2  
5. BASE 1  
6. COLLECTOR 1

### STYLE 3:

- PIN 1. CATHODE 1  
2. CATHODE 1  
3. ANODE/ANODE 2  
4. CATHODE 2  
5. CATHODE 2  
6. ANODE/ANODE 1

### STYLE 4:

- PIN 1. COLLECTOR  
2. COLLECTOR  
3. BASE  
4. EMITTER  
5. COLLECTOR  
6. COLLECTOR

# NST3906DXV6T1, NST3906DXV6T5

Thermal Clad is a registered trademark of the Bergquist Company.

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer.

## PUBLICATION ORDERING INFORMATION

### Literature Fulfillment:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** ONlit@hibbertco.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**JAPAN:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

For additional information, please contact your local Sales Representative.





## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331