

---

## 2-Port USB 2.0 Hi-Speed Hub Controller

---

### General Description

The Microchip USB2422 hub is a low-power, single transaction translator, hub controller IC with two downstream ports for embedded USB solutions. The hub controller can attach to an upstream port as a Hi-Speed and Full-Speed hub or as a Full-Speed only hub. The hub supports Low-Speed, Full-Speed, and Hi-Speed (when configured as a Hi-Speed hub) downstream devices on the enabled downstream ports.

All required resistors on the USB ports are integrated into the hub. This includes all series termination resistors on D+ and D- pins and all required pull-down and pull-up resistors on D+ and D- pins. The over-current sense inputs for the downstream facing ports have internal pull-up resistors.

### Features

- Supports the *USB Battery Charging Specification, Revision 1.1*
- Fully integrated USB termination and pull-up/pull-down resistors
- Supports a single external 3.3 V supply source; internal regulators provide 1.2 V internal core voltage
- On-chip driver for 24 MHz crystal resonator or external 24 MHz clock input
- ESD protection up to 6 kV on all USB pins
- Supports self-powered operation
- The hub contains a built-in default configuration; no external configuration options or components are required
- Downstream ports as non-removable ports
- Downstream port power control and over-current detection on an individual or ganged basis
- Supports compound devices on a port-by-port basis
- 24-pin SQFN (4x4 mm), RoHS-compliant package
- Commercial temperature range support: 0°C to +70°C
- Industrial temperature range support: -40°C to +85°C

### Highlights

- High performance, low-power, small footprint hub controller IC with two downstream ports
- Fully compliant with the *USB 2.0 Specification*
- Optimized for minimal bill-of-materials and low-cost designs

### Applications

- LCD monitors and TVs
- Multi-function USB peripherals
- PC motherboards
- Set-top boxes, DVD players, DVR/PVR
- Printers and scanners
- PC media drive bay
- Portable hub boxes
- Mobile PC docking
- Embedded systems
- Gaming consoles
- Cable/DSL modems
- HDD enclosures
- KVM switches
- Server front panels
- Point-of-Sale (POS) systems
- IP telephony
- Automobile/home audio systems
- Thin client terminals

## TO OUR VALUED CUSTOMERS

It is our intention to provide our valued customers with the best documentation possible to ensure successful use of your Microchip products. To this end, we will continue to improve our publications to better suit your needs. Our publications will be refined and enhanced as new volumes and updates are introduced.

If you have any questions or comments regarding this publication, please contact the Marketing Communications Department via E-mail at [docerrors@microchip.com](mailto:docerrors@microchip.com). We welcome your feedback.

### Most Current Data Sheet

To obtain the most up-to-date version of this data sheet, please register at our Worldwide Web site at:

<http://www.microchip.com>

You can determine the version of a data sheet by examining its literature number found on the bottom outside corner of any page. The last character of the literature number is the version number, (e.g., DS30000000A is version A of document DS30000000).

### Errata

An errata sheet, describing minor operational differences from the data sheet and recommended workarounds, may exist for current devices. As device/documentation issues become known to us, we will publish an errata sheet. The errata will specify the revision of silicon and revision of document to which it applies.

To determine if an errata sheet exists for a particular device, please check with one of the following:

- Microchip's Worldwide Web site; <http://www.microchip.com>
- Your local Microchip sales office (see last page)

When contacting a sales office, please specify which device, revision of silicon and data sheet (include -literature number) you are using.

### Customer Notification System

Register on our web site at [www.microchip.com](http://www.microchip.com) to receive the most current information on all of our products.


## Table of Contents

|                                               |    |
|-----------------------------------------------|----|
| 1.0 Block Diagram .....                       | 4  |
| 2.0 Pin Descriptions .....                    | 6  |
| 3.0 Battery Charging Support .....            | 14 |
| 4.0 Configuration Options .....               | 16 |
| 5.0 DC Parameters .....                       | 35 |
| 6.0 AC Specifications .....                   | 38 |
| 7.0 Package Outline .....                     | 40 |
| Appendix A: Acronyms .....                    | 41 |
| Appendix B: References .....                  | 42 |
| Appendix C: Data Sheet Revision History ..... | 43 |
| The Microchip Web Site .....                  | 44 |
| Customer Change Notification Service .....    | 44 |
| Customer Support .....                        | 44 |
| Product Identification System .....           | 45 |

# USB2422

## 1.0 BLOCK DIAGRAM

FIGURE 1-1: USB2422 BLOCK DIAGRAM

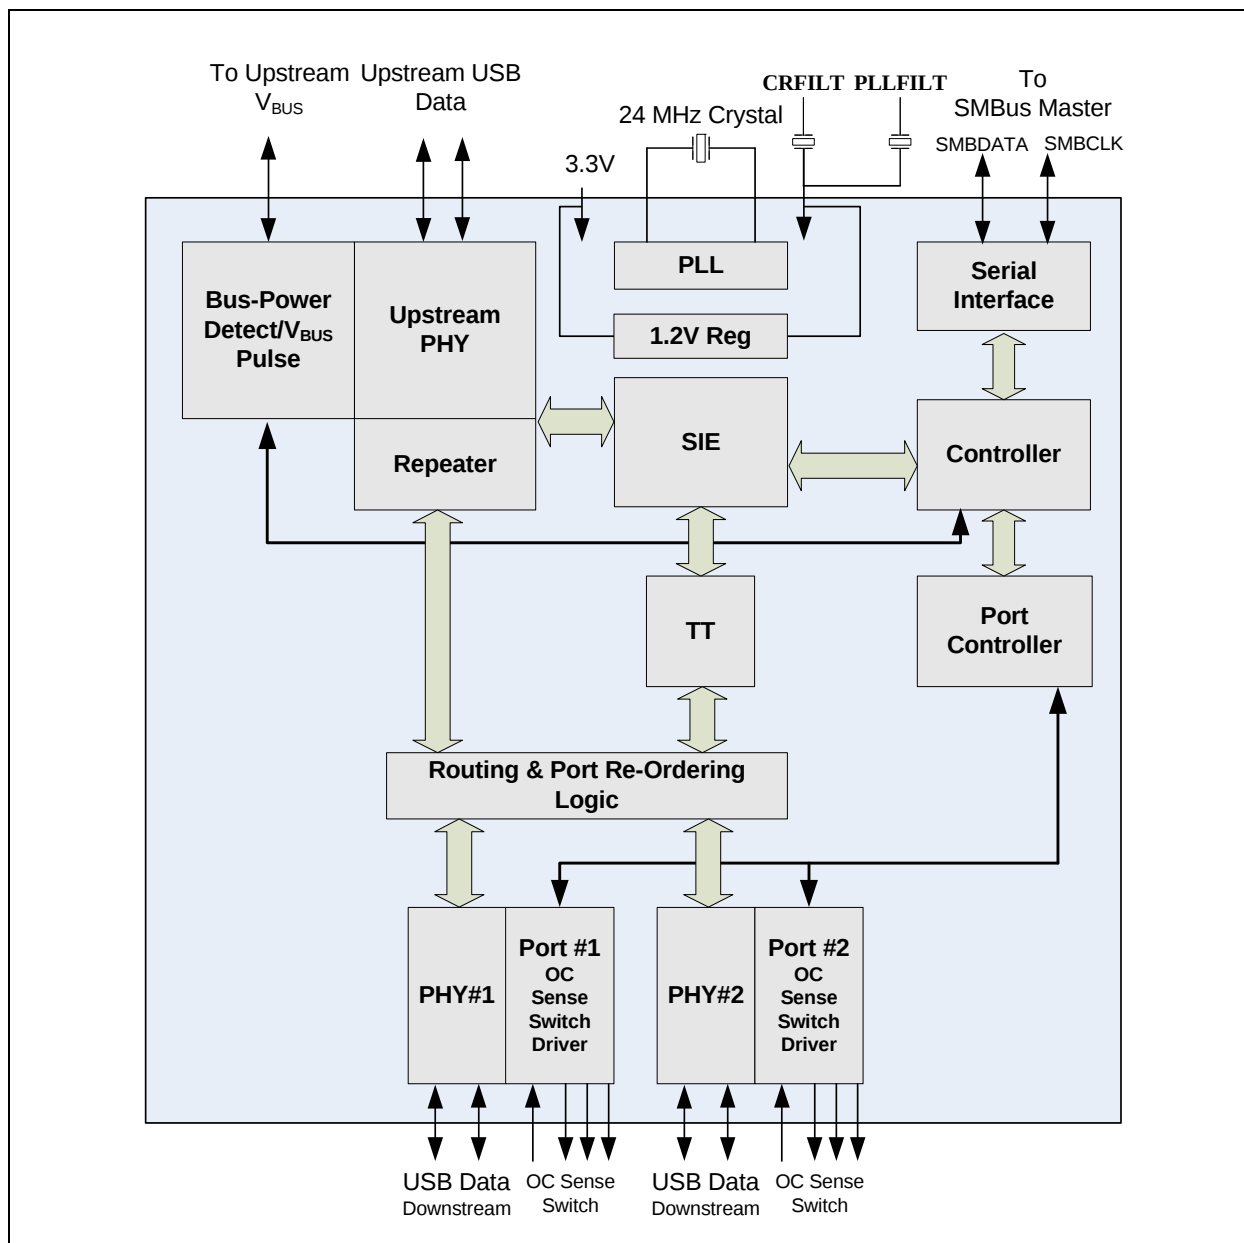

Within this manual, the following abbreviations and symbols are used to improve readability.

| Example                | Description                                                                                                                                                                       |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>BIT</b>             | Name of a single bit within a field                                                                                                                                               |
| <b>FIELD.BIT</b>       | Name of a single bit (BIT) in FIELD                                                                                                                                               |
| x...y                  | Range from x to y, inclusive                                                                                                                                                      |
| <b>BITS[m:n]</b>       | Groups of bits from m to n, inclusive                                                                                                                                             |
| <b>PIN</b>             | Pin Name                                                                                                                                                                          |
| zzzzb                  | Binary number (value zzzz)                                                                                                                                                        |
| 0xzzz                  | Hexadecimal number (value zzz)                                                                                                                                                    |
| zzh                    | Hexadecimal number (value zz)                                                                                                                                                     |
| rsvd                   | Reserved memory location. Must write 0, read value indeterminate                                                                                                                  |
| code                   | Instruction code, or API function or parameter                                                                                                                                    |
| <i>Multi Word Name</i> | Used for multiple words that are considered a single unit, such as: <i>Resource Allocate</i> message, or <i>Connection Label</i> , or <i>Decrement Stack Pointer</i> instruction. |
| <i>Section Name</i>    | Section or Document name.                                                                                                                                                         |
| x                      | Don't care                                                                                                                                                                        |
| <Parameter>            | <> indicate a Parameter is optional or is only used under some conditions                                                                                                         |
| {,Parameter}           | Braces indicate Parameter(s) that repeat one or more times.                                                                                                                       |
| [Parameter]            | Brackets indicate a nested Parameter. This Parameter is not real and actually decodes into one or more real parameters.                                                           |

# USB2422


## 2.0 PIN DESCRIPTIONS

This chapter is organized by a set of pin configurations followed by a corresponding pin list organized by function according to their associated interface. A detailed description list of each signal (named in the pin list) is organized by function in [Table 2-2, “USB2422 Pin Descriptions,” on page 7](#). Refer to [Table 2-3, “Buffer Type Descriptions,” on page 10](#) for a list of buffer types.

An *N* at the end of a signal name indicates that the active (asserted) state occurs when the signal is at a low voltage level. When the *N* is not present, the signal is asserted when it is at a high voltage level. The terms assertion and negation are used exclusively in order to avoid confusion when working with a mixture of active low and active high signals. The term assert, or assertion, indicates that a signal is active, independent of whether that level is represented by a high or low voltage. The term negate, or negation, indicates that a signal is inactive.

## 2.1 Pin Configuration

FIGURE 2-1: USB2422 24-Pin SQFN

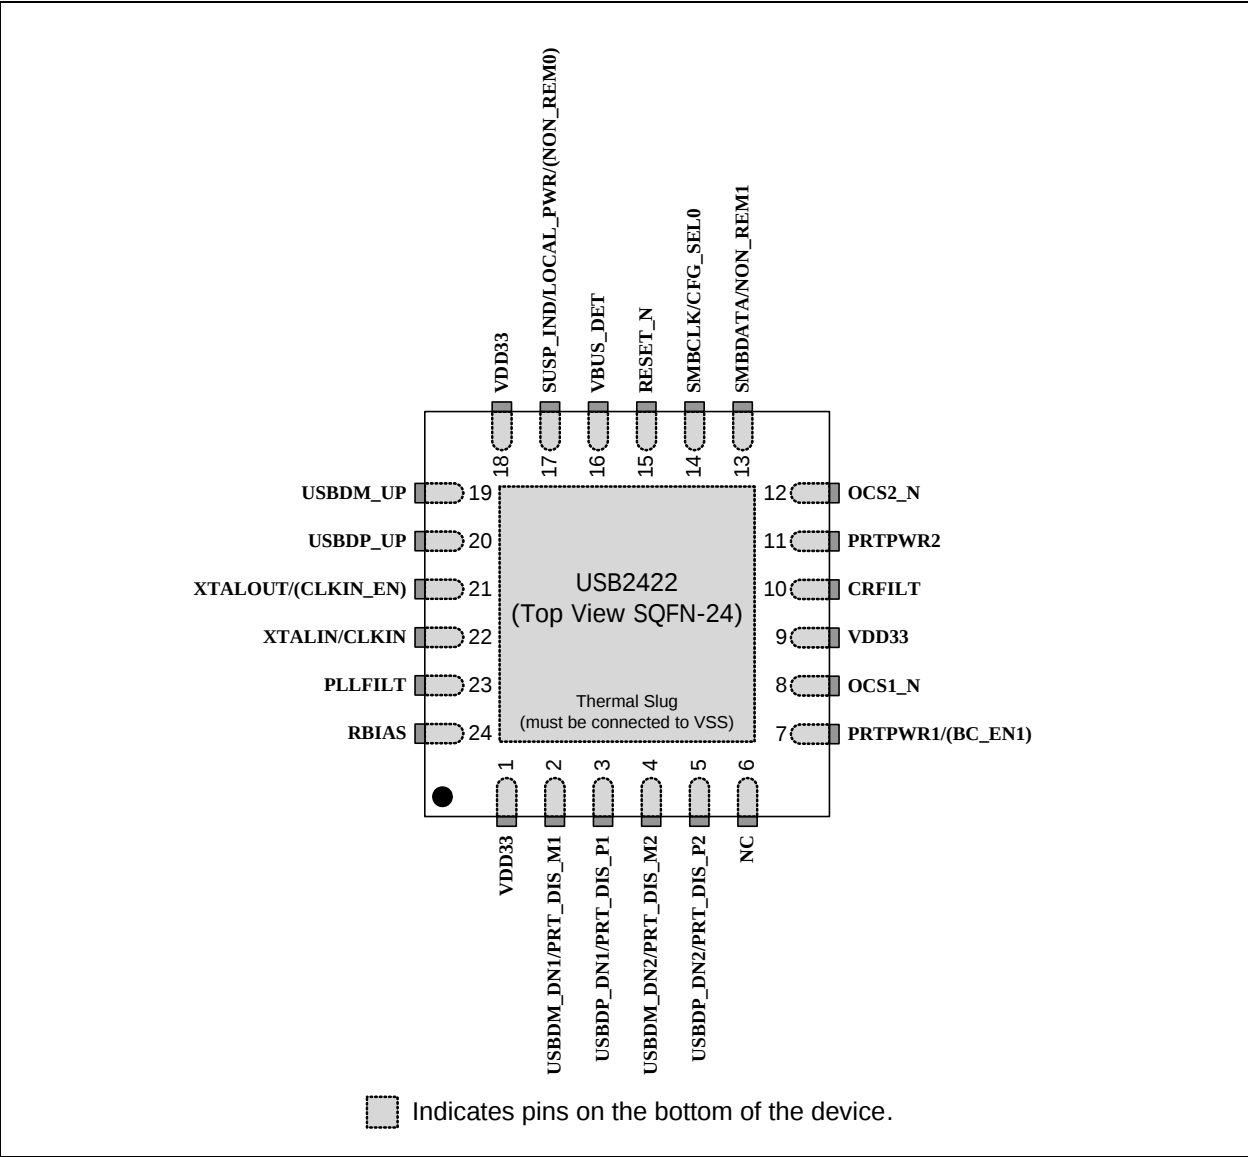

## 2.2 Pin Table

**TABLE 2-1: USB2422 PIN TABLE**

| UPSTREAM USB 2.0 INTERFACES (3 PINS)          |                          |                          |                                     |
|-----------------------------------------------|--------------------------|--------------------------|-------------------------------------|
| USBDM_UP                                      | usbDM_UP                 | VBUS_DET                 |                                     |
| DOWNSTREAM 2-PORT USB 2.0 INTERFACES (9 PINS) |                          |                          |                                     |
| USBDP_DN1/<br>PRT_DIS_P1                      | USBDM_DN1/<br>PRT_DIS_M1 | USBDP_DN2/<br>PRT_DIS_P2 | USBDM_DN2/<br>PRT_DIS_M2            |
| PRT_PWR1/<br>BC_EN1                           | PRT_PWR2                 | OCS1_N                   | OCS2_N                              |
| RBIAS                                         |                          |                          |                                     |
| SERIAL PORT INTERFACE (2 PINS)                |                          |                          |                                     |
| SMBDATA/<br>NON_REM1                          | SMBCLK/<br>CFG_SEL       |                          |                                     |
| MISC (5 PINS)                                 |                          |                          |                                     |
| XTALIN/<br>CLKIN                              | XTALOUT/<br>CLKIN_EN     | RESET_N                  | SUSP_IND/<br>LOCAL_PWR/<br>NON_REM0 |
| NC                                            |                          |                          |                                     |
| POWER, GROUND, AND NO CONNECTS (5 PINS)       |                          |                          |                                     |
| (3) VDD33                                     | CRFILT                   | PLLFLT                   | VSS                                 |
| TOTAL 24                                      |                          |                          |                                     |

## 2.3 Pin Descriptions (Grouped by Function)

**TABLE 2-2: USB2422 PIN DESCRIPTIONS**

| Pin #                       | Symbol               | Buffer Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------|----------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| UPSTREAM USB 2.0 INTERFACES |                      |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 19<br>20                    | USBDM_UP<br>USBDP_UP | IO-U        | USB Bus Data:<br>Connect to the upstream USB bus data signals (host, port, or upstream hub).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 16                          | VBUS_DET             | I           | <p>Detect Upstream VBUS Power:</p> <p>Detects the state of upstream VBUS power. The hub monitors <b>VBUS_DET</b> to determine when to assert the internal D+ pull-up resistor (signalling a connect event)</p> <p>When designing a detachable hub, this pin should be connected to VBUS on the upstream port via a 2:1 voltage divider. Two 100 kΩ resistors are suggested.</p> <p>For self-powered applications with a permanently attached host, this pin must be connected to a dedicated host control output, or connected to the 3.3 V domain that powers the host (typically <b>VDD33</b>).</p> |

# USB2422

**TABLE 2-2: USB2422 PIN DESCRIPTIONS (CONTINUED)**

| Pin #                                | Symbol                                                                      | Buffer Type    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------|-----------------------------------------------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOWNSTREAM USB 2.0 INTERFACES</b> |                                                                             |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 5<br>3<br>and<br>4<br>2              | USBDP_DN[2:1]/<br>PRT_DIS_P[2:1]<br>and<br>USBDN_DN[2:1]/<br>PRT_DIS_M[2:1] | IO-U           | <p>Hi-Speed USB Data:</p> <p>Connect to the downstream USB peripheral devices attached to the hub's ports.</p> <p>Port Disable Strap Option:</p> <p>If this strap is enabled by package and configuration settings (see <a href="#">Table 4-1, "Hub Configuration Options"</a>), this pin will be sampled at <b>RESET_N</b> negation to determine if the port is disabled.</p> <p>Both USB data pins for the corresponding port must be tied to <b>VDD33</b> to disable the associated downstream port.</p>                                                                                                                                                                                                                                |
| 7                                    | PRT_PWR1/<br><br>BC_EN1                                                     | O12<br><br>IPD | <p>USB Power Enable:</p> <p>Enables power to USB peripheral devices that are downstream, where the hub supports active high power controllers only.</p> <p>Battery Charging Strap Option:</p> <p>Port 1 pin will be sampled at <b>RESET_N</b> negation to determine if port 1 supports the battery charging protocol (and thus the supporting external port power controllers) that would enable a device to draw the currents per the <i>USB Battery Charging Specification</i>.</p> <p>This pin has an internal pull-down that will be removed after the strap option hold time is completed.</p> <p>BC_EN1= 1: Battery charging feature is supported for port 1<br/>BC_EN1= 0: Battery charging feature is not supported for port 1</p> |
| 11                                   | PRT_PWR2                                                                    | O12            | <p>USB Power Enable:</p> <p>Enables power to USB peripheral devices that are downstream, where the hub supports active high power controllers only.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 8<br>12                              | OCS1_N<br>OCS2_N                                                            | IPU            | <p>Over-Current Sense:</p> <p>Input from external current monitor indicating an over-current condition. This pin contains an internal pull-up to the 3.3 V supply.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 24                                   | RBIAS                                                                       | I-R            | <p>USB Transceiver Bias:</p> <p>A12.0 k<math>\Omega</math> (+/- 1%) resistor is attached from ground to this pin to set the transceiver's internal bias settings.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>SERIAL PORT INTERFACE</b>         |                                                                             |                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 13                                   | SMBDATA<br>NON_REM1                                                         | I/OSD12        | <p>System Management Bus Data</p> <p>Non-removable Port Strap Option:</p> <p>This pin is sampled (in conjunction with <b>SUSP_IND/NON_REM0</b>) at <b>RESET_N</b> negation to determine if ports [2:1] contain permanently attached (non-removable) devices:</p> <p>NON_REM[1:0] = 00: all ports are removable<br/>NON_REM[1:0] = 01: port 1 is non-removable<br/>NON_REM[1:0] = 10: ports 1 and 2 are non-removable<br/>NON_REM[1:0] = 11: reserved</p> <p>See <a href="#">Section 2.5, "Strap Pin Configuration"</a> for details.</p>                                                                                                                                                                                                    |
| 14                                   | SMBCLK/<br>CFG_SEL                                                          | I/OSD12        | <p>System Management Bus Clock</p> <p>Configuration Select:</p> <p>The logic state of this multifunction pin is internally latched on the rising edge of <b>RESET_N</b> (<b>RESET_N</b> negation), and will determine the hub configuration method as described in <a href="#">Table 4-1</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**TABLE 2-2: USB2422 PIN DESCRIPTIONS (CONTINUED)**

| Pin #       | Symbol                                      | Buffer Type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------|---------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MISC</b> |                                             |             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 22          | XTALIN/<br>CLKIN                            | ICLKx       | 24 MHz Crystal or External Clock Input:<br><br>This pin connects to either one terminal of the crystal or to an external 24 MHz clock when a crystal is not used.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 21          | XTALOUT                                     | OCLKx       | Crystal Output:<br><br>This is the other terminal of the crystal circuit with 1.2 V p-p output and a weak (< 1 mA) driving strength. When an external clock source is used to drive XTALIN/CLKIN, leave this pin unconnected, or use with appropriate caution.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 15          | RESET_N                                     | IS          | RESET Input:<br><br>The system must reset the chip by driving this input low. The minimum active low pulse is 1 $\mu$ s.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 6           | NC                                          | IPD         | Treat as a no connect pin or connect to ground. No trace or signal should be routed or attached to this pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 17          | SUSP_IND<br><br>LOCAL_PWR<br><br>(NON_REM0) | I/O12       | <p>Suspend Indicator:<br/><br/>Indicates the USB state of the hub.</p> <p>negated : unconfigured, or configured and in USB Suspend<br/>asserted : Hub is configured, and is active (i.e., not in suspend)</p> <p>Local Power:<br/><br/>This input selects whether the hub reports itself as bus or self-powered when dynamic power switching is enabled via the <a href="#">Dynamic Power Enable (DYNAMIC)</a> bit of the <a href="#">Configuration Data Byte 2 Register (CFG2)</a>. This pin is sampled at POR/Reset before the USB Hub Attach command is sent. Once the hub has entered the attach state (as indicated by the <a href="#">USB Attach and Write Protect (USB_ATTACH)</a> bit of the <a href="#">Status/Command Register (STCD)</a>), this pin cannot be changed.</p> <p>Low : self/local power source is not available (i.e., the Hub gets all power from the upstream USB VBus).<br/>High : self/local power source is available.</p> <p><b>Note:</b> Never tie this pin directly to VDD33, as doing so may cause it to act as SUSP_IND.</p> <p><b>Note:</b> This pin assumes the meaning of local power input only if properly configured via SMBus. If the hub is configured via straps, it is NON_REM0 at reset and SUSP_IND after reset.</p> <p>Non-Removable Port Strap Option:<br/><br/>This pin is sampled (in conjunction with SUSP_IND/NON_REM0) at RESET_N negation to determine if ports [2:1] contain permanently attached (non-removable) devices:</p> <p>NON_REM[1:0] = 00: all ports are removable<br/>NON_REM[1:0] = 01: port 1 is non-removable<br/>NON_REM[1:0] = 10: ports 1 and 2 are non-removable<br/>NON_REM[1:0] = 11: reserved</p> <p>See <a href="#">Section 2.5, "Strap Pin Configuration"</a> for details.</p> |

# USB2422

TABLE 2-2: USB2422 PIN DESCRIPTIONS (CONTINUED)

| Pin #                                 | Symbol  | Buffer Type | Description                                                                                                                                                                                                               |
|---------------------------------------|---------|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>POWER, GROUND, and NO CONNECTS</b> |         |             |                                                                                                                                                                                                                           |
| 1<br>9<br>18                          | VDD33   |             | 3.3 V power to the chip.<br><br>A 1.0 $\mu$ F low-ESR capacitor to VSS is required on pin 9 as close as possible to the pin. A 0.1 $\mu$ F low-ESR capacitor to VSS is required on pin 1 as close as possible to the pin. |
| 10                                    | CRFILT  |             | VDD Core Regulator Filter Capacitor:<br><br>This pin requires a 1.0 $\mu$ F low-ESR capacitor to VSS for proper operation.                                                                                                |
| 23                                    | PLLFILT |             | PLL Regulator Filter Capacitor:<br><br>This pin can have up to a 0.1 $\mu$ F low-ESR capacitor to VSS, or be left unconnected.                                                                                            |
|                                       | VSS     |             | Ground Pad/ePad:<br><br>The package slug is the only VSS for the device and must be tied to ground with multiple vias.                                                                                                    |

## 2.4 Buffer Type Descriptions

TABLE 2-3: BUFFER TYPE DESCRIPTIONS

| Buffer | Description                                          |
|--------|------------------------------------------------------|
| I/O    | Input/Output                                         |
| IPD    | Input with internal weak pull-down resistor          |
| IPU    | Input with internal weak pull-up resistor            |
| IS     | Input with Schmitt trigger                           |
| I/O12  | Input/Output buffer with 12 mA sink and 12 mA source |
| ICLKx  | XTAL clock input                                     |
| OCLKx  | XTAL clock output                                    |
| I-R    | RBIAS                                                |
| I/O-U  | Analog Input/Output defined in USB specification     |

## 2.5 Strap Pin Configuration

If a pin's strap function is enabled through hub configuration selection ([Table 4-1](#)), the strap pins must be pulled either high or low using the values provided in [Table 2-4](#). Each strap option is dependent on the pin's buffer type, as outlined in the sections that follow.


TABLE 2-4: STRAP OPTION SUMMARY

| Strap Option             | Resistor Value      | Buffer Type | Notes                                                                                                                   |
|--------------------------|---------------------|-------------|-------------------------------------------------------------------------------------------------------------------------|
| Non-Removable            | 47 - 100 k $\Omega$ | I/O         |                                                                                                                         |
| Internal Pull-Down (IPD) | 10 k $\Omega$       | IPD         | <ul style="list-style-type: none"><li>Only applicable to port power pins</li><li>Contains a built-in resistor</li></ul> |
| LED                      | 47 - 100 k $\Omega$ | I/O         |                                                                                                                         |

## 2.5.1 NON-REMOVABLE

If a strap pin's buffer type is I/O, an external pull-up or pull-down must be implemented as shown in [Figure 2-2](#). Use Strap High to set the strap option to 1 and Strap Low to set the strap option to 0. When implementing the Strap Low option, no additional components are needed (i.e., the internal pull-down provides the resistor).


**FIGURE 2-2: NON-REMOVABLE PIN STRAP EXAMPLE**

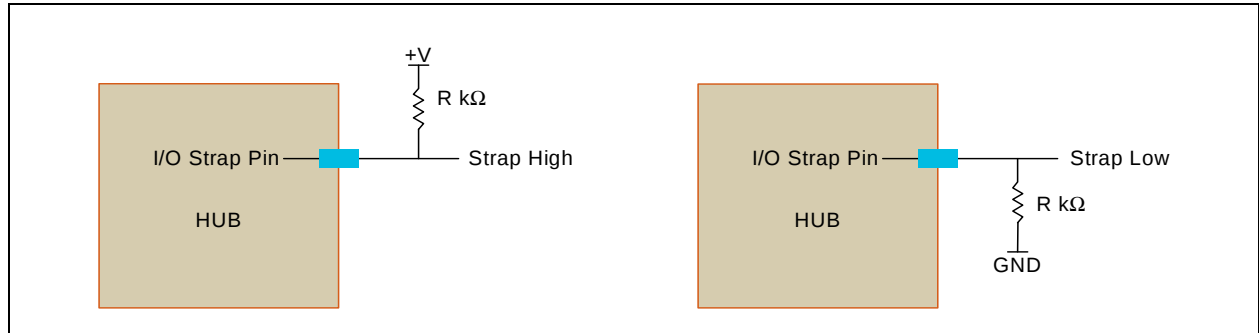

## 2.5.2 INTERNAL PULL-DOWN (IPD)

If a strap pin's buffer type is IPD, one of the two hardware configurations outlined in [Figure 2-3](#) must be implemented. Use the Strap High configuration to set the strap option value to 1 and Strap Low to set the strap option value to 0.


**FIGURE 2-3: IPD PIN STRAP EXAMPLE**

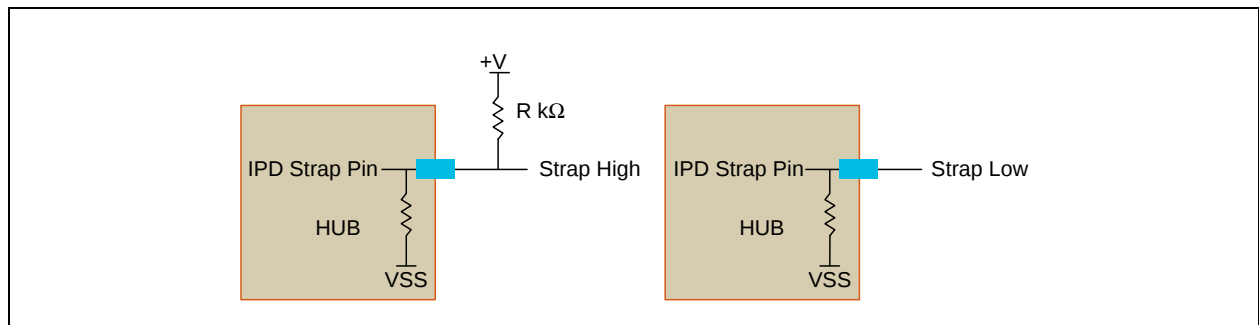

## 2.5.3 LED

If a strap pin's buffer type is I/O and shares functionality with an LED, the hardware configuration outlined below must be implemented. The internal logic will drive the LED appropriately (active high or low) depending on the sampled strap option. Use the Strap High configuration to set the strap option value to 1 and Strap Low to set the strap option to 0.

**FIGURE 2-4: LED PIN STRAP EXAMPLE**

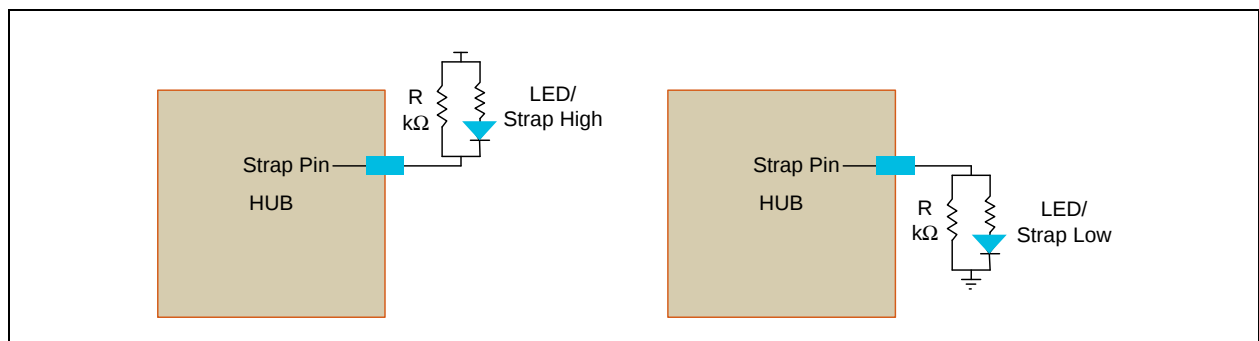

# USB2422

## 2.6 Example Applications

Figure 2-5 and Figure 2-6 depict example applications for an SoC based design and a non-SoC based design, respectively. The corresponding resistor and capacitor values for these examples are provided in Table 2-5.

FIGURE 2-5: EXAMPLE APPLICATION - SOC BASED DESIGN


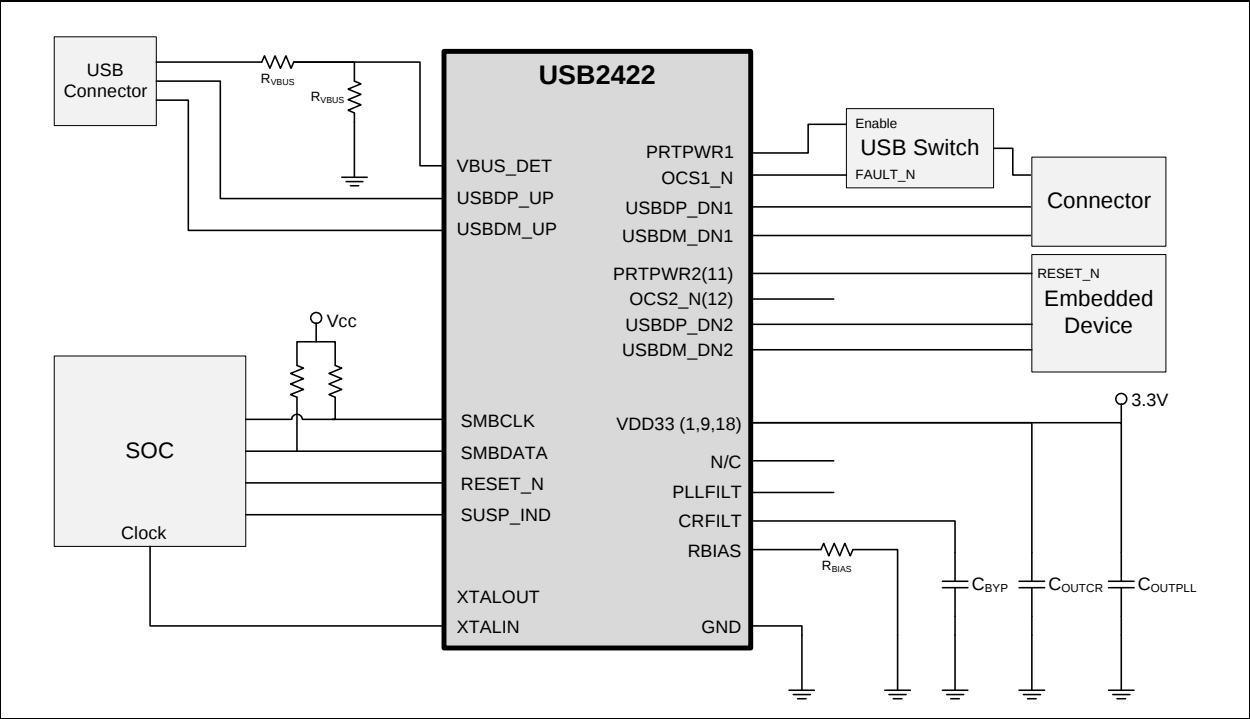


FIGURE 2-6: EXAMPLE APPLICATION - NON-SOC BASED DESIGN

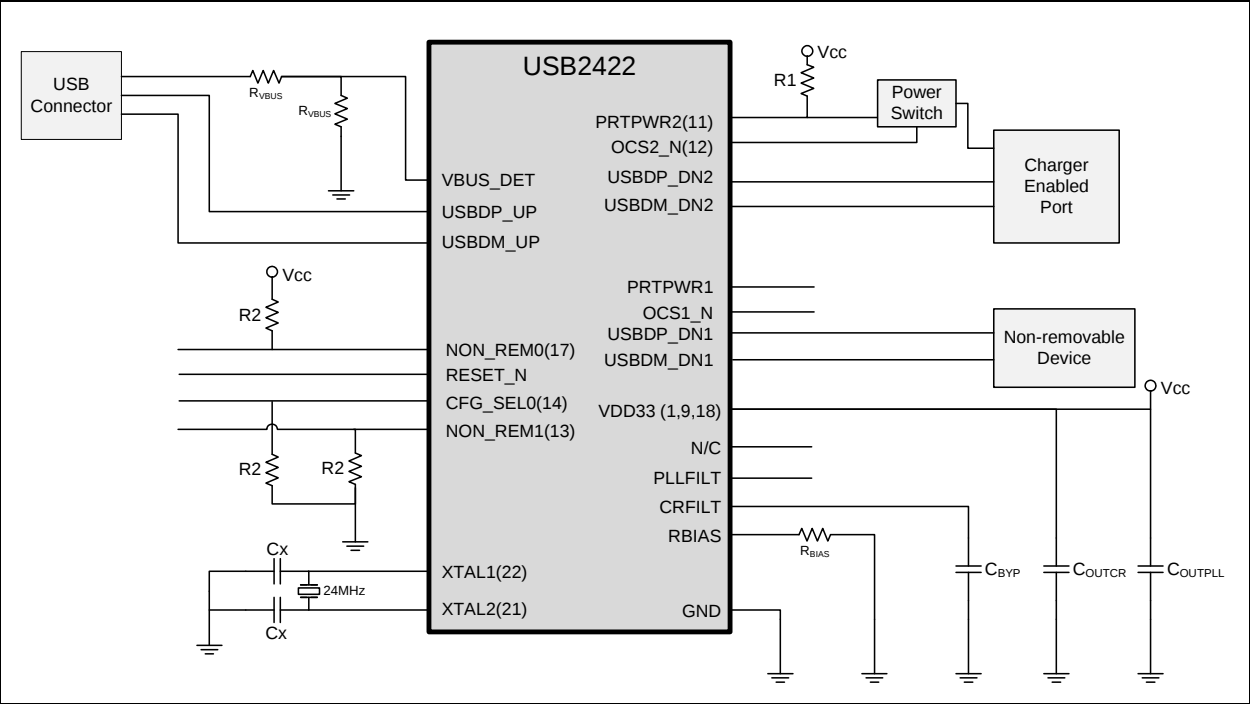

**TABLE 2-5: EXAMPLE APPLICATIONS - RESISTOR/CAPACITOR VALUES**

| Designator          | Value                     |
|---------------------|---------------------------|
| R1                  | 20 k $\Omega$             |
| R2                  | 50 k $\Omega$             |
| Cx                  | 18 pF                     |
| C <sub>BYP</sub>    | 1.0 $\mu$ F               |
| C <sub>OUTCR</sub>  | 1.0 $\mu$ F<br>(Note 2-1) |
| C <sub>OUTPLL</sub> | 0.1 $\mu$ F<br>(Note 2-2) |
| R <sub>BIAS</sub>   | 12 k $\Omega$             |
| R <sub>VBUS</sub>   | 100 k $\Omega$            |


**Note 2-1** C<sub>OUTCR</sub> should be placed as close as possible to pin 9

**Note 2-2** C<sub>OUTPLL</sub> should be placed as close as possible to pin 1

## 3.0 BATTERY CHARGING SUPPORT

The USB2422 hub provides support for battery charging devices on a per port basis in compliance with the *USB Battery Charging Specification, Revision 1.1*. The hub can be configured to individually enable each downstream port for battery charging support either via pin strapping (Port 1 only) as illustrated in Figure 3-1 or by setting the corresponding configuration bits via SMBus (Section 4.1 on page 16).

FIGURE 3-1: BATTERY CHARGING VIA EXTERNAL POWER SUPPLY

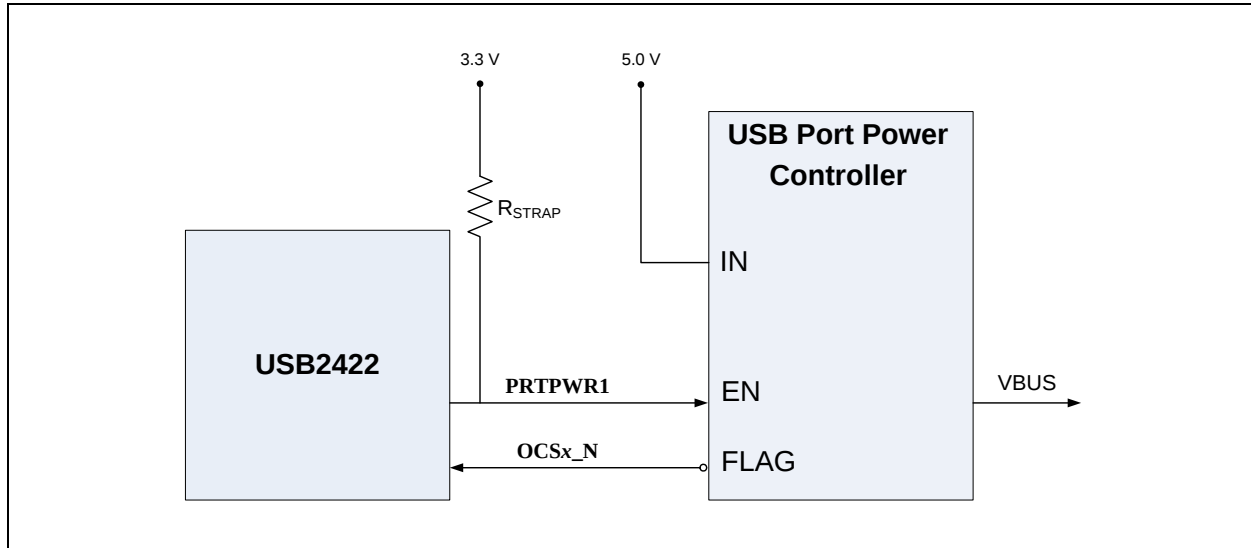

**Note:**  $R_{STRAP}$  enables battery charging.

### 3.1 USB Battery Charging

A downstream port enabled for battery charging turns on port power as soon as the power on reset and hardware configuration process has completed. The hub does not need to be enumerated nor does **VBUS\_DET** need to be asserted for the port power to be enabled. These conditions allow battery charging in S3, S4, and S5 system power states as well as in the fully operational state. The *USB Battery Charging Specification* does not interfere with standard USB operation, which allows a device to perform battery charging at any time.

A port that supports battery charging must be able to support 1.5 amps of current on VBUS. Standard USB port power controllers typically only allow for 0.8 amps of current before detecting an over-current condition. Therefore, the 5 volt power supply, port power controller, or over-current protection devices must be chosen to handle the larger current demand compared to standard USB hub designs.

#### 3.1.1 SPECIAL BEHAVIOR OF PRTPWR PINS

The USB2422 enables VBUS by asserting the port power (**PRTPWR[2:1]**) as soon as the hardware configuration process has completed. If the port detects an over-current condition, **PRTPWR[2:1]** will be turned off to protect the circuitry from overloading. If an over-current condition is detected when the hub is not enumerated, **PRTPWR[2:1]** can only be turned on from the host or if **RESET\_N** is toggled. These behaviors provide battery charging even when the hub is not enumerated and protect the hub from sustained short circuit conditions. If the short circuit condition persists when the hub is plugged into a host system the user is notified that a port has an over-current condition. Otherwise **PRTPWR[2:1]** turned on by the host system and the ports operate normally.

## 3.2 Battery Charging Configuration

The battery charging option can be configured in one of two ways:

- When the hub is brought up in the default configuration with strapping options enabled, with the **P RTP-WR1/BC\_EN1** pin configured (Port 1 only). See the following sections for details:
  - [Section 2.3, "Pin Descriptions \(Grouped by Function\)," on page 7](#)
  - [Section 2.5, "Strap Pin Configuration," on page 10](#)
- When the hub is initialized for configuration over SMBus.

### 3.2.1 BATTERY CHARGING ENABLED VIA SMBUS

Register memory map location 0xD0 is allocated for battery charging support. The Battery Charging register at location 0xD0 starting from bit 1 enables battery charging for each downstream port when asserted. Bit 1 represents port 1, and bit 2 represents port 2. Each port that has battery charging enabled asserts the corresponding **P RTPWR[2:1]** pin.

## 4.0 CONFIGURATION OPTIONS

Microchip's USB 2.0 hub is fully compliant with the *USB Specification* [1]. Refer to Chapter 10 (Hub Specification) for general details regarding hub operation and functionality.

The hub provides one Transaction Translator (TT) that is shared by both downstream ports (defined as Single-TT configuration). The TT contains 4 non-periodic buffers.

### 4.1 Hub Configuration

The USB2422 only supports internal defaults with the exception of the non-removable strap option (using **NON\_REM[1:0]**). The hub internal default settings are as follows:

- Internal Default Configuration without over-rides
- Strap options enabled
- Self-powered operation enabled
- Individual power switching
- Individual over-current sensing

**TABLE 4-1: HUB CONFIGURATION OPTIONS**

| CFG_SEL | Description                                                                                                                                                                                                                                                                               |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0       | Default configuration: <ul style="list-style-type: none"><li>• Strap options enabled</li><li>• Hub descriptors indicate the hub as “self-powered”</li></ul>                                                                                                                               |
| 1       | The hub is configured externally over SMBus (as an SMBus slave device with address 0101100b): <ul style="list-style-type: none"><li>• Strap options disabled</li><li>• Self-powered or bus-powered depending on register settings</li><li>• All registers configured over SMBus</li></ul> |

### 4.2 Resets

There are two device resets: a hardware reset via **RESET\_N**, and a USB Bus Reset.

#### 4.2.1 EXTERNAL HARDWARE RESET\_N


A valid hardware reset is defined as assertion of **RESET\_N** for a minimum of 1  $\mu$ s after all power supplies are within operating range. While reset is asserted, the hub (and its associated external circuitry) consumes less than 500  $\mu$ A of current from the upstream USB power source.

Assertion of **RESET\_N** causes the following:

1. All downstream ports are disabled.
2. The **PRTPWR** power to downstream devices is turned on when battery charging is enabled for a specific port, and removed when battery charging is disabled for a specific port.
3. The PHYs are disabled, and the differential pairs will be in a high-impedance state.
4. All transactions immediately terminate; no states are saved.
5. All internal registers return to the default state (in most cases, 00h).
6. The external crystal oscillator is halted.
7. The PLL is halted.

## 4.2.1.1 Hub Configuration Timing for Strapping Option

**FIGURE 4-1: HUB CONFIGURATION TIMING**

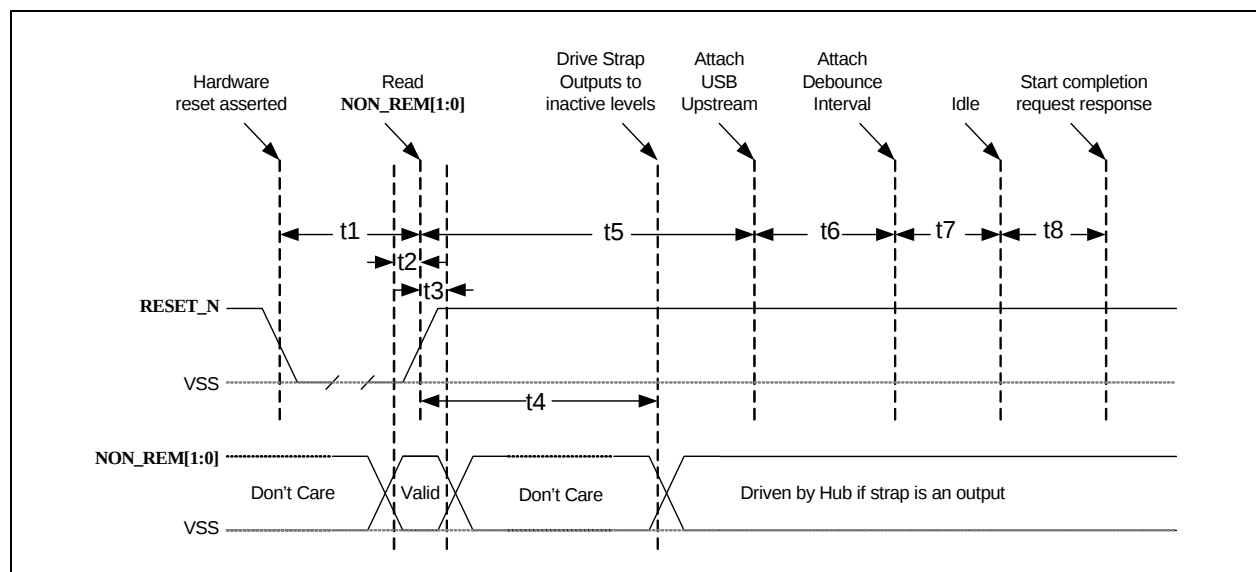

**TABLE 4-2: HUB CONFIGURATION TIMING**

| Name | Description                                               | MIN  | TYP       | MAX  | Units |
|------|-----------------------------------------------------------|------|-----------|------|-------|
| t1   | RESET_N asserted                                          | 1    |           |      | μsec  |
| t2   | Strap setup time                                          | 16.7 |           |      | nsec  |
| t3   | Strap hold time                                           | 16.7 |           | 1400 | nsec  |
| t4   | Hub outputs driven to inactive logic states               |      | 1.5       | 2    | μsec  |
| t5   | USB attach (See Note)                                     |      | 3         |      | μsec  |
| t6   | Host acknowledges attach and signals USB reset            | 100  |           |      | msec  |
| t7   | USB idle                                                  |      | undefined |      | msec  |
| t8   | Completion time for requests (with or without data stage) |      |           | 5    | msec  |

**Note:** All power supplies must have reached the operating levels mandated in [Section 5.0, "DC Parameters"](#), prior to (or coincident with) the assertion of **RESET\_N**.

## 4.2.2 USB BUS RESET

In response to the upstream port signaling a reset to the hub, the hub does the following:

1. Sets default address to 0.
2. Sets configuration to unconfigured.
3. The **PRTPWR** power to downstream devices is turned on when battery charging is enabled for a specific port, and removed when battery charging is disabled for a specific port.
4. Clears all TT buffers.
5. Moves device from suspended to active (if suspended).
6. Complies with Section 11.10 of the *USB 2.0 Specification* for behavior after completion of the reset sequence. The host then configures the hub and the hub's downstream port devices in accordance with the specification.

The hub does not propagate the upstream USB reset to downstream devices.

4.3 SMBus

The Microchip hub can be configured by an external processor via an SMBus interface (see [Table 4-1](#) for details on enabling the SMBus interface). The Microchip hub waits indefinitely for the SMBus code load to complete and only appears as a newly connected device on USB after the code load is complete.

The hub's SMBus acts as a slave-only SMBus device. The implementation only supports block write ([Section 4.3.2.1](#)) and block read ([Section 4.3.2.2](#)) protocols. Reference the *System Management Bus Specification* [2] for additional information.

Refer to [Section 4.4, "SMBus Registers," on page 20](#) for details on all SMBus accessible registers.

4.3.1 SMBUS SLAVE ADDRESS

The 7-bit slave address is 0101100b. The hub will not respond to the general call address of 0000000b.

4.3.2 PROTOCOL IMPLEMENTATION

Typical block write and block read protocols are shown in figures 4-2 and 4-3. Register accesses are performed using 7-bit slave addressing, an 8-bit register address field, and an 8-bit data field. The shading shown in the figures during a read or write indicates the hub is driving data on the **SMBDATA** line; otherwise, host data is on the **SMBDATA** line.

The SMBus slave address assigned to the hub (0101100b) allows it to be identified on the SMBus. The register address field is the internal address of the register to be accessed. The register data field is the data that the host is attempting to write to the register or the contents of the register that the host is attempting to read.

**Note:** Data bytes are transferred MSB first.


4.3.2.1 Block Write/Read

The block write begins with a slave address and a write condition. After the command code, the host issues a byte count which describes how many more bytes will follow in the message. If a slave had 20 bytes to send, the first byte would be the number 20 (14h), followed by the 20 bytes of data. The byte count may not be zero. A block write or read allows a transfer maximum of 32 data bytes.

**Note:** For the following SMBus tables:

Denotes Master-to-Slave       Denotes Slave-to-Master


FIGURE 4-2: BLOCK WRITE

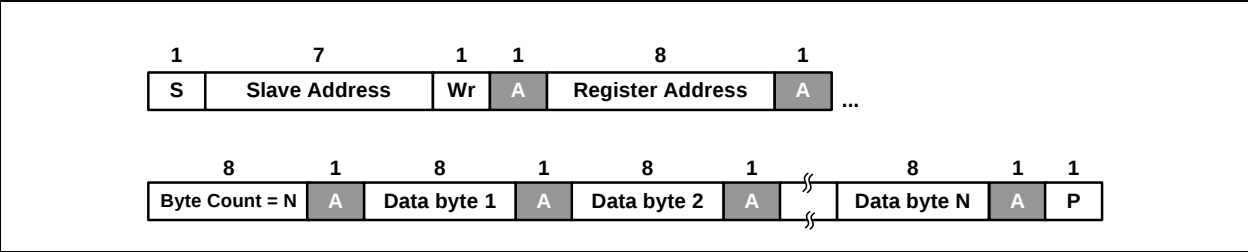

## 4.3.2.2 Block Read

A block read differs from a block write in that the repeated start condition exists to satisfy the SMBus specification's requirement for a change in the transfer direction.

**FIGURE 4-3: BLOCK READ**

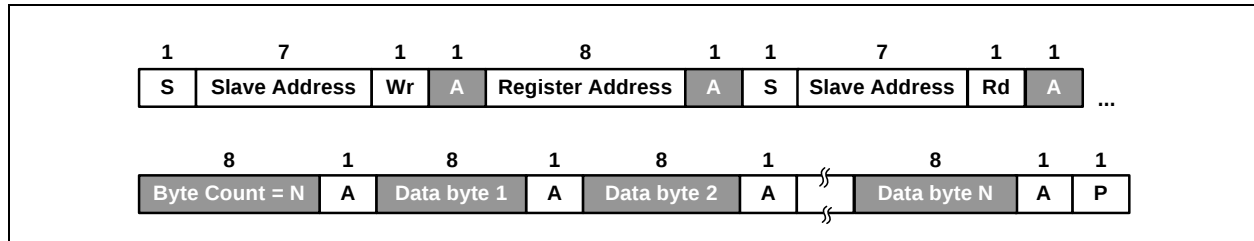

## 4.3.2.3 Invalid Protocol Response Behavior

Note that any attempt to update registers with an invalid protocol will not be updated. The only valid protocols are write block and read block (described above), where the hub only responds to the 7-bit hardware selected slave address (0101100b).

## 4.3.3 SLAVE DEVICE TIMEOUT

Devices in a transfer can abort the transfer in progress and release the bus when any single clock low interval exceeds 25 ms ( $T_{\text{TIMEOUT, MIN}}$ ). The master must detect this condition and generate a stop condition within or after the transfer of the interrupted data byte. Slave devices must reset their communication and be able to receive a new START condition no later than 35 ms ( $T_{\text{TIMEOUT, MAX}}$ ).

**Note:** Some simple devices do not contain a clock low drive circuit; this simple kind of device typically resets its communications port after a start or stop condition. The slave device timeout must be implemented.

## 4.3.4 STRETCHING THE SCLK SIGNAL

The hub supports stretching of the SCLK by other devices on the SMBus. However, the hub does not stretch the SCLK.

## 4.3.5 SMBUS TIMING

The SMBus slave interface complies with the *SMBus Specification Revision 1.0 2..* See Section 2.1, *AC Specifications* on page 3 for more information.

## 4.3.6 BUS RESET SEQUENCE

The SMBus slave interface resets and returns to the idle state upon a START condition followed immediately by a STOP condition.

## 4.3.7 SMBUS ALERT RESPONSE ADDRESS

The SMBALERT# signal is not supported by the hub.

## 4.4 SMBus Registers

This section details the device SMBus registers.

**Note:** Internal Default ROM values are not visible to THE SMBus interface and cannot be read. When the hub is configured for SMBus register load, the entire register set must be written.

**TABLE 4-3: INTERNAL DEFAULT AND SMBUS REGISTER MEMORY MAP**

| Reg. Address | Type | Register Name                                                          | Internal Default ROM | SMBus & EEPROM Default |
|--------------|------|------------------------------------------------------------------------|----------------------|------------------------|
| 00h          | R/W  | Vendor ID Least Significant Bit Register (VIDL)                        | 24h                  | 00h                    |
| 01h          | R/W  | Vendor ID Most Significant Bit Register (VIDM)                         | 04h                  | 00h                    |
| 02h          | R/W  | Product ID Least Significant Bit Register (PIDL)                       | 22h                  | 00h                    |
| 03h          | R/W  | Product ID Most Significant Bit Register (PIDM)                        | 24h                  | 00h                    |
| 04h          | R/W  | Device ID Least Significant Bit Register (DIDL)                        | A0h                  | 00h                    |
| 05h          | R/W  | Device ID Most Significant Bit Register (DIDM)                         | 00h                  | 00h                    |
| 06h          | R/W  | Configuration Data Byte 1 Register (CFG1)                              | 8Bh                  | 00h                    |
| 07h          | R/W  | Configuration Data Byte 2 Register (CFG2)                              | 20h                  | 00h                    |
| 08h          | R/W  | Configuration Data Byte 3 Register (CFG3)                              | 02h                  | 00h                    |
| 09h          | R/W  | Non-Removable Device Register (NRD)                                    | 00h                  | 00h                    |
| 0Ah          | R/W  | Port Disable for Self-Powered Operation Register (PDS)                 | 00h                  | 00h                    |
| 0Bh          | R/W  | Port Disable for Bus-Powered Operation Register (PDB)                  | 00h                  | 00h                    |
| 0Ch          | R/W  | Max Power for Self-Powered Operation Register (MAXPS)                  | 01h                  | 00h                    |
| 0Dh          | R/W  | Max Power for Bus-Powered Operation Register (MAXPB)                   | 32h                  | 00h                    |
| 0Eh          | R/W  | Hub Controller Max Current for Self-Powered Operation Register (HCMCS) | 01h                  | 00h                    |
| 0Fh          | R/W  | Hub Controller Max Power for Bus-Powered Operation Register (HCMCB)    | 32h                  | 00h                    |
| 10h          | R/W  | Power-On Time Register (PWRT)                                          | 32h                  | 00h                    |
| 11h          | R/W  | Language ID High Register (LANGIDH)                                    | 00h                  | 00h                    |
| 12h          | R/W  | Language ID Low Register (LANGIDL)                                     | 00h                  | 00h                    |
| 13h          | R/W  | Manufacturer String Length Register (MFRSL)                            | 00h                  | 00h                    |
| 14h          | R/W  | Product String Length Register (PRDSL)                                 | 00h                  | 00h                    |
| 15h          | R/W  | Serial String Length Register (SERSL)                                  | 00h                  | 00h                    |
| 16h-53h      | R/W  | Manufacturer String Registers (MANSTR)                                 | 00h                  | 00h                    |
| 54h-91h      | R/W  | Product String Registers (PRDSTR)                                      | 00h                  | 00h                    |
| 92h-CFh      | R/W  | Serial String Registers (SERSTR)                                       | 00h                  | 00h                    |
| D0h          | R/W  | Battery Charging Enable Register (BC_EN)                               | 00h                  | 00h                    |
| E0h-F5h      | -    | RESERVED                                                               | -                    | -                      |
| F6h          | R/W  | Boost Upstream Register (BOOSTUP)                                      | 00h                  | 00h                    |
| F7h          | -    | RESERVED                                                               | -                    | -                      |
| F8h          | R/W  | Boost Downstream Register (BOOST40)                                    | 00h                  | 00h                    |
| F9h          | -    | RESERVED                                                               | -                    | -                      |
| FAh          | R/W  | Port Swap Register (PRTSP)                                             | 00h                  | 00h                    |
| FBh          | R/W  | Port 1/2 Remap Register (PRTR12)                                       | 00h                  | 00h                    |
| FCh-FEh      | -    | RESERVED                                                               | -                    | -                      |
| FFh          | R/W  | Status/Command Register (STCD)                                         | 00h                  | 00h                    |

## 4.4.1 VENDOR ID LEAST SIGNIFICANT BIT REGISTER (VIDL)

Offset: 00h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                 | Type | Default |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Least Significant Byte of the Vendor ID (VID_LSB)</b><br>This is a 16-bit value that uniquely identifies the Vendor of the user device (assigned by USB-Interface Forum). This field is set by the OEM using the SMBus interface option. | R/W  | 00h     |

## 4.4.2 VENDOR ID MOST SIGNIFICANT BIT REGISTER (VIDM)

Address: 01h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                 | Type | Default |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Most Significant Byte of the Vendor ID (VID_LSB)</b><br>This is a 16-bit value that uniquely identifies the Vendor of the user device (assigned by USB-Interface Forum). This field is set by the OEM using the SMBus interface options. | R/W  | 00h     |

## 4.4.3 PRODUCT ID LEAST SIGNIFICANT BIT REGISTER (PIDL)

Address: 02h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                        | Type | Default |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Least Significant Byte of the Product ID (PID_LSB)</b><br>This is a 16-bit value that the Vendor can assign that uniquely identifies this particular product (assigned by OEM). This field is set by the OEM using the SMBus interface options. | R/W  | 00h     |

## 4.4.4 PRODUCT ID MOST SIGNIFICANT BIT REGISTER (PIDM)

Address: 03h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                          | Type | Default |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Most Significant Byte of the Product ID (PID_LSB)</b><br>This is a 16-bit value that the Vendor can assign that uniquely identifies this particular product (assigned by OEM). This field is set by the OEM using either SMBus interface options. | R/W  | 00h     |

## 4.4.5 DEVICE ID LEAST SIGNIFICANT BIT REGISTER (DIDL)

Address: 04h Size: 8 bits

| Bits | Description                                                                                                                                                                                                   | Type | Default |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Least Significant Byte of the Device ID (DID_LSB)</b><br>This is a 16-bit device release number in BCD format (assigned by OEM).<br>This field is set by the OEM using either the SMBus interface options. | R/W  | 00h     |

## 4.4.6 DEVICE ID MOST SIGNIFICANT BIT REGISTER (DIDM)

Address: 05h Size: 8 bits

| Bits | Description                                                                                                                                                                                           | Type | Default |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Most Significant Byte of the Device ID (DID_LSB)</b><br>This is a 16-bit device release number in BCD format (assigned by OEM).<br>This field is set by the OEM using the SMBus interface options. | R/W  | 00h     |

## 4.4.7 CONFIGURATION DATA BYTE 1 REGISTER (CFG1)

Address: 06h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Type | Default |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7    | <p><b>Self or Bus Power (SELF_BUS_PWR)</b><br/>Selects between Self- and Bus-Powered operation.</p> <p>The Hub is either Self-Powered (draws less than 2mA of upstream bus power) or Bus-Powered (limited to a 100mA maximum of upstream power prior to being configured by the host controller).</p> <p>When configured as a Bus-Powered device, the Hub consumes less than 100mA of current prior to being configured. After configuration, the Bus-Powered Hub (along with all associated hub circuitry, any embedded devices if part of a compound device, and 100mA per externally available downstream port) must consume no more than 500mA of upstream VBUS current. The current consumption is system dependent, and the OEM must ensure that the USB2.0 specifications are not violated.</p> <p>When configured as a Self-Powered device, &lt;1mA of upstream VBUS current is consumed and all ports are available, with each port being capable of sourcing 500mA of current.</p> <p>This field is set by the OEM using the SMBus interface option. Please see the description under Dynamic Power for the self/bus power functionality when dynamic power switching is enabled.</p> <p>0 = Bus-Powered operation<br/>1 = Self-Powered operation</p> <p><b>Note:</b> If Dynamic Power Switching is enabled, this bit is ignored and the LOCAL_PWR pin is used to determine if the hub is operating from self or bus power.</p> | R/W  | 0b      |
| 6    | <b>RESERVED</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | -    | -       |
| 5    | <p><b>High Speed Disable (HS_DISABLE)</b><br/>Disables the capability to attach as either a High/Full- speed device, and forces attachment as Full-speed only i.e. (no High-Speed support).</p> <p>0 = High-/Full-Speed<br/>1 = Full-Speed-Only (High-Speed disabled)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | R/W  | 0b      |
| 4    | <p><b>Multi-TT Enable (MTT_ENABLE)</b><br/>Enables one transaction translator per port operation.</p> <p>Selects between a mode where only one transaction translator is available for all ports (Single-TT), or each port gets a dedicated transaction translator (Multi-TT)</p> <p><b>Note:</b> The host may force Single-TT mode only</p> <p>0 = Single TT for all ports. Default to STT if MTT still exists<br/>1 = One TT per port (multiple TT's supported)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | R/W  | 0b      |

# USB2422

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Type | Default |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 3    | <b>EOP Disable (EOP_DISABLE)</b><br>Disables EOP generation of EOF1 when in Full-Speed mode. During FS operation only, this permits the Hub to send EOP if no downstream traffic is detected at EOF1. See Section 11.3.1 of the USB 2.0 Specification for additional details.<br><b>Note:</b> generation of an EOP at the EOF1 point may prevent a Host controller (operating in FS mode) from placing the USB bus in suspend.<br>0 = An EOP is generated at the EOF1 point if no traffic is detected<br>1 = EOP generation at EOF1 is disabled (Note: This is normal USB operation)<br><b>Note:</b> This is a rarely used feature in the PC environment. It is included because it is a permitted feature in Chapter 11 of the USB specification. | R/W  | 0b      |
| 2:1  | <b>Over Current Sense (CURRENT_SNS)</b><br>Selects current sensing on a port-by-port basis, all ports ganged, or none (only for bus-powered hubs) The ability to support current sensing on a port or ganged basis is hardware implementation dependent.<br>00 = Ganged sensing (all ports together)<br>01 = Individual port-by-port<br>1x = Over current sensing not supported (Must only be used with Bus-Powered configurations)                                                                                                                                                                                                                                                                                                                | R/W  | 00b     |
| 0    | <b>Port Power Switching (PORT_PWR)</b><br>Enables power switching on all ports simultaneously (ganged), or port power is individually switched on and off on a port- by-port basis (individual). The ability to support power enabling on a port or ganged basis is hardware implementation dependent.<br>0 = Ganged switching (all ports together)<br>1 = Individual port-by-port switching                                                                                                                                                                                                                                                                                                                                                       | R/W  | 0b      |

## 4.4.8 CONFIGURATION DATA BYTE 2 REGISTER (CFG2)

Address: 07h

Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Type | Default |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7    | <p><b>Dynamic Power Enable (DYNAMIC)</b><br/>Controls the ability of the Hub to automatically change from Self-Powered operation to Bus-Powered operation if the local power source is removed or is unavailable (and from Bus-Powered to Self-Powered if the local power source is restored).</p> <p><b>Note:</b> If the local power source is available, the Hub will always switch to Self-Powered operation.</p> <p>When Dynamic Power switching is enabled, the Hub detects the availability of a local power source by monitoring the external LOCAL_PWR pin. If the Hub detects a change in power source availability, the Hub immediately disconnects and removes power from all downstream devices and disconnects the upstream port. The Hub will then re-attach to the upstream port as either a Bus-Powered Hub (if local-power is unavailable) or a Self-Powered Hub (if local power is available).</p> <p>0 = No Dynamic auto-switching<br/>(pin becomes SUSP_IND) and the hub controller will utilize the inverse of the SELF_BUS_PWR bit for 'Hub_Status_Field' bit '0' (local power source)<br/>1 = Dynamic Auto-switching capable<br/>(pin becomes LOCAL_PWR) and the hub controller will utilize the LOCAL_PWR pin for 'Hub_Status_Field' bit '0' (local power source)</p> | R/W  | 0b      |
| 6    | <b>RESERVED</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -    | -       |
| 5:4  | <p><b>Over Current Timer Delay (OC_TIMER)</b></p> <p>00 = 0.1ms<br/>01 = 4ms<br/>10 = 8ms<br/>11 = 16ms</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | R/W  | 00b     |
| 3    | <p><b>Compound Device (COMPOUND)</b><br/>Allows the OEM to indicate that the Hub is part of a compound (see the USB Specification for definition) device. The applicable port(s) must also be defined as having a "Non-Removable Device".</p> <p><b>Note:</b> When configured via strapping options, declaring a port as non-removable automatically causes the hub controller to report that it is part of a compound device.</p> <p>0 = No<br/>1 = Yes, Hub is part of a compound device</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | R/W  | 0b      |
| 2:0  | <b>RESERVED</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | -    | -       |

## 4.4.9 CONFIGURATION DATA BYTE 3 REGISTER (CFG3)

Address: 08h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Type | Default |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:4  | <b>RESERVED</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -    | -       |
| 3    | <b>Port Remapping Enable (PRTMAP_EN)</b><br>Selects the method used by the hub to assign port numbers and disable ports<br><br>0 = Standard Mode<br>Strap options or the following registers are used to define which ports are enabled, and the ports are mapped as Port'n' on the hub is reported as Port'n' to the host, unless one of the ports is disabled, then the higher numbered ports are remapped in order to report contiguous port numbers to the host.<br><br>Register 0Ah: Port Disable For Self Powered Operation (Reset = 0x00)<br>Register 0Bh: Port Disable For Bus Powered Operation (Reset = 0x00).<br><br>1 = Port Re-Map mode<br>The mode enables remapping via Register FBh: Port Remap 12 | R/W  | 0b      |
| 2:1  | <b>RESERVED</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | -    | -       |
| 0    | <b>String Enable (STRING_EN)</b><br>Enables string descriptor support.<br><br>0 = String support disabled<br>1 = String support enabled                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | R/W  | 0b      |

## 4.4.10 NON-REMOVABLE DEVICE REGISTER (NRD)

Address: 09h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Type | Default |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Non-Removable Device (NR_DEVICE)</b><br>Indicates which port(s) include non- removable devices.<br><br>0 = port is removable<br>1 = port is non- removable<br><br>Informs the Host if one of the active physical ports has a permanent device that is undetachable from the Hub.<br><br><b>Note:</b> The device must provide its own descriptor data.<br>When using the internal default option, the NON_REM[1:0] pins will designate the appropriate ports as being non- removable.<br><br>Bit 7= Reserved<br>Bit 6= Reserved<br>Bit 5= Reserved<br>Bit 4= Reserved<br>Bit 3= Reserved<br>Bit 2= Port 2 non-removable<br>Bit 1= Port 1 non removable<br>Bit 0= Reserved | R/W  | 00h     |

## 4.4.11 PORT DISABLE FOR SELF-POWERED OPERATION REGISTER (PDS)

Address: 0Ah Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Type | Default |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <p><b>Port Disable Self-Powered (PORT_DIS_SP)</b><br/>Disables 1 or more ports.</p> <p>0 = port is available<br/>1 = port is disabled</p> <p>During Self-Powered operation, when PRTMAP_EN = '0', this selects the ports which will be permanently disabled, and are not available to be enabled or enumerated by a Host Controller. The ports can be disabled in any order, the internal logic will automatically report the correct number of enabled ports to the USB Host, and will reorder the active ports in order to ensure proper function.</p> <p>When using the internal default option, the PRT_DIS[1:0] pins will disable the appropriate ports.</p> <p>Bit 7= Reserved<br/>Bit 6= Reserved<br/>Bit 5= Reserved<br/>Bit 4= Reserved<br/>Bit 3= Reserved<br/>Bit 2= Port 2 Disable<br/>Bit 1= Port 1 Disable<br/>Bit 0= Reserved</p> | R/W  | 00h     |

## 4.4.12 PORT DISABLE FOR BUS-POWERED OPERATION REGISTER (PDB)

Address: 0Bh Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Type | Default |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <p><b>Port Disable Bus-Powered (PORT_DIS_BP)</b><br/>Disables 1 or more ports.</p> <p>0 = port is available<br/>1 = port is disabled</p> <p>During Bus-Powered operation, when PRTMAP_EN = '0', this selects the ports which will be permanently disabled, and are not available to be enabled or enumerated by a Host Controller. The ports can be disabled in any order, the internal logic will automatically report the correct number of enabled ports to the USB Host, and will reorder the active ports in order to ensure proper function.</p> <p>When using the internal default option, the PRT_DIS[1:0] pins will disable the appropriate ports.</p> <p>Bit 7= Reserved<br/>Bit 6= Reserved<br/>Bit 5= Reserved<br/>Bit 4= Reserved<br/>Bit 3= Reserved<br/>Bit 2= Port 2 Disable<br/>Bit 1= Port 1 Disable<br/>Bit 0= Reserved</p> | R/W  | 00h     |

## 4.4.13 MAX POWER FOR SELF-POWERED OPERATION REGISTER (MAXPS)

Address: 0Ch Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Type | Default |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Max Power Self-Powered (MAX_PWR_SP)</b><br>Value in 2mA increments that the Hub consumes from an upstream port (VBUS) when operating as a self-powered hub. This value includes the hub silicon along with the combined power consumption (from VBUS) of all associated circuitry on the board. This value also includes the power consumption of a permanently attached peripheral if the hub is configured as a compound device, and the embedded peripheral reports 0mA in its descriptors.<br><b>Note:</b> The USB2.0 Specification does not permit this value to exceed 100mA. | R/W  | 00h     |

## 4.4.14 MAX POWER FOR BUS-POWERED OPERATION REGISTER (MAXPB)

Address: 0Dh Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Type | Default |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Max Power Bus-Powered (MAX_PWR_BP)</b><br>Value in 2mA increments that the Hub consumes from an upstream port (VBUS) when operating as a self-powered hub. This value includes the hub silicon along with the combined power consumption (from VBUS) of all associated circuitry on the board. This value also includes the power consumption of a permanently attached peripheral if the hub is configured as a compound device, and the embedded peripheral reports 0mA in its descriptors. | R/W  | 00h     |

## 4.4.15 HUB CONTROLLER MAX CURRENT FOR SELF-POWERED OPERATION REGISTER (HCMCS)

Address: 0Eh Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Type | Default |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Hub Controller Max Current Self-Powered (HC_MAX_C_SP)</b><br>Value in 2mA increments that the Hub consumes from an upstream port (VBUS) when operating as a self-powered hub. This value includes the hub silicon along with the combined power consumption (from VBUS) of all associated circuitry on the board. This value does NOT include the power consumption of a permanently attached peripheral if the hub is configured as a compound device.<br><b>Note:</b> The USB2.0 Specification does not permit this value to exceed 100mA. | R/W  | 00h     |

## 4.4.16 HUB CONTROLLER MAX POWER FOR BUS-POWERED OPERATION REGISTER (HCMCB)

Address: 0Fh Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                               | Type | Default |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Hub Controller Max Power Bus-Powered (MAX_PWR_BP)</b><br>Value in 2mA increments that the Hub consumes from an upstream port (VBUS) when operating as a bus-powered hub. This value will include the hub silicon along with the combined power consumption (from VBUS) of all associated circuitry on the board. This value will NOT include the power consumption of a permanently attached peripheral if the hub is configured as a compound device. | R/W  | 00h     |

## 4.4.17 POWER-ON TIME REGISTER (PWRT)

Address: 10h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                          | Type | Default |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Power-On Time (POWER_ON_TIME)</b><br>The length of time that is takes (in 2 ms intervals) from the time the host initiated power-on sequence begins on a port until power is good on that port. System software uses this value to determine how long to wait before accessing a powered-on port. | R/W  | 00h     |

## 4.4.18 LANGUAGE ID HIGH REGISTER (LANGIDH)

Address: 11h Size: 8 bits

| Bits | Description                                                                              | Type | Default |
|------|------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>USB Language ID High (LANG_ID_H)</b><br>Upper 8 bits of the 16-bit language ID field. | R/W  | 00h     |

## 4.4.19 LANGUAGE ID LOW REGISTER (LANGIDL)

Address: 12h Size: 8 bits

| Bits | Description                                                                             | Type | Default |
|------|-----------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>USB Language ID Low (LANG_ID_L)</b><br>Lower 8 bits of the 16-bit language ID field. | R/W  | 00h     |

## 4.4.20 MANUFACTURER STRING LENGTH REGISTER (MFRSL)

Address: 13h Size: 8 bits

| Bits | Description                                                                                | Type | Default |
|------|--------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Manufacturer String Length (MFR_STR_LEN)</b><br>Maximum string length is 31 characters. | R/W  | 00h     |

# USB2422

## 4.4.21 PRODUCT STRING LENGTH REGISTER (PRDSL)

Address: 14h Size: 8 bits

| Bits | Description                                                                           | Type | Default |
|------|---------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Product String Length (PRD_STR_LEN)</b><br>Maximum string length is 31 characters. | R/W  | 00h     |

## 4.4.22 SERIAL STRING LENGTH REGISTER (SERSL)

Address: 15h Size: 8 bits

| Bits | Description                                                                          | Type | Default |
|------|--------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Serial String Length (SER_STR_LEN)</b><br>Maximum string length is 31 characters. | R/W  | 00h     |

## 4.4.23 MANUFACTURER STRING REGISTERS (MANSTR)

Address: 16h-53h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Type | Default |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Manufacturer String (MFR_STR)</b><br>UNICODE UTF-16LE per USB 2.0 Specification.<br>Maximum string length is 31 characters (62 Bytes).<br><b>Note:</b> The String consists of individual 16 Bit UNICODE UTF-16LE characters. The Characters will be stored starting with the LSB at the least significant address and the MSB at the next 8-bit location (subsequent characters must be stored in sequential contiguous address in the same LSB, MSB manner). | R/W  | 00h     |

## 4.4.24 PRODUCT STRING REGISTERS (PRDSTR)

Address: 54h-91h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Type | Default |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Product String (PRD_STR)</b><br>UNICODE UTF-16LE per USB 2.0 Specification.<br>Maximum string length is 31 characters (62 Bytes).<br><b>Note:</b> The String consists of individual 16 Bit UNICODE UTF-16LE characters. The Characters will be stored starting with the LSB at the least significant address and the MSB at the next 8-bit location (subsequent characters must be stored in sequential contiguous address in the same LSB, MSB manner). | R/W  | 00h     |

## 4.4.25 SERIAL STRING REGISTERS (SERSTR)

Address: 92h-CFh Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Type | Default |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Serial String (SER_STR)</b><br>UNICODE UTF-16LE per USB 2.0 Specification.<br>Maximum string length is 31 characters (62 Bytes).<br><br><b>Note:</b> The String consists of individual 16 Bit UNICODE UTF-16LE characters. The Characters will be stored starting with the LSB at the least significant address and the MSB at the next 8-bit location (subsequent characters must be stored in sequential contiguous address in the same LSB, MSB manner). | R/W  | 00h     |

## 4.4.26 BATTERY CHARGING ENABLE REGISTER (BC\_EN)

Address: D0h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                      | Type | Default |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Battery Charging Enable (BC_EN)</b><br>Enables the battery charging feature for the corresponding port.<br><br>0 = Battery Charging support is not enabled<br>1 = Battery charging support is enabled<br><br>Bit 7= Reserved<br>Bit 6= Reserved<br>Bit 5= Reserved<br>Bit 4= Reserved<br>Bit 3= Reserved<br>Bit 2= Port 2 Battery Charging Enable<br>Bit 1= Port 1 Battery Charging Enable<br>Bit 0= Reserved | R/W  | 00h     |

## 4.4.27 BOOST UPSTREAM REGISTER (BOOSTUP)

Address: F6h Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                         | Type | Default |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:2  | <b>RESERVED</b>                                                                                                                                                                                                                                                                                                                     | -    | -       |
| 1:0  | <b>Boost Upstream (BOOST_IOUT_A)</b><br>USB electrical signaling drive strength Boost Bit for Upstream Port 'A'.<br><br>00 = Normal electrical drive strength<br>01 = Elevated electrical drive strength (+4% boost)<br>10 = Elevated electrical drive strength (+8% boost)<br>11 = Elevated electrical drive strength (+12% boost) | R/W  | 00b     |

# USB2422

## 4.4.28 BOOST DOWNSTREAM REGISTER (BOOST40)

Address: **F8h** Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                  | Type | Default |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:4  | <b>RESERVED</b>                                                                                                                                                                                                                                                                                                                              | -    | -       |
| 3:2  | <b>Boost Downstream Port 2 (BOOST_IOUT_2)</b><br>USB electrical signaling drive strength Boost Bit for Upstream Port '2'.<br><br>00 = Normal electrical drive strength<br>01 = Elevated electrical drive strength (+4% boost)<br>10 = Elevated electrical drive strength (+8% boost)<br>11 = Elevated electrical drive strength (+12% boost) | R/W  | 00b     |
| 1:0  | <b>Boost Downstream Port 1 (BOOST_IOUT_1)</b><br>USB electrical signaling drive strength Boost Bit for Upstream Port '1'.<br><br>00 = Normal electrical drive strength<br>01 = Elevated electrical drive strength (+4% boost)<br>10 = Elevated electrical drive strength (+8% boost)<br>11 = Elevated electrical drive strength (+12% boost) | R/W  | 00b     |

## 4.4.29 PORT SWAP REGISTER (PRTSP)

Address: **FAh** Size: 8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Type | Default |
|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:0  | <b>Port Swap (PRTSP)</b><br>Swaps the Upstream and Downstream USB DP and DM Pins for ease of board routing to devices and connectors.<br><br>0 = USB D+ functionality is associated with the DP pin and D- functionality is associated with the DM pin.<br>1 = USB D+ functionality is associated with the DM pin and D- functionality is associated with the DP pin<br><br>Bit 7= Reserved<br>Bit 6= Reserved<br>Bit 5= Reserved<br>Bit 4= Reserved<br>Bit 3= Reserved<br>Bit 2= Port 2 DP/DM Swap<br>Bit 1= Port 1 DP/DM Swap<br>Bit 0= Upstream Port DP/DM Swap | R/W  | 00h     |

## 4.4.30 PORT 1/2 REMAP REGISTER (PRTR12)

Address: **FBh**

Size: 8 bits

| Bits        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                             | Type        | Default |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-------------|---------|-----------------------------|------|---------------------------------------------|------|---------------------------------------------|--------------|-----------------------------------------|-------------|------|-----------------------------|------|---------------------------------------------|------|---------------------------------------------|--------------|-----------------------------------------|-----|-----|
| 7:0         | <p><b>Port 1/2 Remap (PRTR12)</b><br/>When a hub is enumerated by a USB Host Controller, the hub is only permitted to report how many ports it has, the hub is not permitted to select a numerical range or assignment. The Host Controller will number the downstream ports of the hub starting with the number '1', up to the number of ports that the hub reported as having.</p> <p>The host's port number is referred to as “Logical Port Number” and the physical port on the hub is the “Physical Port Number”. When remapping mode is enabled (PRTMAP_EN in the <a href="#">Configuration Data Byte 3 Register (CFG3)</a>), the hub's downstream port numbers can be remapped to different logical port numbers assigned by the host.</p> <p><b>Note:</b> The OEM must ensure that Contiguous Logical Port Numbers are used, starting from one up to the maximum number of enabled ports. This ensures that the hub's ports are numbered in accordance with the way a Host will communicate with the ports.</p> <table><tr><td rowspan="4">Bits[7:4] =</td><td>0000</td><td>Physical Port 2 is disabled</td></tr><tr><td>0001</td><td>Physical Port 2 is mapped to Logical Port 1</td></tr><tr><td>0010</td><td>Physical Port 2 is mapped to Logical Port 2</td></tr><tr><td>0011 to 1111</td><td>RESERVED<br/>Will default to 0000 value.</td></tr><tr><td rowspan="4">Bits[3:0] =</td><td>0000</td><td>Physical Port 1 is disabled</td></tr><tr><td>0001</td><td>Physical Port 1 is mapped to Logical Port 1</td></tr><tr><td>0010</td><td>Physical Port 1 is mapped to Logical Port 2</td></tr><tr><td>0011 to 1111</td><td>RESERVED<br/>Will default to 0000 value.</td></tr></table> |                                             | Bits[7:4] = | 0000    | Physical Port 2 is disabled | 0001 | Physical Port 2 is mapped to Logical Port 1 | 0010 | Physical Port 2 is mapped to Logical Port 2 | 0011 to 1111 | RESERVED<br>Will default to 0000 value. | Bits[3:0] = | 0000 | Physical Port 1 is disabled | 0001 | Physical Port 1 is mapped to Logical Port 1 | 0010 | Physical Port 1 is mapped to Logical Port 2 | 0011 to 1111 | RESERVED<br>Will default to 0000 value. | R/W | 00h |
| Bits[7:4] = | 0000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Physical Port 2 is disabled                 |             |         |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |
|             | 0001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Physical Port 2 is mapped to Logical Port 1 |             |         |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |
|             | 0010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Physical Port 2 is mapped to Logical Port 2 |             |         |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |
|             | 0011 to 1111                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | RESERVED<br>Will default to 0000 value.     |             |         |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |
| Bits[3:0] = | 0000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Physical Port 1 is disabled                 |             |         |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |
|             | 0001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Physical Port 1 is mapped to Logical Port 1 |             |         |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |
|             | 0010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Physical Port 1 is mapped to Logical Port 2 |             |         |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |
|             | 0011 to 1111                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | RESERVED<br>Will default to 0000 value.     |             |         |                             |      |                                             |      |                                             |              |                                         |             |      |                             |      |                                             |      |                                             |              |                                         |     |     |

# USB2422

## 4.4.31 STATUS/COMMAND REGISTER (STCD)

Address:

FFh

Size:

8 bits

| Bits | Description                                                                                                                                                                                                                                                                                                                                                                                                       | Type | Default |
|------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------|
| 7:3  | <b>RESERVED</b>                                                                                                                                                                                                                                                                                                                                                                                                   | -    | -       |
| 2    | <b>SMBus Interface Power Down (INTF_PW_DN)</b><br><br>0 = Interface is active<br>1 = Interface power down after ACK has completed<br><b>Note:</b> This bit is write once and is only cleared by assertion of the external RESET_N pin.                                                                                                                                                                            | R/W  | 0b      |
| 1    | <b>Reset (RESET)</b><br>Resets the SMBus Interface and internal memory back to RESET_N assertion default settings.<br><br>0 = Normal Run/Idle State<br>1 = Force a reset of the registers to their default state<br><b>Note:</b> During this reset, this bit is automatically cleared to its default value of 0.                                                                                                  | R/W  | 0b      |
| 0    | <b>USB Attach and Write Protect (USB_ATTACH)</b><br><br>0 = SMBus slave interface is active<br>1 = Hub will signal a USB attach event to an upstream device, and the internal memory that is not Modify capable in the address range 00h-FEh, is "write-protected" to prevent unintentional data corruption.<br><b>Note:</b> This bit is write once and is only cleared by assertion of the external RESET_N pin. | R/W  | 0b      |

## 5.0 DC PARAMETERS

### 5.1 Maximum Ratings

| Parameter              | Symbol            | MIN  | MAX | Units | Comments                                                    |
|------------------------|-------------------|------|-----|-------|-------------------------------------------------------------|
| Storage Temperature    | T <sub>STOR</sub> | -55  | 150 | °C    |                                                             |
| Lead Temperature       |                   |      |     |       | Refer to JEDEC Specification J-STD-020D <a href="#">3</a> . |
| 3.3 V supply voltage   | VDD33             |      | 4.6 | V     |                                                             |
| Voltage on any I/O pin |                   | -0.5 | 5.5 | V     |                                                             |
| Voltage on XTALIN      |                   | -0.5 | 4.0 | V     |                                                             |
| Voltage on XTALOUT     |                   | -0.5 | 2.5 | V     |                                                             |

**Note 5-1** Refer to JEDEC Specification J-STD-020D [\[3\]](#).


**Note 5-2** Stresses above the specified parameters could cause permanent damage to the device. This is a stress rating only and functional operation of the device at any condition above those indicated in the operation sections of this specification is not implied.

**Note 5-3** When powering this device from laboratory or system power supplies, it is important that the absolute maximum ratings not be exceeded or device failure can result. Some power supplies exhibit voltage spikes on their outputs when the AC power is switched on or off. In addition, voltage transients on the AC power line may appear on the DC output. When this possibility exists, it is suggested that a clamp circuit be used.

### 5.2 Operating Conditions

| Parameter                       | Symbol            | MIN  | MAX         | Units | Comments                                                                                             |
|---------------------------------|-------------------|------|-------------|-------|------------------------------------------------------------------------------------------------------|
| USB2422 Operating Temperature   | T <sub>A</sub>    | 0    | 70          | °C    | Ambient temperature in still air                                                                     |
| USB2422-i Operating Temperature | T <sub>A</sub>    | -40  | 85          | °C    | Ambient temperature in still air                                                                     |
| 3.3 V supply voltage            | VDD33             | 3.0  | 3.6         | V     |                                                                                                      |
| 3.3 V supply rise time          | t <sub>RT33</sub> | 0    | 400         | μs    | See <a href="#">Figure 5-1</a>                                                                       |
| Voltage on any I/O pin          |                   | -0.3 | 5.5         | V     | If any 3.3 V supply voltage drops below 3.0 V, then the MAX becomes:<br>(3.3 V supply voltage) + 0.5 |
| Voltage on XTALIN               |                   | -0.3 | VDD12 + 0.3 | V     |                                                                                                      |

**FIGURE 5-1: SUPPLY RISE TIME MODEL**

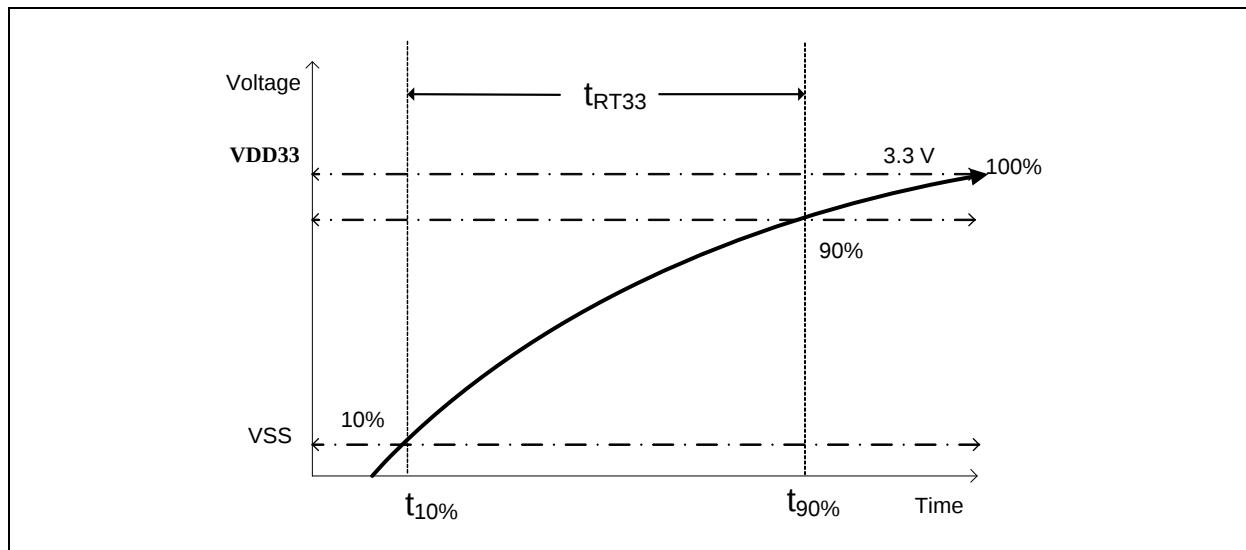

**TABLE 5-1: DC ELECTRICAL CHARACTERISTICS**

| Parameter                                | Symbol     | MIN | TYP | MAX | Units   | Comments                     |
|------------------------------------------|------------|-----|-----|-----|---------|------------------------------|
| <b>I, IS Type Input Buffer</b>           |            |     |     |     |         |                              |
| Low Input Level                          | $V_{ILI}$  |     |     | 0.8 | V       | TTL Levels                   |
| High Input Level                         | $V_{IHI}$  | 2.0 |     |     | V       |                              |
| Input Leakage                            | $I_{IL}$   | -10 |     | +10 | $\mu A$ | $V_{IN} = 0$ to <b>VDD33</b> |
| Hysteresis (IS only)                     | $V_{HYSI}$ | 250 |     | 350 | mV      |                              |
| <b>Input Buffer with Pull-Up (IPU)</b>   |            |     |     |     |         |                              |
| Low Input Level                          | $V_{ILI}$  |     |     | 0.8 | V       | TTL Levels                   |
| High Input Level                         | $V_{IHI}$  | 2.0 |     |     | V       |                              |
| Low Input Leakage                        | $I_{ILL}$  | +35 |     | +90 | $\mu A$ | $V_{IN} = 0$                 |
| High Input Leakage                       | $I_{IHL}$  | -10 |     | +10 | $\mu A$ | $V_{IN} = \mathbf{VDD33}$    |
| <b>Input Buffer with Pull-Down (IPD)</b> |            |     |     |     |         |                              |
| Low Input Level                          | $V_{ILI}$  |     |     | 0.8 | V       | TTL Levels                   |
| High Input Level                         | $V_{IHI}$  | 2.0 |     |     | V       |                              |
| Low Input Leakage                        | $I_{ILL}$  | +10 |     | -10 | $\mu A$ | $V_{IN} = 0$                 |
| High Input Leakage                       | $I_{IHL}$  | -35 |     | -90 | $\mu A$ | $V_{IN} = \mathbf{VDD33}$    |
| <b>ICLK Input Buffer</b>                 |            |     |     |     |         |                              |
| Low Input Level                          | $V_{ILCK}$ |     |     | 0.3 | V       |                              |
| High Input Level                         | $V_{IHCK}$ | 0.9 |     |     | V       |                              |
| Input Leakage                            | $I_{IL}$   | -10 |     | +10 | $\mu A$ | $V_{IN} = 0$ to <b>VDD33</b> |

**TABLE 5-1: DC ELECTRICAL CHARACTERISTICS (CONTINUED)**

| Parameter                                                            | Symbol        | MIN | TYP | MAX      | Units         | Comments                                                                                                                                                                                                                          |
|----------------------------------------------------------------------|---------------|-----|-----|----------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>O12, I/O12 &amp; I/OSD12 Type Buffer</b>                          |               |     |     |          |               |                                                                                                                                                                                                                                   |
| Low Output Level                                                     | $V_{OL}$      |     |     | 0.4      | V             | $I_{OL} = 12 \text{ mA @}$<br>$V_{DD33} = 3.3 \text{ V}$<br>$I_{OH} = -12 \text{ mA @}$<br>$V_{DD33} = 3.3 \text{ V}$<br>$I_{OL} = 10 \text{ } \mu\text{A @}$<br>$V_{HYSC} = 250 \text{ mV}$<br>$V_{IN} = V_{DD33}$<br>(Note 5-1) |
| High Output Level                                                    | $V_{OH}$      | 2.4 |     |          | V             |                                                                                                                                                                                                                                   |
| Output Leakage                                                       | $I_{OL}$      | -10 |     | +10      | $\mu\text{A}$ |                                                                                                                                                                                                                                   |
| Hysteresis (SD pad only)                                             | $V_{HYSC}$    | 250 |     | 350      | mV            |                                                                                                                                                                                                                                   |
| <b>Supply Current Unconfigured Hi-Speed Host</b>                     | $I_{CCINTHS}$ |     | 40  | 45       | mA            |                                                                                                                                                                                                                                   |
| <b>Supply Current Hi-Speed Host, each additional downstream port</b> | $I_{CCINTFS}$ |     | 35  | 40       | mA            | Note 5-8                                                                                                                                                                                                                          |
| <b>Supply Current Hi-Speed Host, 1 downstream port</b>               | $I_{HCH1}$    |     | 47  | 58       | mA            | Note 5-8                                                                                                                                                                                                                          |
| <b>Supply Current Hi-Speed Host, 2 downstream ports</b>              | $I_{HCH2}$    |     | 70  | 89       | mA            | Note 5-8                                                                                                                                                                                                                          |
| <b>Supply Current Full-Speed Host, 1 downstream port</b>             | $I_{FCC1}$    |     | 29  | 40       | mA            | Note 5-8                                                                                                                                                                                                                          |
| <b>Supply Current Full-Speed Host, 2 downstream ports</b>            | $I_{FCC2}$    |     | 35  | 45       | mA            | Note 5-8                                                                                                                                                                                                                          |
| <b>Supply Current Suspend</b>                                        | $I_{CSBY}$    |     | 425 | Note 5-6 | $\mu\text{A}$ |                                                                                                                                                                                                                                   |
| <b>Supply Current Reset</b>                                          | $I_{CRST}$    |     | 300 | Note 5-7 | $\mu\text{A}$ |                                                                                                                                                                                                                                   |

**Note 5-4** Output leakage is measured with the current pins in high impedance.

**Note 5-5** See *USB 2.0 Specification 1.* for USB DC electrical characteristics.

**Note 5-6** 1000  $\mu\text{A}$  for commercial temperature part, and 1200  $\mu\text{A}$  for industrial temperature part.

**Note 5-7** 800  $\mu\text{A}$  for commercial temperature part, and 1000  $\mu\text{A}$  for industrial temperature part.

**Note 5-8** Current measured during peak USB traffic and does not reflect the average current draw.

## 5.2.1 PIN CAPACITANCE

**TABLE 5-2: PIN CAPACITANCE**

| Parameter               | Symbol     | Limits |     |     | Unit | Test Condition                                                                              |
|-------------------------|------------|--------|-----|-----|------|---------------------------------------------------------------------------------------------|
|                         |            | MIN    | TYP | MAX |      |                                                                                             |
| Clock Input Capacitance | $C_{XTAL}$ |        |     | 6   | pF   | All pins except USB pins and the pins under the test tied to AC ground.                     |
| Input Capacitance       | $C_{IN}$   |        |     | 6   | pF   | Capacitance $T_A = 25^\circ\text{C}$<br>$f_c = 1 \text{ MHz}$<br>$V_{DD33} = 3.3 \text{ V}$ |
| Output Capacitance      | $C_{OUT}$  |        |     | 6   | pF   | The maximum capacitance values include the full length of the pin pad.                      |

## 6.0 AC SPECIFICATIONS

### 6.1 Oscillator/Crystal

Parallel Resonant, Fundamental Mode, 24 MHz  $\pm$ 350 ppm.

FIGURE 6-1: TYPICAL CRYSTAL CIRCUIT

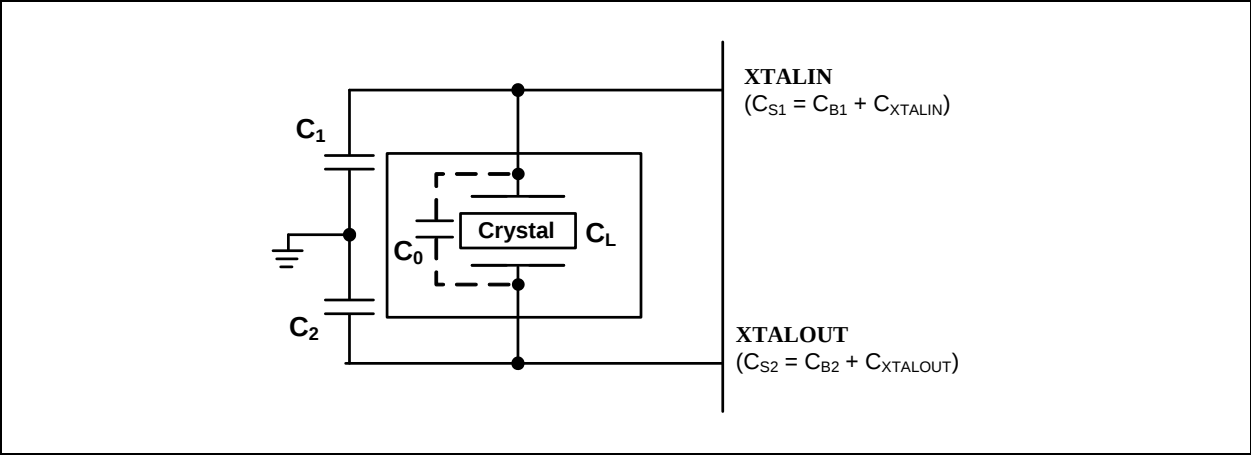


TABLE 6-1: CRYSTAL CIRCUIT LEGEND

| Symbol            | Description                            | In Accordance with                                                                                                               |
|-------------------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| C <sub>0</sub>    | Crystal shunt capacitance              | Crystal manufacturer's specification (See <a href="#">Note 6-1</a> )                                                             |
| C <sub>L</sub>    | Crystal load capacitance               |                                                                                                                                  |
| C <sub>B</sub>    | Total board or trace capacitance       | OEM board design                                                                                                                 |
| C <sub>S</sub>    | Stray capacitance                      | Microchip IC and OEM board design                                                                                                |
| C <sub>XTAL</sub> | XTAL pin input capacitance             | Microchip IC                                                                                                                     |
| C <sub>1</sub>    | Load capacitors installed on OEM board | Calculated values based on <a href="#">Figure 6-2</a> , "Formula to Find the Value of C1 and C2" (See <a href="#">Note 6-2</a> ) |
| C <sub>2</sub>    |                                        |                                                                                                                                  |

FIGURE 6-2: FORMULA TO FIND THE VALUE OF C<sub>1</sub> AND C<sub>2</sub>

$$C_1 = 2 \times (C_L - C_0) - C_{S1}$$
$$C_2 = 2 \times (C_L - C_0) - C_{S2}$$

**Note 6-1** C<sub>0</sub> is usually included (subtracted by the crystal manufacturer) in the specification for C<sub>L</sub> and should be set to 0 for use in the calculation of the capacitance formulas in [Figure 6-2](#), "Formula to Find the Value of C1 and C2". However, the PCB itself may present a parasitic capacitance between XTALIN and XTALOUT. For an accurate calculation of C<sub>1</sub> and C<sub>2</sub>, take the parasitic capacitance between traces XTALIN and XTALOUT into account.

**Note 6-2** Each of these capacitance values is typically approximately 18 pF.

## 6.2 External Clock

50% Duty cycle  $\pm 10\%$ , 24 MHz  $\pm 350$  ppm.

The external clock is recommended to conform to the signaling level designated in the JESD76-2 specification on 1.2 V CMOS Logic. XTALOUT should be treated as a weak ( $< 1$  mA) buffer output.

### 6.2.1 USB 2.0

The Microchip hub conforms to all voltage, power, and timing characteristics and specifications as set forth in the *USB 2.0 Specification 1*.. See the *USB Specification* for more information.

## 6.3 SMBus Interface

The Microchip hub conforms to all voltage, power, and timing characteristics and specifications as set forth in the *SMBus 1.0 Specification 2*. for slave-only devices (except as noted in [Section 4.3, "SMBus," on page 18](#)).



## APPENDIX A: ACRONYMS

|               |                                               |
|---------------|-----------------------------------------------|
| <b>OCS:</b>   | Over-Current Sense                            |
| <b>PCB:</b>   | Printed Circuit Board                         |
| <b>PHY:</b>   | Physical Layer                                |
| <b>PLL:</b>   | Phase-Locked Loop                             |
| <b>SQFN:</b>  | Sawn Quad Flat No Leads                       |
| <b>RoHS:</b>  | Restriction of Hazardous Substances Directive |
| <b>SCL:</b>   | Serial Clock                                  |
| <b>SIE:</b>   | Serial Interface Engine                       |
| <b>SMBus:</b> | System Management Bus                         |
| <b>TT:</b>    | Transaction Translator                        |

## APPENDIX B: REFERENCES

1. Universal Serial Bus Specification, Version 2.0, April 27, 2000 (12/7/2000 and 5/28/2002 Errata)  
USB Implementers Forum, Inc. <http://www.usb.org>
2. System Management Bus Specification, version 1.0  
SMBus. <http://smbus.org/specs/>
3. JEDEC Specifications: JESD76-2 (June 2001) and J-STD-020D.1 (March 2008)  
JEDEC Global Standards for the Microelectronics Industry. <http://www.jedec.org/standards-documents>
4. USB Battery Charging Specification, Revision 1.1, April 15, 2009  
USB Implementers Forum, Inc. <http://www.usb.org>

## APPENDIX C: DATA SHEET REVISION HISTORY

TABLE C-1: REVISION HISTORY

| REVISION LEVEL & DATE                                   | SECTION/FIGURE/ENTRY                                                              | CORRECTION                                                              |
|---------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| DS00001726B (08-21-15)                                  | <a href="#">FIGURE 2-6: Example Application - Non-SoC Based Design on page 12</a> | Updated figure to correct removable and non-removable port assignments. |
|                                                         | Ordering Codes                                                                    | Updated reel size to 5000.                                              |
|                                                         | <a href="#">Section 7.0, "Package Outline"</a>                                    | Removed tape and reel drawings.                                         |
| DS00001726A replaces the previous SMSC version rev. 1.0 |                                                                                   |                                                                         |
| Rev. 1.0 (06-04-13)                                     | Initial Revision                                                                  |                                                                         |

## THE MICROCHIP WEB SITE

Microchip provides online support via our WWW site at [www.microchip.com](http://www.microchip.com). This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQ), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

## CUSTOMER CHANGE NOTIFICATION SERVICE

Microchip's customer notification service helps keep customers current on Microchip products. Subscribers will receive e-mail notification whenever there are changes, updates, revisions or errata related to a specified product family or development tool of interest.

To register, access the Microchip web site at [www.microchip.com](http://www.microchip.com). Under "Support", click on "Customer Change Notification" and follow the registration instructions.

## CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

**Technical support is available through the web site at: <http://www.microchip.com/support>**



**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

**Trademarks**

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELOQ, KEELOQ logo, Kleer, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC<sup>32</sup> logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KleerNet, KleerNet logo, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2013 - 2015, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 9781632776990

**QUALITY MANAGEMENT SYSTEM**  
**CERTIFIED BY DNV**  
**= ISO/TS 16949 =**

*Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*



## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Austin, TX**  
Tel: 512-257-3370

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Cleveland**  
Independence, OH  
Tel: 216-447-0464  
Fax: 216-447-0643

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Novi, MI  
Tel: 248-848-4000

**Houston, TX**  
Tel: 281-894-5983

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

**New York, NY**  
Tel: 631-435-6000

**San Jose, CA**  
Tel: 408-735-9110

**Canada - Toronto**  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

**Asia Pacific Office**  
Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon

**Hong Kong**  
Tel: 852-2943-5100  
Fax: 852-2401-3431

**Australia - Sydney**  
Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

**China - Beijing**  
Tel: 86-10-8569-7000  
Fax: 86-10-8528-2104

**China - Chengdu**  
Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

**China - Chongqing**  
Tel: 86-23-8980-9588  
Fax: 86-23-8980-9500

**China - Dongguan**  
Tel: 86-769-8702-9880

**China - Hangzhou**  
Tel: 86-571-8792-8115  
Fax: 86-571-8792-8116

**China - Hong Kong SAR**  
Tel: 852-2943-5100  
Fax: 852-2401-3431

**China - Nanjing**  
Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

**China - Qingdao**  
Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

**China - Shanghai**  
Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

**China - Shenyang**  
Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

**China - Shenzhen**  
Tel: 86-755-8864-2200  
Fax: 86-755-8203-1760

**China - Wuhan**  
Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

**China - Xian**  
Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

### ASIA/PACIFIC

**China - Xiamen**  
Tel: 86-592-2388138  
Fax: 86-592-2388130

**China - Zhuhai**  
Tel: 86-756-3210040  
Fax: 86-756-3210049

**India - Bangalore**  
Tel: 91-80-3090-4444  
Fax: 91-80-3090-4123

**India - New Delhi**  
Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

**India - Pune**  
Tel: 91-20-3019-1500

**Japan - Osaka**  
Tel: 81-6-6152-7160  
Fax: 81-6-6152-9310

**Japan - Tokyo**  
Tel: 81-3-6880-3770  
Fax: 81-3-6880-3771

**Korea - Daegu**  
Tel: 82-53-744-4301  
Fax: 82-53-744-4302

**Korea - Seoul**  
Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

**Malaysia - Kuala Lumpur**  
Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

**Malaysia - Penang**  
Tel: 60-4-227-8870  
Fax: 60-4-227-4068

**Philippines - Manila**  
Tel: 63-2-634-9065  
Fax: 63-2-634-9069

**Singapore**  
Tel: 65-6334-8870  
Fax: 65-6334-8850

**Taiwan - Hsin Chu**  
Tel: 886-3-5778-366  
Fax: 886-3-5770-955

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7828

**Taiwan - Taipei**  
Tel: 886-2-2508-8600  
Fax: 886-2-2508-0102

**Thailand - Bangkok**  
Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Dusseldorf**  
Tel: 49-2129-3766400

**Germany - Karlsruhe**  
Tel: 49-721-625370

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Italy - Venice**  
Tel: 39-049-7625286

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Poland - Warsaw**  
Tel: 48-22-3325737

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**Sweden - Stockholm**  
Tel: 46-8-5090-4654

**UK - Wokingham**  
Tel: 44-118-921-5800  
Fax: 44-118-921-5820

07/14/15

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[USB2422-I/MJ](#) [USB2422/MJ](#) [USB2422T/MJ](#) [USB2422T-I/MJ](#) [USB2422I-CP](#) [USB2422-CP](#) [USB2422I-CP-TR](#)  
[USB2422-CP-TR](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331