

### FEATURES

**±4000 V HBM ESD**

**Very low distortion**

0.00025% THD + N (20 kHz)

0.0015% THD + N (100 kHz)

Drives 600 Ω loads

**Two gain settings**

Gain of  $\frac{1}{2}$  (-6 dB)

Gain of 2 (+6 dB)

0.05% maximum gain error

10 ppm/°C maximum gain drift

**Excellent ac specifications**

20 V/μs minimum slew rate

800 ns to 0.01% settling time

**High accuracy dc performance**

77 dB minimum CMRR

700 μV maximum offset voltage

**14-lead SOIC package**

**Supply current: 2.5 mA maximum per channel**

**Supply range: ±2.5 V to ±18 V**

### APPLICATIONS

**ADC drivers**

**High performance audio**

**Instrumentation amplifier building blocks**

**Level translators**

**Automatic test equipment**

**Sine/cosine encoders**

### GENERAL DESCRIPTION

The AD8273 is a low distortion, dual-channel amplifier with internal gain setting resistors. With no external components, it can be configured as a high performance difference amplifier ( $G = \frac{1}{2}$  or 2), inverting amplifier ( $G = \frac{1}{2}$  or 2), or noninverting amplifier ( $G = 1\frac{1}{2}$  or 3).

The AD8273 operates on both single and dual supplies and only requires 2.5 mA maximum supply current for each amplifier. It is specified over the industrial temperature range of -40°C to +85°C and is fully RoHS compliant.

### FUNCTIONAL BLOCK DIAGRAM

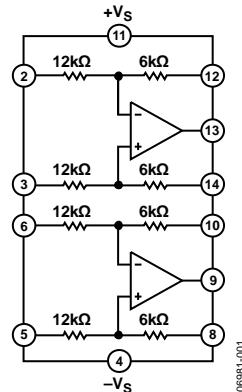


Figure 1.

Rev. B

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

Table 1. Difference Amplifiers by Category

Low Distortion	High Voltage	Single-Supply Unidirectional	Single-Supply Bidirectional
AD8270	AD628	AD8202	AD8205
AD8273	AD629	AD8203	AD8206
AD8274			AD8216
AMP03			

## TABLE OF CONTENTS

Features .....	1	Pin Configuration and Function Descriptions.....	5
Applications.....	1	Typical Performance Characteristics .....	6
Functional Block Diagram .....	1	Theory of Operation .....	12
General Description .....	1	Configurations.....	12
Revision History .....	2	Power Supplies.....	12
Specifications.....	3	Outline Dimensions.....	14
Absolute Maximum Ratings.....	4	Ordering Guide .....	14
Maximum Power Dissipation .....	4		
ESD Caution.....	4		

## REVISION HISTORY

### 8/10—Rev. A to Rev. B

Changes to Data Sheet Title .....	1
Changes to THD + Noise (THD + N) Parameter, Gain Nonlinearity Parameter, and Offset vs. Power Supply Parameter, Table 2 .....	3
Changed –12A Pin to –INA Pin, +12A Pin to +INA Pin, +12B Pin to INB Pin, –12B Pin to –INB Pin, +6B Pin to REFB Pin, –6B Pin to SENSEB Pin, –6A Pin to SENSEA Pin, and +6A Pin to REFA Pin Throughout .....	5
Changes to Figure 3 and Table 4.....	5

### 1/09—Rev. 0 to Rev. A

Changes to Product Title, Features Section, and Applications Section.....	1
Added Human Body Model (HBM) ESD Rating Parameter, Table 3 .....	4
Changes to Figure 6 to Figure 9 .....	6
Changes to Figure 10 to Figure 12.....	7
Changes to Figure 18.....	8
Deleted Figure 31; Renumbered Sequentially .....	10
Added Figure 31 to Figure 33; Renumbered Sequentially .....	10
Added Figure 34 to Figure 36.....	11

### 1/08—Revision 0: Initial Version

## SPECIFICATIONS

$V_S = \pm 15$  V,  $V_{REF} = 0$  V,  $T_A = 25^\circ\text{C}$ ,  $G = \frac{1}{2}$ ,  $R_L = 2$  k $\Omega$ , unless otherwise noted.

Table 2.

Parameter	Conditions	Min	Typ	Max	Unit
DYNAMIC PERFORMANCE					
Bandwidth			20		MHz
Slew Rate		20			V/ $\mu$ s
Settling Time to 0.1%	10 V step on output, $C_L = 100$ pF		670	750	ns
Settling Time to 0.01%	10 V step on output, $C_L = 100$ pF		750	800	ns
Channel Separation	$f = 1$ kHz		130		dB
NOISE/DISTORTION <sup>1</sup>					
THD + Noise (THD + N)	$f = 1$ kHz, $V_{OUT} = 10$ V p-p, 600 $\Omega$ load		0.00025		%
Noise Floor, RTO <sup>2</sup>	20 kHz BW		-106		dBu
Output Voltage Noise (Referred to Output)	$f = 20$ Hz to 20 kHz		3.5		$\mu$ V rms
	$f = 1$ kHz		26		nV/ $\sqrt{\text{Hz}}$
GAIN					
Gain Error				0.05	%
Gain Drift	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	2	10		ppm/ $^\circ\text{C}$
Gain Nonlinearity	$V_{OUT} = 10$ V p-p, 600 $\Omega$ load	2			ppm
INPUT CHARACTERISTICS					
Offset <sup>3</sup>	Referred to output	100	700		$\mu$ V
vs. Temperature	$-40^\circ\text{C}$ to $+85^\circ\text{C}$	3			$\mu$ V/ $^\circ\text{C}$
vs. Power Supply	$V_S = \pm 2.5$ V to $\pm 18$ V	2	5		$\mu$ V/V
Common-Mode Rejection Ratio	$V_{CM} = \pm 40$ V, $R_S = 0$ $\Omega$ , referred to input	77	86		dB
Input Voltage Range <sup>4</sup>		$-3V_S + 4.5$		$+3V_S - 4.5$	V
Impedance <sup>5</sup>			36		k $\Omega$
Differential	$V_{CM} = 0$ V		9		k $\Omega$
Common Mode <sup>6</sup>					
OUTPUT CHARACTERISTICS					
Output Swing		$-V_S + 1.5$		$+V_S - 1.5$	V
Short-Circuit Current Limit	Sourcing	100			mA
	Sinking	60			mA
Capacitive Load Drive	$G = \frac{1}{2}$	200			pF
	$G = 2$	1200			pF
POWER SUPPLY					
Supply Current (per Amplifier)				2.5	mA
TEMPERATURE RANGE					
Specified Performance		-40		+85	$^\circ\text{C}$

<sup>1</sup> Includes amplifier voltage and current noise, as well as noise of internal resistors.

<sup>2</sup> dB<sub>u</sub> = 20 log (V rms/0.7746).

<sup>3</sup> Includes input bias and offset current errors.

<sup>4</sup> May also be limited by absolute maximum input voltage or by the output swing. See the Absolute Maximum Ratings section and Figure 9 through Figure 12 for details.

<sup>5</sup> Internal resistors are trimmed to be ratio matched but have  $\pm 20\%$  absolute accuracy.

<sup>6</sup> Common mode is calculated looking into both inputs. Common-mode impedance looking into only one input is 18 k $\Omega$ .

## ABSOLUTE MAXIMUM RATINGS

Table 3.

Parameter	Rating
Supply Voltage	$\pm 18\text{ V}$
Output Short-Circuit Current	Observe derating curve
Voltage at Any Input Pin	40 V
Differential Input Voltage	40 V
Current into Any Input Pin	3 mA
Human Body Model (HBM) ESD Rating	$\pm 4000\text{ V}$
Storage Temperature Range	$-65^\circ\text{C}$ to $+130^\circ\text{C}$
Specified Temperature Range	$-40^\circ\text{C}$ to $+85^\circ\text{C}$
Thermal Resistance	
$\theta_{JA}$	$105^\circ\text{C}/\text{W}$
$\theta_{JC}$	$36^\circ\text{C}/\text{W}$
Package Glass Transition Temperature ( $T_G$ )	150°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### MAXIMUM POWER DISSIPATION

The maximum safe power dissipation for the AD8273 is limited by the associated rise in junction temperature ( $T_J$ ) on the die. At approximately 150°C, which is the glass transition temperature, the plastic changes its properties. Even temporarily exceeding this temperature limit may change the stresses that the package exerts on the die, permanently shifting the parametric performance of the amplifiers. Exceeding a temperature of 150°C for an extended period can result in a loss of functionality.

The AD8273 has built-in, short-circuit protection that limits the output current to approximately 100 mA (see Figure 2 for more information). While the short-circuit condition itself does not damage the part, the heat generated by the condition can cause the part to exceed its maximum junction temperature, with corresponding negative effects on reliability.

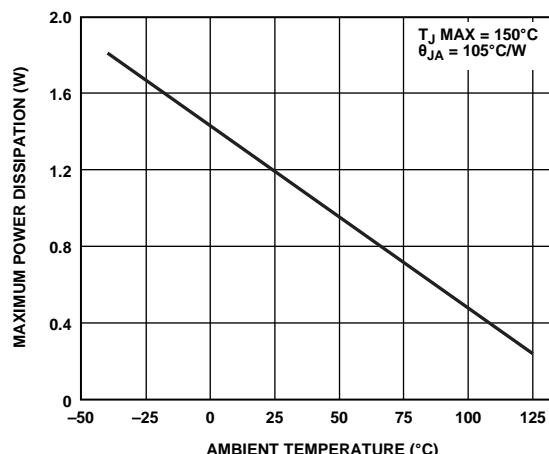


Figure 2. Maximum Power Dissipation vs. Ambient Temperature

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

## PIN CONFIGURATION AND FUNCTION DESCRIPTIONS




Figure 3. Pin Configuration

Table 4. Pin Function Descriptions

Pin No.	Mnemonic	Description
1, 7	NC	No Connect.
2	-INA	The 12 kΩ resistor connects to the negative terminal of Op Amp A.
3	+INA	The 12 kΩ resistor connects to the positive terminal of Op Amp A.
4	-V <sub>S</sub>	Negative Supply.
5	+INB	The 12 kΩ resistor connects to the positive terminal of Op Amp B.
6	-INB	The 12 kΩ resistor connects to the negative terminal of Op Amp B.
8	REFB	The 6 kΩ resistor connects to the positive terminal of Op Amp B.
9	OUTB	Op Amp B Output.
10	SENSEB	The 6 kΩ resistor connects to the negative terminal of Op Amp B.
11	+V <sub>S</sub>	Positive Supply.
12	SENSEA	The 6 kΩ resistor connects to the negative terminal of Op Amp A.
13	OUTA	Op Amp A Output.
14	REFA	The 6 kΩ resistor connects to the positive terminal of Op Amp A.

## TYPICAL PERFORMANCE CHARACTERISTICS

$V_S = \pm 15$  V,  $T_A = 25^\circ\text{C}$ ,  $G = \frac{1}{2}$ , difference amplifier configuration, unless otherwise noted.

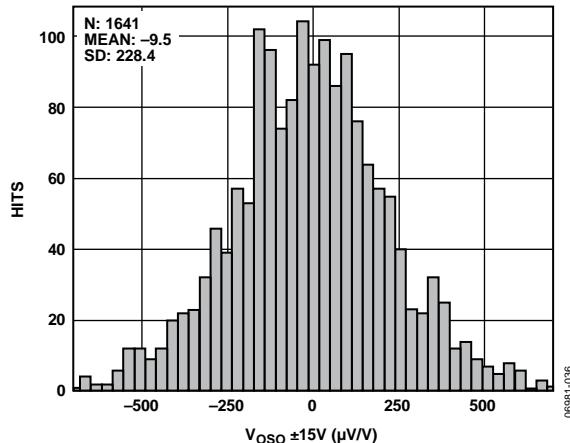


Figure 4. Typical Distribution of System Offset Voltage,  
 $G = \frac{1}{2}$ , Referred to Output

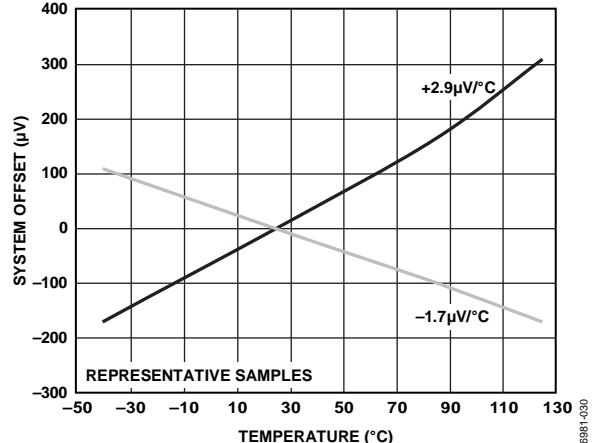


Figure 7. System Offset vs. Temperature, Normalized at 25°C,  
Referred to Output

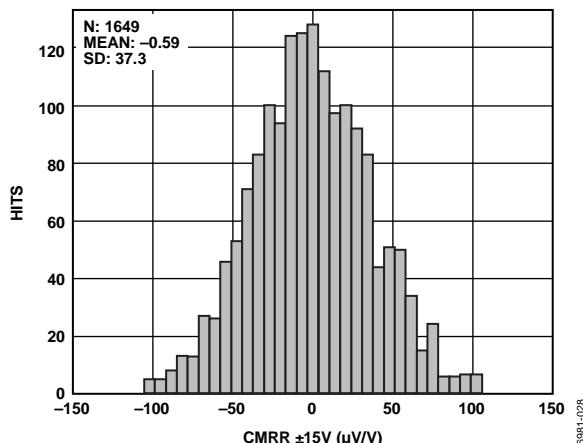


Figure 5. Typical Distribution of CMRR,  $G = \frac{1}{2}$ , Referred to Input

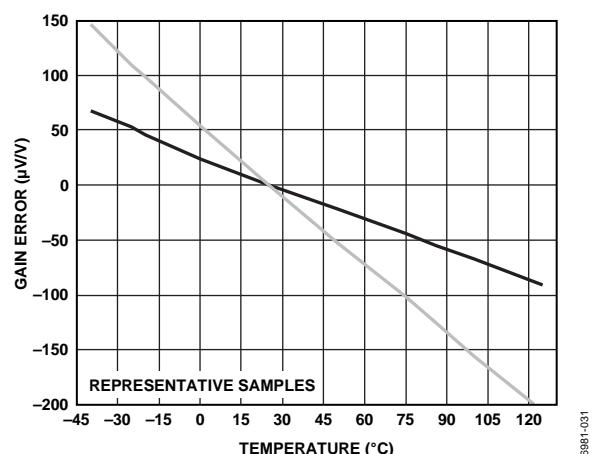


Figure 8. Gain Error vs. Temperature, Normalized at 25°C

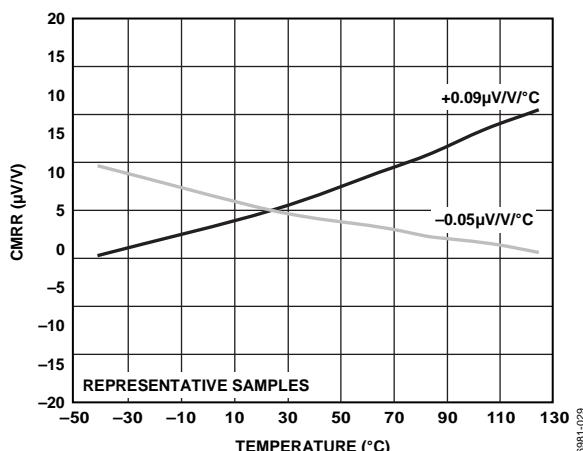


Figure 6. CMRR vs. Temperature, Normalized at 25°C







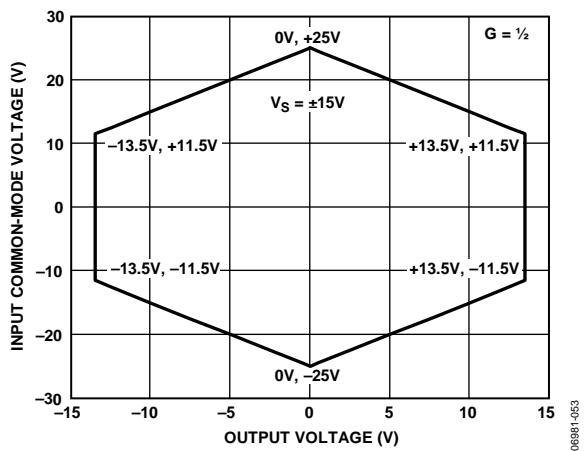


Figure 9. Input Common-Mode Voltage vs. Output Voltage,  
Gain =  $\frac{1}{2}$ ,  $\pm 15$  V Supplies

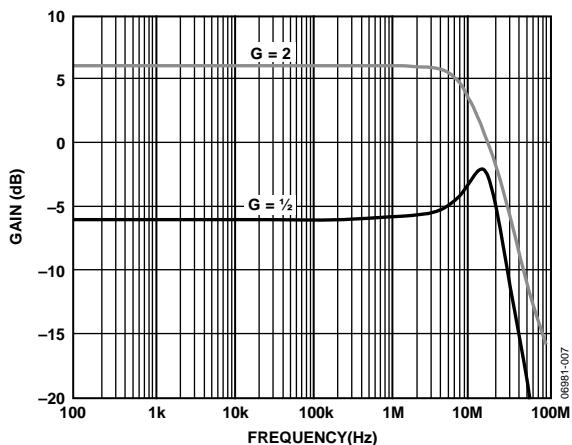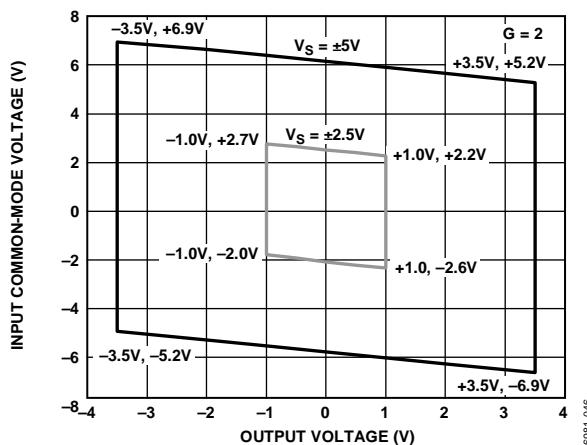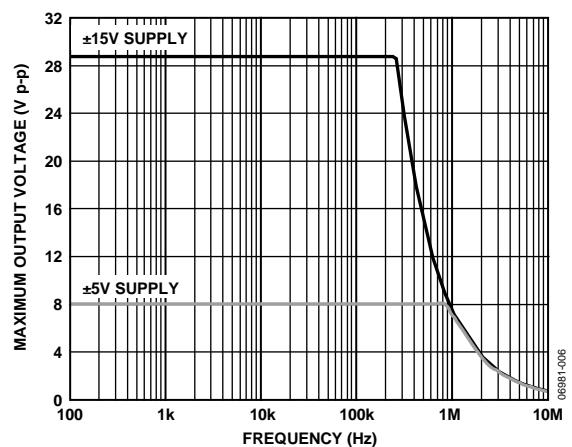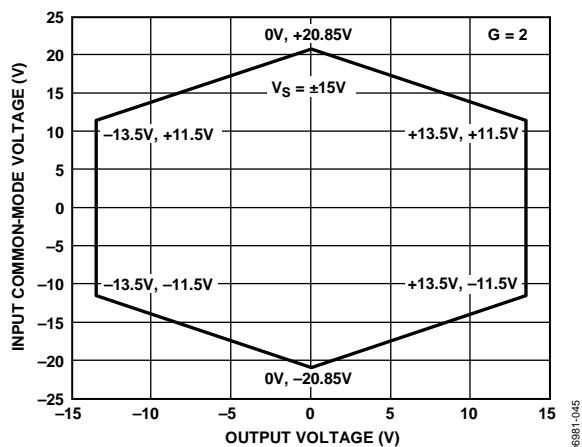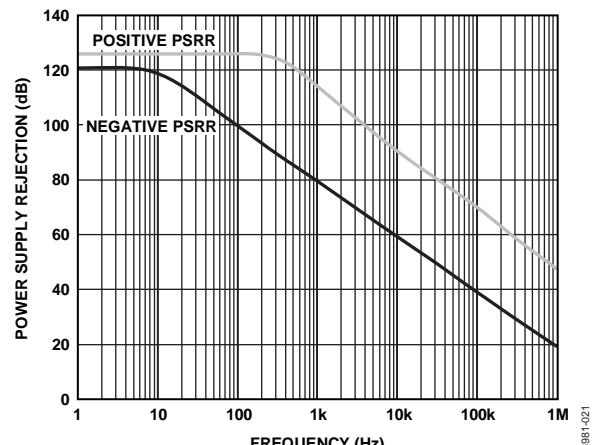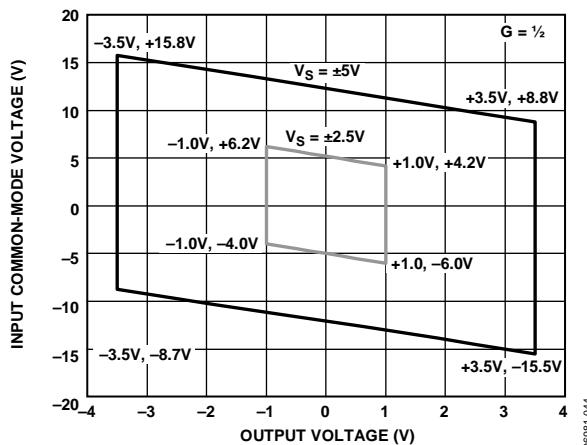

# AD8273

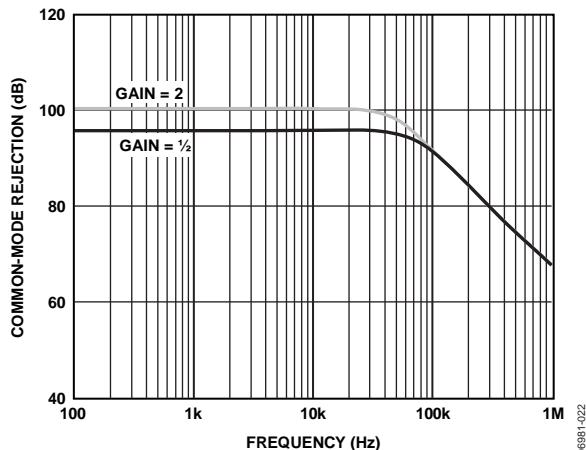


Figure 16. Common-Mode Rejection vs. Frequency, Referred to Input

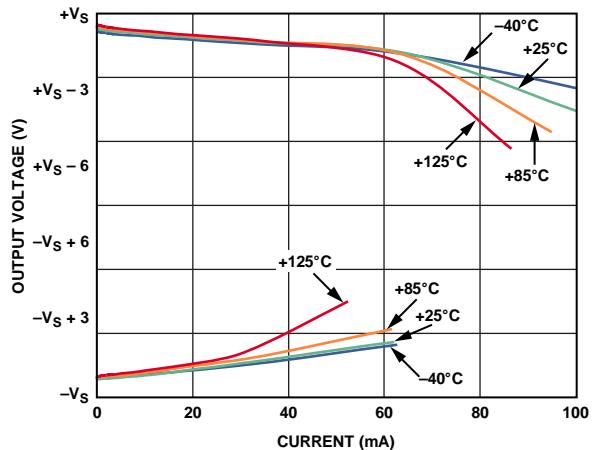


Figure 19. Output Voltage vs.  $I_{OUT}$

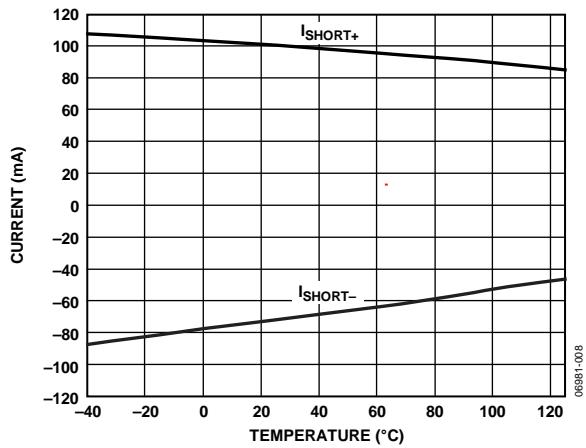


Figure 17. Short-Circuit Current vs. Temperature

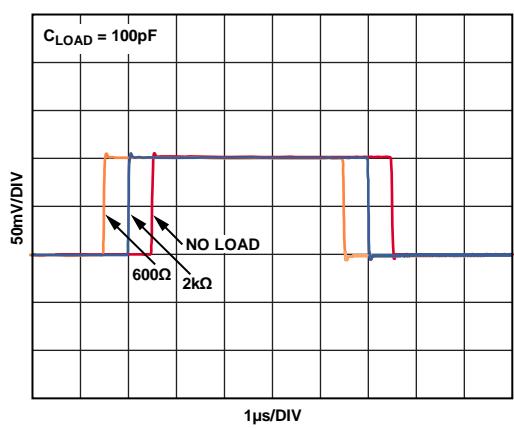


Figure 20. Small Signal Step Response, Gain = 2

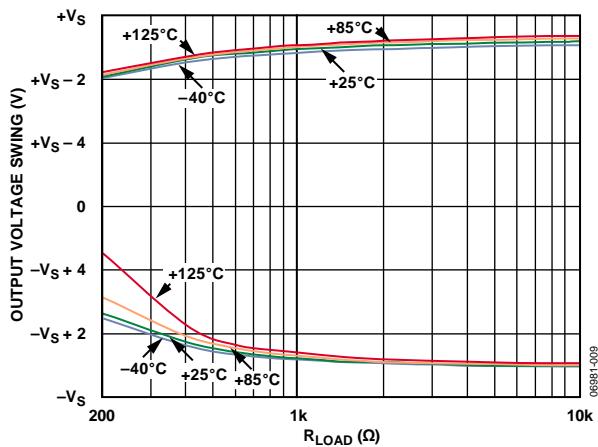


Figure 18. Output Voltage Swing vs.  $R_{LOAD}$ ,  $V_s = \pm 15\text{V}$

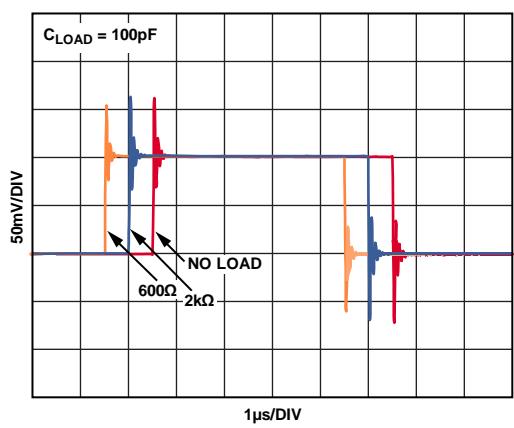


Figure 21. Small Signal Step Response, Gain = 1/2

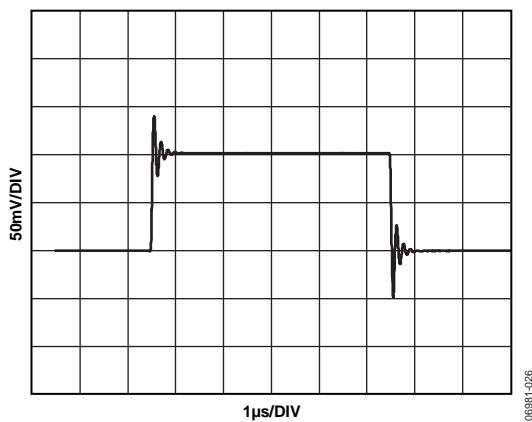


Figure 22. Small Signal Pulse Response with 500 pF Capacitor Load, Gain = 2

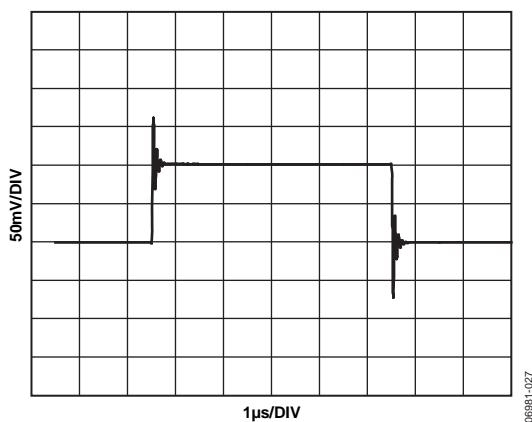


Figure 23. Small Signal Pulse Response for 100 pF Capacitive Load, Gain = ½

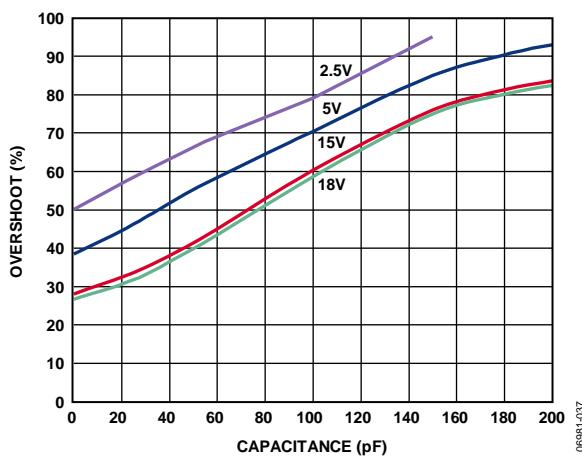


Figure 24. Small Signal Overshoot vs. Capacitive Load,  $G = \frac{1}{2}$ , No Resistive Load

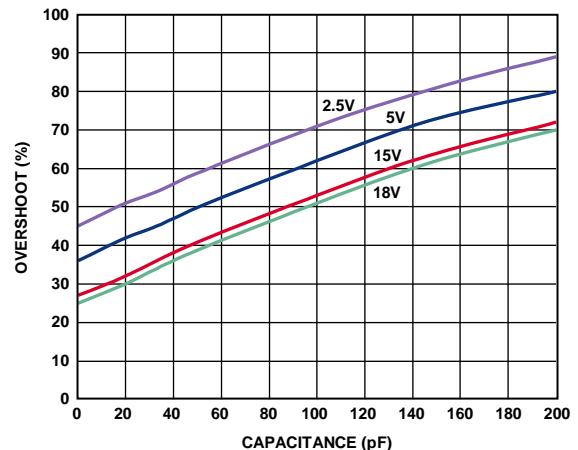


Figure 25. Small Signal Overshoot vs. Capacitive Load,  $G = \frac{1}{2}$ , 600 Ω in Parallel with Capacitive Load

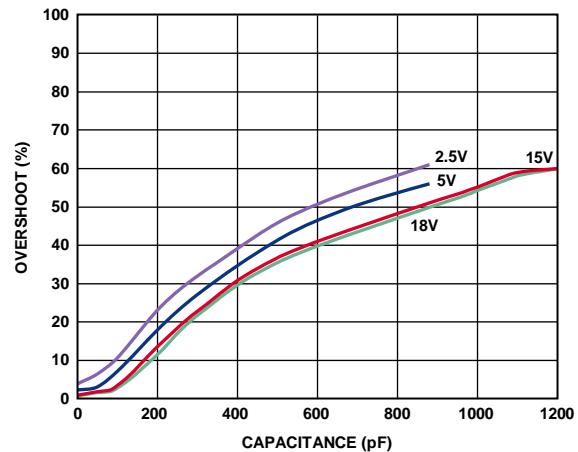


Figure 26. Small Signal Overshoot vs. Capacitive Load,  $G = 2$ , No Resistive Load

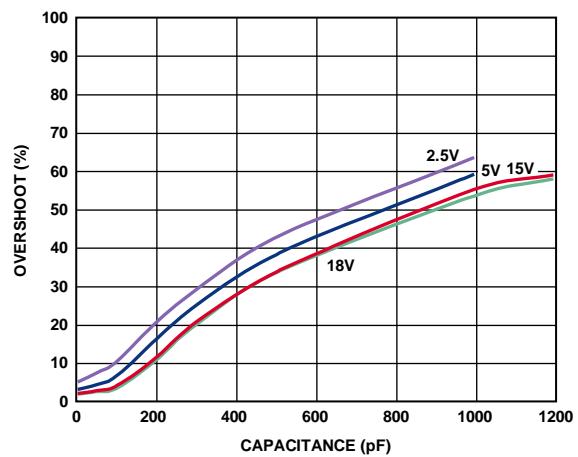


Figure 27. Small Signal Overshoot vs. Capacitive Load,  $G = 2$ , 600 Ω in Parallel with Capacitive Load

# AD8273

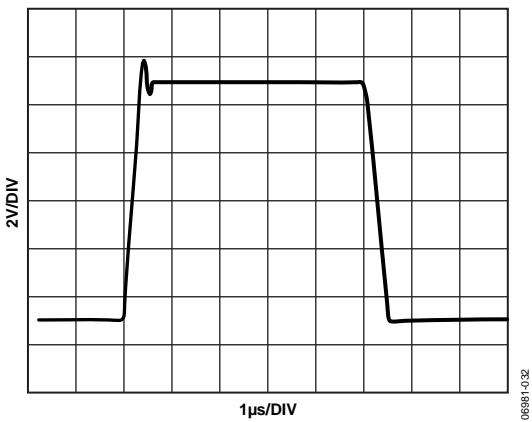


Figure 28. Large Signal Pulse Response, Gain = 1/2

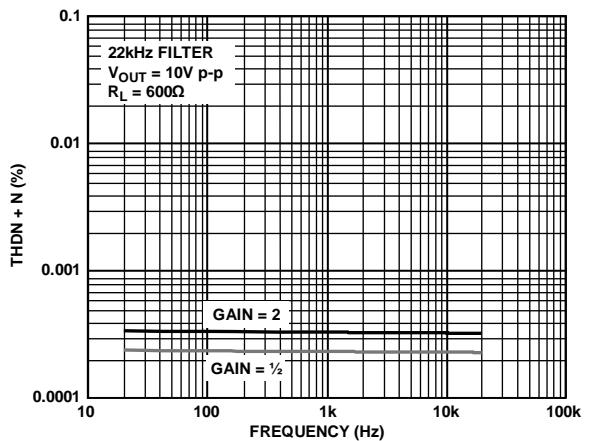


Figure 31. THD + N vs. Frequency, Filter = 22 kHz

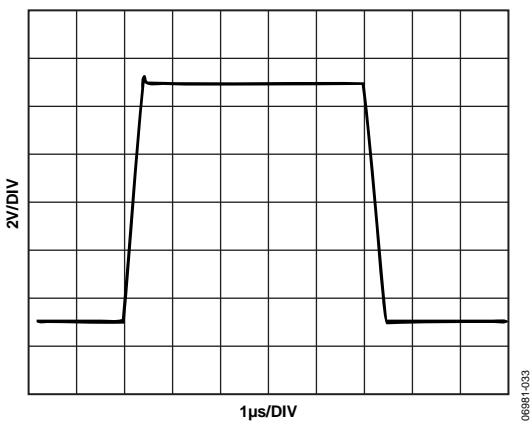


Figure 29. Large Signal Pulse Response, Gain = 2

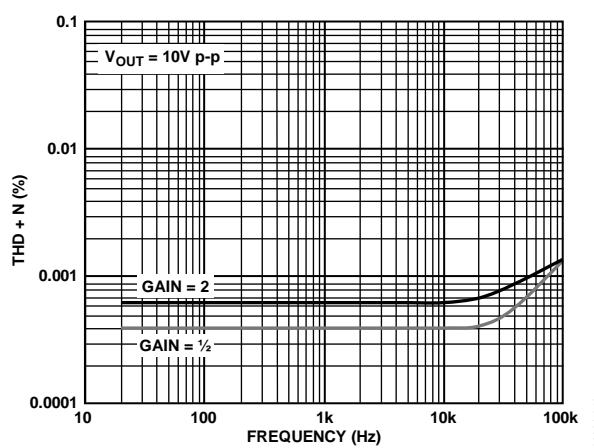


Figure 32. THD + N vs. Frequency, Filter = 120 kHz

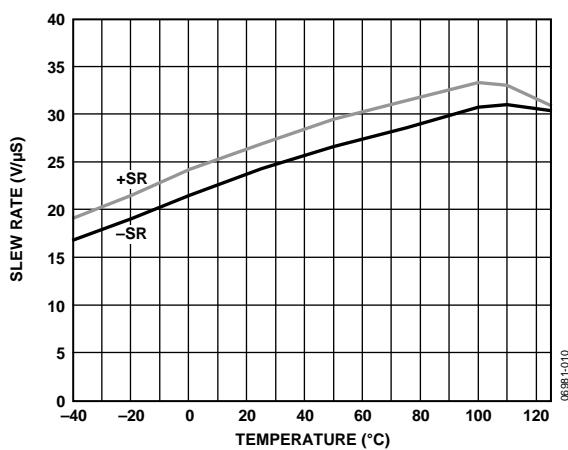


Figure 30. Slew Rate vs. Temperature






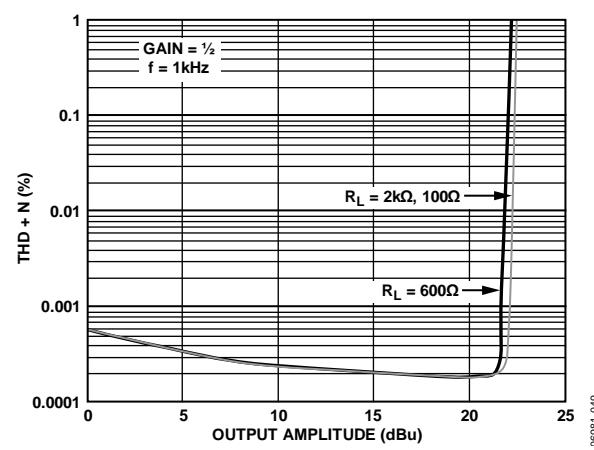


Figure 33. THD + N vs. Output Amplitude, G = 1/2

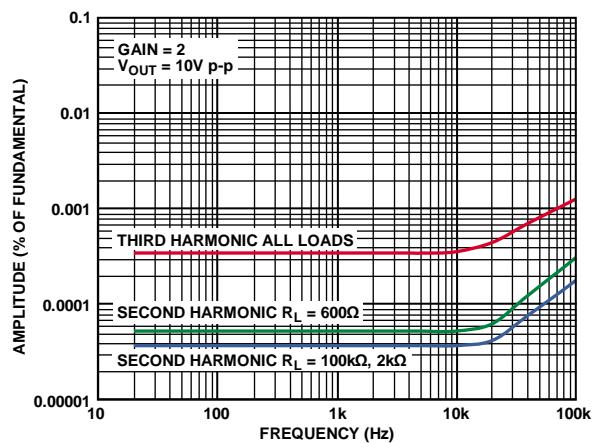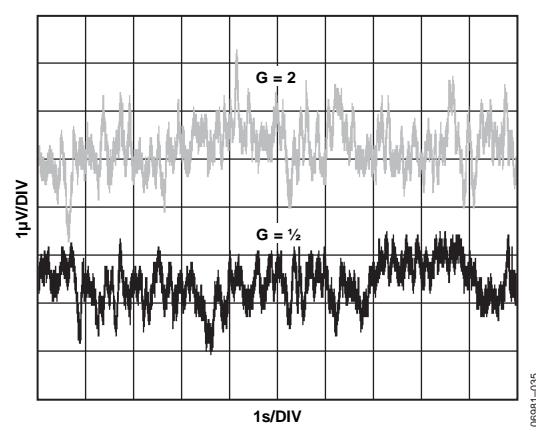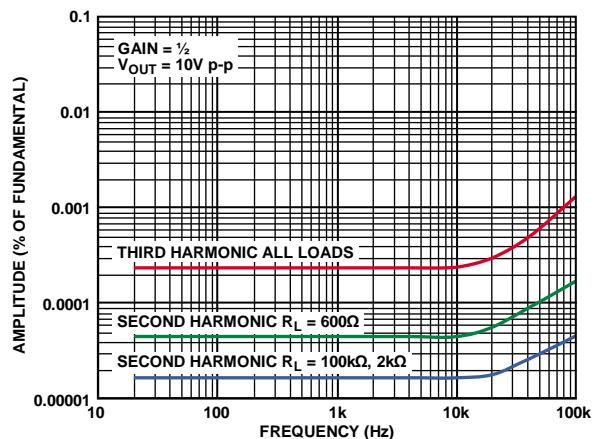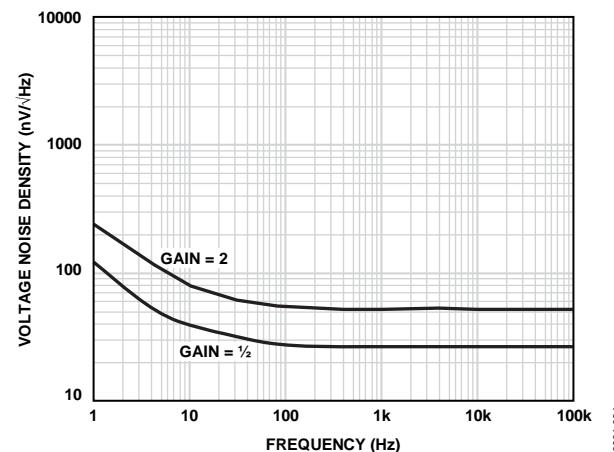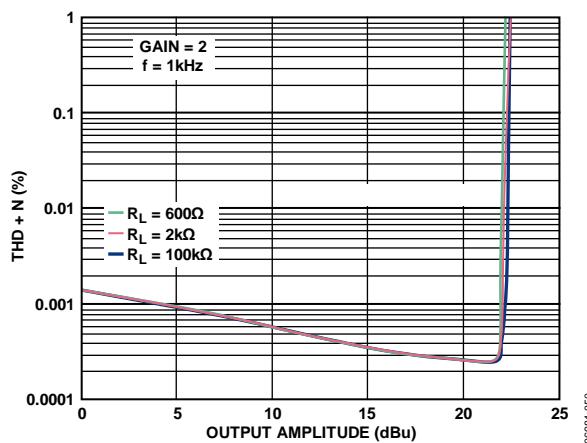

## THEORY OF OPERATION

The AD8273 has two channels, each consisting of a high precision, low distortion op amp and four trimmed resistors. Although such a circuit can be built discretely, placing the resistors on the chip offers advantages to board designers that include better dc specifications, better ac specification, and lower production costs.

The resistors on the AD8273 are laser trimmed and tightly matched. Specifications that depend on the resistor matching, such as gain drift, common-mode rejection, and gain accuracy, are better than can be achieved with standard discrete resistors.

The positive and negative input terminals of the AD8273 op amp are not pinned out intentionally. Keeping these nodes internal means their capacitance is considerably lower than it would be in discrete designs. Lower capacitance at these nodes means better loop stability and improved common-mode rejection vs. frequency.

The internal resistors of the AD8273 lower production costs. One part rather than several is placed on the board, which improves both board build time and reliability.


## CONFIGURATIONS

The AD8273 can be configured in several different ways; see Figure 39 to Figure 46. Because these configurations rely on the internal, matched resistors, these configurations have excellent gain accuracy and gain drift.

## POWER SUPPLIES


Use a stable dc voltage to power the AD8273. Noise on the supply pins can adversely affect performance. Place a bypass capacitor of  $0.1\ \mu\text{F}$  between each supply pin and ground, as close to each pin as possible. Also, use a tantalum capacitor of  $10\ \mu\text{F}$  between each supply and ground. It can be farther away from the AD8273 and typically can be shared by other precision integrated circuits.

The AD8273 is specified at  $\pm 15\text{ V}$ , but it can be used with unbalanced supplies as well, for example,  $-V_S = 0\text{ V}$ ,  $+V_S = 20\text{ V}$ . The difference between the two supplies must be kept below 36 V.

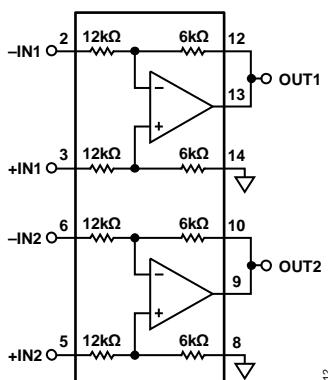

$$V_{\text{OUT}} = \frac{1}{2} (V_{\text{IN}+} - V_{\text{IN}-})$$


Figure 39. Difference Amplifier,  $G = \frac{1}{2}$

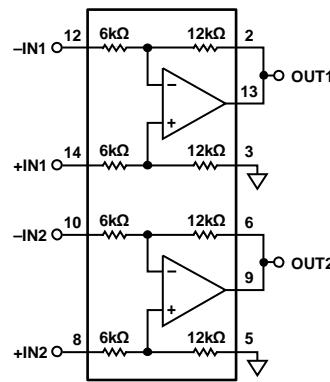

$$V_{\text{OUT}} = 2 (V_{\text{IN}+} - V_{\text{IN}-})$$

Figure 40. Difference Amplifier,  $G = 2$


06981-016

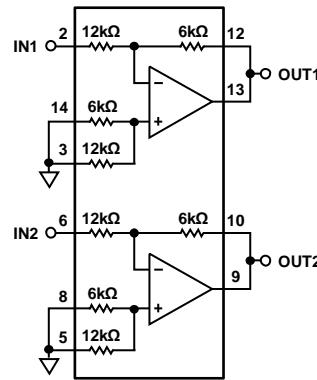

$$V_{\text{OUT}} = -\frac{1}{2} V_{\text{IN}}$$

Figure 41. Inverting Amplifier,  $G = \frac{1}{2}$


06981-013

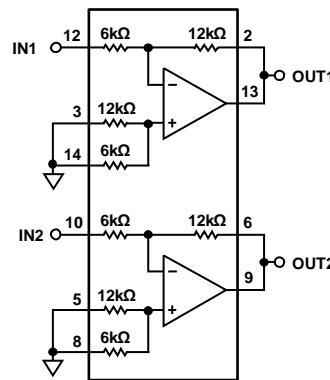


$$V_{\text{OUT}} = -2 V_{\text{IN}}$$

Figure 42. Inverting Amplifier,  $G = 2$


06981-017

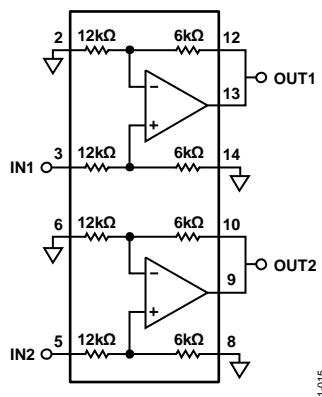


$V_{\text{OUT}} = \frac{1}{2} V_{\text{IN}}$   
Figure 43. Noninverting Amplifier,  $G = \frac{1}{2}$

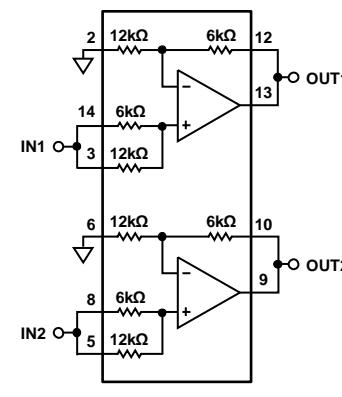

$V_{\text{OUT}} = 1\frac{1}{2} V_{\text{IN}}$   
Figure 45. Noninverting Amplifier,  $G = 1.5$

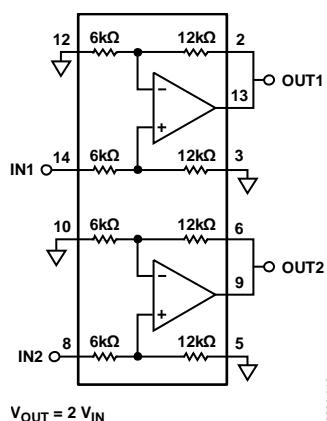


$V_{\text{OUT}} = 2 V_{\text{IN}}$   
Figure 44. Noninverting Amplifier,  $G = 2$

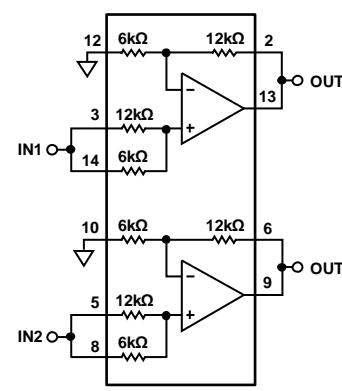

$V_{\text{OUT}} = 3 V_{\text{IN}}$   
Figure 46. Noninverting Amplifier,  $G = 3$

## OUTLINE DIMENSIONS

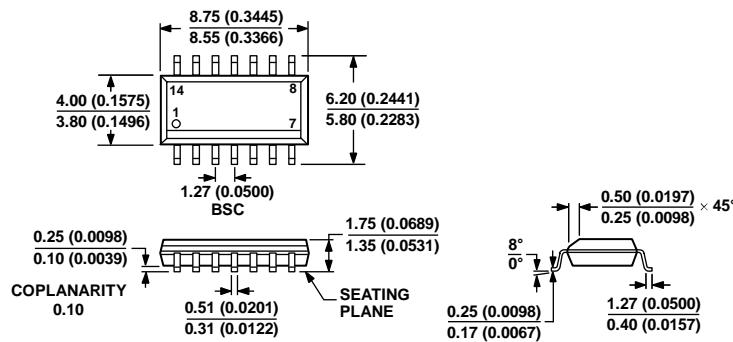

COMPLIANT TO JEDEC STANDARDS MS-012-AB  
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
 (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

060606-A

Figure 47. 14-Lead Standard Small Outline Package [SOIC\_N]

Narrow Body

(R-14)

Dimensions shown in millimeters and (inches)

## ORDERING GUIDE

Model <sup>1</sup>	Temperature Range	Package Description	Package Option
AD8273ARZ	-40°C to +85°C	14-Lead SOIC_N	R-14
AD8273ARZ-R7	-40°C to +85°C	14-Lead SOIC_N, 7" Tape and Reel	R-14
AD8273ARZ-RL	-40°C to +85°C	14-Lead SOIC_N, 13" Tape and Reel	R-14

<sup>1</sup> Z = RoHS Compliant Part.

**AD8273**

**NOTES**

# AD8273

## NOTES

©2008–2010 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.  
D06981-0-8/10(B)



[www.analog.com](http://www.analog.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331