



30 V, High Speed, Low Noise, Low Bias Current, JFET Operational Amplifier

ADA4627-1/ADA4637-1

FEATURES

Low offset voltage: 200 μV maximum
Offset drift: 1 $\mu\text{V}/^\circ\text{C}$ typical
Very low input bias current: 5 pA maximum
Extended temperature range: -40°C to $+125^\circ\text{C}$
 $\pm 5\text{ V}$ to $\pm 15\text{ V}$ dual supply
ADA4627-1 GBW: 19 MHz
ADA4637-1 GBW: 79 MHz
Voltage noise: 6.1 nV/ $\sqrt{\text{Hz}}$ at 1 kHz
ADA4627-1 slew rate: 82 V/ μs
ADA4637-1 slew rate: 170 V/ μs
High gain: 120 dB typical
High CMRR: 116 dB typical
High PSRR: 112 dB typical

APPLICATIONS

High impedance sensors
Photodiode amplifier
Precision instrumentation
Phase-locked loop filters
High end, professional audio
DAC output amplifier
ATE
Medical

GENERAL DESCRIPTION

The ADA4627-1/ADA4637-1 are wide bandwidth precision amplifiers featuring low noise, very low offset, drift, and bias current. The parts operate from $\pm 5\text{ V}$ to $\pm 15\text{ V}$ dual supply.

The ADA4627-1/ADA4637-1 provide benefits previously found in few amplifiers. These amplifiers combine the best specifications of precision dc and high speed ac op amps. The ADA4637-1 is a decompensated version of the ADA4627-1 and is stable at a noise gain of 5 or greater.

With a typical offset voltage of only 70 μV , drift of less than 1 $\mu\text{V}/^\circ\text{C}$, and noise of only 0.86 μV p-p (0.1 Hz to 10 Hz), the ADA4627-1/ADA4637-1 are suited for applications where error sources cannot be tolerated.

Table 1. High Speed Precision Op Amps

Supply	5 V Low Cost	5 V	26 V Low Power	30 V Low Cost	30 V
Single	AD8615	AD8651	AD8610	AD8510	ADA4627-1/ADA4637-1
Dual	AD8616	AD8652	AD8620	AD8512	
Quad	AD8618			AD8513	

PIN CONFIGURATIONS




Figure 1. 8-Lead SOIC_N (R-8)




Figure 2. 8-Lead SOIC_N (R-8)




Figure 3. 8-Lead LFCSP_VD (CP-8-2)

The ADA4627-1/ADA4637-1 are specified for both the industrial temperature range of -25°C to $+85^\circ\text{C}$ and the extended industrial temperature range of -40°C to $+125^\circ\text{C}$. The ADA4627-1/ADA4637-1 are available in tiny 8-lead LFCSP and 8-lead SOIC packages.

The ADA4627-1/ADA4637-1 are members of a growing series of high speed, precision op amps offered by Analog Devices, Inc. (see Table 1).

Rev. D

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 781.329.4700 www.analog.com
Fax: 781.461.3113 ©2009-2010 Analog Devices, Inc. All rights reserved.

TABLE OF CONTENTS

Features	1
Applications	1
Pin Configurations	1
General Description	1
Revision History	2
Specifications	3
Electrical Characteristics—30 V Operation	3
Absolute Maximum Ratings	5
Thermal Resistance	5
ESD Caution	5
Typical Performance Characteristics	6
Theory of Operation	14

Input Voltage Range	14
Input Offset Voltage Adjust Range	14
Input Bias Current	14
Noise Considerations	14
THD + N Measurements	15
Printed Circuit Board Layout, Bias Current, and Bypassing	15
Output Phase Reversal	15
Decompensated Op Amps	16
Driving Capacitive Loads	16
Outline Dimensions	17
Ordering Guide	18

REVISION HISTORY

10/10—Rev. C to Rev. D

Changes to Figure 1 and General Description	1
Changes to Ordering Guide	18

7/10—Rev. B to Rev. C

Added ADA4637-1	Universal
Added Figure 2; Renumbered Sequentially	1
Changes to Table 2	3
Change to Table 3	5
Changes to Typical Performance Characteristics Section	6
Updated Outline Dimensions	17
Changes to Ordering Guide	18

10/09—Rev. A to Rev. B

Changes to Figure 2	1
---------------------------	---

9/09—Rev. 0 to Rev. A

Changes to General Description Section	1
Changes to Table 2	3
Updated Outline Dimensions	14
Changes to Ordering Guide	15

7/09—Revision 0: Initial Version

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS—30 V OPERATION

$V_{SY} = \pm 15\text{ V}$, $V_{CM} = 0\text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 2.

Parameter	Symbol	Test Conditions/Comments	B Grade			A Grade			Unit
			Min	Typ	Max	Min	Typ	Max	
INPUT CHARACTERISTICS									
Offset Voltage ¹	V _{OS}	−40°C ≤ T _A ≤ +85°C		70	200		120	300	μV
		−40°C ≤ T _A ≤ +125°C			350			410	μV
		−40°C ≤ T _A ≤ +125°C			400			660	μV
Offset Voltage Drift, Average	ΔV _{OS} /ΔT	−40°C ≤ T _A ≤ +125°C		1	2		1	3	μV/°C
Power Supply Rejection Ratio	PSRR	V _{SY} = ±4.5 V to ±18 V	106	112		103	108		dB
Input Bias Current ²	I _B	−40°C ≤ T _A ≤ +125°C	101			99			dB
		−40°C ≤ T _A ≤ +85°C		1	5		1	5	pA
		−40°C ≤ T _A ≤ +125°C			0.5			0.5	nA
Input Offset Current	I _{OS}	−40°C ≤ T _A ≤ +125°C			2			2	nA
		−40°C ≤ T _A ≤ +85°C		0.5	5		0.5	5	pA
		−40°C ≤ T _A ≤ +125°C			0.5			0.5	nA
NOISE PERFORMANCE									
Voltage Noise Density	e _n	f = 10 Hz		16.5	40		16.5	40	nV/√Hz
		f = 100 Hz		7.9	20		7.9	20	nV/√Hz
		f = 1 kHz		6.1	8		6.1	8	nV/√Hz
		f = 10 kHz		4.8	6		4.8	6	nV/√Hz
Voltage Noise	e _n p-p	0.1 Hz to 10 Hz		0.7	1.6		0.7	1.6	μV p-p
Current Noise Density	i _n	f = 100 Hz		1.6			2.5		fA/√Hz
Current Noise	i _n p-p	0.1 Hz to 10 Hz		30			48		fA p-p
Input Resistance	R _{IN}			10			10		TΩ
Input Capacitance, Differential Mode	C _{INDM}			8			8		pF
Input Capacitance, Common Mode	C _{INCM}			7			7		pF
Input Voltage Range	IVR		−11		+11	−11		+11	V
		−40°C ≤ T _A ≤ +125°C	−10.5		+10.5	−10.5		+10.5	V
Common-Mode Rejection Ratio	CMRR	T _A = 25°C, V _{CM} = −11 V to +11 V	106	116		100	110		dB
		−40°C ≤ T _A ≤ +125°C, V _{CM} = −10.5 V to +10.5 V	98			97			dB
		R _L = 1 kΩ, V _O = −10 V to +10 V	112	120		106	120		dB
Large Signal Voltage Gain	A _{VO}	−40 ≤ T _A ≤ +85°C	110			104			dB
		−40 ≤ T _A ≤ +125°C	102			100			dB
DYNAMIC PERFORMANCE									
Slew Rate ADA4627-1	SR	±10 V step, R _L = 1 kΩ, C _L = 100 pF, A _V = +1	40	56/78 ³		40	56/78 ³		V/μs
	SR	±10 V step, R _L = 1 kΩ, C _L = 100 pF, R _s = R _f = 1 kΩ, A _V = −1	40	82/84 ³		40	82/84 ³		V/μs
Slew Rate ADA4637-1	SR	±10 V out, C _f = 4.8 pF, A _V = −4		170			170		V/μs
	SR	±10 V out, C _f = 4.8 pF, A _V = +5		170			170		V/μs

ADA4627-1/ADA4637-1

Parameter	Symbol	Test Conditions/Comments	Min	B Grade Typ	Max	Min	A Grade Typ	Max	Unit
Settling Time to 0.01% ADA4627-1	t_s	$V_{IN} = 10\text{ V step, } C_L = 35\text{ pF,}$ $R_L = +1\text{ k}\Omega, A_V = -1$		550			550		ns
ADA4637-1		$V_{IN} = 10\text{ V step, } C_L = 35\text{ pF,}$ $R_L = +1\text{ k}\Omega, A_V = -4$		300			300		ns
Settling Time to 0.1% ADA4627-1	t_s	$V_{IN} = 10\text{ V step, } C_L = 35\text{ pF,}$ $R_L = +1\text{ k}\Omega, A_V = -1$		450			450		ns
ADA4637-1		$V_{OUT} = 10\text{ V step, } C_L = 35\text{ pF,}$ $R_L = +1\text{ k}\Omega, A_V = -4$		200			200		ns
Gain Bandwidth Product ADA4627-1	GBP	$R_L = 1\text{ k}\Omega, C_L = 20\text{ pF, } A_V = 1$ $A_V = 10$	16^4	19		16^4	19		MHz
ADA4637-1				79.9			79.9		
Phase Margin ADA4627-1	Φ_M	$R_L = 1\text{ k}\Omega, C_L = 20\text{ pF, } A_V = 1$ $A_V = 10$		72			72		Degrees
ADA4637-1				85		85			
Total Harmonic Distortion + Noise	THD + N	f = 1 kHz, $A_V = 1$, ADA4627-1		0.000045			0.000045		%
POWER SUPPLY									
Supply Current per Amplifier	I_{SY}	$I_O = 0\text{ mA}$		± 7.0	± 7.5		± 7.0	± 7.5	mA
		$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$			± 7.8			± 7.8	mA
OUTPUT CHARACTERISTICS									
Output Voltage High	V_{OH}	$R_L = 1\text{ k}\Omega$ to V_{CM} $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$	12.0 11.8 11.7	12.3		12.0 11.8 11.7	12.3		V V V
Output Voltage Low	V_{OL}	$R_L = 1\text{ k}\Omega$ to V_{CM} $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$		-12.7	-12.3 -12.1 -12.0		-12.7	-12.3 -12.1 -12.0	V V V
Output Current	I_{OUT}	$V_O = \pm 10\text{ V}$		± 45			± 45		mA
Short-Circuit Current	I_{SC}	$T_A = 25^\circ\text{C}$		+70/-55			+70/-55		mA
Closed-Loop Output Impedance	Z_{OUT}	f = 1 MHz, $A_V = -100$		41			41		Ω

¹ V_{OS} is measured fully warmed up.

² Tested/extrapolated from 125°C .

³ Rising/falling.

⁴ Not tested. Guaranteed by simulation and characterization.

ABSOLUTE MAXIMUM RATINGS

Table 3.

Parameter	Rating
Supply Voltage	36 V
Input Voltage Range ¹	(V ₋) – 0.3 V to (V ₊) + 0.3 V
Input Current ¹	±10 mA
Differential Input Voltage ²	±V _{SY}
Output Short-Circuit Duration to GND	Indefinite
Storage Temperature Range	–65°C to +150°C
Operating Temperature Range	–40°C to +125°C
Junction Temperature Range	–65°C to +150°C
Lead Temperature (Soldering, 60 sec)	300°C
ESD Human Body Model	4 kV

¹ Input pin has clamp diodes to the power supply pins. Input current should be limited to 10 mA or less whenever input signals exceed the power supply rail by 0.3 V.

² Differential input voltage is limited to ±30 V or the supply voltage, whichever is less.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages. This was measured using a standard 2-layer board. For the LFCSP package, the exposed pad should be soldered to a copper plane.

Table 4. Thermal Resistance

Package Type	θ_{JA}	θ_{JC}	Unit
8-Lead SOIC_N (R-8)	155	45	°C/W
8-Lead LFCSP (CP-8-2)	77	14	°C/W

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

TYPICAL PERFORMANCE CHARACTERISTICS

$T_A = 25^\circ\text{C}$, unless otherwise noted.

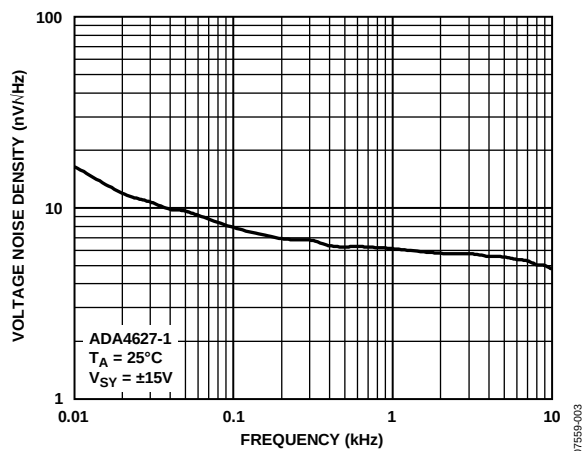


Figure 4. Voltage Noise Density vs. Frequency

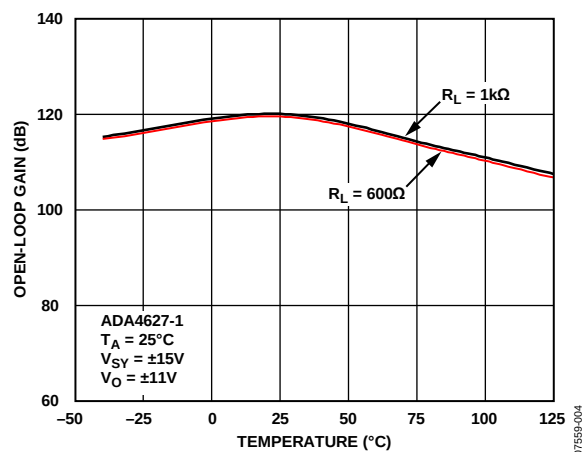


Figure 5. Open-Loop Gain vs. Temperature

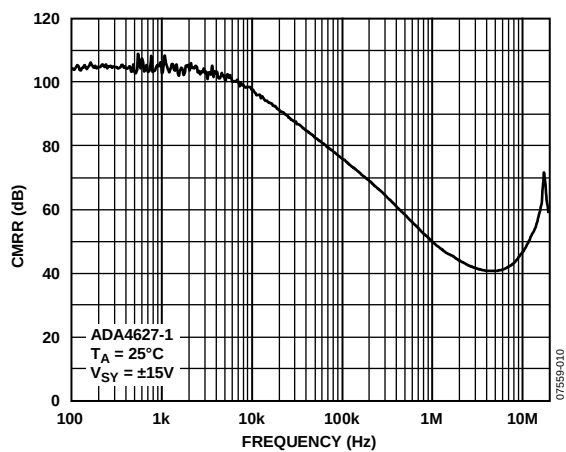


Figure 6. CMRR vs. Frequency

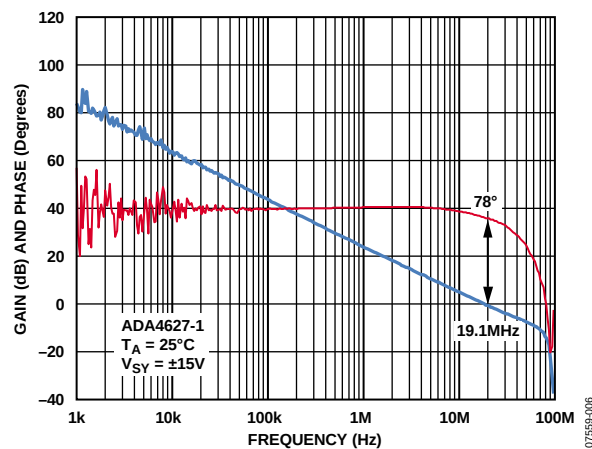


Figure 7. Open-Loop Gain and Phase vs. Frequency

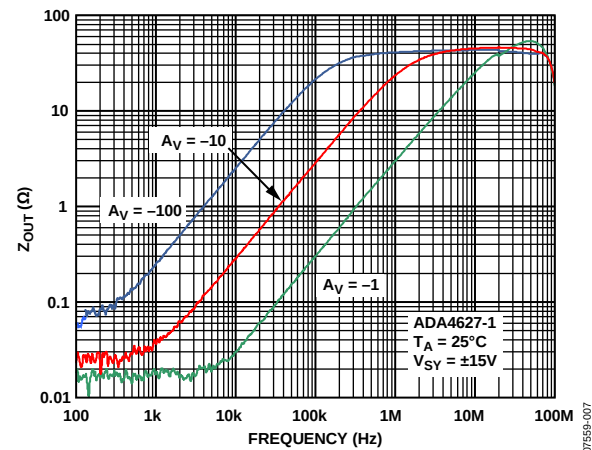


Figure 8. Closed-Loop Z_{OUT} vs. Frequency

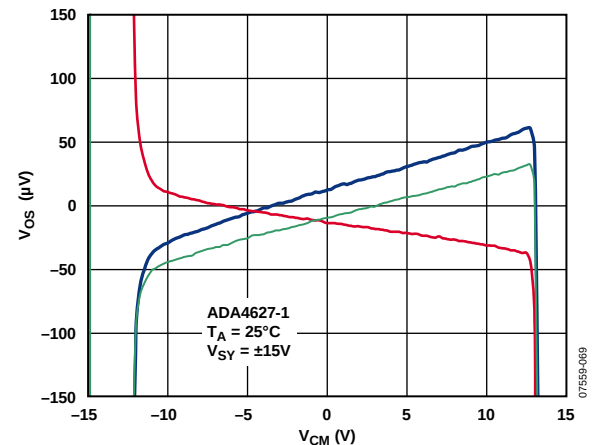


Figure 9. V_{OS} vs. Common-Mode Voltage

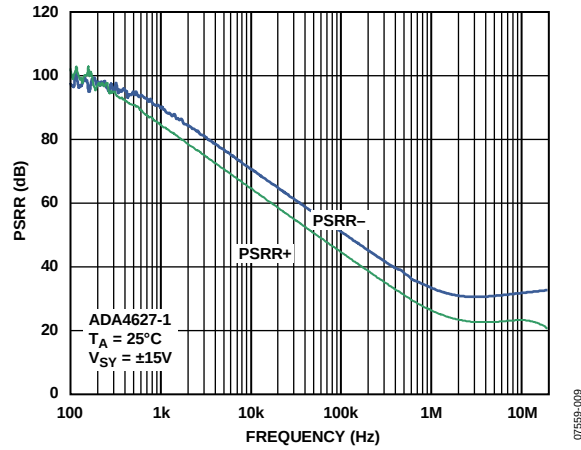


Figure 10. PSRR vs. Frequency

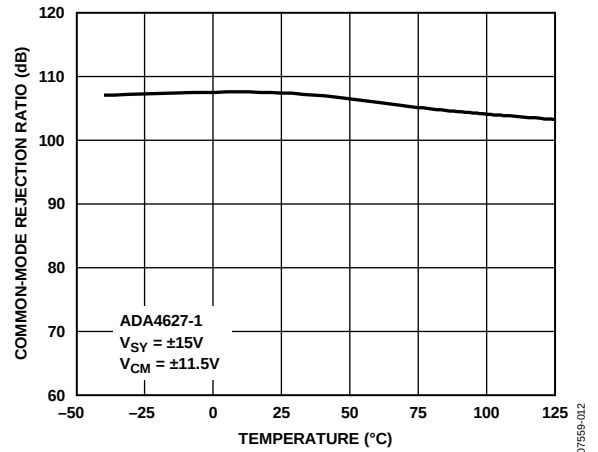


Figure 13. CMRR vs. Temperature

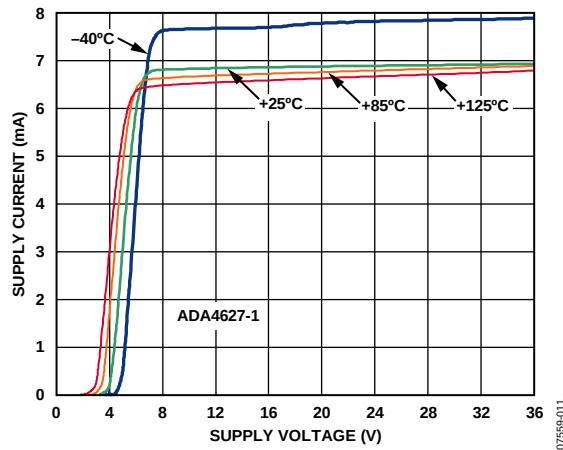


Figure 11. Supply Current vs. Supply Voltage and Temperature

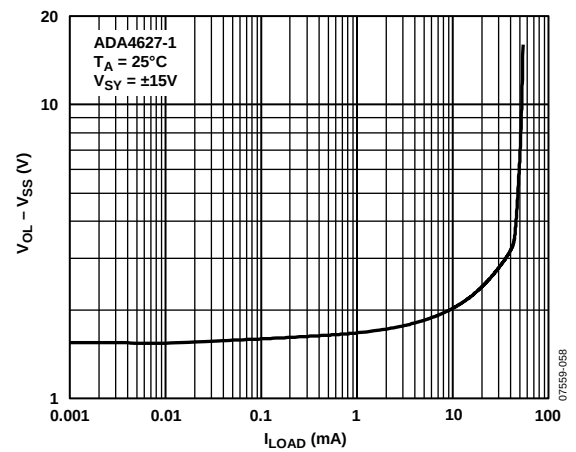


Figure 14. V_{OUT} Sinking vs. I_{LOAD} Current

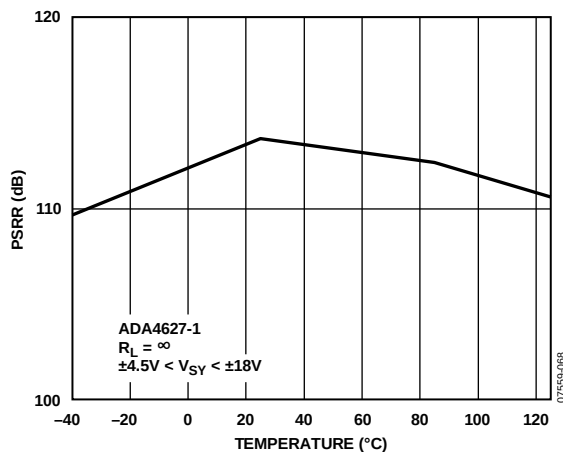


Figure 12. PSRR vs. Temperature

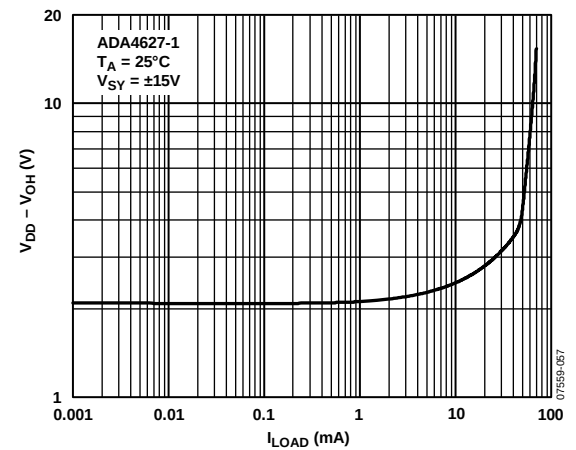


Figure 15. V_{OUT} Sourcing vs. I_{LOAD} Current

ADA4627-1/ADA4637-1

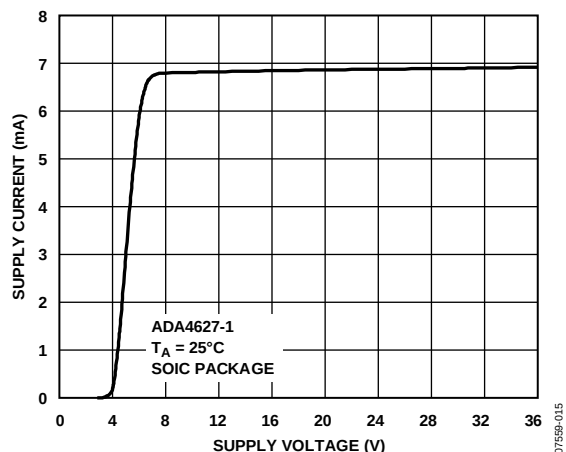


Figure 16. Supply Current vs. Supply Voltage

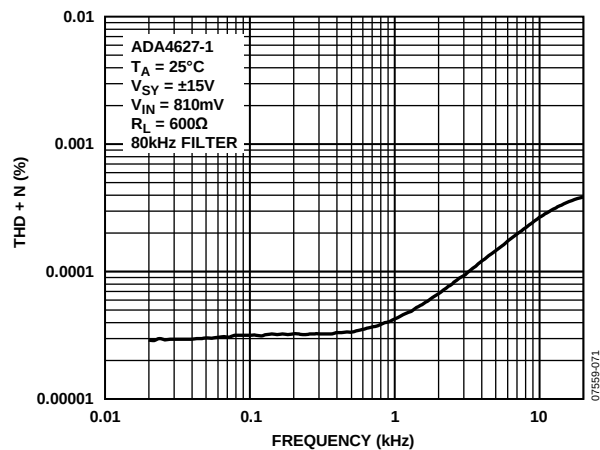


Figure 19. THD + N vs. Frequency

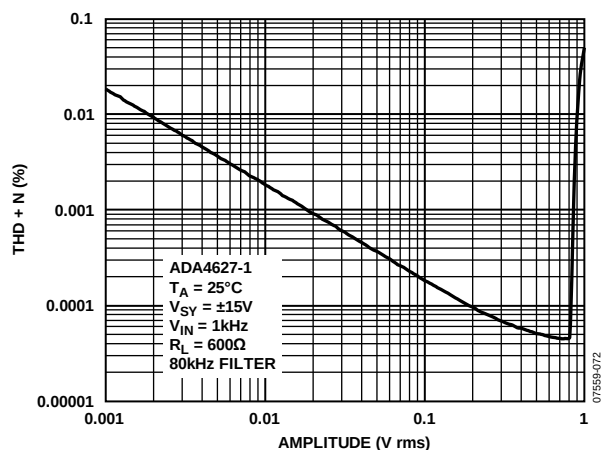


Figure 17. THD + N vs. V_{IN}

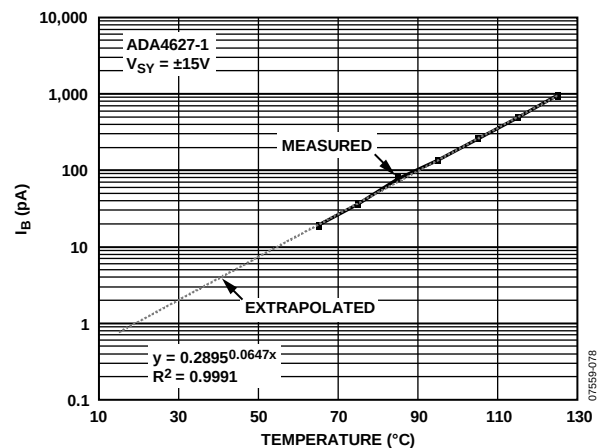


Figure 20. Input Bias Current vs. Temperature

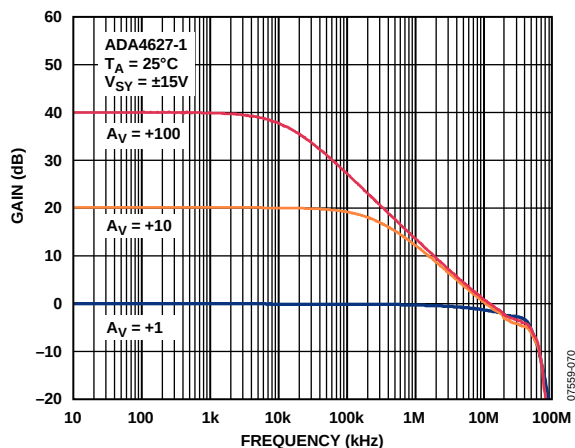


Figure 18. Closed-Loop Gain vs. Frequency

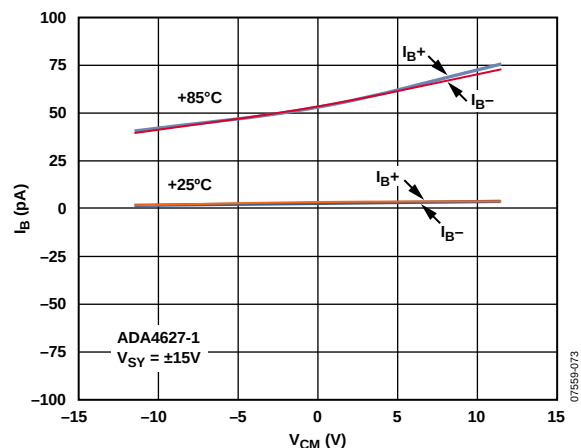


Figure 21. Input Bias Current vs. V_{CM} and Temperature

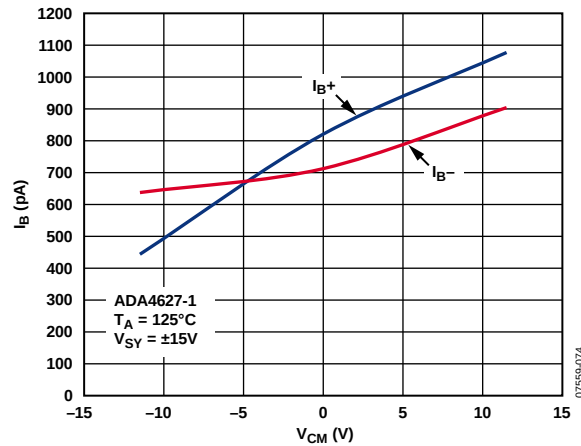


Figure 22. Input Bias Current vs. V_{CM} at 125°C

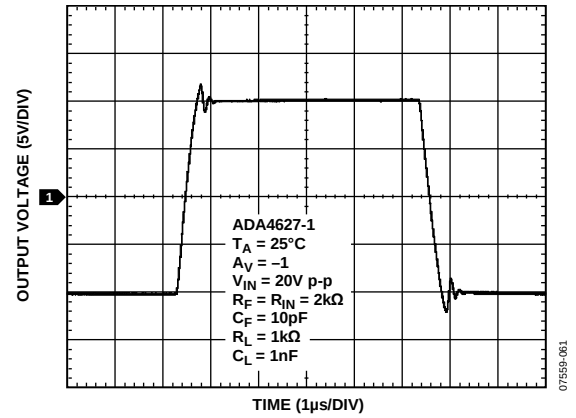


Figure 25. Large Signal Transient Response

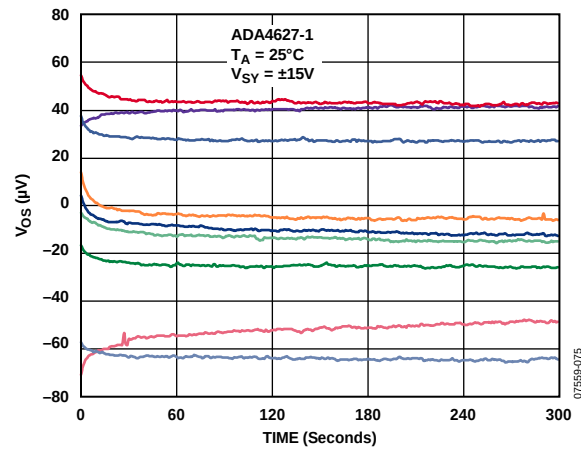


Figure 23. Input Offset Voltage vs. Time

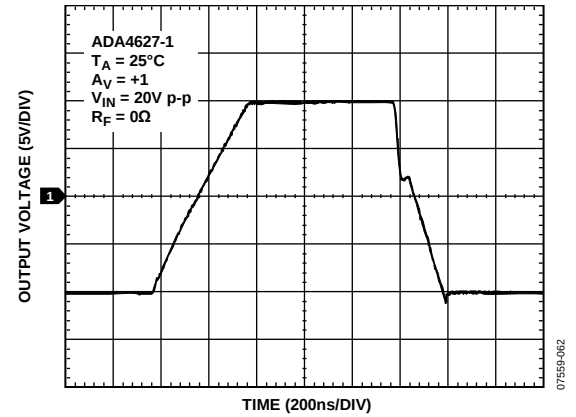


Figure 26. Large Signal Transient Response

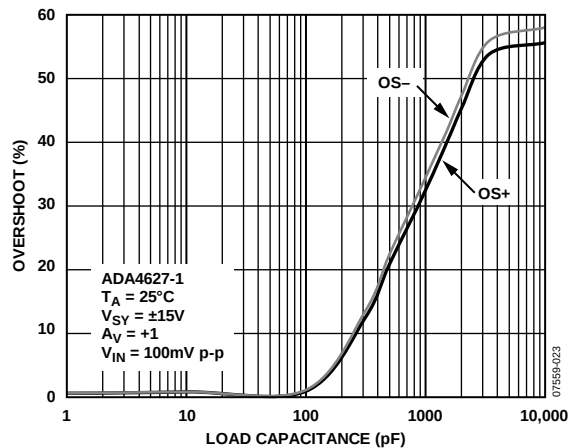


Figure 24. Small Signal Overshoot vs. Load Capacitance

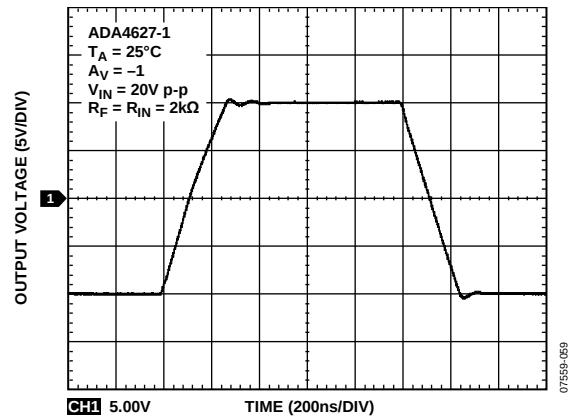


Figure 27. Large Signal Transient Response

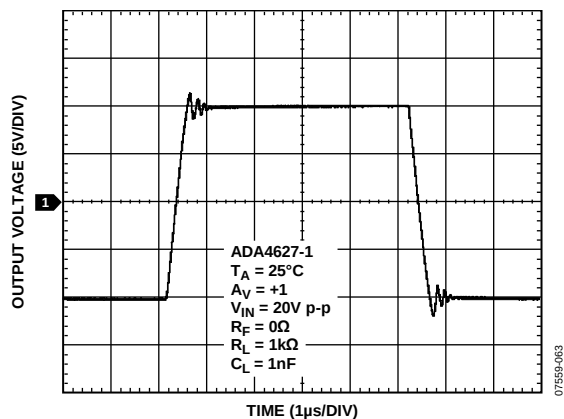


Figure 28. Large Signal Transient Response

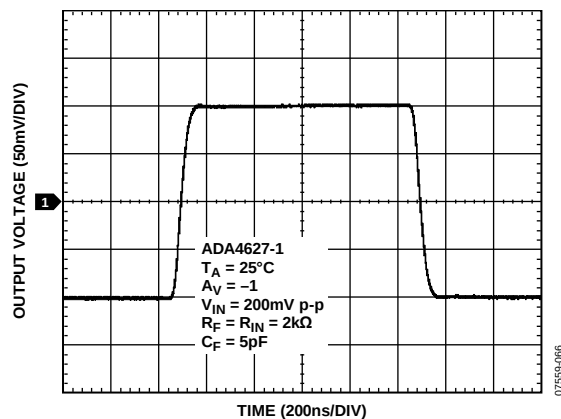


Figure 31. Small Signal Transient Response

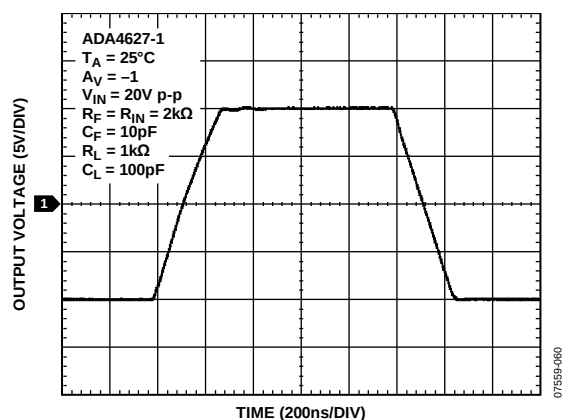


Figure 29. Large Signal Transient Response

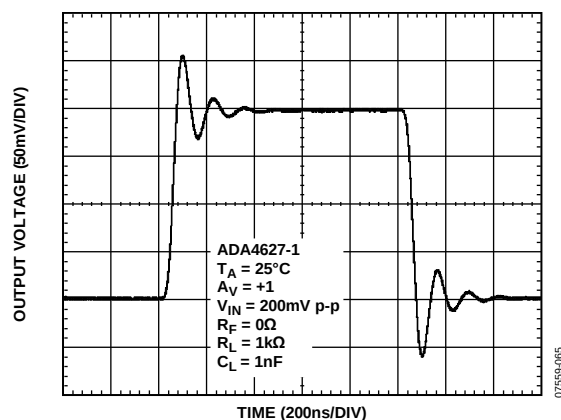


Figure 32. Small Signal Transient Response

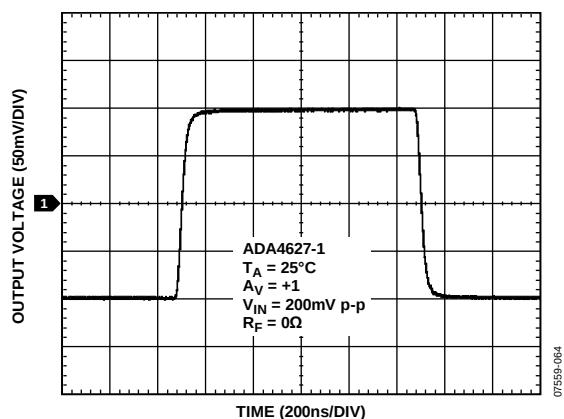


Figure 30. Small Signal Transient Response

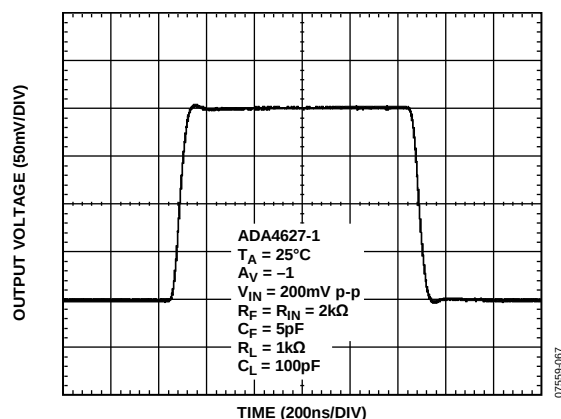


Figure 33. Small Signal Transient Response

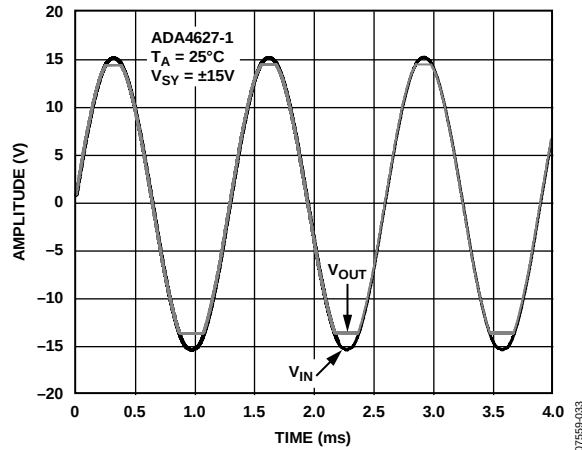


Figure 34. No Phase Reversal

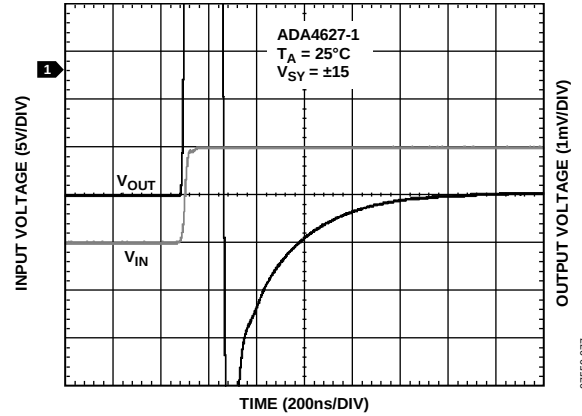


Figure 37. Positive Settling Time to 0.01%

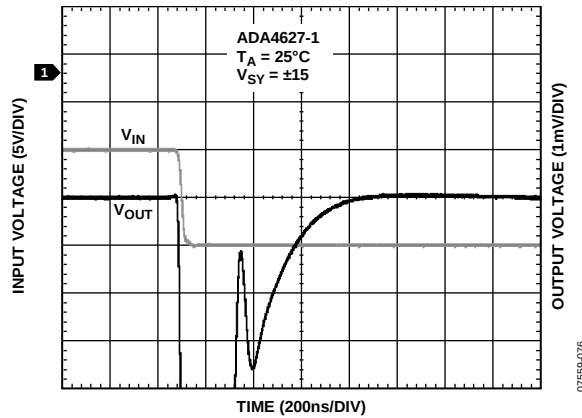


Figure 35. Negative Settling Time to 0.01%

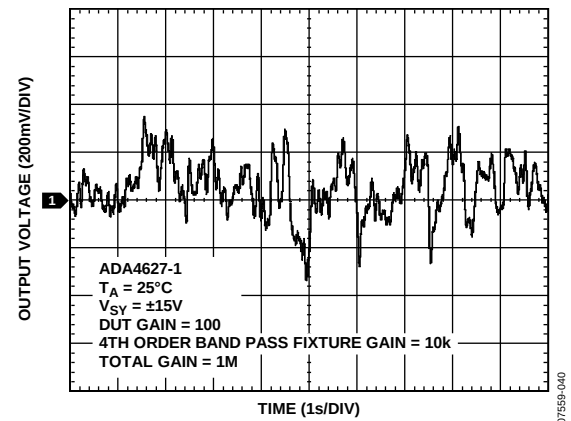


Figure 38. 0.1 Hz to 10 Hz Noise

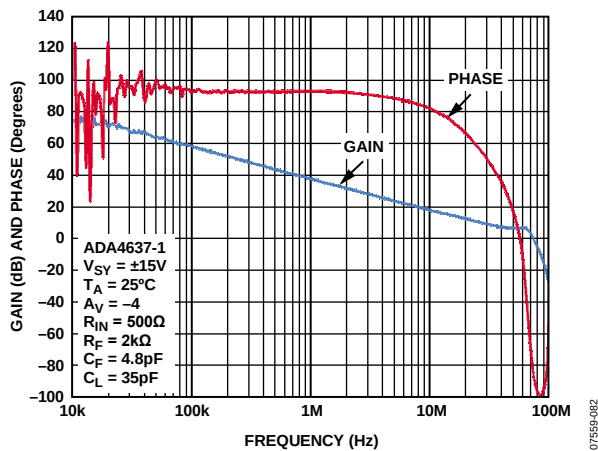


Figure 36. Open-Loop Gain and Phase vs. Frequency

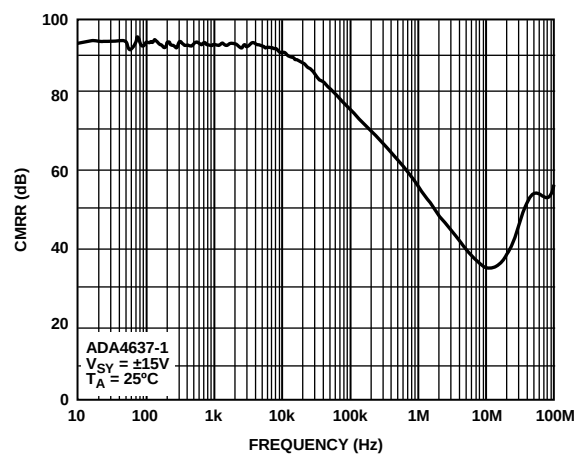


Figure 39. CMRR vs. Frequency

ADA4627-1/ADA4637-1

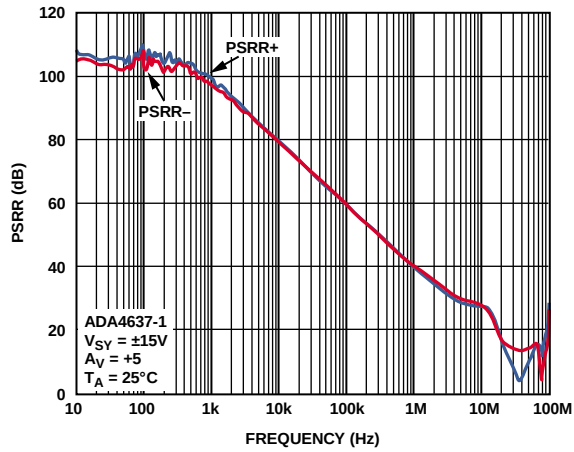


Figure 40. PSRR vs. Frequency

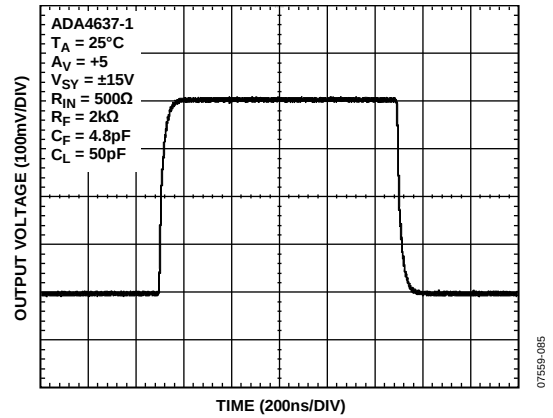


Figure 43. Small Signal Transient Response

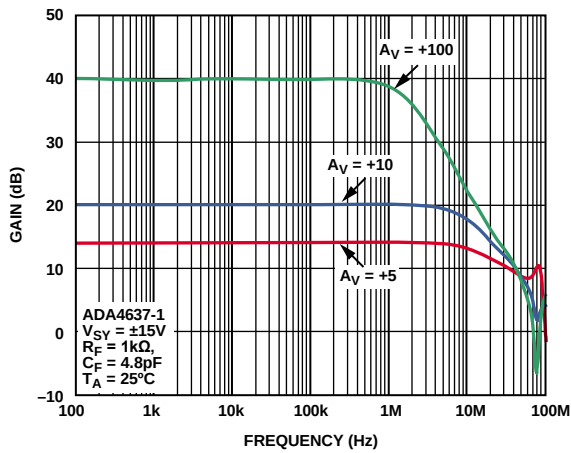


Figure 41. Closed-Loop Gain vs. Frequency

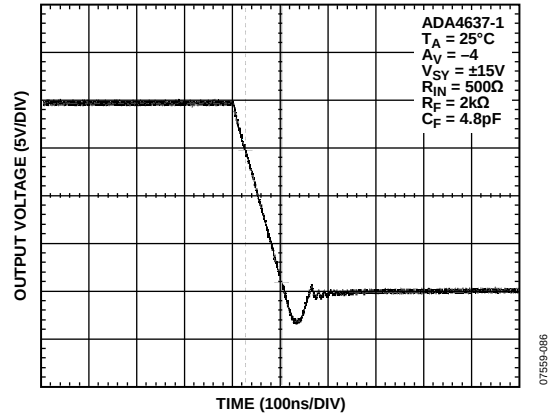


Figure 44. Slew Rate Falling

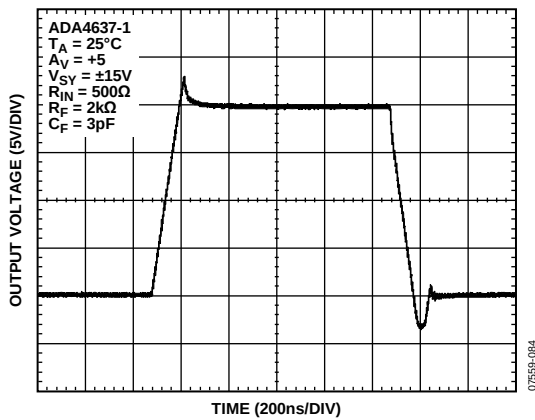


Figure 42. Large Signal Transient Response

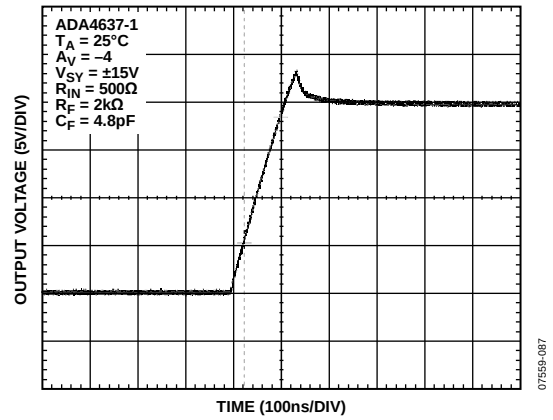


Figure 45. Slew Rate Rising

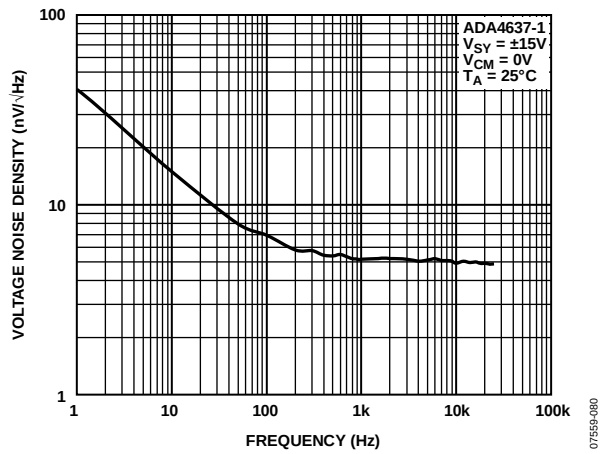


Figure 46. Voltage Noise Density vs. Frequency

THEORY OF OPERATION

The ADA4627-1 is a high speed, unity gain stable amplifier with excellent dc characteristics. The ADA4637-1 is a decompensated version that is stable at a gain of 5 or greater. The typical offset voltage of 70 μV allows the amplifiers to be easily configured for high gains without the risk of excessive output voltage errors. The small temperature drift of 2 $\mu\text{V}/^\circ\text{C}$ ensures a minimum offset voltage error over the entire temperature range of -40°C to $+125^\circ\text{C}$, making the amplifiers ideal for a variety of sensitive measurement applications in harsh operating environments.

INPUT VOLTAGE RANGE

The ADA4627-1/ADA4637-1 are not rail-to-rail input amplifiers; therefore, care is required to ensure that both inputs do not exceed the input voltage range. Under normal negative feedback operating conditions, the amplifier corrects its output to ensure that the two inputs are at the same voltage. However, if either input exceeds the input voltage range, the loop opens, and large currents begin to flow through the ESD protection diodes in the amplifier.

These diodes are connected between the inputs and each supply rail to protect the input transistors against an electrostatic discharge event, and they are normally reverse-biased. However, if the input voltage exceeds the supply voltage, these ESD diodes can become forward-biased. Without current limiting, excessive amounts of current can flow through these diodes, causing permanent damage to the device. If inputs are subject to overvoltage, insert appropriate series resistors to limit the diode current to less than 5 mA.

INPUT OFFSET VOLTAGE ADJUST RANGE

The ADA4627-1/ADA4637-1 SOIC packages have offset adjust pins for compatibility with some existing designs. The recommended offset nulling circuit is shown in Figure 47.




Figure 47. Standard Offset Null Circuit

With a 100 k Ω potentiometer, the adjustment range is more than ± 11 mV. However, the V_{OS} temperature drift increases by several $\mu\text{V}/^\circ\text{C}$ for every millivolt of offset adjust. The ADA4627-1/ADA4637-1 have matching thin film resistors that are laser trimmed at two temperatures to minimize both offset voltage and offset voltage drift. The offset voltage at room temperature is less than 0.5 mV, and the offset voltage drift is only a few $\mu\text{V}/^\circ\text{C}$ or less; therefore, it is not recommended to

use the offset adjust pins, especially for offset adjust of a complete signal chain. Signal chain offset can be addressed with an auto-zero amplifier used to form a composite amplifier; or, if the ADA4627-1 or the ADA4637-1 is in an inverting amplifier stage, it can be modified easily to add a potentiometer (see Figure 48). The LFCSP package does not have offset adjust pins.

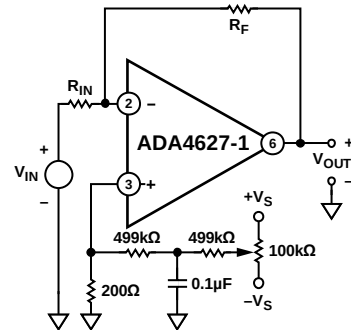


Figure 48. Alternate Offset Null Circuit for Inverting Stage

INPUT BIAS CURRENT

Because the ADA4627-1/ADA4637-1 have a JFET input stage, the input bias current, due to the reverse-biased junction, has a leakage current that approximately doubles every 10°C . The power dissipation of the part, combined with the thermal resistance of the package, results in the junction temperature increasing up to 20 degrees to 30 degrees Celsius above ambient. This parameter is tested with high speed ATE equipment, which does not result in the die temperature reaching equilibrium. This is correlated with bench measurements to match the guaranteed maximum at room temperature shown in Table 2.

The input current can be reduced by keeping the temperature as low as possible and using a light load on the output.

NOISE CONSIDERATIONS

The JFET input stage offers very low input voltage noise and input current noise. The thermal noise of a 1 k Ω resistor at room temperature is 4 nV/ $\sqrt{\text{Hz}}$; therefore, low values of resistance should be used for dc-coupled inverting and noninverting amplifier configurations. In the case of transimpedance amplifiers (TIAs), current noise is more important.

The ADA4627-1/ADA4637-1 are an excellent choice for both of these applications. Analog Devices offers a wide variety of low voltage noise and low current noise op amps in a variety of processes that are optimized for different supply voltage ranges. Refer to Application Note [AN-940](#) for a discussion of noise, calculations, and selection tables for more than three dozen low noise, op amp families.

THD + N MEASUREMENTS

Total harmonic distortion plus noise (THD + N) is usually measured with an audio analyzer, such as those from Audio Precision, Inc[™]. The analyzer consists of a low distortion oscillator that is swept from the starting frequency to the ending frequency. The oscillator is connected to the circuit under test, and the output of the circuit goes back to the analyzer.

The analyzer has a tunable notch filter in lock step with the swept oscillator. This removes the fundamental frequency but allows all of the harmonics and wideband noise to be measured with an integrating voltmeter. However, there is a switchable low-pass filter in series with the notch filter. If the sine wave is at 100 Hz, then the tenth harmonic is still at 1 kHz; therefore, having a low pass at 80 kHz is not a problem. When the oscillator reaches 20 kHz, the fourth harmonic (80 kHz) is partially attenuated, resulting in a lower reading from the voltmeter. When evaluating THD + N curves from any manufacturer, careful attention should be paid to the test conditions. The difference between an 80 kHz low-pass filter and a 500 kHz filter is shown in Figure 49.

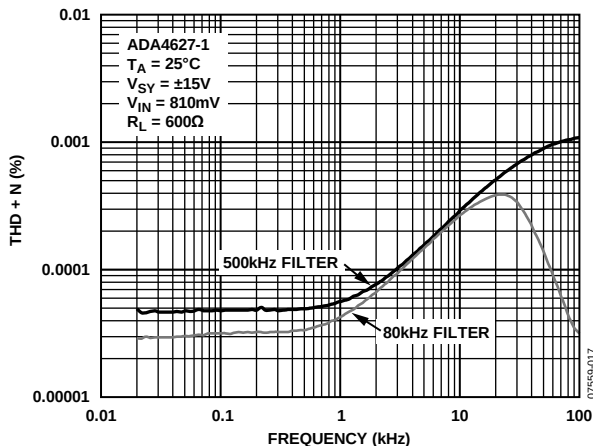


Figure 49. THD + N vs. Frequency

PRINTED CIRCUIT BOARD LAYOUT, BIAS CURRENT, AND BYPASSING

To take advantage of the very low input bias current of the ADA4627-1/ADA4637-1 at room temperature, leakage paths must be considered. A printed circuit board (PCB), with dust and humidity, can have 100 MΩ of resistance over a few tenths of an inch. A 1 mV differential between the two points results in 10 pA of leakage current, more than the guaranteed maximum.

The op amp inputs should be guarded by surrounding the nets with a metal trace maintained at the predicted voltage. In the case of an inverting configuration or transimpedance amplifier, (see Figure 50), the inverting and noninverting nodes can be surrounded by traces held at a quiet analog ground.

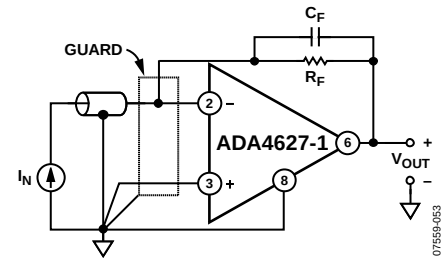


Figure 50. Inverting Amplifier with Guard

For a noninverting configuration, the trace can be driven from the feedback divider, but the resistors should be chosen to offer a low impedance drive to the trace (see Figure 51).

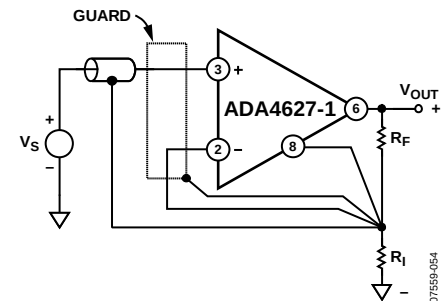


Figure 51. Noninverting Amplifier with Guard

The board layout should be compact with traces as short as possible. For second-order board considerations, such as triboelectric effects and piezoelectric effects, as well as a table of insulating material properties, see the AD549 data sheet.

In some cases, shielding from air currents may be helpful. A general rule of thumb, for op amps with gain bandwidth products higher than 1 MHz, bypass capacitors should be very close to the part, within 3 mm. Each supply should be bypassed with a 0.01 μF ceramic capacitor in parallel with a 1 μF bulk decoupling capacitor. The ceramic capacitors should be closer to the op amp. Sockets, which add inductance and capacitance, should not be used.

OUTPUT PHASE REVERSAL

Output phase reversal occurs in some amplifiers when the input common-mode voltage range is exceeded. As common-mode voltage is moved outside the common-mode range, the outputs of these amplifiers can suddenly jump in the opposite direction to the supply rail. This is the result of the differential input pair shutting down, causing a radical shifting of internal voltages that results in the erratic output behavior.

The ADA4627-1/ADA4637-1 amplifiers have been carefully designed to prevent any output phase reversal if both inputs are maintained within the specified input voltage range. If one or both inputs exceed the input voltage range but remain within the supply rails, an internal loop opens and the output varies. Therefore, the inputs should always be a minimum of 3 V away from either supply rail.

ADA4627-1/ADA4637-1

DECOMPENSATED OP AMPS

The ADA4637-1 is a decompensated op amp, and, as such, must always be operated at a noise gain of 5 or greater. See tutorial MT-033, “Voltage Feedback Op Amp Gain and Bandwidth”, at www.analog.com for more information.

DRIVING CAPACITIVE LOADS

Adding capacitance to the output of any op amp results in additional phase shift, which reduces stability and leads to overshoot

or oscillation. The ADA4627-1/ADA4637-1 have a high phase margin and low output impedance, so they can drive reasonable values of capacitance. This is a common situation when an amplifier is used to drive the input of switched capacitor ADCs. For other considerations and various circuit solutions, see the Analog Dialogue article titled *Ask the Applications Engineer-25, Op Amps Driving Capacitive Loads*, available at www.analog.com.

OUTLINE DIMENSIONS

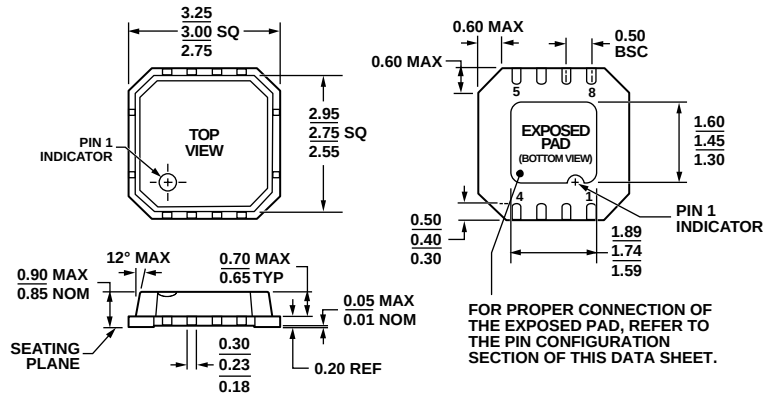


Figure 52. 8-Lead Lead Frame Chip Scale Package [LFCSP_VD]
3 mm × 3 mm Body, Very Thin, Dual Lead
(CP-8-2)
Dimensions shown in millimeters

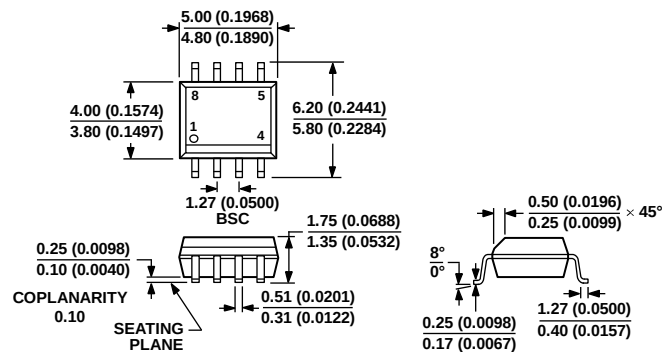


Figure 53. 8-Lead Standard Small Outline Package [SOIC_N]
Narrow Body
(R-8)
Dimensions shown in millimeters and (inches)

ADA4627-1/ADA4637-1

ORDERING GUIDE

Model ¹	Temperature Range	Package Description	Package Option	Branding
ADA4627-1ACPZ-R2	–40°C to +125°C	8-Lead LFCSP_VD	CP-8-2	A29
ADA4627-1ACPZ-RL	–40°C to +125°C	8-Lead LFCSP_VD	CP-8-2	A29
ADA4627-1ACPZ-R7	–40°C to +125°C	8-Lead LFCSP_VD	CP-8-2	A29
ADA4627-1ARZ	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4627-1ARZ-RL	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4627-1ARZ-R7	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4627-1BRZ	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4627-1BRZ-R7	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4627-1BRZ-RL	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4637-1ACPZ-R2	–40°C to +125°C	8-Lead LFCSP_VD	CP-8-2	A2S
ADA4637-1ACPZ-RL	–40°C to +125°C	8-Lead LFCSP_VD	CP-8-2	A2S
ADA4637-1ACPZ-R7	–40°C to +125°C	8-Lead LFCSP_VD	CP-8-2	A2S
ADA4637-1ARZ	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4637-1ARZ-RL	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4637-1ARZ-R7	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4637-1BRZ	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4637-1BRZ-R7	–40°C to +125°C	8-Lead SOIC_N	R-8	
ADA4637-1BRZ-RL	–40°C to +125°C	8-Lead SOIC_N	R-8	

¹ Z = RoHS Compliant Part.

NOTES

NOTES



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331