

FEATURES

- 3 dB bandwidth of 5 GHz ($A_V = 6 \text{ dB}$)**
- Single resistor programmable gain: 0 dB to 18 dB**
- Differential or single-ended input to differential output**
- Low harmonic distortion (HD2/HD3 @ $A_V = 6 \text{ dB}$)**
 - $-88/-69 \text{ dBc} @ 250 \text{ MHz}$
 - $-77/-66 \text{ dBc} @ 500 \text{ MHz}$
 - $-73/-72 \text{ dBc} @ 1 \text{ GHz}$
- IMD3 @ 1 GHz = -63 dBc**
- Slew rate**
 - $8700 \text{ V}/\mu\text{s} (\text{A}_V = 6 \text{ dB}, 2 \text{ V step})$
 - $6600 \text{ V}/\mu\text{s} (\text{A}_V = 18 \text{ dB}, 2 \text{ V step})$
- Fast settling: 1 ns to 1%, 1.4 ns to 0.1%**
- Fast overdrive recovery: 6.7 ns to 1%, 9.3 ns to 0.5%**
- Single-supply operation: 5 V**
- 0.1 dB gain flatness to 300 MHz**
- DC level translation**
- Available in 16-lead LFCSP**

APPLICATIONS

- Differential ADC drivers for giga-sample ADCs**
- GBPS line drivers with pre-emphasis**
- High speed data acquisition**
- Electronic surveillance countermeasures**
- Pulse capture and conditioning**
- Oscilloscopes**
- Satellite communications**
- Single-ended-to-differential converters**
- RF/IF gain blocks**


GENERAL DESCRIPTION

The ADA4960-1 is a high performance, differential amplifier optimized for RF and IF applications. It achieves better than 63 dB IMD3 performance for frequencies up to and beyond 1 GHz, making it an ideal driver for 8-bit to 10-bit giga-sample analog-to-digital converters (ADCs).

The buffered inputs of the ADA4960-1 isolate the gain-setting resistor (R_G) from the signal inputs, maintaining a constant 10 k Ω input resistance, easing matching and input drive requirements. The ADA4960-1 has a nominal 150 Ω differential output impedance.

The ADA4960-1 is optimized for wideband, low distortion performance for frequencies up to and beyond 1 GHz. These attributes, together with its adjustable gain capability, make this device the amplifier of choice for general-purpose IF and broadband applications where low distortion, noise, and power are critical.

FUNCTIONAL BLOCK DIAGRAM

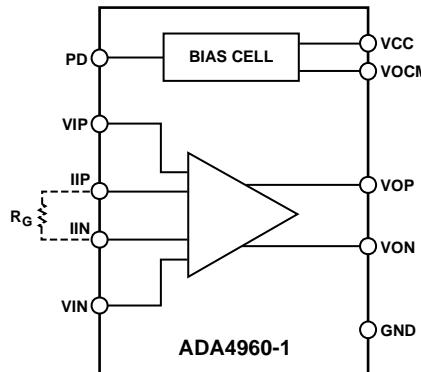

08496-001

Figure 1.

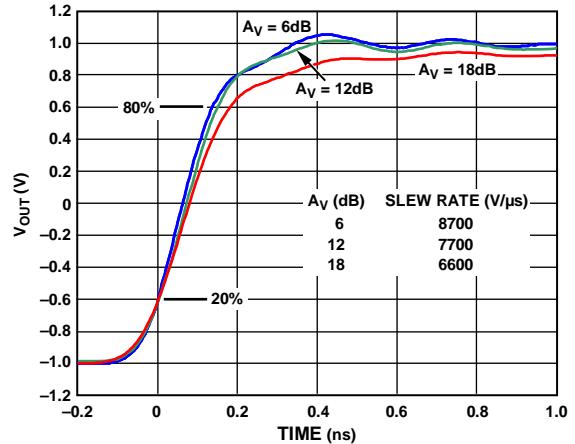


Figure 2. Rise Time, $V_{OUT} = 2 \text{ V p-p}$, $T_A = 25^\circ\text{C}$,
For $A_V = 6 \text{ dB}$, $A_V = 12 \text{ dB}$, and $A_V = 18 \text{ dB}$

08496-047

The device is optimized for the best combination of slew rate, bandwidth, and broadband distortion. These attributes allow it to drive a wide variety of ADCs. It is ideally suited for driving mixers, pin diode attenuators, SAW filters, and multi-element discrete devices.

The user accessible gain adjust and bandwidth extension features allow configuration of the ADA4960-1 for line driver and channel equalization applications.

The quiescent current of the ADA4960-1 is typically 60 mA. When disabled, it consumes less than 3 mA, offering excellent input-to-output isolation.

Fabricated on an Analog Devices, Inc., high speed SiGe process, the ADA4960-1 is available in a compact 3 mm × 3 mm, 16-lead LFCSP. It operates over the temperature range of -40°C to $+85^\circ\text{C}$.

Rev. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

| | | | |
|--|----|---------------------------------------|----|
| Features | 1 | Circuit Description..... | 13 |
| Applications..... | 1 | Basic Structure..... | 13 |
| Functional Block Diagram | 1 | Applications Information | 14 |
| General Description | 1 | Basic Connections..... | 14 |
| Revision History | 2 | Input and Output Interfacing | 14 |
| Specifications..... | 3 | Gain Adjust | 15 |
| Absolute Maximum Ratings..... | 6 | Bandwidth Extension..... | 15 |
| Thermal Resistance | 6 | ADC Interfacing..... | 16 |
| Maximum Power Dissipation | 6 | Line Driver Applications | 16 |
| ESD Caution..... | 6 | Overdrive and Recovery..... | 17 |
| Pin Configuration and Function Descriptions..... | 7 | Layout, Grounding, and Bypassing..... | 18 |
| Typical Performance Characteristics | 8 | Outline Dimensions | 19 |
| Test Circuits..... | 12 | Ordering Guide | 19 |

REVISION HISTORY

4/10—Revision 0: Initial Version

SPECIFICATIONS

V_{CC} = 5 V, VO_{CM} = 2.5 V, R_L = 100 Ω differential, A_V = 6 dB, C_L = 1 pF differential, f = 140 MHz, T = 25°C. Inputs and outputs are ac-coupled.

Table 1.

| Parameter | Conditions | Min | Typ | Max | Unit |
|------------------------------------|--|-------------------|------|------|--------|
| DYNAMIC PERFORMANCE | | | | | |
| –3 dB Bandwidth | A _V = 6 dB, V _{OUT} ≤ 1.0 V p-p | 5000 | | | MHz |
| | A _V = 12 dB, V _{OUT} ≤ 1.0 V p-p | 2000 | | | MHz |
| | A _V = 18 dB, V _{OUT} ≤ 1.0 V p-p | 1200 | | | MHz |
| Bandwidth for 0.1 dB Flatness | V _{OUT} ≤ 1.0 V p-p | 300 | | | MHz |
| Gain Accuracy | R _G = 95.3 Ω | 0.5 | | | dB |
| Gain Supply Sensitivity | V _S ± 5% | 0.2 | | | dB/V |
| Gain Temperature Sensitivity | –40°C to +85°C | 2.5 | | | mdB/°C |
| Slew Rate | A _V = 6 dB, V _{OUT} = 2 V step, 20% to 80% | 8700 | | | V/μs |
| | A _V = 12 dB, V _{OUT} = 2 V step, 20% to 80% | 7700 | | | V/μs |
| | A _V = 18 dB, V _{OUT} = 2 V step, 20% to 80% | 6600 | | | V/μs |
| | A _V = 6 dB, V _{OUT} = 1 V step, 20% to 80% | 7200 | | | V/μs |
| | A _V = 12 dB, V _{OUT} = 1 V step, 20% to 80% | 4900 | | | V/μs |
| | A _V = 18 dB, V _{OUT} = 1 V step, 20% to 80% | 3700 | | | V/μs |
| Settling Time | 1 V step to 1% | 1 | | | ns |
| | 1 V step to 0.1% | 1.4 | | | ns |
| Overdrive Recovery Time | V _{IN} = 1 V to 0 V step, A _V = 12 dB, V _{OUT} ≤ 1% | 6.7 | | | ns |
| | V _{IN} = 1 V to 0 V step, A _V = 12 dB, V _{OUT} ≤ 0.5% | 9.3 | | | ns |
| Reverse Isolation (S12) | f = ≤1 GHz | 68 | | | dB |
| INPUT/OUTPUT CHARACTERISTICS | | | | | |
| Output Common Mode | | V _S /2 | | | V |
| VO _{CM} Adjustment Range | | 1 | 2.75 | | V |
| Input Common-Mode Range | | 2.25 | 2.75 | | V |
| Maximum Output Voltage Swing | 1 dB compressed | 3.5 | | | V p-p |
| Output Common-Mode Offset | Referenced to V _{CC} /2 | –20 | +10 | | mV |
| Output Common-Mode Drift | –40°C to +85°C | 0.05 | | | mV/°C |
| Output Differential Offset Voltage | | –36 | +22 | | mV |
| Common-Mode Rejection Ratio (CMRR) | | 60 | | | dB |
| Output Differential Offset Drift | –40°C to +85°C | 0.05 | | | mV/°C |
| Input Bias Current | –40°C to +85°C | –20 | | | μA |
| Input Resistance (Differential) | A _V = all gains | 10 | | | kΩ |
| Input Capacitance (Differential) | A _V = all gains | 0.4 | | | pF |
| Input Resistance (Single-Ended) | A _V = all gains | 5 | | | kΩ |
| Input Capacitance (Single-Ended) | A _V = all gains | 0.8 | | | pF |
| Output Resistance (Differential) | | 150 | | | Ω |
| Output Capacitance (Differential) | | 1.2 | | | pF |
| POWER INTERFACE | | | | | |
| Supply Voltage | | 4.75 | 5.0 | 5.25 | V |
| ENB Threshold | Low to high | 2.2 | | | V |
| | High to low | | | 1.3 | V |
| ENB Input Bias Current | ENB high | | 30 | | μA |
| | ENBL low | | –180 | | μA |
| Quiescent Current | ENB high | 56 | 60 | 64 | mA |
| | ENBL low | | 2.9 | | mA |

ADA4960-1

| Parameter | Conditions | Min | Typ | Max | Unit |
|----------------------------------|--|-------------------------------------|-----|-----|------------------------|
| NOISE/HARMONIC PERFORMANCE | | | | | |
| 140 MHz | | | | | |
| Second/Third Harmonic Distortion | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ | -91/-73 -86/-73 -82/-72 | | | dBc |
| OIP3/IMD3 | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ | +33.2/-79 +33.4/-78 +33.3/-78 | | | dBm/dBc |
| Noise Spectral Density (RTI) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 5.4 3.2 2.1 | | | nV/ $\sqrt{\text{Hz}}$ |
| 1 dB Compression Point (RTO) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 12.0 12.0 11.9 | | | dBm |
| 250 MHz | | | | | |
| Second/Third Harmonic Distortion | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ | -88/-69 -81/-68 -77/-68 | | | dBc |
| OIP3/IMD3 | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ | +32.5/-77 +32.6/-77 +32.1/-76 | | | dBm/dBc |
| Noise Spectral Density (RTI) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 5.4 3.1 2.0 | | | nV/ $\sqrt{\text{Hz}}$ |
| 1 dB Compression Point (RTO) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 12.0 11.9 11.7 | | | dBm |
| 500 MHz | | | | | |
| Second/Third Harmonic Distortion | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ | -77/-66 -71/-66 -68/-65 | | | dBc |
| OIP3/IMD3 | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ | +30.2/-72 +29.9/-71 +29.1/-70 | | | dBm/dBc |
| Noise Spectral Density (RTI) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 5.2 3.0 1.9 | | | nV/ $\sqrt{\text{Hz}}$ |
| 1 dB Compression Point (RTO) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 11.6 11.4 11.0 | | | dBm |
| 750 MHz | | | | | |
| Second/Third Harmonic Distortion | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ | -70/-68 -67/-69 -64/-69 | | | dBc |
| OIP3/IMD3 | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ | +28.3/-67 +27.7/-67 +26.9/-65 | | | dBm/dBc |
| Noise Spectral Density (RTI) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 5.0 3.0 1.8 | | | nV/ $\sqrt{\text{Hz}}$ |
| 1 dB Compression Point (RTO) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 9.7 9.5 9.5 | | | dBm |

| Parameter | Conditions | Min | Typ | Max | Unit |
|--|--|-----------|-----|-----|------------------------|
| 1000 MHz Second/Third Harmonic Distortion | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p}$ | -73/-72 | | | dBc |
| OIP3/IMD3 | $A_v = 6 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 12 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ $A_v = 18 \text{ dB}, V_{\text{OUT}} = 0.9 \text{ V p-p composite (2 MHz spacing)}$ | +26.2/-63 | | | dBm/dBc |
| Noise Spectral Density (RTI) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 4.8 | | | nV/ $\sqrt{\text{Hz}}$ |
| 1 dB Compression Point (RTO) | $A_v = 6 \text{ dB}$ $A_v = 12 \text{ dB}$ $A_v = 18 \text{ dB}$ | 8.0 | | | dBm |
| | | 7.7 | | | dBm |
| | | 7.6 | | | dBm |

ABSOLUTE MAXIMUM RATINGS

Table 2.

| Parameter | Rating |
|------------------------------|-----------------|
| Supply Voltage, VCC | 5.25 V |
| VIP, VIN | VCC + 0.5 V |
| Internal Power Dissipation | See Figure 3 |
| Maximum Junction Temperature | 150°C |
| Operating Temperature Range | -40°C to +85°C |
| Storage Temperature Range | -65°C to +150°C |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the device (including the exposed pad) soldered to a high thermal conductivity, 4-layer circuit board, as described in EIA/JESD 51-7.

Table 3. Thermal Resistance

| Package Type | θ_{JA} | Unit |
|-----------------------------|---------------|------|
| 16-Lead LFCSP (Exposed Pad) | 89.5 | °C/W |

MAXIMUM POWER DISSIPATION

The maximum safe power dissipation in the ADA4960-1 package is limited by the associated rise in junction temperature (T_j) on the die. At approximately 150°C, which is the glass transition temperature, the plastic changes its properties. Even temporarily exceeding this temperature limit can change the stresses that the package exerts on the die, permanently shifting the parametric performance of the ADA4960-1. Exceeding a junction temperature of 150°C for an extended period can result in changes in the silicon devices, potentially causing failure.

The power dissipated in the package (P_D) is the sum of the quiescent power dissipation and the power dissipated in the package due to the load drive. The quiescent power is the voltage between the supply pins (V_s) times the quiescent current (I_s). The power dissipated due to the load drive depends upon the particular application. The power due to load drive is calculated by multiplying the load current by the associated voltage drop across the device. RMS voltages and currents must be used in these calculations.

Airflow increases heat dissipation, effectively reducing θ_{JA} . In addition, more metal directly in contact with the package leads/exposed pad from metal traces, through holes, ground, and power planes reduce θ_{JA} .

Figure 3 shows the maximum safe power dissipation of the ADA4960-1 vs. the ambient temperature on a JEDEC standard 4-layer board.

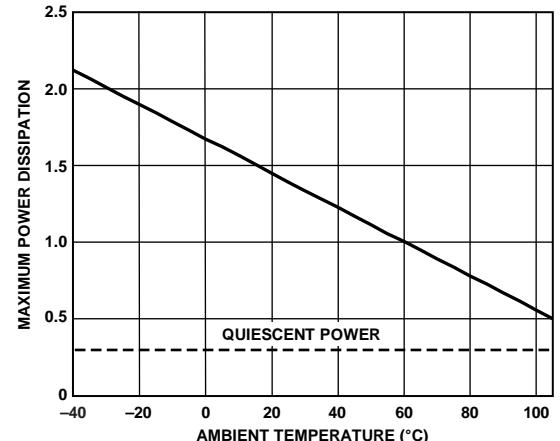


Figure 3. Maximum Power Dissipation vs. Ambient Temperature for 4-Layer Board

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

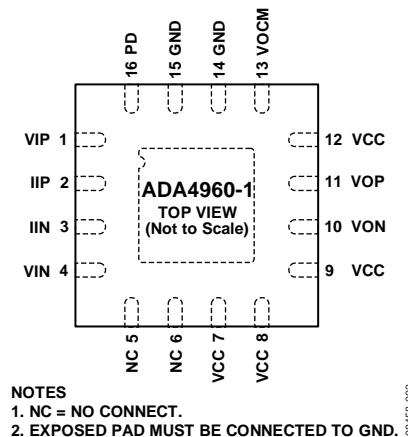


Figure 4. Pin Configuration

Table 4. Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|-------------|------------------|---|
| 1 | VIP | Balanced Differential Input. This pin is internally biased to VCC/2. |
| 2 | IIP | Gain Setting Resistor. Connect RG between this pin and IIN. |
| 3 | IIN | Gain Setting Resistor. Connect RG between this pin and IIP. |
| 4 | VIN | Balanced Differential Input. This pin is internally biased to VCC/2. |
| 5, 6 | NC | Leave these pins unconnected. |
| 7, 8, 9, 12 | VCC | Positive 5 V Supply Pins. |
| 10 | VON | Balanced Differential Output. This pin is biased to the VO _{CM} input voltage. |
| 11 | VOP | Balanced Differential Output. This pin is biased to the VO _{CM} input voltage. |
| 13 | VO _{CM} | This pin is internally biased at VCC/2. As an input, this pin sets the dc VOP and VON voltages. |
| 14, 15 | GND | Ground. Connect this pin to a low impedance ground. |
| 16 | PD | This pin grounded disables the part, and at 5 V, this pin turns the part on. |
| | EPAD | The exposed pad must be connected to GND. |

TYPICAL PERFORMANCE CHARACTERISTICS

V_{CC} = 5 V, V_{OCL} = 2.5 V, R_L = 100 Ω differential, A_V = 6 dB, C_L = 1 pF differential, f = 140 MHz, T = 25°C.

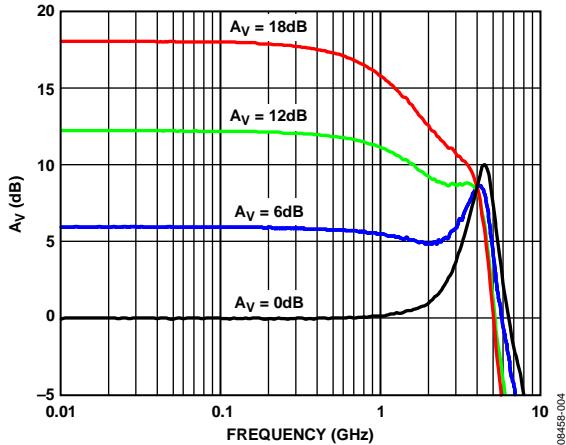


Figure 5. Small Signal Frequency Response,
Gain vs. Frequency at A_V = 0 dB, A_V = 6 dB, A_V = 12 dB, and A_V = 18 dB

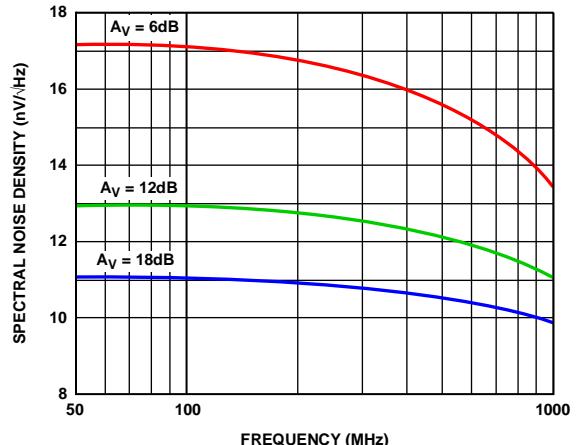


Figure 8. RTO Noise Spectral Density vs. Frequency at
A_V = 6 dB, A_V = 12 dB, and A_V = 18 dB

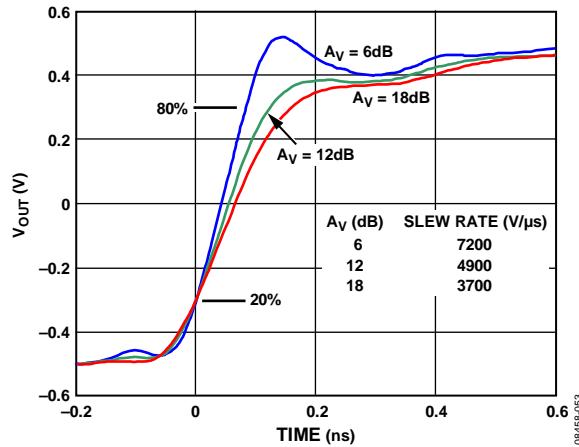


Figure 6. Rise Time, V_{OUT} vs. Time, V_{OUT} = 1 V p-p

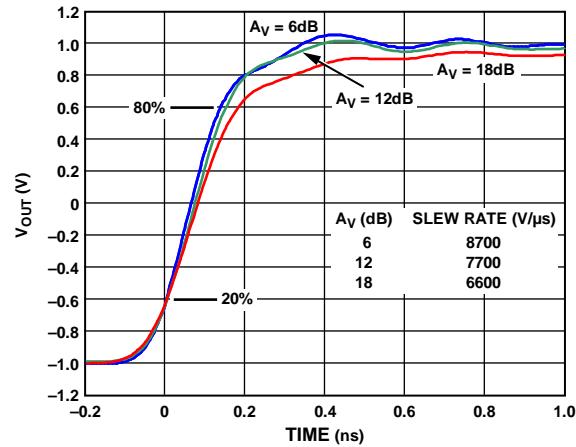


Figure 9. Rise Time, V_{OUT} vs. Time, V_{OUT} = 2 V p-p

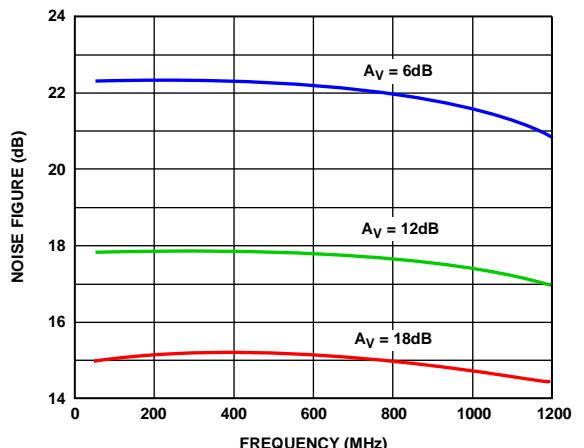


Figure 7. Noise Figure vs. Frequency at A_V = 6 dB, A_V = 12 dB, and A_V = 18 dB

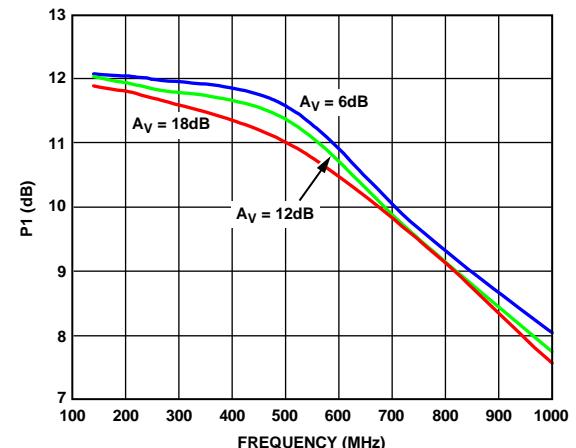


Figure 10. P1dB vs. Frequency at A_V = 6 dB, A_V = 12 dB, and A_V = 18 dB

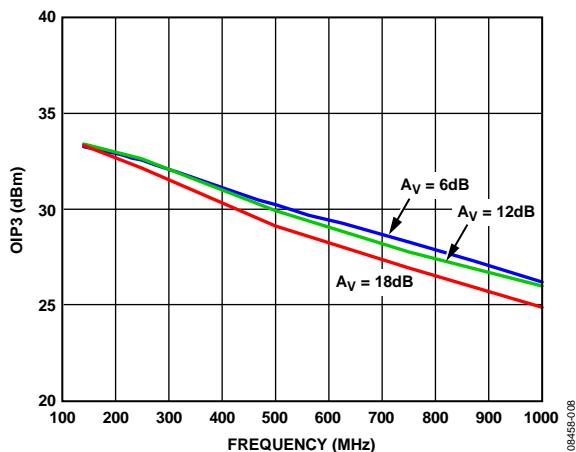


Figure 11. OIP3 vs. Frequency at $A_V = 6\text{ dB}$, $A_V = 12\text{ dB}$, and $A_V = 18\text{ dB}$, $V_{OUT} = 0.45\text{ Vp-p/Tone}$, 2 MHz Spacing

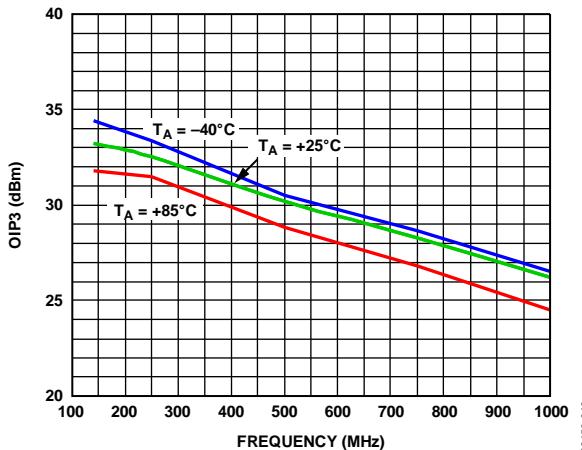


Figure 12. OIP3 vs. Frequency at $A_V = 6\text{ dB}$, $T_A = -40^\circ\text{C}$, $T_A = +25^\circ\text{C}$, and $T_A = +85^\circ\text{C}$, $V_{OUT} = 0.45\text{ Vp-p/Tone}$, 2 MHz Spacing

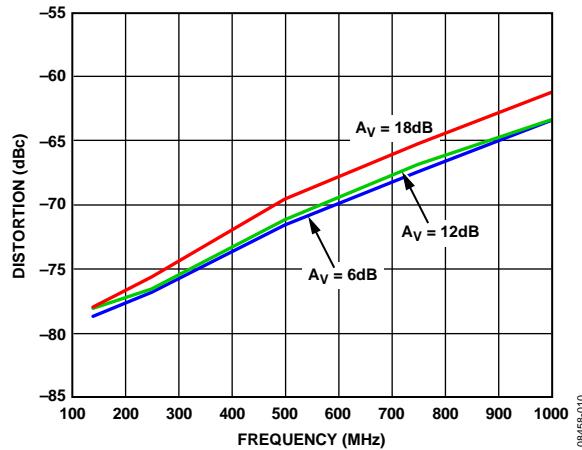


Figure 13. Two Tone IMD3 vs. Frequency, $A_V = 6\text{ dB}$, $A_V = 12\text{ dB}$, and $A_V = 18\text{ dB}$, $V_{OUT} = 0.9\text{ Vp-p/Tone}$, 2 MHz Spacing

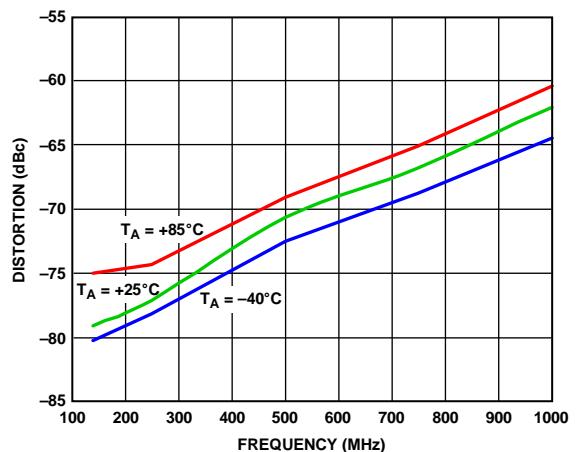


Figure 14. Two Tone IMD3 vs. Frequency at $T_A = -40^\circ\text{C}$, $T_A = +25^\circ\text{C}$, and $T_A = +85^\circ\text{C}$, $A_V = 6\text{ dB}$, $V_{OUT} = 0.45\text{ Vp-p/Tone}$, 2 MHz Spacing

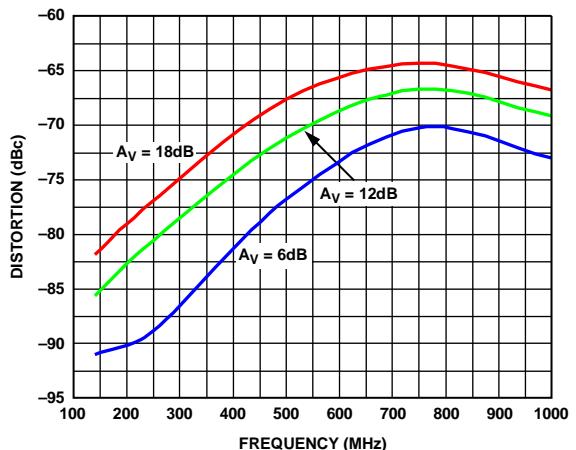


Figure 15. HD2 vs. Frequency at $A_V = 6\text{ dB}$, $A_V = 12\text{ dB}$, and $A_V = 18\text{ dB}$, $V_{OUT} = 0.9\text{ Vp-p}$

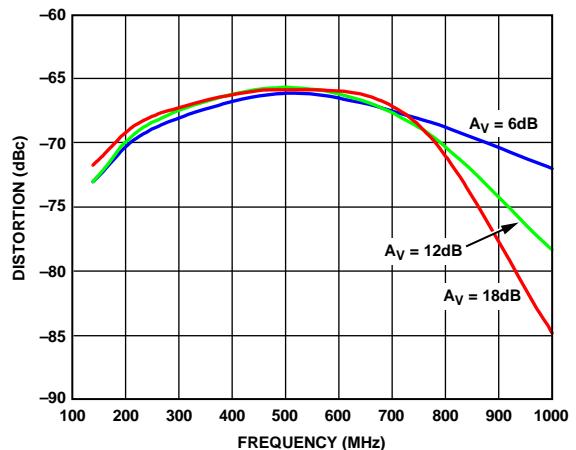


Figure 16. HD3 vs. Frequency at $A_V = 6\text{ dB}$, $A_V = 12\text{ dB}$, and $A_V = 18\text{ dB}$, $V_{OUT} = 0.9\text{ Vp-p}$

ADA4960-1

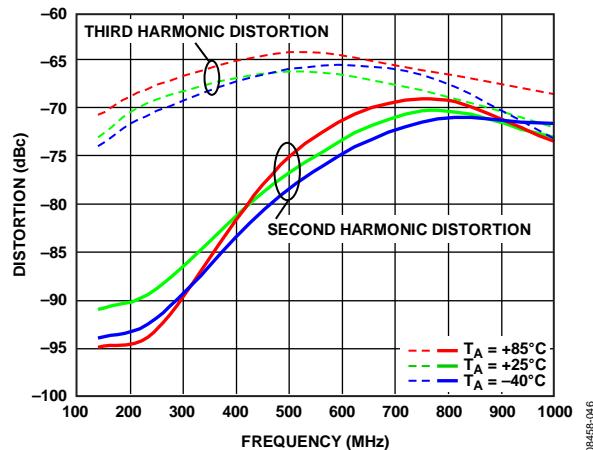


Figure 17. HD2 and HD3 vs. Frequency at $T_A = -40^\circ\text{C}$, $+25^\circ\text{C}$, $+85^\circ\text{C}$, $A_V = 6 \text{ dB}$, $V_{OUT} = 0.9 \text{ V p-p}$

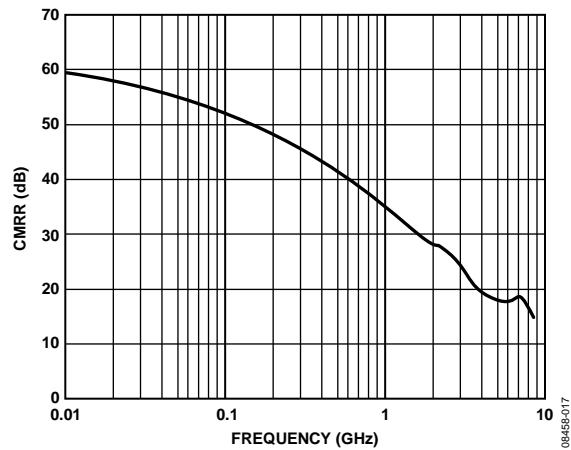


Figure 20. CMRR vs. Frequency, $A_V = 6 \text{ dB}$, $V_{OUT} = 0.9 \text{ V p-p}$

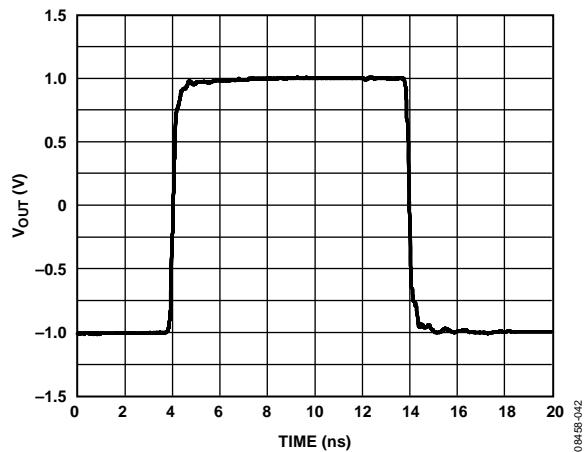


Figure 18. Large Signal Pulse Response, $A_V = 18 \text{ dB}$

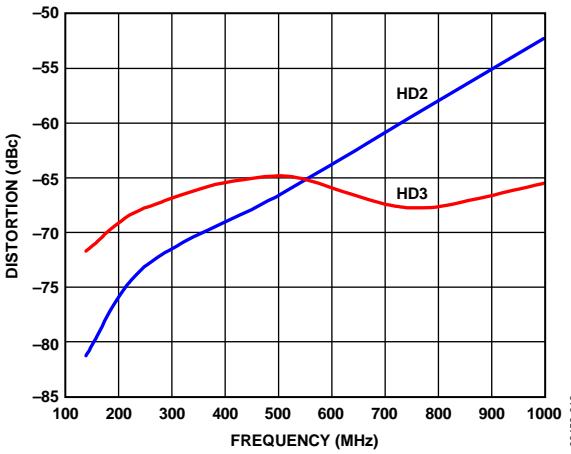


Figure 21. HD2/HD3 vs. Frequency, Single-Ended Input, $A_V = 6 \text{ dB}$, $V_{OUT} = 0.9 \text{ V p-p}$

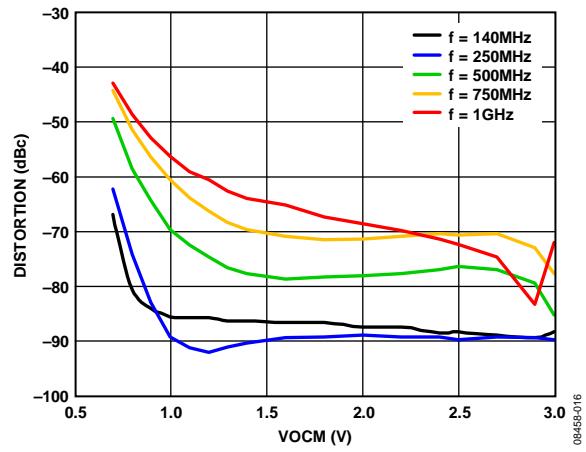


Figure 19. HD2 vs. VOCM, $A_V = 6 \text{ dB}$, $V_{OUT} = 0.9 \text{ V p-p}$, $f = 140 \text{ MHz}$, $f = 250 \text{ MHz}$, $f = 500 \text{ MHz}$, $f = 750 \text{ MHz}$, $f = 1 \text{ GHz}$

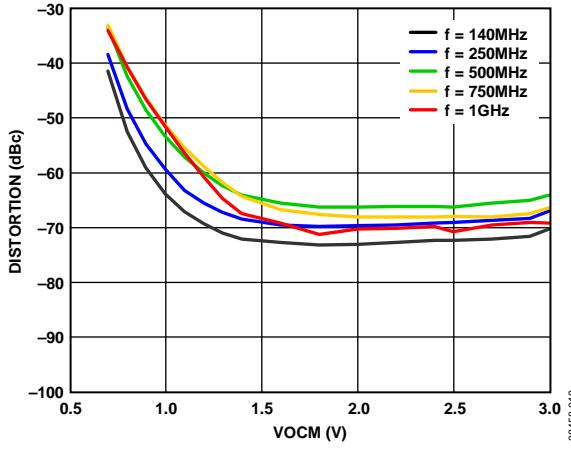


Figure 22. HD3 vs. VOCM, $A_V = 6 \text{ dB}$, $V_{OUT} = 0.9 \text{ V p-p}$, $f = 140 \text{ MHz}$, $f = 250 \text{ MHz}$, $f = 500 \text{ MHz}$, $f = 750 \text{ MHz}$, $f = 1 \text{ GHz}$

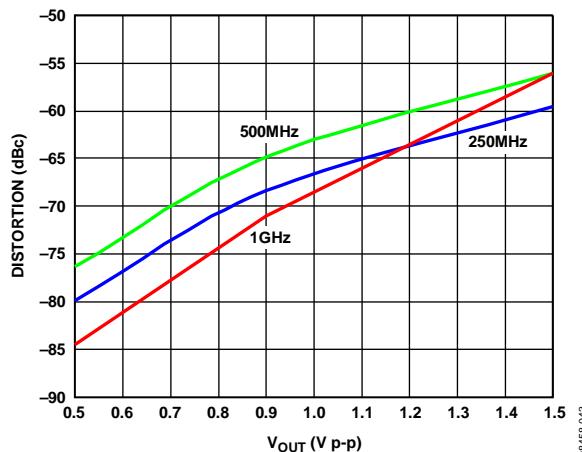


Figure 23. HD3 vs. Output Amplitude @ 250 MHz, 500 MHz, 1 GHz,
 $A_v = 6 \text{ dB}$, $V_{OUT} = 0.9 \text{ V p-p}$

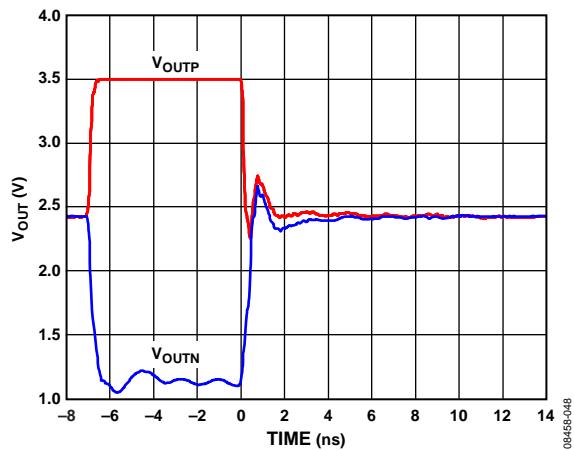


Figure 24. Output Overdrive, V_{OUT} vs. Time, $V_{IN} = 1 \text{ V p-p}$, $A_v = 12 \text{ dB}$

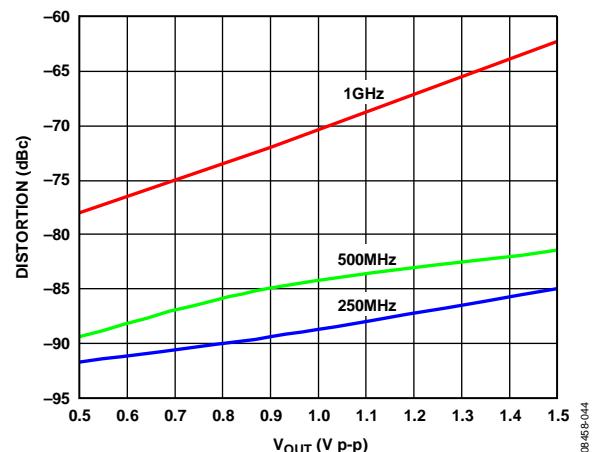


Figure 25. HD2 vs. V_{OUT} @ 250 MHz, 500 MHz, and 1 GHz,
 $A_v = 6 \text{ dB}$, $V_{OUT} = 0.9 \text{ V p-p}$

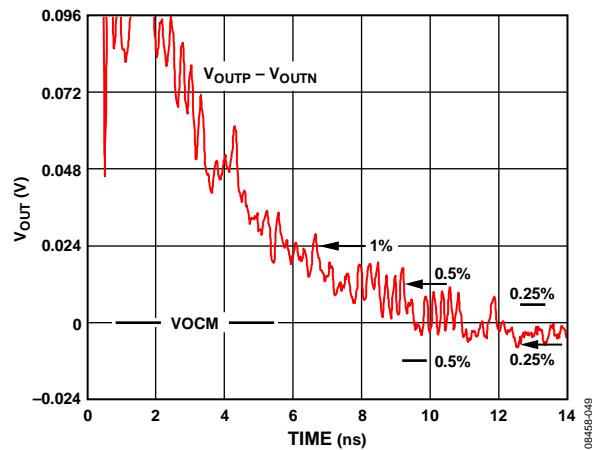


Figure 26. Output Overdrive Recovery, V_{OUT} vs. Time,
 $V_{IN} = 1 \text{ V p-p}$, $A_v = 12 \text{ dB}$, $V_{OCM} = 2.4 \text{ V}$

ADA4960-1

TEST CIRCUITS

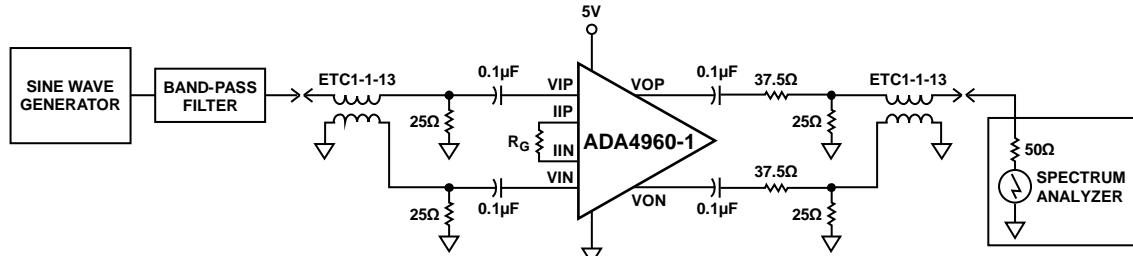


Figure 27. Distortion Test Circuit

08458-022

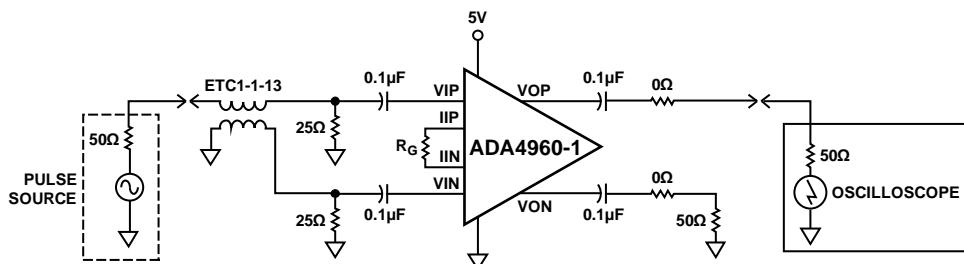


Figure 28. Time Domain Test Circuit

08458-023

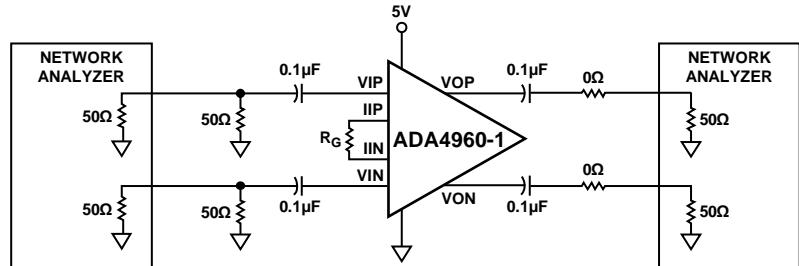


Figure 29. S-Parameter Test Circuit

08458-024

CIRCUIT DESCRIPTION

BASIC STRUCTURE

The ADA4960-1 is a low noise, fully differential amplifier/ADC driver that uses a single 5 V supply at 60 mA. This amplifier has buffered inputs that isolate the gain-setting resistor (R_G) from the input signals, keeping a constant 10 k Ω differential input impedance for all gains.

The differential output impedance is 150 Ω . The gain range is 0 dB to 18 dB and is set using a single resistor (R_G).

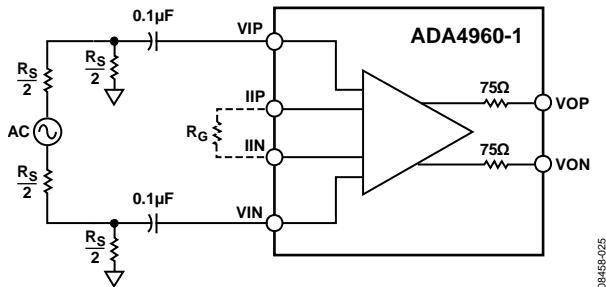


Figure 30. Basic Structure of the ADA4960-1

The ADA4960-1 can be ac-coupled or dc-coupled at the inputs and/or outputs within the specified input and output common-mode range.

The inputs, VIP and VIN, have a common-mode voltage range of 2.25 V to 2.75 V and are internally set at VCC/2. The outputs, VOP and VON, have a common-mode voltage range of 1.0 V to 2.75 V that can be set externally using the VOCM pin. The VOCM pin is internally set to VCC/2 with no external connection.

The input of the device can be configured as single-ended or differential with similar HD3 distortion results.

APPLICATIONS INFORMATION

BASIC CONNECTIONS

The basic connections for operating the ADA4960-1 are shown in Figure 33. Connect VCC to 5 V and decouple each supply pin with a low inductance surface-mount ceramic capacitor of $0.1\ \mu\text{F}$ placed as close to the device as possible.

In addition, decouple the VO_{CM} pin and the V_{CI} pin by using a $0.1\ \mu\text{F}$ capacitor, whether or not they are used as inputs.

For normal operation, the enable pin (PD) should be tied to V_{CC}. When the ADA4960-1 is pulled low, it goes into power-down mode. The V_{OP} and V_{ON} outputs are internally biased at $\text{V}_{\text{CC}}/2$ with no external source. The output common-mode range can be adjusted in the range of 1 V to 2.75 V by applying an external source voltage to the V_{COM} pin.

INPUT AND OUTPUT INTERFACING

The ADA4960-1 can be configured as a differential-input-to-differential-output driver, as shown in Figure 31.

The differential broadband input is provided by the ETC1-1-13 balun transformer. The two $25\ \Omega$ resistors, R₁ and R₂, provide the $50\ \Omega$ match to the $50\ \Omega$ ac source. The $0.1\ \mu\text{F}$ capacitors, connected in series with the inputs and outputs, isolate the source and balanced load from the internal bias. R_G is the gain-setting resistor. Load R_L should equal $100\ \Omega$ to provide the expected ac performance (see the Specifications section). Different loads can be applied with the gain value described by the gain adjust equation (see the Gain Adjust section).

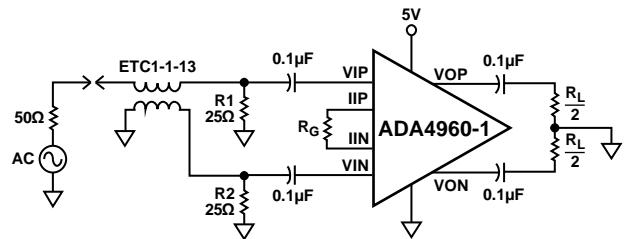


Figure 31. Differential-Input-to-Differential-Output Configuration

The ADA4960-1 can also be configured as a single-ended-input-to-differential-output driver, as shown in Figure 32. R₁ provides the input source match, and R₂ balances the input source impedances. The $0.1\ \mu\text{F}$ capacitors, connected in series with the inputs and outputs, isolate the source and balanced load from the internal bias. R_G is the gain-setting resistor. R_L should equal $100\ \Omega$ to provide the expected ac performance (see the Specifications section).

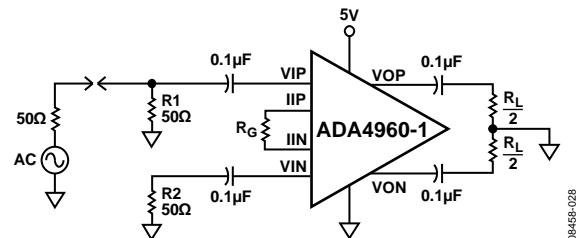


Figure 32. Single-Ended-Input-to-Differential-Output Configuration

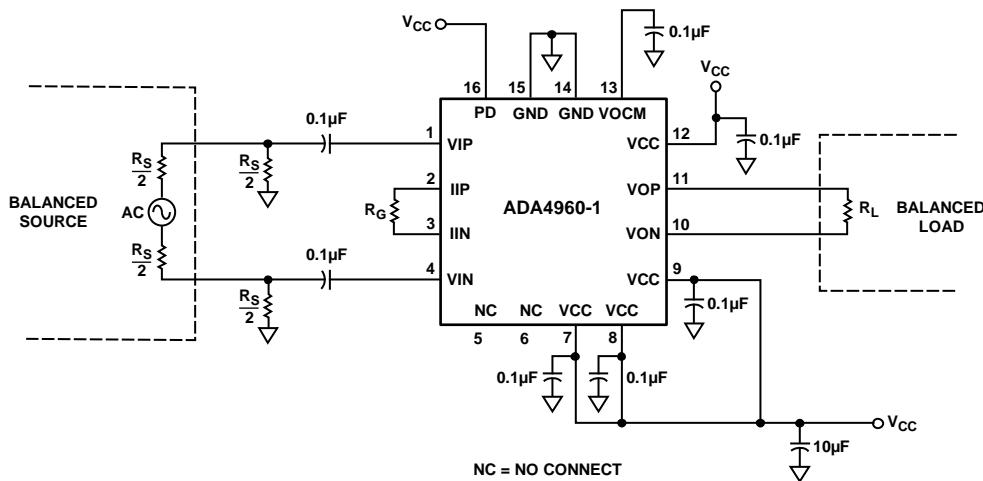


Figure 33. Basic Connections of the ADA4960-1

GAIN ADJUST

The gain of the ADA4960-1 is set with a single resistor, R_G , connected across the IIP and IIN pins. Because the output impedance is $150\ \Omega$, the load affects the gain. The voltage gain can be calculated for both differential and single-ended inputs as follows:

$$A_V = 4.7 \frac{\left(\frac{150R_L}{150 + R_L} \right)}{\left(35.5 + R_G \right)}$$

where R_L and R_G are the load and gain-setting resistors.

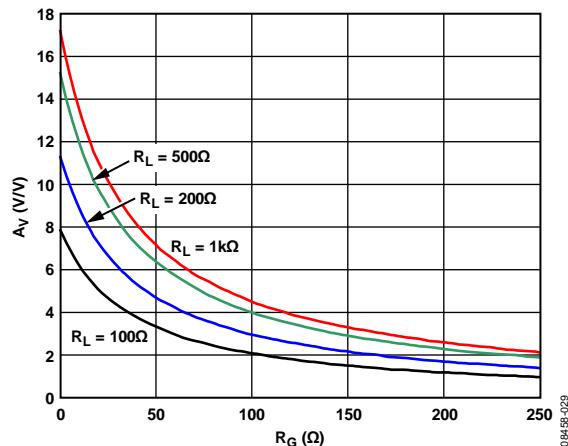


Figure 34. A_V vs. R_G for $R_L = 100\ \Omega$, $R_L = 200\ \Omega$, $R_L = 500\ \Omega$, and $R_L = 1\ k\Omega$

Table 5. A_V vs. R_G for $R_L = 100\ \Omega$, $R_L = 200\ \Omega$, $R_L = 500\ \Omega$, and $R_L = 1\ k\Omega$

| A_V (dB) | RG | | | |
|------------|---------------------|---------------------|---------------------|--------------------|
| | $R_L = 100\ \Omega$ | $R_L = 200\ \Omega$ | $R_L = 500\ \Omega$ | $R_L = 1\ k\Omega$ |
| 0 | 246 | 370 | 505 | 576 |
| 6 | 106 | 167 | 237 | 271 |
| 12 | 35.2 | 65.7 | 101 | 118 |
| 18 | 0 | 15.2 | 32.8 | 41.7 |

BANDWIDTH EXTENSION

The bandwidth of the ADA4960-1 can be extended for both differential and single-ended input configurations by connecting a capacitor, C_S , in parallel with the gain-setting resistor, R_G , as shown in Figure 35.

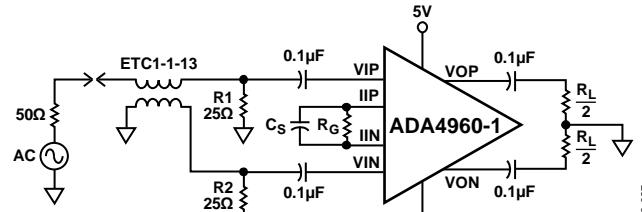


Figure 35. ADA4960-1 with Bandwidth Extension

Figure 36 shows the bandwidth extension for 6 dB and 12 dB gains. Figure 37 shows the recommended C_S values for most gains (dB).

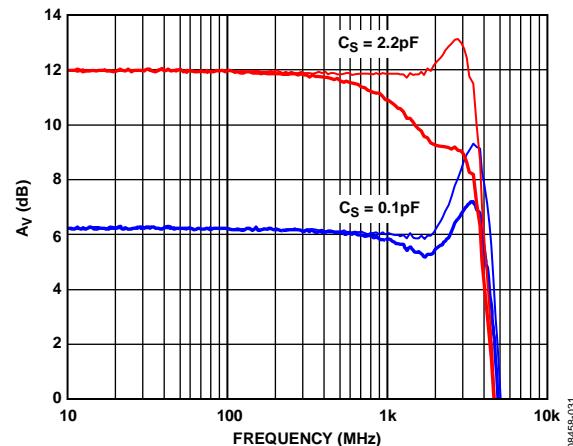


Figure 36. Bandwidth Extension for 6 dB and 12 dB Gains

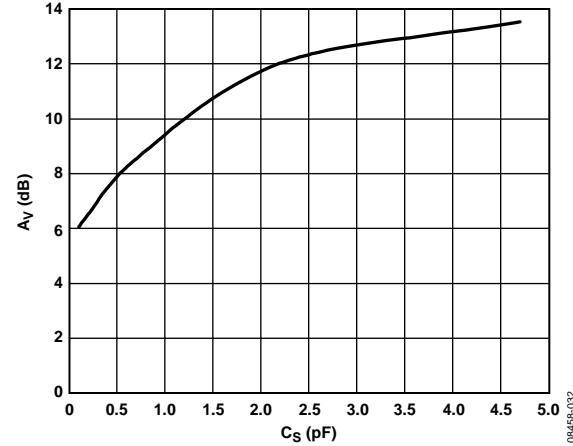


Figure 37. Recommended C_S Values for Most Gains

ADA4960-1

ADC INTERFACING

The ADA4960-1 is a high speed amplifier with linearity performance to drive high speed ADCs up to 1 GHz. Several options are available to the designer to interface with an ADC.

The ADA4960-1 in Figure 38 is a differential input configuration, using an input balun to provide the differential input signal. The $25\ \Omega$ resistors provide the input source match. The ADA4960-1 outputs can be directly connected to the ADC inputs as long as the ADC input common mode is within the output common-mode range of the ADA4960-1. The ADC V_{CM} output pin is connected to the ADA4960-1 V_{OCM} input pin to align the ADA4960-1 output voltages with the ADC inputs.

A $100\ \Omega$ resistor across the outputs of the ADA4960-1 enhances system bandwidth and distortion performance when the ADA4960-1 is driving an ADC with high input impedance. Lighter load resistance improves distortion performance and lowers the overall bandwidth.

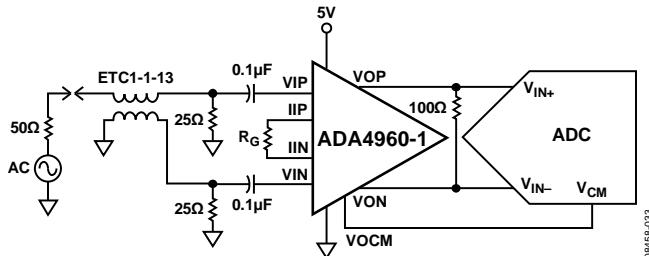


Figure 38. Differential Input Configuration Directly Driving the ADC

The ADA4960-1 in Figure 39 is a single-ended input configuration. The input is matched to the source with $50\ \Omega$ resistors. The ADA4960-1 outputs can be directly connected to the ADC inputs as long as the ADC input common mode is within the output common-mode range of the ADA4960-1.

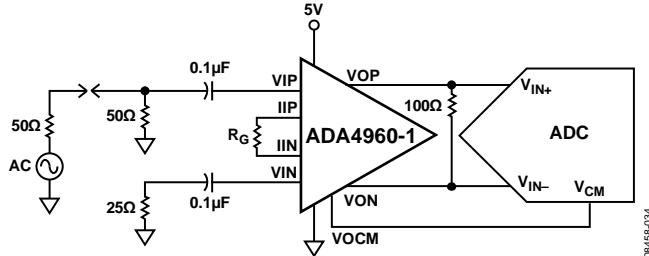


Figure 39. Single-Ended Input Configuration Directly Driving the ADC

The signal source can be directly connected to the ADA4960-1 inputs as long as the source dc level is within the common-mode input range of the ADA4960-1, as shown in Figure 40.

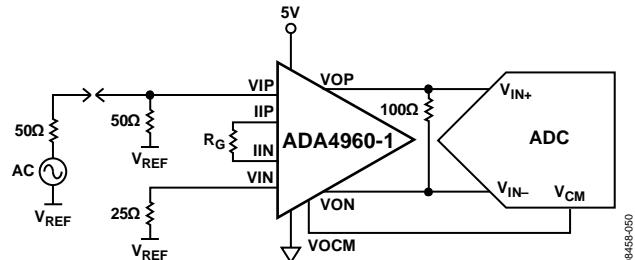


Figure 40. Single-Ended Input Configuration, DC-Coupled Inputs and Outputs

When the ADC input common mode is outside the output common-mode range of the ADA4960-1, the outputs can be ac-coupled to provide coupling, as shown in Figure 41.

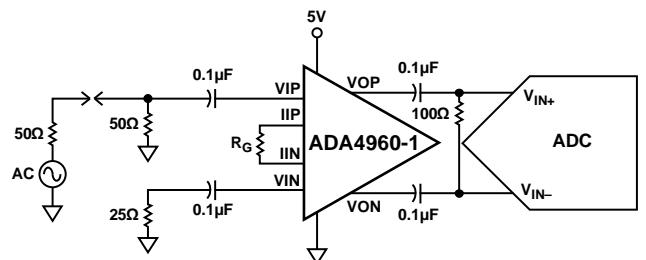


Figure 41. Single-Ended Input Configuration, AC-Coupled to the ADC

LINE DRIVER APPLICATIONS

The user accessible gain adjust and bandwidth extension features allow configuration of the ADA4960-1 for line driver and channel equalization applications from dc to 6.5 Gbps.

Because of its extremely low distortion performance and high linearity, the ADA4960-1 can be deployed in cable and backplane channels to extend channel length and improve signaling margin for serial links using receive equalization and transmit pre-emphasis. The ADA4960-1 unidirectional signal path is protocol and encoding agnostic, supporting myriad signaling types such as NRZ and PAM2/4/8/N, coded (8b/10b), uncoded, and out-of-band (SATA-OOB) data.

OVERDRIVE AND RECOVERY

When overdriven, the ADA4960-1 limits its outputs to 3.4 V typical with no overshoot, as shown in Figure 42. This feature protects the ADC from transients, eliminating the need for additional external clamping at the inputs of the ADC.

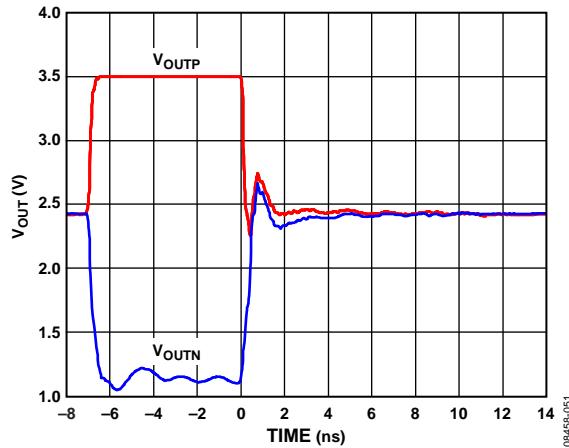


Figure 42. Output Overdrive, $V_{IN} = 1 \text{ V p-p}$, $A_v = 12 \text{ dB}$

Recovery from overdrive is 6.7 ns to 1%, 9.3 ns to 0.5%, and 12.6 ns to 0.25% of the final output voltage, see Figure 43.

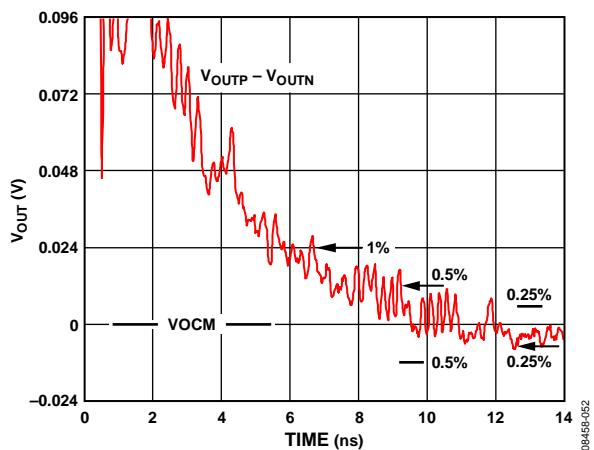


Figure 43. Output Overdrive Recovery

LAYOUT, GROUNDING, AND BYPASSING

The ADA4960-1 is a high speed device. Realizing its superior performance requires attention to the details of high speed printed circuit board (PCB) design.

The first requirement is to use a multilayer PCB with solid ground and power planes that cover as much of the board area as possible.

Bypass each power supply pin directly to a nearby ground plane, as close to the device as possible. Use $0.1\ \mu\text{F}$ high frequency ceramic chip capacitors.

Provide low frequency bulk bypassing, using $10\ \mu\text{F}$ tantalum capacitors from each supply to ground.

Stray transmission line capacitance in combination with package parasitics can potentially form a resonant circuit at high frequencies, resulting in excessive gain peaking or possible oscillation.

Signal routing should be short and direct to avoid such parasitic effects. Provide symmetrical layout for complementary signals to maximize balanced performance.

Use radio frequency transmission lines to connect the driver and receiver to the amplifier.

Minimize stray capacitance at the input/output pins by clearing the underlying ground and low impedance planes near these pins.

If the driver/receiver is more than one-eighth of the wavelength from the amplifier, the signal trace widths should be minimal. This nontransmission line configuration requires the underlying and adjacent ground and low impedance planes to be cleared near the signal lines.

The exposed thermal paddle is internally connected to the ground pin of the amplifier. Solder the paddle to the low impedance ground plane on the PCB to ensure the specified electrical performance and to provide thermal relief. To reduce thermal impedance further, it is recommended that the ground planes on all layers under the paddle be connected together with vias.

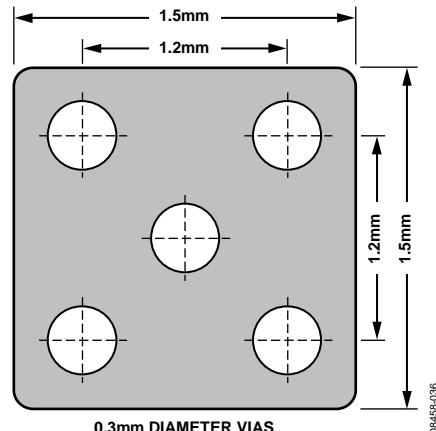


Figure 44. Recommended PCB Thermal Attach Pad

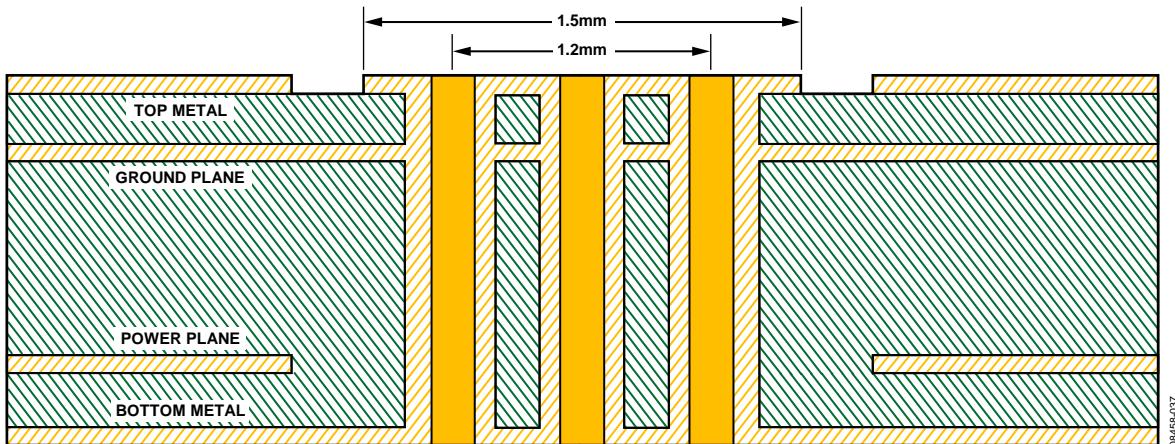


Figure 45. Cross-Section of a 4-Layer PCB Showing Thermal Via Connection to Buried Ground Plane

OUTLINE DIMENSIONS

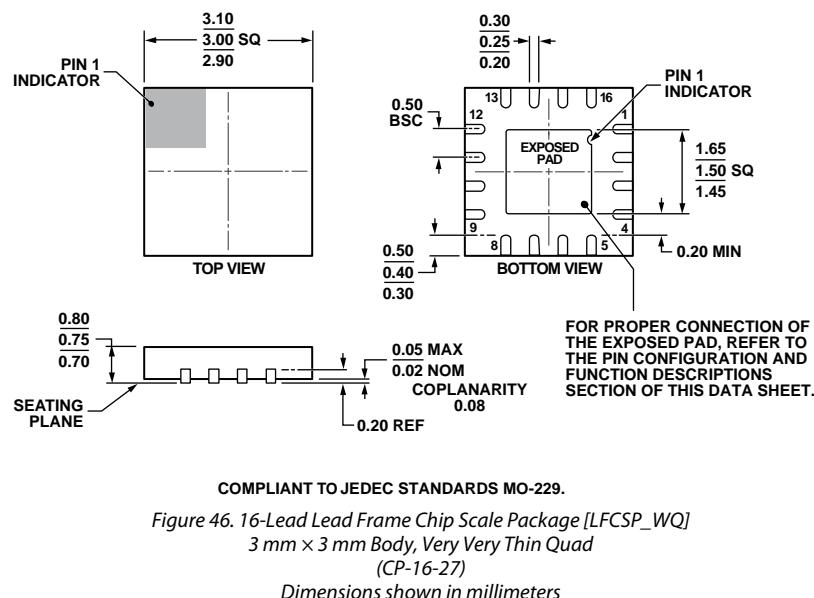


Figure 46. 16-Lead Lead Frame Chip Scale Package [LFCSP_WQ]
3 mm × 3 mm Body, Very Very Thin Quad
(CP-16-27)

Dimensions shown in millimeters

ORDERING GUIDE

| Model ¹ | Temperature Range | Package Description | Package Option | Ordering Quantity | Branding |
|--------------------|-------------------|--|----------------|-------------------|----------|
| ADA4960-1ACPZ-R2 | -40°C to +85°C | 16-Lead Lead Frame Chip Scale Package [LFCSP_WQ] | CP-16-27 | 250 | H23 |
| ADA4960-1ACPZ-RL | -40°C to +85°C | 16-Lead Lead Frame Chip Scale Package [LFCSP_WQ] | CP-16-27 | 5,000 | H23 |
| ADA4960-1ACPZ-R7 | -40°C to +85°C | 16-Lead Lead Frame Chip Scale Package [LFCSP_WQ] | CP-16-27 | 1,500 | H23 |

¹ Z = RoHS Compliant Part.

NOTES



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331