

# LTC3110

## 2A, Bidirectional Buck-Boost DC/DC Regulator and Charger/Balancer

### DESCRIPTION

Demonstration circuit 1964A is a 2A, bidirectional buck-boost DC/DC regulator and charger/balancer, featuring the **LTC<sup>®</sup>3110** boost controller. Its wide voltage range both in capacitor/battery charger mode and in system backup mode makes it well suited to a wide variety of applications using supercapacitors and batteries.

The main features of this board include a wide capacitor voltage range from 0.1V to 5.5V, when the controller works as a backup, buck-boost converter. The input voltage range is also wide, 1.8V to 5.25V, when the controller works as a charger. LTC3110 also features automatic switching from charge to backup mode, programmable  $\pm 2\%$  accurate charge current, automatic capacitor balancing, Burst Mode<sup>®</sup> operation, multipurpose comparator, and open-collector outputs to indicate direction of operation and end of charge.

The 1.2MHz constant-frequency operation results in a small and efficient circuit. In backup mode LTC3110 provides high output voltage accuracy over a wide load range with no minimum load requirement.

DC1964A features two modes of operation: automatic and external direction control. In the automatic mode of operation, DC1964 automatically charges the supercapacitor when a system voltage is present and works as a DC/DC converter providing system backup power to the load when system power is removed. In the external direction mode, users have control over charging and discharging the supercapacitor by changing logic on the EXT/DIR terminal.

The DC1964A supports three levels of input current limits—0.5A, 1A, 2A—while charging the supercapacitor.

The DC1964A has a small circuit footprint. It is a high performance and cost effective solution for supercap, battery backup converters and chargers, servers, RAID and RF systems.

DC1964 supports surface-mount supercapacitors as installed C3 and also through-hole packages as optional C5, C8.

**Design files for this circuit board are available at <http://www.linear.com/demo/DC1964A>**

LT, LTC, LTM, Linear Technology, Burst Mode and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

### PERFORMANCE SUMMARY

| PARAMETER                      | CONDITIONS  |             | UNITS |
|--------------------------------|-------------|-------------|-------|
| Minimum Input Supply Voltage   |             | 1.8         | V     |
| Maximum Input Supply Voltage   |             | 5.5         | V     |
| System Voltage Range           | Backup Mode | 1.8 to 5.25 | V     |
| Supercapacitor Voltage Range   |             | 0.1V to 5.5 | V     |
| Typical Switching Frequency    |             | 1.2         | MHz   |
| Efficiency Typical, DC/DC Mode | Backup Mode | 93          | %     |

## QUICK START PROCEDURE

Demonstration circuit 1964A is easy to set up to evaluate the performance of the LTC3110 bidirectional regulator. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below. 5V power supply should be rated minimum 2A of output current.

**NOTE:** When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the  $V_{IN}$  or  $V_{OUT}$  and GND terminals. See Figure 2 for proper scope probe technique.

To verify the capability of DC1964A for charging supercapacitors, proceed with the following steps:

1. Place jumper MODE (JP4) to FIXED FREQ. position.
2. Place jumper FBCAP (JP5) to 5.0V position. Place jumper PROG (JP3) to 0.5A position. Place switch DIR (SW1) to AUTO position for automatic switch between charge or backup modes of operation.
3. Place jumper FB (JP1) into 3.2V to set 3.2V voltage on the load, when supercapacitor C3 discharges in backup mode.
4. With power off, connect the input power supply to VEXT, GND load to VSYS, GND as shown on Figure 1.

5. Turn the input power source on and slowly increase the input voltage to 4.0V. Set the load to 0.2A. You have to see voltage around 3.6V (diode forward voltage drop lower compared to VEXT) on the VSYS terminal.
6. Place jumper RUN (JP2) in the ON position. Voltage on VCAP terminal should rise above 4.8V. If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

To verify the ability of DC1964 to work in backup mode, proceed with the following:

7. Disconnect input power from VEXT (E2) terminal, because SW1 in AUTO position, supercapacitor C3 starts discharging, however LTC3110 will maintain a voltage of 3.3V on terminal VSYS (E2).
8. Repeat steps 1 to 7 for different charging currents and VSYS voltages. While discharging, increase load current to 2.0A to verify high current capability and good load regulation of LTC3110 controller.
9. You can measure voltage regulation and ripple in backup mode on VSYS (E2) terminals.
10. Make sure that input voltage on VEXT and VSYS terminals does not exceed 5.5V.

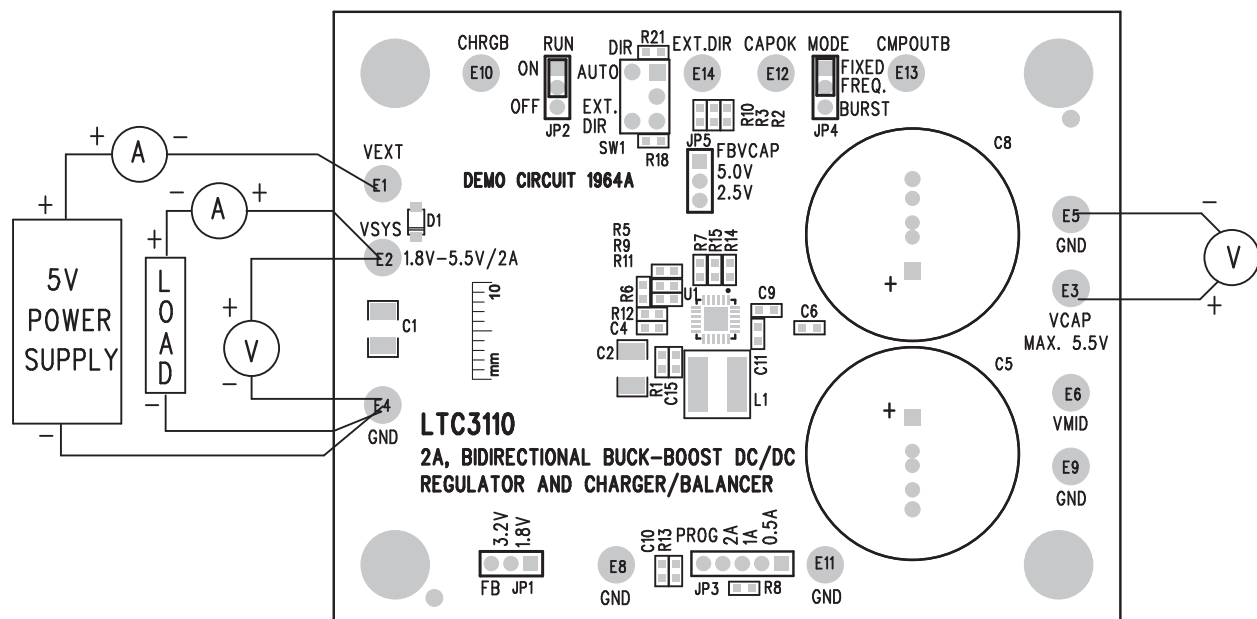


Figure 1. Proper Measurement Equipment Setup

dc1964afa

## QUICK START PROCEDURE




Figure 2. Measuring Input or Output Ripple



Figure 3. Charging Mode,  $V_{SYS}$  2.5V, Input Current Set to 0.5A, Ch 4 (Red) Input Current, 200mA/DIV, Ch3 (Blue) VCAP Voltage

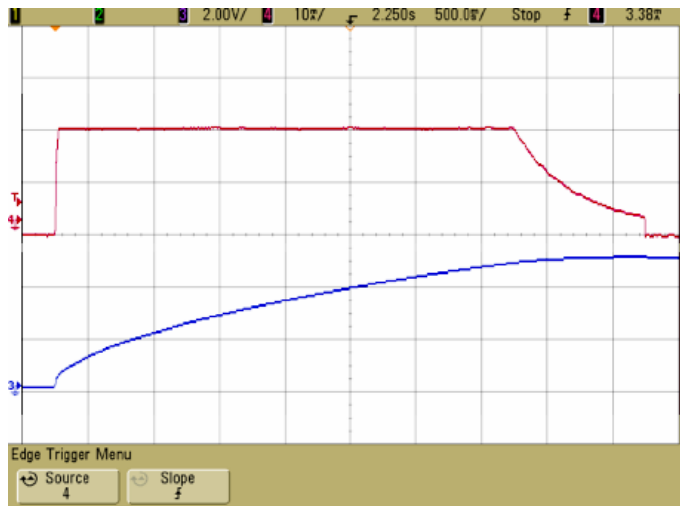


Figure 4. Charging Mode,  $V_{SYS}$  2.5V, Input Current Set to 2.0, Ch 4 (Red) Input Current, 1.0A/DIV, Ch3 (Blue) VCAP Voltage

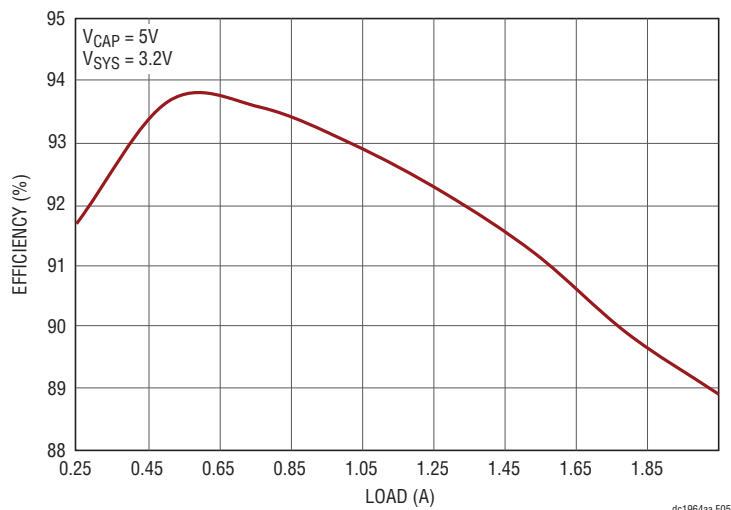


Figure 5. Efficiency vs Load, Backup Mode

# DEMO MANUAL DC1964A

## PARTS LIST

| ITEM                                            | QTY | REFERENCE                      | PART DESCRIPTION                              | MANUFACTURER/PART NUMBER          |
|-------------------------------------------------|-----|--------------------------------|-----------------------------------------------|-----------------------------------|
| <b>Required Circuit Components</b>              |     |                                |                                               |                                   |
| 1                                               | 1   | C2                             | CAP., X5R, 47µF, 6.3V, 10%, 1210              | AVX, 12106D476KAT2A               |
| 2                                               | 1   | C3                             | SUPERCAP, 1.2F, 5.5V, 39mm x 17mm             | CAP-XX, HS230F                    |
| 3                                               | 1   | C4                             | CAP., X5R, 1µF, 25V, 10%, 0603                | AVX, 06033D105KAT2A               |
| 4                                               | 1   | C11                            | CAP., X5R, 10µF, 10V, 20%, 0603               | AVX, 0603ZD106MAT2A               |
| 5                                               | 4   | C6, C9, C15, R2                | CAP., X5R, 0.1µF, 25V, 10%, 0603              | AVX, 06033D104KAT2A               |
| 6                                               | 1   | C11                            | CAP., X5R, 10µF, 10V, 20%, 0603               | AVX, 0603ZD106MAT2A               |
| 7                                               | 1   | C13                            | CAP., X5R, 470pF, 25V, 10%, 0603              | AVX, 06033D471KAT2A               |
| 8                                               | 1   | D1                             | DIODE, SCHOTTKY 2A 30V SOD-123FL              | ON SEMI., MBR230LSFT1G            |
| 9                                               | 1   | D2                             | DIODE, SW DUAL 75V 200MW SC70-3               | DIODE, BAV70W-7-F                 |
| 10                                              | 1   | L1                             | POWER INDUCTOR, 2.2uH                         | COILCRAFT, XAL5030-222MEB         |
| 11                                              | 1   | R1                             | RES., CHIP, 24, 1%, 0603                      | VISHAY, CRCW060324R0FKEA          |
| 12                                              | 1   | R3                             | RES., CHIP, 634k, 1%, 0603                    | VISHAY, CRCW0603634KFKEA          |
| 13                                              | 1   | R4                             | RES., CHIP, 576k, 1%, 0603                    | VISHAY, CRCW0603576KFKEA          |
| 14                                              | 1   | R5                             | RES., CHIP, 1.02M, 1%, 0603                   | VISHAY, CRCW06031M02FKEA          |
| 15                                              | 2   | R7, R8                         | RES., CHIP, 6.04k, 1%, 0603                   | YAGEO, RC0603FR-076K04L           |
| 16                                              | 1   | R9                             | RES., CHIP, 200k, 1%, 0603                    | VISHAY, CRCW0603200KFKEA          |
| 17                                              | 1   | R10                            | RES., CHIP, 1.91M, 1%, 0603                   | VISHAY, CRCW06031M91FKEA          |
| 18                                              | 1   | R12                            | RES., CHIP, 280k, 1%, 0603                    | VISHAY, CRCW0603280KFKEA          |
| 19                                              | 1   | R13                            | RES., CHIP, 2k, 1%, 0603                      | VISHAY, CRCW06032K00FKEA          |
| 20                                              | 1   | R14                            | RES., CHIP, 1.5M, 1%, 0603                    | VISHAY, CRCW06031M50FKEA          |
| 21                                              | 1   | R15                            | RES., CHIP, 845k, 1%, 0603                    | VISHAY, CRCW0603845KFKEA          |
| 22                                              | 2   | R16, R17                       | RES., CHIP, 100k, 1%, 0603                    | VISHAY, CRCW0603100KFKEA          |
| 23                                              | 1   | R18                            | RES., CHIP, 931k, 1%, 0603                    | VISHAY, CRCW0603931KFKEA          |
| 24                                              | 1   | R19, R20                       | RES., CHIP, 1M, 1%, 0603                      | VISHAY, CRCW06031M00FKEA          |
| 25                                              | 1   | R22                            | RES., CHIP, 1K, 1%, 0603                      | VISHAY, CRCW06031K00FKEA          |
| 26                                              | 1   | U1                             | IC., LTC3110EUF, QFN 4mm x 4mm                | LINEAR TECH., LTC3110EUF#PBF      |
| <b>Additional Demo Board Circuit Components</b> |     |                                |                                               |                                   |
| 1                                               |     | C1, C5, C8, C10, C14, C16, C17 |                                               | OPT                               |
| 2                                               |     | R6, R11, R21                   |                                               | OPT                               |
| <b>Hardware: For Demo Board Only</b>            |     |                                |                                               |                                   |
| 1                                               | 1   | JP3                            | HEADER, 0.079 SINGLE ROW 5 PIN                | SULLINS, NRPN051PAEN-RC           |
| 2                                               | 4   | JP1, JP2, JP5, JP6             | HEADER, 0.079 SINGLE ROW 3 PIN                | SULLINS, NRPN031PAEN-RC           |
| 3                                               | 5   | JP1, JP2, JP3, JP5, JP6        | SHUNT                                         | SAMTEC, 2SN-BK-G                  |
| 4                                               | 13  | E1-E6, E8-E14                  | TESTPOINT, TURRET, .095"                      | MILL-MAX, 2501-2-00-80-00-00-07-0 |
| 5                                               | 1   | SW1                            | SWITCH, TOGGLE SPDT ULTIMINI PC TH LT 5/08/12 | C & K, GT11MCBETR                 |



# DEMO MANUAL DC1964A

---

## DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

**Please read the DEMO BOARD manual prior to handling the product.** Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology  
1630 McCarthy Blvd.  
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331