

PS9331L, PS9331L2

R08DS0111EJ0200 Rev.2.00 Jun 21, 2013

2.5 A OUTPUT CURRENT, HIGH CMR, IGBT GATE DRIVE, 6-PIN SDIP PHOTOCOUPLER

DESCRIPTION

The PS9331L and PS9331L2 are optical coupled isolators containing a GaAlAs LED on the input side and a photo diode, a signal processing circuit and power MOSFETs on the output side on one chip.

The PS9331L and PS9331L2 are in 6-pin plastic SDIP (Shrink Dual In-line Package). The PS9331L2 has 8 mm creepage distance. The mount area of 6-pin plastic SDIP is half size of 8-pin DIP.

The PS9331L and PS9331L2 are designed specifically for high common mode transient immunity (CMR) and high switching speed. It is suitable for driving IGBTs and MOS FETs.

The PS9331L is lead bending type (Gull-wing) for surface mounting.

The PS9331L2 is lead bending type for long creepage distance (Gull-wing) for surface mount.

FEATURES

- Long creepage distance (8 mm MIN.: PS9331L2)
- Half size of 8-pin DIP
- Peak output current (2.5 A MAX., 2.0 A MIN.)
- High speed switching (t_{PLH} , $t_{PHL} = 175$ ns MAX.)
- High common mode transient immunity (CMH, CML = $\pm 50 \text{ kV/}\mu\text{s}$ MIN.)
- Operating Ambient Temperature (125 °C)
- Embossed tape product: PS9331L-E3, PS9331L2-E3: 2 000 pcs/reel
- Pb-Free product
- · Safety standards
 - UL approved: No. E72422
 - CSA approved: No. CA 101391 (CA5A, CAN/CSA-C22.2 60065, 60950)
 - SEMKO approved (EN 60065, EN 60950)
 - DIN EN 60747-5-5 (VDE 0884-5) approved (Option)

PIN CONNECTION (Top View) 6 5 4 1. Anode 2. NC 3. Cathode 4. VEE 5. Vo 6. Vcc

APPLICATIONS


- IGBT, Power MOS FET Gate Driver
- Industrial inverter
- AC Servo

The mark <R> shows major revised points.


The revised points can be easily searched by copying an "<R>" in the PDF file and specifying it in the "Find what:" field.

PACKAGE DIMENSIONS (UNIT: mm)

Lead Bending Type (Gull-wing) For Surface Mount

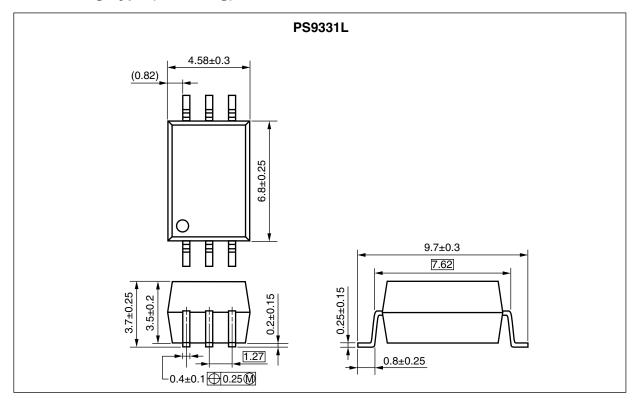


Lead Bending Type (Gull-wing) For Long Creepage Distance (Surface Mount)

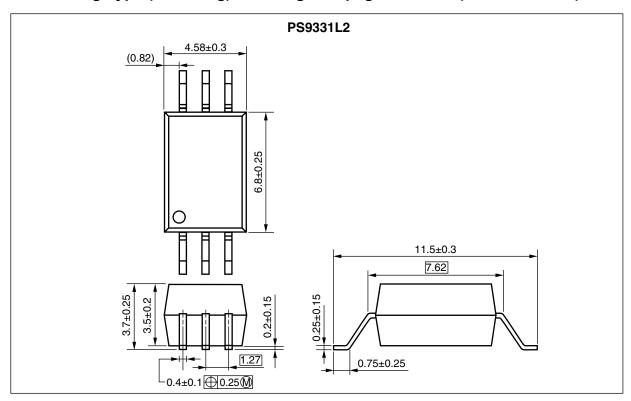

PHOTOCOUPLER CONSTRUCTION

Parameter	PS9331L	PS9331L2
Air Distance (MIN.)	7 mm	8 mm
Outer Creepage Distance (MIN.)	7 mm	8 mm
Isolation Distance (MIN.)	0.4 mm	0.4 mm

MARKING EXAMPLE

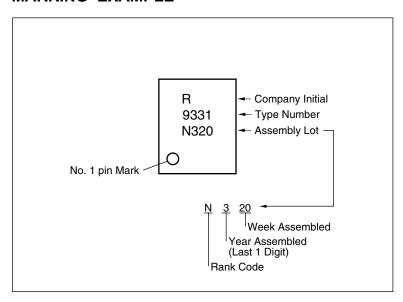

ORDERING INFORMATION

Part Number	Order Number	Solder Plating Specification	Packing Style	Safety Standard Approval	Application Part Number*1
PS9331L	PS9331L-AX	Pb-Free	20 pcs (Tape 20 pcs cut)	Standard	PS9331L
PS9331L-E3	PS9331L-E3-AX	(Ni/Pd/Au)	Embossed Tape 2 000	products	
			pcs/reel	(UL, CSA,	
PS9331L2	PS9331L2-AX		20 pcs (Tape 20 pcs cut)	SEMKO	PS9331L2
PS9331L2-E3	PS9331L2-E3-AX		Embossed Tape 2 000	approved)	
			pcs/reel		
PS9331L-V	PS9331L-V-AX		20 pcs (Tape 20 pcs cut)	DIN EN 60747-5-5	PS9331L
PS9331L-V-E3	PS9331L-V-E3-AX		Embossed Tape 2 000	(VDE 0884-5)	
			pcs/reel	approved	
PS9331L2-V	PS9331L2-V-AX		20 pcs (Tape 20 pcs cut)	(Option)	PS9331L2
PS9331L2-V-E3	PS9331L2-V-E3-AX		Embossed Tape 2 000	1	
			pcs/reel		

Note: *1. For the application of the Safety Standard, following part number should be used.

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C, unless otherwise specified)

	Parameter	Symbol	Ratings	Unit
Diode	Forward Current	I _F	25	mA
	Peak Transient Forward Current (Pulse Width < 1 μs)	I _{F (TRAN)}	1.0	А
	Reverse Voltage	V_R	5	٧
	Power Dissipation *1	P_D	45	mW
Detector	High Level Peak Output Current *2	I _{OH (PEAK)}	2.5	Α
	Low Level Peak Output Current *2	I _{OL (PEAK)}	2.5	Α
	Supply Voltage	(V _{CC} – V _{EE})	0 to 35	V
	Output Voltage	Vo	0 to V _{CC}	V
Power Dissipation *3		Pc	250	mW
Isolation Voltage *4		BV	5 000	Vr.m.s.
Operating Frequency		f	50	kHz
Operating Ambient Temperature		T _A	-40 to +125	°C
Storage Temperature		T _{stg}	−55 to +150	°C

Notes: *1. Reduced to 1.2 mW/ $^{\circ}$ C at T_A = 110 $^{\circ}$ C or more.

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	(V _{CC} – V _{EE})	15		30	V
Forward Current (ON)	I _{F (ON)}	8	10	12	mA
Forward Voltage (OFF)	V _{F (OFF)}	-2		0.8	V
Operating Ambient Temperature	T _A	-40		125	°C

^{*2.} Maximum pulse width = 10 μ s, Maximum duty cycle = 0.2%

^{*3.} Reduced to 3.9 mW/°C at T_A = 85°C or more.

^{*4.} AC voltage for 1 minute at T_A = 25°C, RH = 60% between input and output. Pins 1-3 shorted together, 4-6 shorted together.

ELECTRICAL CHARACTERISTICS (at RECOMMENDED OPERATING CONDITIONS, $V_{EE} = GND$, unless otherwise specified)

Parameter		Symbol	Conditions	MIN.	TYP.*1	MAX.	Unit
Diode	Forward Voltage	V _F	I _F = 10 mA, T _A = 25°C	1.35	1.56	1.75	V
	Reverse Current	I _R	V _R = 3 V, T _A = 25°C			10	μΑ
	Input Capacitance	C _{IN}	$f = 1 \text{ MHz}, V_F = 0 \text{ V}$		30		pF
Detector	High Level Output Current	I _{OH}	$V_{\rm O} = (V_{\rm CC} - 4 \text{ V})^{*2}$	0.5	2.2		Α
			$V_{\rm O} = (V_{\rm CC} - 15 \text{ V})^{*3}$	2.0			
	Low Level Output Current	I _{OL}	$V_{O} = (V_{EE} + 2.5 \text{ V})^{*2}$	0.5	2.4		Α
			$V_{O} = (V_{EE} + 15 \text{ V})^{*3}$	2.0			
	High Level Output Voltage		$I_{\rm O}$ = -100 mA *4	V _{CC} - 3.0	V _{CC} – 1.3		V
	Low Level Output Voltage		I _O = 100 mA		0.2	0.5	V
	High Level Supply Current		V _O = Open		1.7	2.2	mA
	Low Level Supply Current		V _O = Open		1.7	2.2	mA
	UVLO Threshold	V _{UVLO+}	$V_{\rm O} > 5 \text{ V}, I_{\rm F} = 10 \text{ mA}$	10.8	12.3	13.4	V
				9.5	11.0	12.5	
	UVLO Hysteresis	UVLO _{HYS}	$V_O > 5 V$, $I_F = 10 mA$	0.4	1.3		V
Coupled	Threshold Input Current	I _{FLH}	$I_{O} = 0 \text{ mA}, V_{O} > 5 \text{ V}$		1.7	4.0	mA
		V_{FHL}	I _O = 0 mA, V _O < 5 V	0.8			V

Notes: *1. Typical values at $T_A = 25^{\circ}C$, $V_{CC} - V_{EE} = 30 \text{ V}$.

SWITCHING CHARACTERISTICS (at RECOMMENDED OPERATING CONDITIONS, $V_{EE} = GND$, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.*1	MAX.	Unit
Propagation Delay Time $(L \rightarrow H)$	t_{PLH}	$R_g = 10 \Omega, C_g = 10 nF,$		80	175	ns
Propagation Delay Time $(H \rightarrow L)$	t _{PHL}	f = 10 kHz,		105	175	ns
Pulse Width Distortion (PWD)	t _{PHL} -t _{PLH}	Duty Cycle = 50%,		25	75	ns
Propagation Delay Time	t _{PHL} -t _{PLH}	I _F = 10 mA	-90		90	ns
(Difference Between Any Two						
Products)						
Rise Time	t _r			40		ns
Fall Time	t _f			40		ns
Common Mode Transient	[CM _H]	$T_A = 25^{\circ}C$, $I_F = 10 \text{ mA}$,	50			kV/ <i>μ</i> s
Immunity at High Level Output		$V_{CC} = 30 \text{ V}, V_{CM} = 1.5 \text{ kV}$				
Common Mode Transient	CM _L	$T_A = 25^{\circ}C$, $I_F = 0$ mA,	50			kV/ <i>μ</i> s
Immunity at Low Level Output		$V_{CC} = 30 \text{ V}, V_{CM} = 1.5 \text{ kV}$				

Notes: *1. Typical values at $T_A = 25$ °C, V_{CC} – $V_{EE} = 30$ V.

^{*2.} Maximum pulse width = 50 μ s, Maximum duty cycle = 0.5%.

^{*3.} Maximum pulse width = 10 μ s, Maximum duty cycle = 0.2%.

^{*4.} V_{OH} is measured with the DC load current in this testing (Maximum pulse width = 2 ms, Maximum duty cycle = 20%).

TEST CIRCUIT

Fig. 1 Іон Test Circuit Fig. 2 lo∟ Test Circuit V_{CC} Vcc _1.0 μF Fig. 3 Von Test Circuit Fig. 4 Vol Test Circuit V_{CC} V_{CC} 1.0 μF L 1.0μF Vон VOL 100 mA 100 mA Fig. 6 UVLO Test Circuit Fig. 5 Icch/IccL Test Circuit V_{CC} I_F = 10 mA [‡] 1.0*μ*F [⊥] 1.0*μ*F ⊸ Vo>5 V







Fig. 8 tplh, tphl, tr, tf Test Circuit and Wave Forms










Fig. 9 CMR Test Circuit and Wave Forms







<R> TYPICAL CHARACTERISTICS (T_A = 25°C, unless otherwise specified)






DIODE POWER DISSIPATION







THRESHOLD INPUT CURRENT vs. AMBIENT TEMPERATURE



OUTPUT VOLTAGE vs. FORWARD CURRENT





HIGH LEVEL OUTPUT VOLTAGE – SUPPLY VOLTAGE vs. HIGH LEVEL OUTPUT CURRENT



Remark The graphs indicate nominal characteristics.


LOW LEVEL OUTPUT VOLTAGE vs. LOW LEVEL OUTPUT CURRENT 6 Low Level Output Voltage Vo∟(V) Vcc = 30 VVEE = GND. $T_A = 125^{\circ}C$ $I_F = 0 \text{ mA}$ 4 $T_A = 25^{\circ}C$ 2 0.0 0.5 1.0 1.5 2.0 25 Low Level Output Current IoL (A) PROPAGATION DELAY TIME, PULSE WIDTH DISTORTION vs. SUPPLY VOLTAGE 175






Remark The graphs indicate nominal characteristics.


PROPAGATION DELAY TIME, PULSE WIDTH DISTORTION vs. FORWARD CURRENT




PROPAGATION DELAY TIME, PULSE WIDTH DISTORTION vs. LOAD CAPACITANCE




PROPAGATION DELAY TIME, PULSE WIDTH DISTORTION vs. AMBIENT TEMPERATURE






HIGH LEVEL OUTPUT VOLTAGE – SUPPLY VOLTAGE vs. AMBIENT TEMPERATURE




HIGH LEVEL OUTPUT CURRENT vs. AMBIENT TEMPERATURE




Remark The graphs indicate nominal characteristics.


SUPPLY CURRENT vs. SUPPLY VOLTAGE




LOW LEVEL OUTPUT VOLTAGE vs. AMBIENT TEMPERATURE



LOW LEVEL OUTPUT CURRENT vs. AMBIENT TEMPERATURE





OUTPUT VOLTAGE vs. SUPPLY VOLTAGE




Remark The graphs indicate nominal characteristics.

TAPING SPECIFICATIONS (UNIT: mm)

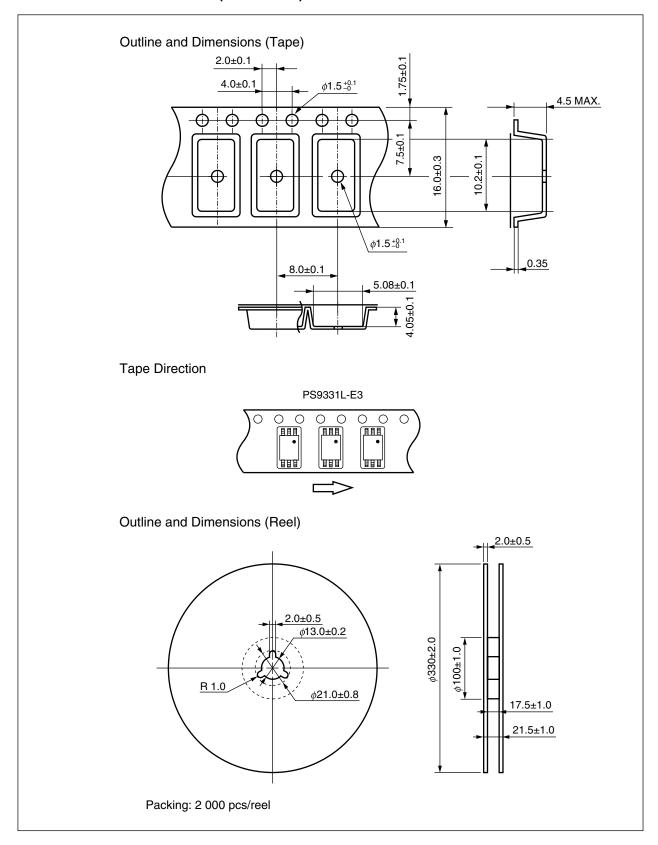

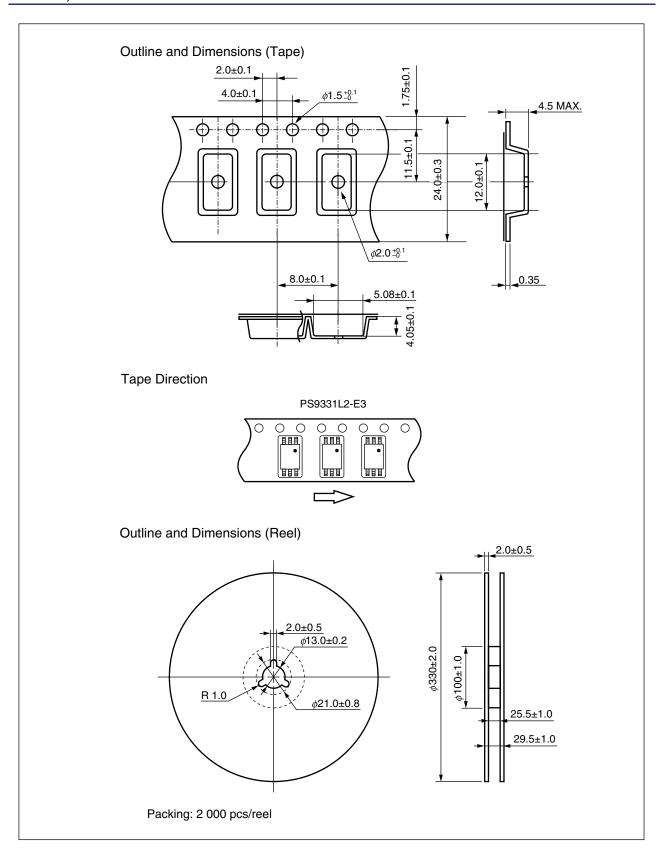

RECOMMENDED MOUNT PAD DIMENSIONS (UNIT: mm)

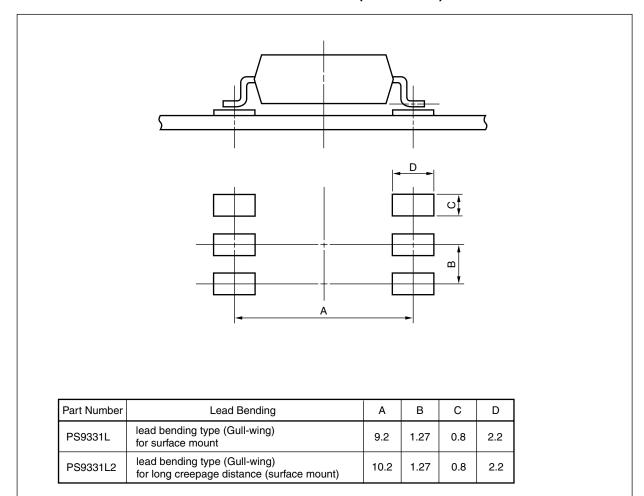

NOTES ON HANDLING

- 1. Recommended soldering conditions
 - (1) Infrared reflow soldering
 - Peak reflow temperature 260°C or below (package surface temperature)
 - Time of peak reflow temperature
 - Time of temperature higher than 220°C 60 seconds or less $120 \pm 30 \text{ s}$
 - Time to preheat temperature from 120 to 180°C
 - Number of reflows
 - Flux

10 seconds or less


Three

Rosin flux containing small amount of chlorine (The flux

with a maximum chlorine content of 0.2 Wt% is

recommended.)

Recommended Temperature Profile of Infrared Reflow

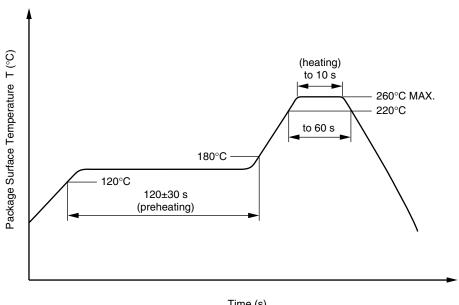

Time (s)

(2) Wave soldering

Temperature 260°C or below (molten solder temperature)

Time 10 seconds or less

Preheating conditions 120°C or below (package surface temperature)

Number of times One (Allowed to be dipped in solder including plastic mold portion.)

Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine

content of 0.2 Wt% is recommended.)

(3) Soldering by Soldering Iron

Peak Temperature (lead part temperature) 350°C or below

Time (each pins) 3 seconds or less

Flux Rosin flux containing small amount of chlorine (The flux with a

maximum chlorine content of 0.2 Wt% is recommended.)

(a) Soldering of leads should be made at the point 1.5 to 2.0 mm from the root of the lead

(4) Cautions

 Fluxes Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

2. Cautions regarding noise

Be aware that when voltage is applied suddenly between the photocoupler's input and output at startup, the output transistor may enter the on state, even if the voltage is within the absolute maximum ratings.

USAGE CAUTIONS

- 1. This product is weak for static electricity by designed with high-speed integrated circuit so protect against static electricity when handling.
- 2. Board designing
 - (1) By-pass capacitor of more than 1.0 μ F is used between V_{CC} and GND near device. Also, ensure that the distance between the leads of the photocoupler and capacitor is no more than 10 mm.
 - (2) When designing the printed wiring board, ensure that the pattern of the IGBT collectors/emitters is not too close to the input block pattern of the photocoupler. If the pattern is too close to the input block and coupling occurs, a sudden fluctuation in the voltage on the IGBT output side might affect the photocoupler's LED input, leading to malfunction or degradation of characteristics. (If the pattern needs to be close to the input block, to prevent the LED from lighting during the off state due to the abovementioned coupling, design the input-side circuit so that the bias of the LED is reversed, within the range of the recommended operating conditions, and be sure to thoroughly evaluate operation.)
 - (3) Pin 2 (which is an NC*1 pin) can either be connected directly to the GND pin on the LED side or left open. Unconnected pins should not be used as a bypass for signals or for any other similar purpose because this may degrade the internal noise environment of the device.
 - Note: *1. NC: Non-Connection (No Connection).
- 3. Make sure the rise/fall time of the forward current is 0.5 μ s or less.
- 4. In order to avoid malfunctions, make sure the rise/fall slope of the supply voltage is $3 \text{ V}/\mu \text{s}$ or less.
- 5. Avoid storage at a high temperature and high humidity.

SPECIFICATION OF VDE MARKS LICENSE DOCUMENT

Parameter	Symbol	Spec.	Unit
Climatic test class (IEC 60068-1/DIN EN 60068-1)		40/125/21	
Dielectric strength			
maximum operating isolation voltage	U_IORM	1 130	V_{peak}
Test voltage (partial discharge test, procedure a for type test and random test)	U_pr	1 808	V_{peak}
$U_{pr} = 1.6 \times U_{IORM.}$, $P_d < 5 pC$			
Test voltage (partial discharge test, procedure b for all devices)	U_pr	2 119	V_{peak}
$U_{pr} = 1.875 \times U_{IORM.}, P_d < 5 pC$			
Highest permissible overvoltage	U_TR	8 000	V_{peak}
Degree of pollution (DIN EN 60664-1 VDE0110 Part 1)		2	
Comparative tracking index (IEC 60112/DIN EN 60112 (VDE 0303 Part 11))	CTI	175	
Material group (DIN EN 60664-1 VDE0110 Part 1)		III a	
Storage temperature range	T_{stg}	-55 to +150	°C
Operating temperature range	T_A	-40 to +125	°C
Isolation resistance, minimum value			
V_{IO} = 500 V dc at T_A = 25°C	Ris MIN.	10 ¹²	Ω
V _{IO} = 500 V dc at T _A MAX. at least 100°C	Ris MIN.	10 ¹¹	Ω
Safety maximum ratings (maximum permissible in case of fault, see thermal			
derating curve)			
Package temperature	Tsi	175	°C
Current (input current I _F , Psi = 0)	Isi	400	mA
Power (output or total power dissipation)	Psi	700	mW
Isolation resistance			
V_{IO} = 500 V dc at T_A = Tsi	Ris MIN.	10 ⁹	Ω

Caution

GaAs Products

This product uses gallium arsenide (GaAs).

GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.

- Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
 - Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
- 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
- Do not burn, destroy, cut, crush, or chemically dissolve the product.
- Do not lick the product or in any way allow it to enter the mouth.

Revision History

PS9331L, PS9331L2 Data Sheet

		Description		
Rev.	Date	Page	Summary	
1.00	May 24, 2013	_	First edition issued	
2.00	Jun 21, 2013	pp.8 to 11	Addition of TYPICAL CHARACTERISTICS	

Notice

- 1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information,
- 2. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 3. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or
- 4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product
- 5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc.

Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by Renesas Electronics.

- 6. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
- 8. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
- 10. It is the responsibility of the buyer or distributor of Renesas Electronics products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the contents and conditions set forth in this document. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
- 11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of Renesas Electronics
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries, (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics



SALES OFFICES

Renesas Electronics Corporation

http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information

California Eastern Laboratories, Inc. 4590 Patrick Henry Drive, Santa Clara, California 95054, U.S.A. Tel: +1-408-919-2500, Fax: +1-408-988-0279

Renesas Electronics Europe Limited
Dukes Meadow, Milliboard Road, Bourne End, Buckinghamshire, SL8 5FH, U.K
Tel: +44-1628-651-700, Fax: +44-1628-651-804 Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germar Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-9235-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd. Unit 204, 205, AZIA Center, No.1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China Tel: +86-21-5877-1818, Fax: +86-21-6887-7858 / -7898

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2868-9318, Fax: +852-2886-9022/9044

Renesas Electronics Taiwan Co., Ltd. 13F, No. 363, Fu Shing North Road, Taipei, Tai Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd. 80 Bendemeer Road, Unit #06-02 Hyflux Ini Tel: +65-6213-0200, Fax: +65-6213-0300 Innovation Centre Singapore 339949

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia Tei: +60-3-7955-9390, Fax: +60-3-7955-9510

Renesas Electronics Korea Co., Ltd. 11F., Samik Lavied' or Bidg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea Tel: 482-2-558-3737, Fax: +82-2-558-5141

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Renesas Electronics:

<u>PS9331L-V-E3-AX</u> <u>PS9331L-AX</u> <u>PS9331L2-V-AX</u> <u>PS9331L2-AX</u> <u>PS9331L-V-AX</u> <u>PS9331L-E3-AX</u> <u>PS9331L2-E3-AX</u>



Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России, а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научноисследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,

Промышленная ул, дом № 19, литера Н,

помещение 100-Н Офис 331