

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit

General Description

The MAX17608 evaluation kit (EV kit) is a fully assembled and tested circuit board that demonstrates the MAX17608 4.5V to 60V, 1A, OV, UV, reverse-voltage protector with forward/reverse current-limit in a 12-pin TDFN-EP package. The EV kit can be configured to demonstrate adjustable overvoltage, undervoltage, different current-limit types, and different current-limit thresholds.

Features

- 4.5V to 60V Operating-Voltage Range
- Features a TVS Diode across the Input and Schottky Diode across the Output Terminals
- Evaluates UVLO, OVLO, Three Current-Limit Types, and Current-Limit Threshold
- UVLO programmed to 4.5V
- OVLO programmed to 36V
- Jumper-Configurable Current-Limit (Selected as 0.1A by default)
- Current-Limit Mode Set To Autoretry by default
- Proven PCB Layout
- Fully Assembled and Tested

Ordering Information appears at end of data sheet.

Quick Start

Recommended Equipment

- MAX17608 EV kit
- 60V DC power supply
- Multimeters
- Adjustable load (0A-1.5A)
- USB-A male to USB-B male cable or 5V DC power supply

Equipment Setup and Test Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify board operation.

Caution: Do not turn on the power supply until all connections are completed.

- 1) Verify that all jumpers are in their default positions.
- 2) Connect the USB cable to J1 from a computer or connect a 5V-DC power supply to TP3.
- 3) Verify that LED1 is on.
- 4) Set the 60V DC power supply to 5V and connect to IN (J2/TP6). Verify that OUT (J3/TP8) is 5V.
- 5) Gradually increase the DC power-supply voltage and verify that OUT voltage goes down and $\overline{UV\overline{OV}}$ goes low when input reaches approximately 36V.
- 6) Gradually decrease the DC power-supply voltage and verify that OUT comes back and $\overline{UV\overline{OV}}$ goes high when the input reaches approximately 34.8V.
- 7) Set the DC power-supply voltage to 24V and connect the adjustable load between OUT and GND terminals and a multimeter in series to measure the current. Gradually increase the load current and verify that the OUT goes down and $\overline{FLAG}$ goes low when the load current increases above 0.1A.
- 8) The jumper JU1 can be configured to change the current limit as given in [Table 2](#). Verify various current limit operations by repeating step 7.

CAUTION: When applying a negative input to V_{IN} , the negative input test should be performed when the output capacitors are fully discharged and V_{BUS} is not supplied.

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit

Detailed Description

The EV kit circuit can be configured to evaluate user-defined UVLO and OVLO thresholds using resistor-dividers. The overcurrent threshold is determined by external resistors connected to the SET1 pin and is jumper-configurable through jumper JU1. Using jumper JU4, the EV kit circuit can be configured to evaluate different current limit types (Autoretry, Continuous, and Latch-off). LED1 on the EV kit indicates availability of logic power for annunciation signals ($\overline{\text{UVOV}}$ and $\overline{\text{FLAG}}$) and EN.

The EV kit provides on-board output capacitors to enable a demonstration of the MAX17608 protection features.

Input-Power Supply

The EV kit is powered by a user-supplied 4.5V to 60V power supply connected between TP6 (INPUT POWER) and GND.

Enable

To enable the device, connect a USB-A male connector from the computer to the USB-B female connector, J1, or an external 5V supply to TP3 and GND. This provides 5V to V_{BUS} and to the EN pin (JU5 connects V_{BUS} to EN by default). Choose the JU5 setting to enable or disable operation of the MAX17608 (see [Table 1](#)).

UVLO/OVLO Threshold

Ensure jumper JU2 is installed to use the UVLO/OVLO resistive dividers.

Table 1. Enable (JU5)

JUMPER	SHUNT POSITION	DESCRIPTION	MAX17608 STATUS
JU5	1-2*	EN pin connected to V_{BUS}	ON
	2-3	EN pin connected to GND	OFF
	Open	EN pin floating	ON

*Default position.

Table 2. Current-Limit Threshold (JU1)

JUMPER	SHUNT POSITION	DESCRIPTION
JU1	1-2*	Current limit 0.1A
	3-4	Current limit 0.5A
	5-6	Current limit 1.0A
	7-8	Current limit adjustable

*Default position.

The UVLO threshold for input voltage is set through the R9, R10 resistive divider. Use the following equation to calculate the value of R10 for a required undervoltage threshold level:

$$R10 = \frac{R9}{\left(\frac{V_{\text{UVLO}}}{V_{\text{REF}}} - 1\right)}$$

where R9 can be chosen as 2.2M Ω , V_{REF} is 1.5V, and V_{UVLO} is the required undervoltage protection threshold.

The OVLO threshold for input voltage is set through the R11, R12 resistive divider. Use the following equation to calculate the value of R12 for a required overvoltage threshold level:

$$R12 = \frac{R11}{\left(\frac{V_{\text{OVLO}}}{V_{\text{REF}}} - 1\right)}$$

where R11 can be chosen as 2.2M Ω , V_{REF} is 1.5V, and V_{OVLO} is the required overvoltage protection threshold.

Current-Limit Threshold

The EV kit features a jumper (JU1) to select the current-limit threshold. Install a jumper as shown in [Table 2](#) to change the current-limit threshold.

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A, OV, UV, Reverse-Voltage Protector with Forward/Reverse Current Limit

Current-Limit Type Select

The EV kit features jumper JU4 to select different current-limit responses. See [Table 3](#) for jumper settings.

Output-Load Capacitor

Use JU6 to connect the OUT pins to the OUT test point (TP8). Use jumper JU7 to connect output to 330μF capacitors. See [Table 4](#) for jumper settings

Table 3. Current-Limit Type Select (JU4)










JUMPER	SHUNT POSITION	DESCRIPTION
JU4	1-2	Latch-off
	2-3	Continuous
	Open*	Autoretry

*Default position.

Table 4. Output Load Capacitor (JU7)

JUMPER	SHUNT POSITION	DESCRIPTION
JU7	Installed	OUT connected to C4 and C5.
	Not installed*	OUT not connected to C4 and C5.

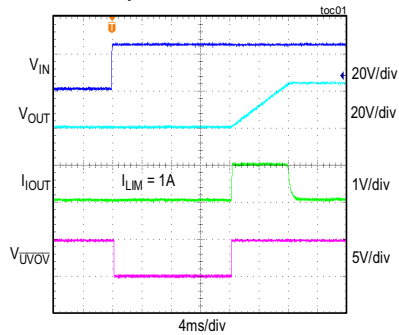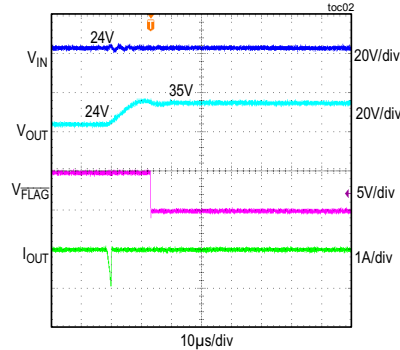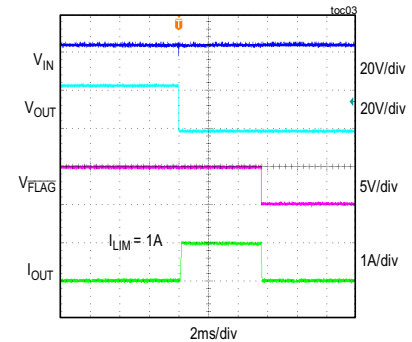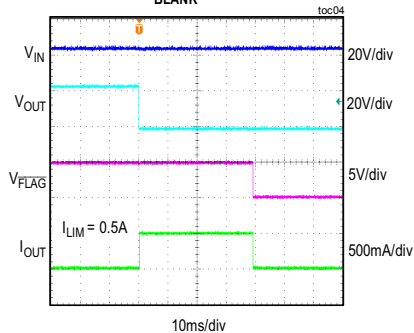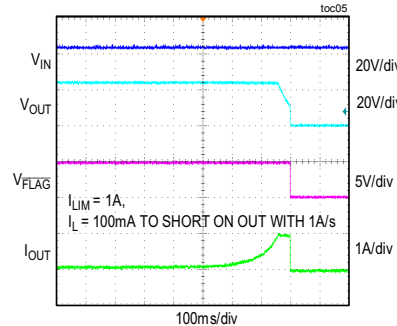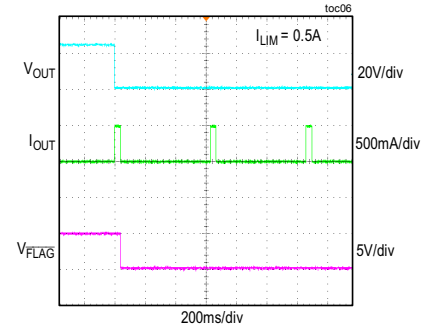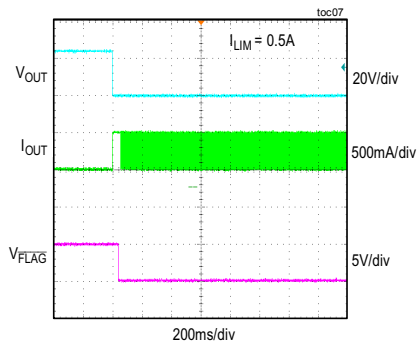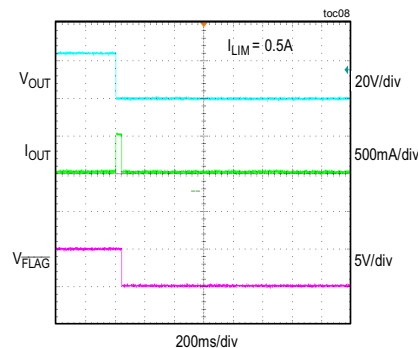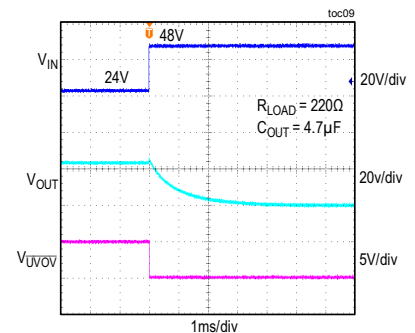*Default position.

MAX17608 EV Kit Performance Report(V_{IN} = 24V, unless otherwise noted.)**POWER-UP RESPONSE
WITH 330 μ F CAPACITOR AT NO LOAD****REVERSE-BLOCKING RESPONSE****THERMAL SHUTDOWN DUE TO
OUTPUT SHORT-CIRCUIT****OUTPUT SHORT-CIRCUIT RESPONSE
t_{BLANK} = 40ms****CURRENT-LIMIT RESPONSE****AUTORETRY CURRENT-LIMIT RESPONSE****CONTINUOUS CURRENT-LIMIT RESPONSE****LATCH-OFF CURRENT-LIMIT RESPONSE****OVERVOLTAGE-FAULT RESPONSE**

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A,
OV, UV, Reverse-Voltage Protector with
Forward/Reverse Current Limit

Component Suppliers

SUPPLIER	WEBSITE
Bourns, Inc.	www.bourns.com
Fairchild Semiconductor	www.fairchildsemi.com
FCI Electronics Interconnection Solutions	www.fciconnect.com
Lite-On, Inc.	www.us.liteon.com
Lumex Inc.	www.lumex.com
Murata Americas	www.murata.com
Panasonic Corp.	www.panasonic.com
Phoenix Contact, Inc.	www.phoenixcontact.com
STMicroelectronics	www.us.st.com
TDK Corp.	www.component.tdk.com

Note: Indicate that you are using the MAX17608 when contacting these component suppliers.

Ordering Information

PART	TYPE
MAX17608EVKIT#	EV Kit

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A,
OV, UV, Reverse-Voltage Protector with
Forward/Reverse Current Limit


MAX17608 EV Kit Bill of Materials

PART REFERENCE	QTY	DESCRIPTION	MANUFACTURER PART NUMBER
C1	1	1µF 10%, 25V X7R ceramic capacitors (0603)	Murata GRM188R61E105KA12
C2	1	0.47µF 10%, 100V X7R ceramic capacitors (0805)	Murata GRM21BR72A474KA73L
C3	1	4.7µF 10%, 100V X7R ceramic capacitors (1210)	Murata GRM32ER72A475KE14
C4	1	330µF 20%, 50V aluminium (10mm)	Panasonic EEU-EB1H331
D1	1	TVS Diode, 600W (SMB)	Bourns SMBJ40CA
D2	1	Power Schottky Diode, 60V, 5A (SMC)	Diodes Incorporated B560CQ-13-F
D3	1	Power Schottky Diode, 60V, 1A (SMA)	Diodes Incorporated B160-13-F
J1	1	USB B connector	FCI Connect 61729-0010BLF
J2, J3	2	2-Pin Green PC Terminal Block	Degson Electronics DG128-5.0-02P-14
JU1	1	2x4 Dual-Row Header, 0.1in centers, cut to fit	Sullins Connector PBC04DAAN
JU2, JU3, JU6, JU7	4	2-Pin Single-Row Header, 0.1in centers, cut to fit	Molex Connector 22-28-4023
JU4, JU5	2	3-Pin Single-Row Header, 0.1in centers, cut to fit	Sullins Connector PEC03SAAN
LED1	1	Green LED (1206)	Kingbright APT3216SGC
R1	1	1k ohm 1% resistors (0603)	-
R2, R3	2	10k ohm 1% resistors (0402)	-
R4	1	150k ohm 5% resistor (0402)	-
R5, R13	2	5k ohm 0.1% resistors (0402)	-
R6	1	15k ohm 1% resistors (0402)	-
R7	1	3k ohm 1% resistors (0402)	-
R8	1	1.5k ohm 1% resistors (0402)	-
R9, R11	2	2.2M ohm 5% resistors (0402)	-
R10	1	1.1M ohm 1% resistors (0402)	-
R12	1	95.3k ohm 1% resistors (0402)	-
R14	1	20k ohm 1% resistors (0402)	-
R15	1	1k ohm 1% resistors (0402)	-
R16	1	20k ohm Trimmer Potentiometers	Bourns 3296W-1-203LF
TP1, TP9, TP11-TP13	5	White Test Point	Keystone Electronics Corp 5002
TP2, TP4, TP5, TP7	4	Black Test Point	Keystone Electronics Corp 5001
TP3, TP6, TP8	3	Red Test Point	Keystone Electronics Corp 5000
TP10	1	Green Test Point	Keystone Electronics Corp 5116
U1	1	4.5V to 60V, 1A, OV, UV, Reverse Voltage Protector with Forward/Reverse Current Limit (12-pin TDFN-EP, 3mmx3mm)	MAX17608ATC+
C5	0	Not Installed; 330µF 20%, 50V aluminium (10mm)	Panasonic EEU-EB1H331
D4	0	Not Installed; TVS Diode, 600W (SMB)	Bourns SMBJ40CA
PCB	1	PCB: MAX17608 Evaluation Kit	-

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A,
OV, UV, Reverse-Voltage Protector with
Forward/Reverse Current Limit

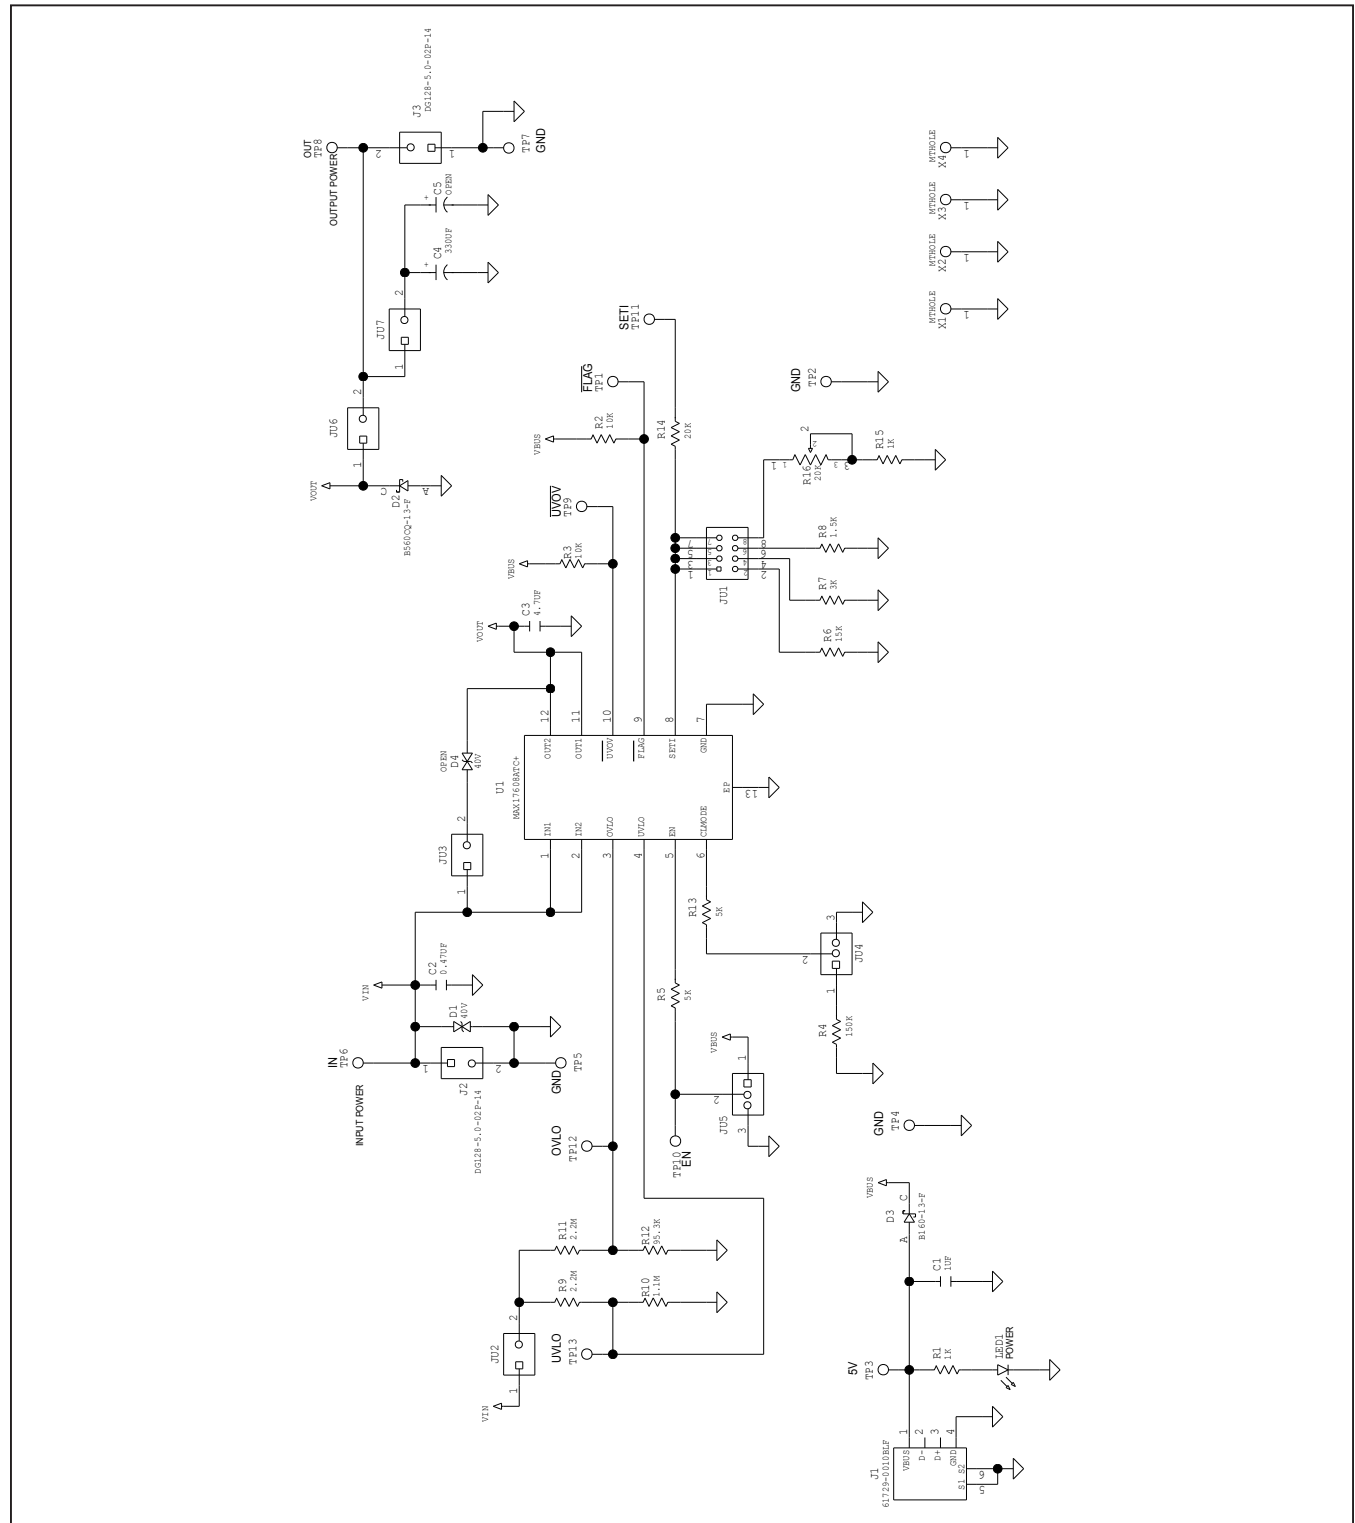
MAX17608 EV Kit Schematic




MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A,
OV, UV, Reverse-Voltage Protector with
Forward/Reverse Current Limit

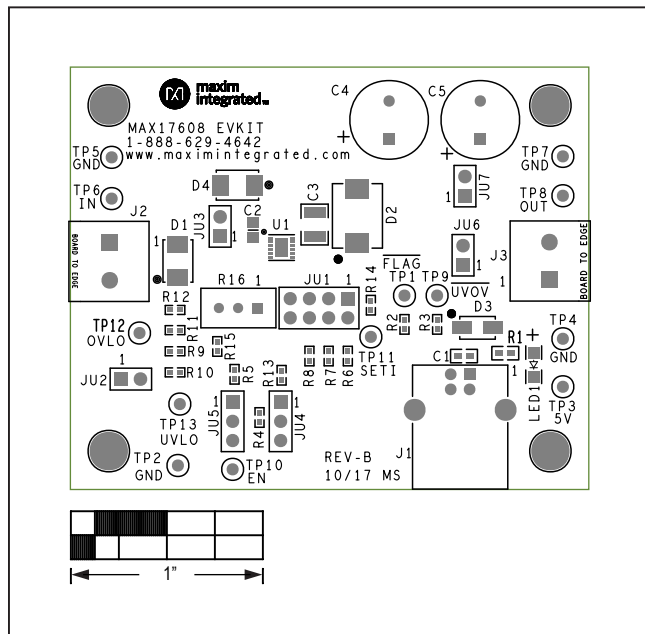
MAX17608 EV Kit PCB Layout



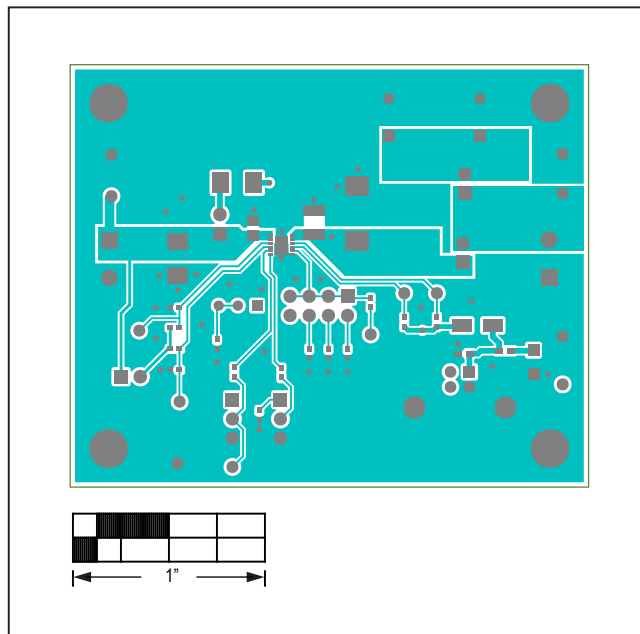MAX17608 EV Kit PCB Layout—Top Silkscreen



MAX17608 EV Kit PCB Layout—Top Layer

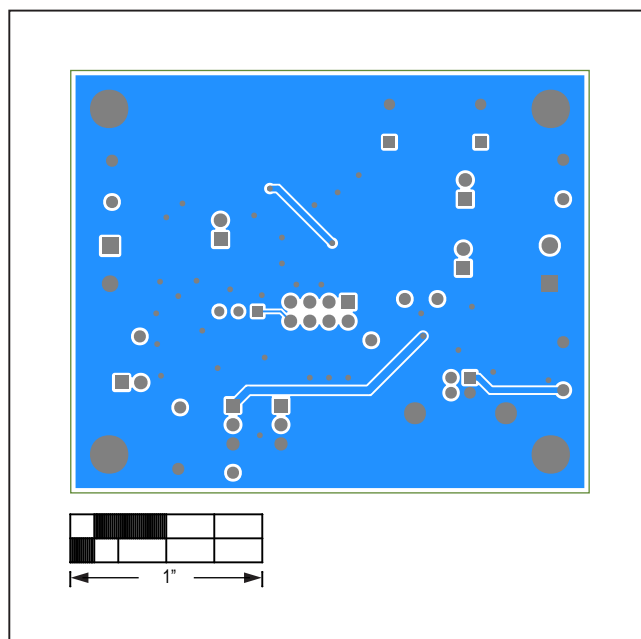

MAX17608 EV Kit PCB Layout—Bottom Layer

MAX17608 Evaluation Kit

Evaluates: MAX17608 – 4.5V to 60V, 1A,
OV, UV, Reverse-Voltage Protector with
Forward/Reverse Current Limit

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
0	1/18	Initial release	—

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at www.maximintegrated.com.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331