

# Ultra-Low Power Supervisor with Power-Fail Output, Selectable Thresholds

## FEATURES

- 500nA Quiescent Current
- $\pm 1.5\%$  (Max) Accuracy over Temperature
- Integrated Precision Attenuators
- Eight Pin-Selectable Reset Thresholds
- Eight Pin-Selectable Power-Fail Thresholds
- Early Warning Power-Fail Output
- 200ms Reset Timeout
- Manual Reset Input
- Compact 8-Lead, 2mm  $\times$  2mm DFN and TSOT-23 (ThinSOT™) Packages

## APPLICATIONS

- Portable Equipment
- Battery-Powered Equipment
- Security Systems
- Point-of-Sale Devices
- Wireless Systems


LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. ThinSOT is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## DESCRIPTION

The LTC®2935 ultra-low power voltage monitor provides system initialization, power-fail warning and reset generation functions. Low quiescent current (500nA typical) makes the LTC2935 an ideal choice for battery-operated applications.

Three binary threshold-select inputs configure one of eight integrated reset thresholds, ranging from 1.6V to 3.45V in pre-determined increments. Early warning of an impending low voltage condition is provided at the power-fail output (PFO), whose threshold is above the configured reset threshold. Supervisory circuits monitor  $V_{CC}$  and pull  $\overline{RST}$  low when  $V_{CC}$  drops below the configured reset threshold. When  $V_{CC}$  is rising from an under-threshold condition, an internal reset timer is started after exceeding the reset threshold by 5%. A 200ms reset timeout delays the return of the  $\overline{RST}$  output to a high state. A pushbutton switch connected to the  $\overline{MR}$  input is typically used to force a manual reset. Outputs  $\overline{RST}$  and PFO are available with open-drain (LTC2935-1/LTC2935-3) or active pull-up (LTC2935-2/LTC2935-4) circuits. Operating temperature range is from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

## TYPICAL APPLICATION

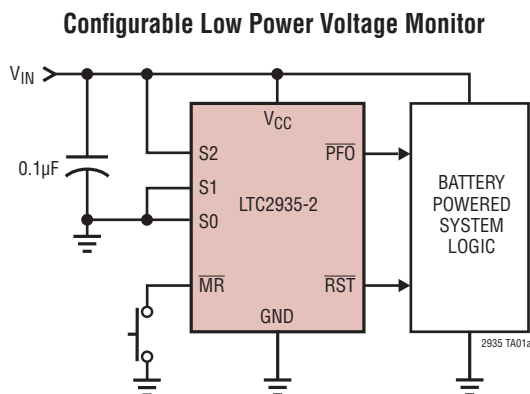

Falling Threshold Selection Table

| LTC2935-1/LTC2935-2 |                          | LTC2935-3/LTC2935-4 |                          |      |      |      |
|---------------------|--------------------------|---------------------|--------------------------|------|------|------|
| RESET THRESHOLD (V) | POWER-FAIL THRESHOLD (V) | RESET THRESHOLD (V) | POWER-FAIL THRESHOLD (V) |      |      |      |
| 3.30                | 3.45                     | 2.44                | 2.56                     | Low  | Low  | Low  |
| 3.15                | 3.30                     | 2.32                | 2.44                     | Low  | Low  | High |
| 3.00                | 3.15                     | 2.20                | 2.32                     | Low  | High | High |
| 2.85                | 3.00                     | 2.08                | 2.20                     | Low  | High | Low  |
| 2.70                | 2.85                     | 1.96                | 2.08                     | High | High | Low  |
| 2.55                | 2.70                     | 1.84                | 1.96                     | High | Low  | Low  |
| 2.40                | 2.55                     | 1.72                | 1.84                     | High | Low  | High |
| 2.25                | 2.40                     | 1.60                | 1.72                     | High | High | High |

# LTC2935

## ABSOLUTE MAXIMUM RATINGS

(Notes 1, 2)

Input Voltages

$V_{CC}$  ..... -0.3V to 6V

S2, S1, S0,  $\overline{MR}$  ..... -0.3V to ( $V_{CC} + 0.3V$ )

Output Voltages ( $\overline{PFO}$ ,  $\overline{RST}$ )

LTC2935-1/LTC2935-3 ..... -0.3V to 6V

LTC2935-2/LTC2935-4 ..... -0.3V to ( $V_{CC} + 0.3V$ )

RMS Currents

$\overline{PFO}$ ,  $\overline{RST}$  .....  $\pm 5mA$

Operating Ambient Temperature Range

LTC2935C ..... 0°C to 70°C


LTC2935I ..... -40°C to 85°C

Storage Temperature Range ..... -65°C to 150°C

Lead Temperature (Soldering, 10 sec)

TSOT-23 Package ..... 300°C

## PIN CONFIGURATION

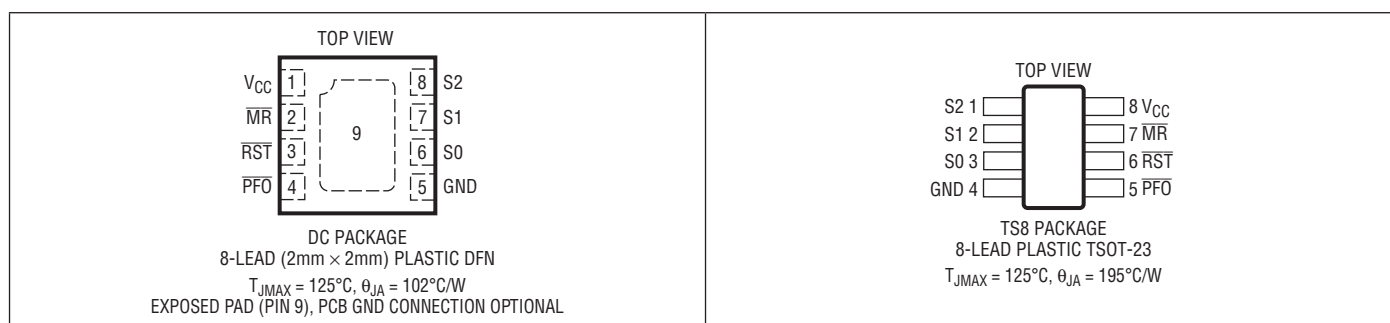

## ORDER INFORMATION

Lead Free Finish

| TAPE AND REEL (MINI) | TAPE AND REEL       | PART MARKING* | PACKAGE DESCRIPTION            | TEMPERATURE RANGE |
|----------------------|---------------------|---------------|--------------------------------|-------------------|
| LTC2935CTS8-1#TRMPBF | LTC2935CTS8-1#TRPBF | LTDPW         | 8-Lead Plastic TSOT-23         | 0°C to 70°C       |
| LTC2935ITS8-1#TRMPBF | LTC2935ITS8-1#TRPBF | LTDPW         | 8-Lead Plastic TSOT-23         | -40°C to 85°C     |
| LTC2935CTS8-2#TRMPBF | LTC2935CTS8-2#TRPBF | LTQDB         | 8-Lead Plastic TSOT-23         | 0°C to 70°C       |
| LTC2935ITS8-2#TRMPBF | LTC2935ITS8-2#TRPBF | LTQDB         | 8-Lead Plastic TSOT-23         | -40°C to 85°C     |
| LTC2935CTS8-3#TRMPBF | LTC2935CTS8-3#TRPBF | LTFHV         | 8-Lead Plastic TSOT-23         | 0°C to 70°C       |
| LTC2935ITS8-3#TRMPBF | LTC2935ITS8-3#TRPBF | LTFHV         | 8-Lead Plastic TSOT-23         | -40°C to 85°C     |
| LTC2935CTS8-4#TRMPBF | LTC2935CTS8-4#TRPBF | LTFHX         | 8-Lead Plastic TSOT-23         | 0°C to 70°C       |
| LTC2935ITS8-4#TRMPBF | LTC2935ITS8-4#TRPBF | LTFHX         | 8-Lead Plastic TSOT-23         | -40°C to 85°C     |
| LTC2935CDC-1#TRMPBF  | LTC2935CDC-1#TRPBF  | LDPX          | 8-Lead (2mm × 2mm) Plastic DFN | 0°C to 70°C       |
| LTC2935IDC-1#TRMPBF  | LTC2935IDC-1#TRPBF  | LDPX          | 8-Lead (2mm × 2mm) Plastic DFN | -40°C to 85°C     |
| LTC2935CDC-2#TRMPBF  | LTC2935CDC-2#TRPBF  | LDQC          | 8-Lead (2mm × 2mm) Plastic DFN | 0°C to 70°C       |
| LTC2935IDC-2#TRMPBF  | LTC2935IDC-2#TRPBF  | LDQC          | 8-Lead (2mm × 2mm) Plastic DFN | -40°C to 85°C     |
| LTC2935CDC-3#TRMPBF  | LTC2935CDC-3#TRPBF  | LFHW          | 8-Lead (2mm × 2mm) Plastic DFN | 0°C to 70°C       |
| LTC2935IDC-3#TRMPBF  | LTC2935IDC-3#TRPBF  | LFHW          | 8-Lead (2mm × 2mm) Plastic DFN | -40°C to 85°C     |
| LTC2935CDC-4#TRMPBF  | LTC2935CDC-4#TRPBF  | LFHY          | 8-Lead (2mm × 2mm) Plastic DFN | 0°C to 70°C       |
| LTC2935IDC-4#TRMPBF  | LTC2935IDC-4#TRPBF  | LFHY          | 8-Lead (2mm × 2mm) Plastic DFN | -40°C to 85°C     |

TRM = 500 pieces. \*Temperature grades are identified by a label on the shipping container.

Consult LTC Marketing for parts specified with wider operating temperature ranges.

Consult LTC Marketing for information on lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

2935fa

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 3.6\text{V}$ , unless otherwise noted. (Note 2)

| SYMBOL                                                                                               | PARAMETER                                                   | CONDITIONS                                                       |        | MIN                       | TYP     | MAX                       | UNITS         |
|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------------------------|--------|---------------------------|---------|---------------------------|---------------|
| $V_{CC}$                                                                                             | $V_{CC}$ Input Supply Voltage                               |                                                                  | ●      |                           |         | 5.5                       | V             |
| $I_{CC}$                                                                                             | $V_{CC}$ Input Supply Current                               |                                                                  | ●      | 225                       | 500     | 1000                      | nA            |
| <b>Reset Thresholds (LTC2935-1/LTC2935-2)</b>                                                        |                                                             |                                                                  |        |                           |         |                           |               |
| $V_{RTF1}$                                                                                           | Reset Threshold 1 ( $V_{CC}$ Falling)                       | $S2 = \text{Low} : S1 = \text{Low} : S0 = \text{Low}$            | ●      | 3.251                     | 3.300   | 3.349                     | V             |
| $V_{RTF2}$                                                                                           | Reset Threshold 2 ( $V_{CC}$ Falling)                       | $S2 = \text{Low} : S1 = \text{Low} : S0 = \text{High}$           | ●      | 3.103                     | 3.150   | 3.197                     | V             |
| $V_{RTF3}$                                                                                           | Reset Threshold 3 ( $V_{CC}$ Falling)                       | $S2 = \text{Low} : S1 = \text{High} : S0 = \text{High}$          | ●      | 2.955                     | 3.000   | 3.045                     | V             |
| $V_{RTF4}$                                                                                           | Reset Threshold 4 ( $V_{CC}$ Falling)                       | $S2 = \text{Low} : S1 = \text{High} : S0 = \text{Low}$           | ●      | 2.808                     | 2.850   | 2.892                     | V             |
| $V_{RTF5}$                                                                                           | Reset Threshold 5 ( $V_{CC}$ Falling)                       | $S2 = \text{High} : S1 = \text{High} : S0 = \text{Low}$          | ●      | 2.660                     | 2.700   | 2.740                     | V             |
| $V_{RTF6}$                                                                                           | Reset Threshold 6 ( $V_{CC}$ Falling)                       | $S2 = \text{High} : S1 = \text{Low} : S0 = \text{Low}$           | ●      | 2.512                     | 2.550   | 2.588                     | V             |
| $V_{RTF7}$                                                                                           | Reset Threshold 7 ( $V_{CC}$ Falling)                       | $S2 = \text{High} : S1 = \text{Low} : S0 = \text{High}$          | ●      | 2.364                     | 2.400   | 2.436                     | V             |
| $V_{RTF8}$                                                                                           | Reset Threshold 8 ( $V_{CC}$ Falling)                       | $S2 = \text{High} : S1 = \text{High} : S0 = \text{High}$         | ●      | 2.217                     | 2.250   | 2.283                     | V             |
| $\Delta V_{RTF}$                                                                                     | Reset Threshold Differential $V_{RTF(N+1)} - V_{RTF(N)}$    | (Note 3)                                                         | ●      | 142                       | 150     | 158                       | mV            |
| $V_{RT(HYST)}$                                                                                       | Reset Threshold Hysteresis ( $V_{CC}$ Rising)               | Relative to Any Selected Reset Threshold                         | ●      | 4.5                       | 5       | 6                         | %             |
| $t_{UVR}$                                                                                            | Undervoltage Detect to $\overline{RST}$ Falling             | $V_{CC}$ Below Threshold by 1% (Note 3)                          |        |                           | 1       |                           | ms            |
| <b>Reset Thresholds (LTC2935-3/LTC2935-4)</b>                                                        |                                                             |                                                                  |        |                           |         |                           |               |
| $V_{RTF1}$                                                                                           | Reset Threshold 1 ( $V_{CC}$ Falling)                       | $S2 = \text{Low} : S1 = \text{Low} : S0 = \text{Low}$            | ●      | 2.404                     | 2.440   | 2.476                     | V             |
| $V_{RTF2}$                                                                                           | Reset Threshold 2 ( $V_{CC}$ Falling)                       | $S2 = \text{Low} : S1 = \text{Low} : S0 = \text{High}$           | ●      | 2.286                     | 2.320   | 2.354                     | V             |
| $V_{RTF3}$                                                                                           | Reset Threshold 3 ( $V_{CC}$ Falling)                       | $S2 = \text{Low} : S1 = \text{High} : S0 = \text{High}$          | ●      | 2.167                     | 2.200   | 2.233                     | V             |
| $V_{RTF4}$                                                                                           | Reset Threshold 4 ( $V_{CC}$ Falling)                       | $S2 = \text{Low} : S1 = \text{High} : S0 = \text{Low}$           | ●      | 2.049                     | 2.080   | 2.111                     | V             |
| $V_{RTF5}$                                                                                           | Reset Threshold 5 ( $V_{CC}$ Falling)                       | $S2 = \text{High} : S1 = \text{High} : S0 = \text{Low}$          | ●      | 1.931                     | 1.960   | 1.989                     | V             |
| $V_{RTF6}$                                                                                           | Reset Threshold 6 ( $V_{CC}$ Falling)                       | $S2 = \text{High} : S1 = \text{Low} : S0 = \text{Low}$           | ●      | 1.813                     | 1.840   | 1.867                     | V             |
| $V_{RTF7}$                                                                                           | Reset Threshold 7 ( $V_{CC}$ Falling)                       | $S2 = \text{High} : S1 = \text{Low} : S0 = \text{High}$          | ●      | 1.695                     | 1.720   | 1.745                     | V             |
| $V_{RTF8}$                                                                                           | Reset Threshold 8 ( $V_{CC}$ Falling)                       | $S2 = \text{High} : S1 = \text{High} : S0 = \text{High}$         | ●      | 1.576                     | 1.600   | 1.624                     | V             |
| $\Delta V_{RTF}$                                                                                     | Reset Threshold Differential $V_{RTF(N+1)} - V_{RTF(N)}$    | (Note 3)                                                         | ●      | 112                       | 120     | 128                       | mV            |
| $V_{RT(HYST)}$                                                                                       | Reset Threshold Hysteresis ( $V_{CC}$ Rising)               | Relative to Any Selected Reset Threshold                         | ●      | 4.5                       | 5       | 6                         | %             |
| $t_{UVR}$                                                                                            | Undervoltage Detect to $\overline{RST}$ Falling             | $V_{CC}$ Below Threshold by 1% (Note 3)                          |        |                           | 1       |                           | ms            |
| <b>Power-Fail Thresholds (LTC2935-1/LTC2935-2)</b>                                                   |                                                             |                                                                  |        |                           |         |                           |               |
| $\Delta V_{PFT}$                                                                                     | Power-Fail Threshold Differential $V_{PFT(N)} - V_{RTF(N)}$ | Any Selected Reset Threshold ( $V_{CC}$ Falling)                 | ●      | 100                       | 150     | 200                       | mV            |
| $V_{PFT(HYST)}$                                                                                      | Power-Fail Threshold Hysteresis                             | Relative to Any Selected Power-Fail Threshold ( $V_{CC}$ Rising) | ●      | 2                         | 2.5     | 3.5                       | %             |
| $t_{UVP}$                                                                                            | Undervoltage Detect to $\overline{PFO}$ Falling             | $V_{CC}$ Below Threshold by 1% (Note 3)                          |        |                           | 1       |                           | ms            |
| <b>Power-Fail Thresholds (LTC2935-3/LTC2935-4)</b>                                                   |                                                             |                                                                  |        |                           |         |                           |               |
| $\Delta V_{PFT}$                                                                                     | Power-Fail Threshold Differential $V_{PFT(N)} - V_{RTF(N)}$ | Any Selected Reset Threshold ( $V_{CC}$ Falling)                 | ●      | 70                        | 120     | 170                       | mV            |
| $V_{PFT(HYST)}$                                                                                      | Power-Fail Threshold Hysteresis                             | Relative to Any Selected Power-Fail Threshold ( $V_{CC}$ Rising) | ●      | 2                         | 2.5     | 3                         | %             |
| $t_{UVP}$                                                                                            | Undervoltage Detect to $\overline{PFO}$ Falling             | $V_{CC}$ Below Threshold by 1% (Note 3)                          |        |                           | 1       |                           | ms            |
| <b>Control Inputs: <math>\overline{MR}</math>, <math>S2</math>, <math>S1</math>, <math>S0</math></b> |                                                             |                                                                  |        |                           |         |                           |               |
| $V_{IN(TH)}$                                                                                         | Control Input Threshold                                     | $S2, S1, S0$<br>$\overline{MR}$                                  | ●<br>● | $0.3 \cdot V_{CC}$<br>0.4 |         | $0.7 \cdot V_{CC}$<br>1.4 | V<br>V        |
| $t_{PW}$                                                                                             | Input Pulse Width                                           | $\overline{MR}$                                                  | ●      | 20                        |         |                           | $\mu\text{s}$ |
| $t_{PD}$                                                                                             | Propagation Delay to $\overline{RST}$ Falling               | Manual Reset Falling                                             | ●      | 2                         | 5       | 20                        | $\mu\text{s}$ |
| $R_{PU}$                                                                                             | Internal Pull-Up Resistance                                 | $\overline{MR}$                                                  | ●      | 600                       | 900     | 1200                      | k $\Omega$    |
| $I_{LK}$                                                                                             | Input Leakage Current                                       | $S2, S1, S0 = V_{CC}$ or GND                                     | ●      |                           | $\pm 1$ | $\pm 10$                  | nA            |

2935fa

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ ,  $V_{CC} = 3.6\text{V}$ , unless otherwise noted. (Note 2)

| SYMBOL                                                                          | PARAMETER                                | CONDITIONS                                                                 |   | MIN                | TYP | MAX | UNITS |
|---------------------------------------------------------------------------------|------------------------------------------|----------------------------------------------------------------------------|---|--------------------|-----|-----|-------|
| Reset and Power-Fail Outputs: $\overline{\text{RST}}$ , $\overline{\text{PFO}}$ |                                          |                                                                            |   |                    |     |     |       |
| $V_{OL}$                                                                        | Voltage Output Low                       | $V_{CC} = 1\text{V}$ , 200 $\mu\text{A}$ Pull-Up Current                   | ● |                    | 25  | 100 | mV    |
|                                                                                 |                                          | $V_{CC} = 3\text{V}$ , 3mA Pull-Up Current<br>$S_2, S_1, S_0 = \text{Low}$ | ● |                    | 50  | 150 | mV    |
| $V_{OH}$                                                                        | Voltage Output High (LTC2935-2)          | −200 $\mu\text{A}$ Pull-Down Current                                       | ● | $0.7 \cdot V_{CC}$ |     |     | V     |
| $I_{OH}$                                                                        | Current Output High, Leakage (LTC2935-1) | $V_{\overline{\text{RST}}}, V_{\overline{\text{PFO}}} = 3.6\text{V}$       | ● |                    | ±1  | ±10 | nA    |
| $t_{\overline{\text{RST}}}$                                                     | Reset Timeout Period                     |                                                                            | ● | 140                | 200 | 260 | ms    |







**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** All currents into pins are positive, all voltages are referenced to GND unless otherwise noted.



**Note 3:** Guaranteed by design. Characterized, but not production tested.

## TYPICAL PERFORMANCE CHARACTERISTICS

$T_A = 25^\circ\text{C}$ , unless otherwise noted.

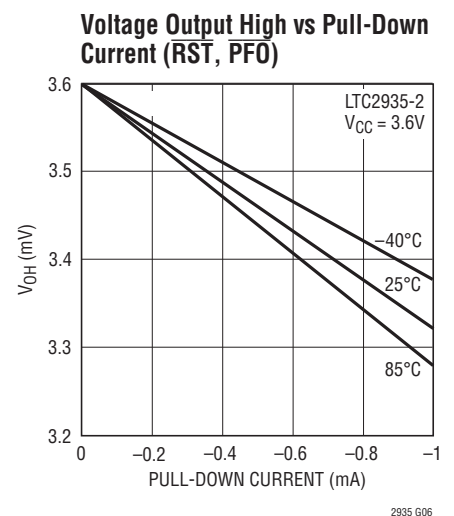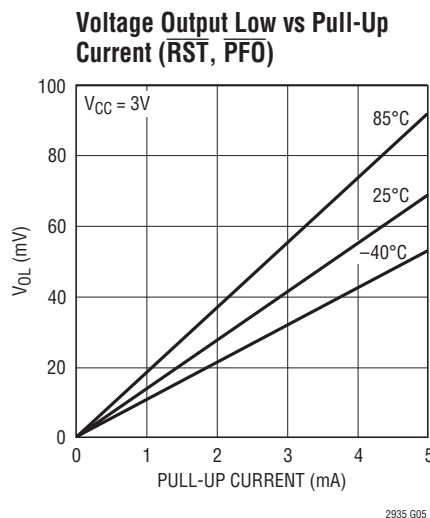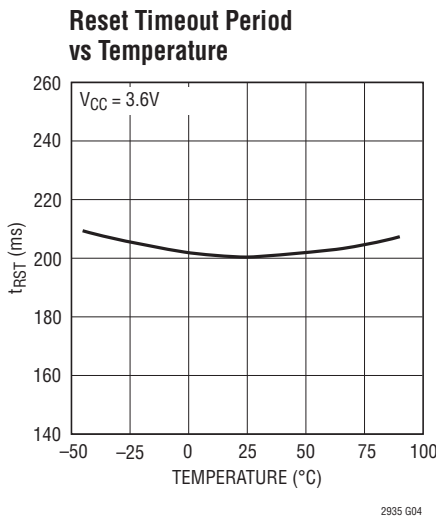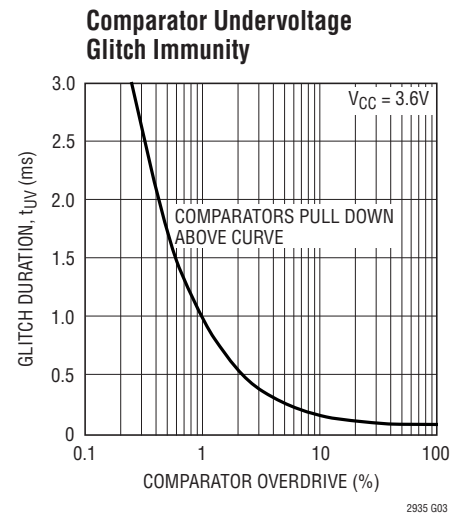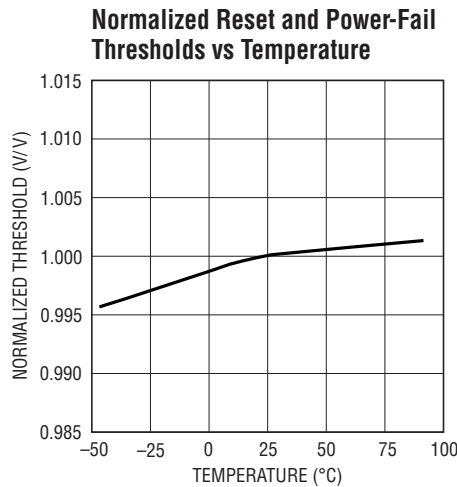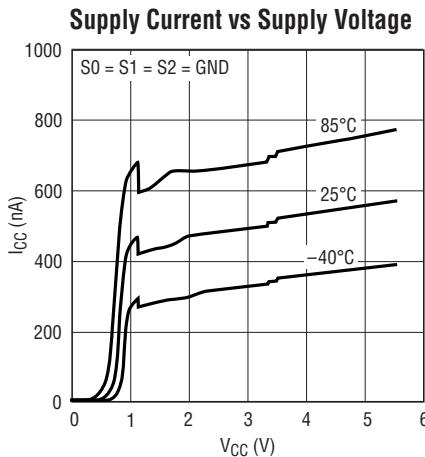

## TYPICAL PERFORMANCE CHARACTERISTICS $T_A = 25^\circ\text{C}$ , unless otherwise noted.

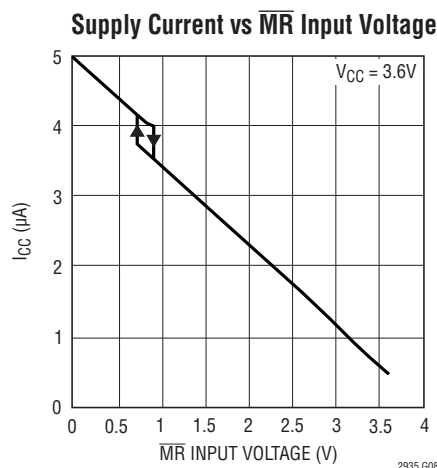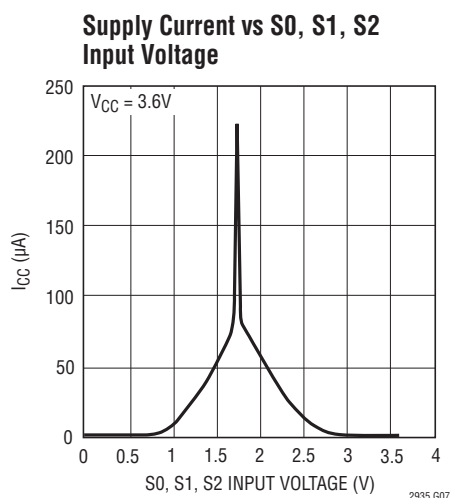

## PIN FUNCTIONS

**Exposed Pad (DFN Only):** Exposed Pad may be left floating or connected to device ground.

**GND:** Device ground.

**$\overline{\text{MR}}$ :** Manual Reset Input. Attach a pushbutton switch between this input and ground. A logic low on this input pulls  $\overline{\text{RST}}$  low. When the  $\overline{\text{MR}}$  input returns to logic high,  $\overline{\text{RST}}$  returns high after 200ms. Tie to  $V_{CC}$  if unused.

**$\overline{\text{PFO}}$ :** Power-Fail Output.  $\overline{\text{PFO}}$  pulls low when  $V_{CC}$  falls below the power-fail threshold. The power-fail threshold is above the configured falling reset threshold by a pre-determined margin.  $\overline{\text{PFO}}$  is released when  $V_{CC}$  rises above the power-fail threshold by 2.5%.  $\overline{\text{PFO}}$  is available with open-drain (LTC2935-1/LTC2935-3) or active pull-up (LTC2935-2/LTC2935-4) outputs. Leave open if unused.


**$\overline{\text{RST}}$ :** Reset Output.  $\overline{\text{RST}}$  pulls low when  $V_{CC}$  falls below the reset threshold.  $\overline{\text{RST}}$  is released 200ms after  $V_{CC}$  exceeds the reset threshold plus 5% hysteresis.  $\overline{\text{RST}}$  is available with open-drain (LTC2935-1/LTC2935-3) or active pull-up (LTC2935-2/LTC2935-4) outputs. Leave open if unused.

**S2, S1, S0:** Threshold Selection Inputs. Tie to GND or  $V_{CC}$  for required reset threshold. See the Falling Threshold Selection Table on page 1 for settings.


**$V_{CC}$ :** Power Supply and Monitored Voltage Input. Bypass  $V_{CC}$  with a 0.1 $\mu\text{F}$  capacitor to GND.

# LTC2935

## BLOCK DIAGRAM

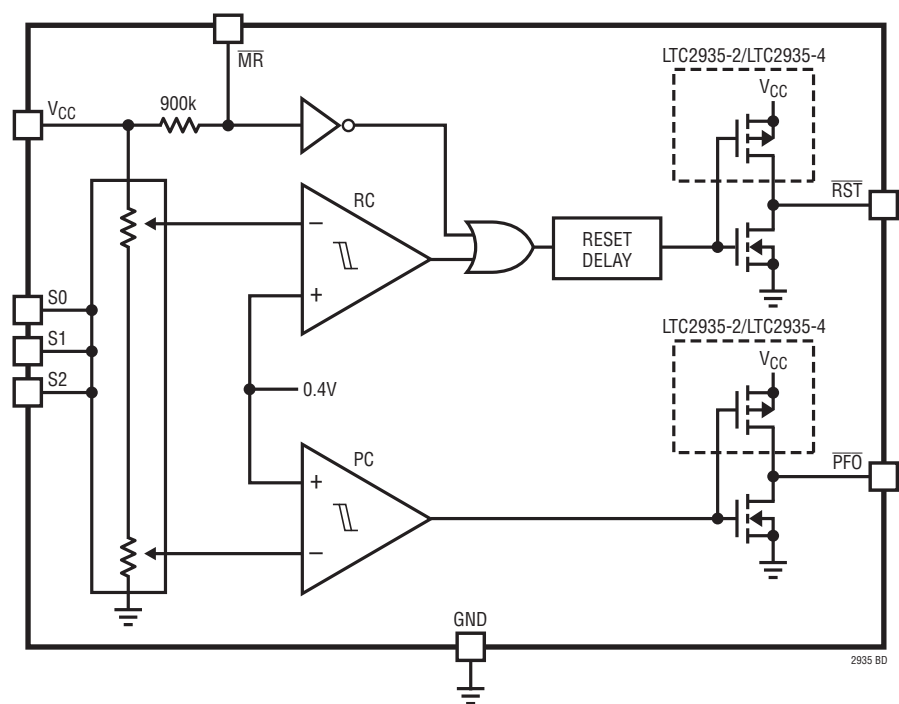

## TIMING DIAGRAM

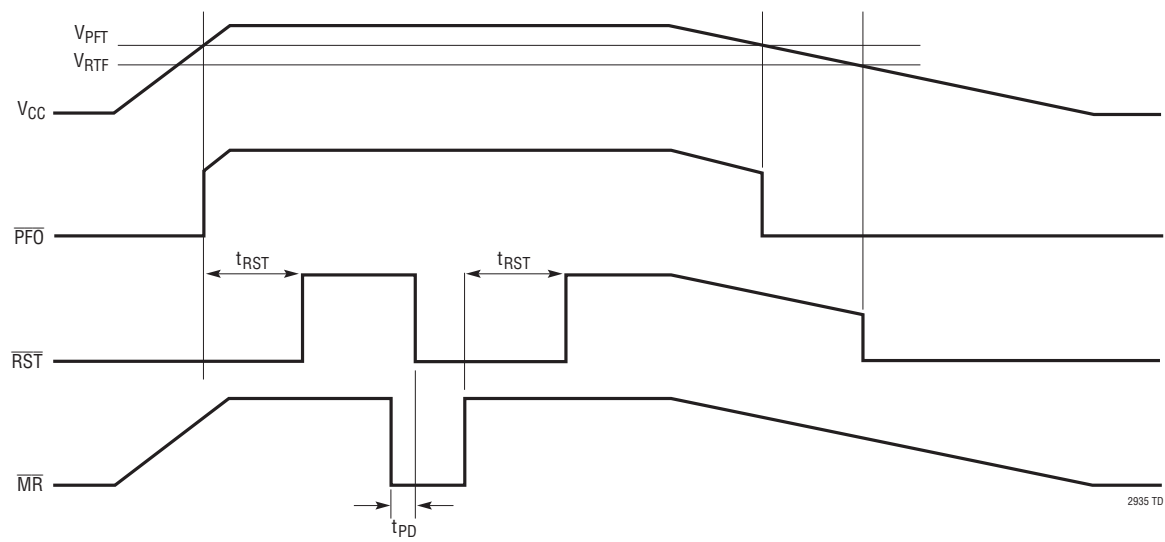

## APPLICATIONS INFORMATION

### VOLTAGE MONITORING

Unmanaged power can cause various system problems. At power-up, voltage fluctuation around critical thresholds can cause improper system or processor initialization. The LTC2935 provides power management capabilities for the system power-up phase. The supervisory device issues a system reset after the monitored voltage has stabilized. Built-in hysteresis and filtering ensures that fluctuations due to load transients or supply noise do not cause chattering of the status outputs. Comparator undervoltage glitch immunity is shown in the Typical Performance Characteristics section. The curve demonstrates the transient amplitude and width required to switch the comparators.

Because many batteries exhibit large series resistance, load currents can cause significant voltage drops. The low DC current draw of the LTC2935 (at any input voltage) does not add to the loading problem. When voltage is initially applied to  $V_{CC}$ ,  $\overline{RST}$  and  $\overline{PFO}$  pull low once there is enough voltage to turn on the pull-down devices (1V maximum).

If the monitored supply voltage falls to the power-fail threshold, the built-in power-fail comparator pulls  $\overline{PFO}$  low. At this point, there remains a voltage margin before the  $\overline{RST}$  output pulls low.  $\overline{PFO}$  remains low until  $V_{CC}$  rises above the power-fail threshold plus 2.5% hysteresis.  $\overline{PFO}$  is typically used in signal preparation for controlled shutdown. For example, the  $\overline{PFO}$  output may be connected to a processor nonmaskable interrupt. Upon interrupt, the processor may begin shutdown procedures. Shutdown events may include supply sequencing and/or storage/erasure of system state in nonvolatile memory.

If the monitored voltage drops below the reset threshold,  $\overline{RST}$  pulls low until  $V_{CC}$  rises above the reset threshold plus 5% hysteresis. This may occur through battery charging

or replacement. An internal reset timer delays the return of the  $\overline{RST}$  output to a high state to provide settling and initialization time. The  $\overline{RST}$  output is typically connected to a processor reset input.

Few, if any external components are necessary for reliable operation. However, a decoupling capacitor between  $V_{CC}$  and ground is recommended (0.01 $\mu$ F minimum).

### Threshold Configuration

The LTC2935 monitors and compares the  $V_{CC}$  voltage against two internal thresholds during operation. The higher threshold (power-fail) is the level used for early warning of a low voltage condition, reported on the  $\overline{PFO}$  output. The lower threshold (reset) is the level at which the  $\overline{RST}$  output pulls low. Use system requirements to choose the appropriate reset threshold from Table 1.

**Table 1. Falling Threshold Selection**

| LTC2935-1/LTC2935-2 |                          | LTC2935-3/LTC2935-4 |                          | S2   | S1   | S0   |
|---------------------|--------------------------|---------------------|--------------------------|------|------|------|
| RESET THRESHOLD (V) | POWER-FAIL THRESHOLD (V) | RESET THRESHOLD (V) | POWER-FAIL THRESHOLD (V) |      |      |      |
| 3.30                | 3.45                     | 2.44                | 2.56                     | Low  | Low  | Low  |
| 3.15                | 3.30                     | 2.32                | 2.44                     | Low  | Low  | High |
| 3.00                | 3.15                     | 2.20                | 2.32                     | Low  | High | High |
| 2.85                | 3.00                     | 2.08                | 2.20                     | Low  | High | Low  |
| 2.70                | 2.85                     | 1.96                | 2.08                     | High | High | Low  |
| 2.55                | 2.70                     | 1.84                | 1.96                     | High | Low  | Low  |
| 2.40                | 2.55                     | 1.72                | 1.84                     | High | Low  | High |
| 2.25                | 2.40                     | 1.60                | 1.72                     | High | High | High |

In the LTC2935-1/LTC2935-2 the power-fail threshold is always 150mV higher than the configured reset threshold. In the LTC2935-3/LTC2935-4 the power-fail threshold is always 120mV higher than the configured reset threshold. Set the threshold selection inputs (S2, S1, S0) accordingly.



## APPLICATIONS INFORMATION

### Selecting Output Logic Style

The LTC2935 status outputs are available in two options: open-drain (LTC2935-1/LTC2935-3) or active pull-up (LTC2935-2/LTC2935-4). The open-drain options (LTC2935-1/LTC2935-3) allow the outputs to be pulled up to a user defined voltage with a resistor. The open-drain pull-up voltage may be greater than  $V_{CC}$  (5.5V maximum), which is not always possible with inferior battery supervisors, due to internal clamps. When the status outputs are low, power is dissipated in the pull-up resistors. Recommended resistor values lie in the range between 10k and 470k. Figure 1 demonstrates typical LTC2935-1/LTC2935-3  $\overline{RST}$  output behavior.

The active pull-up options (LTC2935-2/LTC2935-4) eliminate the need for external pull-up resistors on the status outputs. Integrated pull-up devices pull the outputs up to  $V_{CC}$ . Actively pulled up outputs may not be driven above  $V_{CC}$ .

Some applications require the  $\overline{RST}$  and/or  $\overline{PFO}$  outputs to be valid with  $V_{CC}$  down to ground. Active pull-up handles this requirement with the addition of an external resistor from the output to ground. The resistor provides a path for leakage currents, preventing the output from floating to

undetermined voltages when connected to high impedance (such as CMOS logic inputs). The resistor value should be small enough to provide effective pull-down without excessively loading the pull-up circuitry. A 100k resistor from output to ground is satisfactory for most applications. When the status outputs are high, power is dissipated in the pull-down resistors. Figure 2 demonstrates typical LTC2935-2/LTC2935-4  $\overline{RST}$  output behavior.

### Manual Reset Input

When  $V_{CC}$  is above its reset threshold, and the manual reset input ( $\overline{MR}$ ) is pulled low, the  $\overline{RST}$  output is forced low.  $\overline{RST}$  remains low for 200ms after the manual reset input is released and pulled high. The manual reset input is pulled up internally through 900k to  $V_{CC}$ . If external leakage currents have the ability to pull down the manual reset input below its logic threshold, a lower value pull-up resistor, placed between  $V_{CC}$  and  $\overline{MR}$  will fix the problem.

Input  $\overline{MR}$  is often pulled down through a pushbutton switch requiring human contact. If extended ESD tolerance is required, series resistance between the switch and the input is recommended. For most applications, a 10k resistor provides sufficient current limiting.

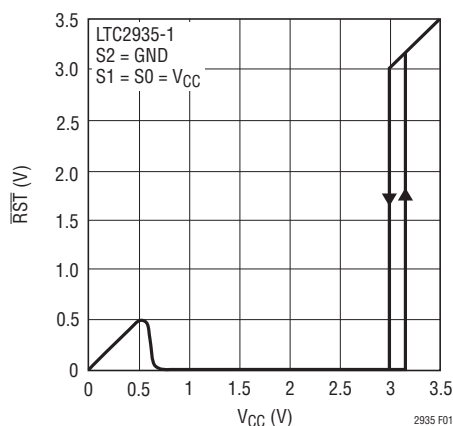


Figure 1.  $\overline{RST}$  vs  $V_{CC}$  with 10k Pull-Up


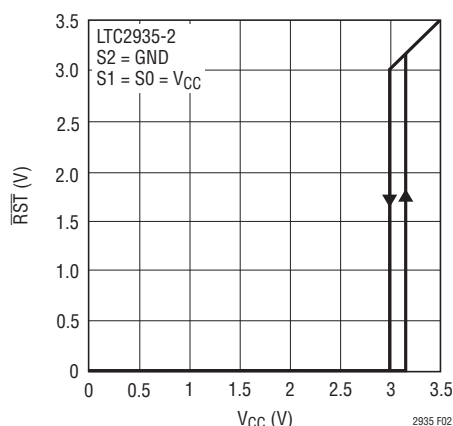


Figure 2.  $\overline{RST}$  vs  $V_{CC}$




# TYPICAL APPLICATIONS

## Battery Monitor with Interface to Low Voltage Logic

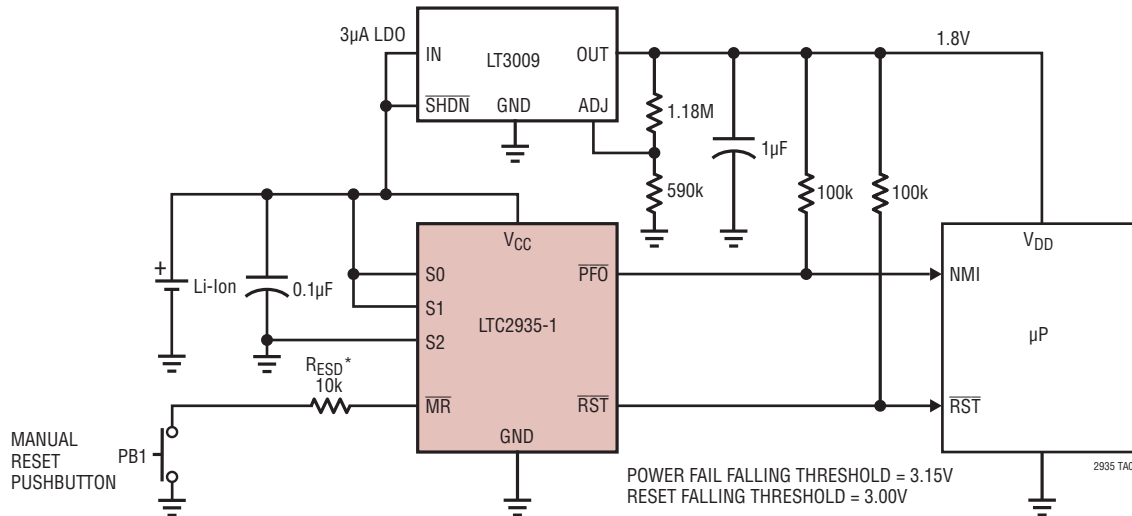


\*OPTIONAL RESISTOR FOR ADDED ESD PROTECTION

## Alkaline Cell Stack Voltage Monitor

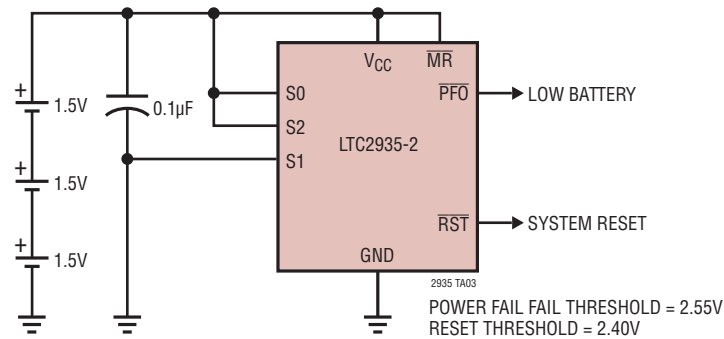


## Coin Cell Voltage Monitor

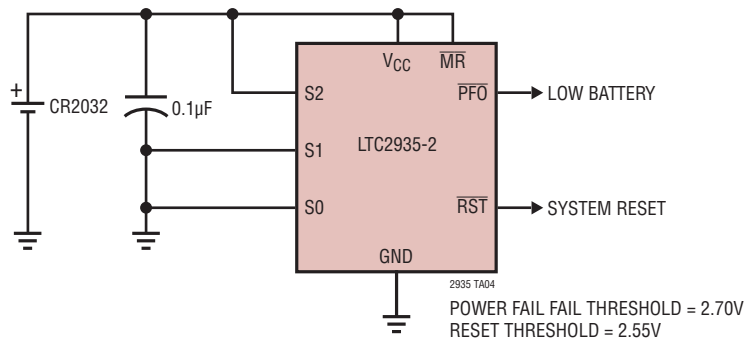


## PACKAGE DESCRIPTION

**DC Package**  
**8-Lead Plastic DFN (2mm × 2mm)**  
 (Reference LTC DWG # 05-08-1719 Rev 0)

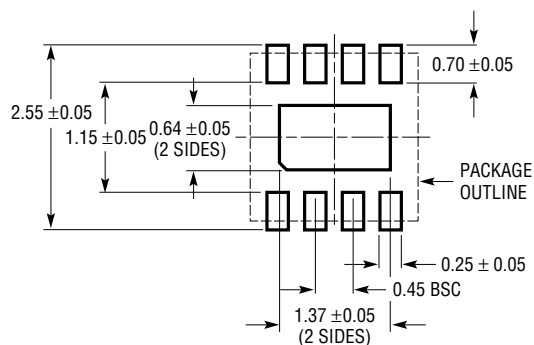

RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS  
 APPLY SOLDER MASK TO AREAS THAT ARE NOT SOLDERED

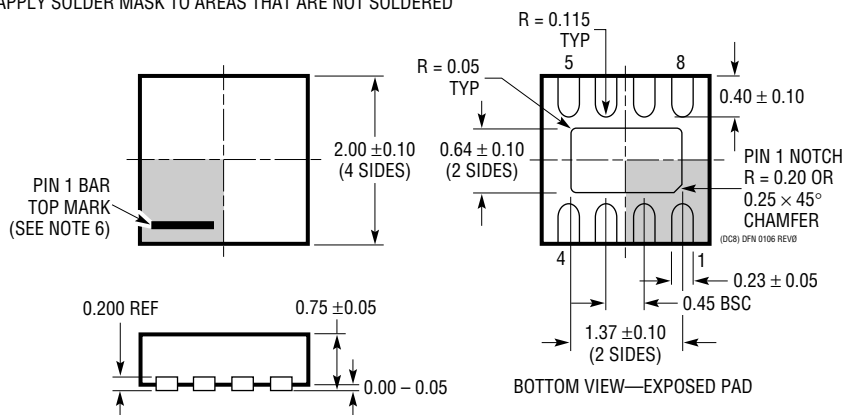


## NOTE:

1. DRAWING IS NOT A JEDEC PACKAGE OUTLINE
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

# PACKAGE DESCRIPTION

**TS8 Package**  
**8-Lead Plastic TSOT-23**  
 (Reference LTC DWG # 05-08-1637)

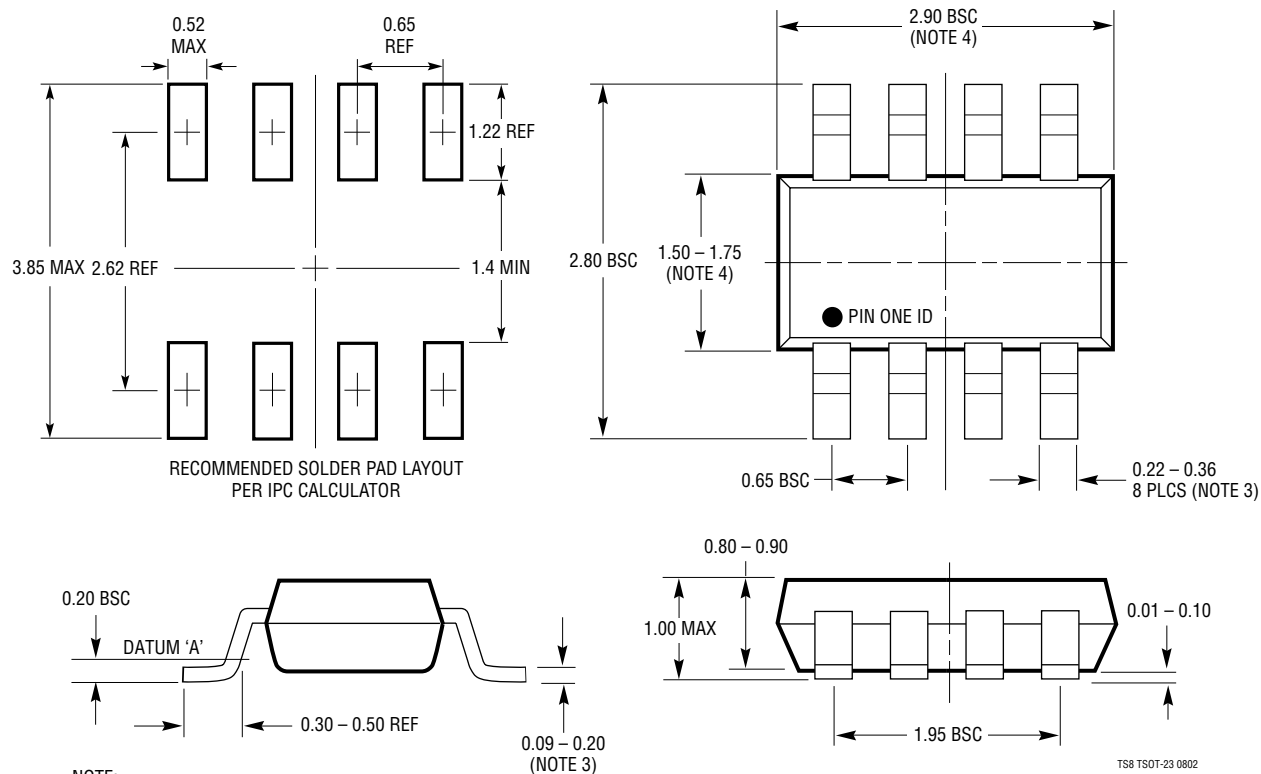


- NOTE:
1. DIMENSIONS ARE IN MILLIMETERS
  2. DRAWING NOT TO SCALE
  3. DIMENSIONS ARE INCLUSIVE OF PLATING
  4. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR
  5. MOLD FLASH SHALL NOT EXCEED 0.254mm
  6. JEDEC PACKAGE REFERENCE IS MO-193

TS8 TSOT-23 0802

## TYPICAL APPLICATION

Portable Device Battery Monitor

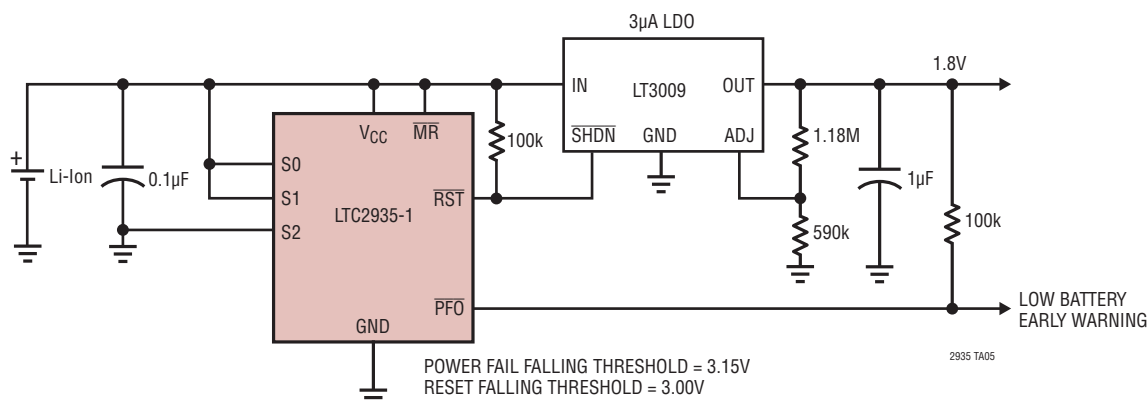

## RELATED PARTS

| PART NUMBER                         | DESCRIPTION                                                     | COMMENTS                                                                                                               |
|-------------------------------------|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| LTC690                              | 5V Supply Monitor, Watchdog Timer and Battery Backup            | 4.65V Threshold                                                                                                        |
| LTC694-3.3                          | 3.3V Supply Monitor, Watchdog Timer and Battery Backup          | 2.9V Threshold                                                                                                         |
| LTC1232                             | 5V Supply Monitor, Watchdog Timer and Pushbutton Reset          | 4.37V/4.62V Threshold                                                                                                  |
| LTC1326                             | Micropower Triple Supply Monitor for 5V/2.5V, 3.3V and ADJ      | 4.725V, 3.118V, 1V Threshold ( $\pm 0.75\%$ ) and ADJ                                                                  |
| LTC1726                             | Micropower Triple Supply Monitor for 2.5V/5V, 3.3V and ADJ      | Adjustable Reset and Watchdog Timeouts                                                                                 |
| LTC1727                             | Micropower Triple Supply Monitor with Open-Drain Reset          | Individual Monitor Outputs in MSOP                                                                                     |
| LTC1728                             | Micropower Triple Supply Monitor with Open-Drain Reset          | 5-Lead SOT-23 Package                                                                                                  |
| LTC1985                             | Micropower Triple Supply Monitor with Push-Pull Reset Output    | 5-Lead SOT-23 Package                                                                                                  |
| LTC2900                             | Programmable Quad Supply Monitor                                | Adjustable Reset, 10-Lead MSOP and DFN Packages                                                                        |
| LTC2901                             | Programmable Quad Supply Monitor                                | Adjustable Reset and Watchdog Timer                                                                                    |
| LTC2902                             | Programmable Quad Supply Monitor                                | Adjustable Reset and Tolerance                                                                                         |
| LTC2903                             | Precision Quad Supply Monitor                                   | 6-Lead SOT-23 Package                                                                                                  |
| LTC2904/LTC2905/<br>LTC2906/LTC2907 | Three-State Programmable Precision Dual Supply Monitor          | 8-Lead SOT-23 and DFN Packages                                                                                         |
| LTC2908                             | Precision Six-Supply Monitor (Four Fixed and Two Adjustable)    | 8-Lead TSOT-23 and DFN Packages                                                                                        |
| LTC2909                             | Precision Triple/Dual Input UV, OV and Negative Voltage Monitor | Shunt Regulated $V_{CC}$ Pin, Adjustable Threshold and Reset, 8-Lead SOT-23 and DFN Packages                           |
| LTC2910                             | Octal Positive/Negative Voltage Monitor                         | Separate $V_{CC}$ Pin, Eight Inputs, Up to Two Negative Monitors Adjustable Reset Timer, 16-Lead SSOP and DFN Packages |
| LTC2912/LTC2913/<br>LTC2914         | Single/Dual/Quad UV and OV Voltage Monitors                     | Separate $V_{CC}$ Pin, Adjustable Reset Timer                                                                          |
| LTC2915/LTC2916/<br>LTC2917/LTC2918 | Single Voltage Supervisors with 27 Pin-Selectable Thresholds    | Manual Reset and Watchdog Functions                                                                                    |
| LTC2934                             | Ultralow Power Supervisor with Power-Fail Output                | 500nA Quiescent Current, 2mm $\times$ 2mm 8-Lead DFN and TSOT-23 Packages, Adjustable via External Resistors           |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331