



# IQS904 Datasheet

## IQ Switch<sup>®</sup> - ProxSense<sup>®</sup> Series

Single Channel Capacitive Sensor and Controller for Dimmer Applications


### Unparalleled Features

- ❑ Extensive feature set in a TSOT23-6 package
- ❑ Extremely low current consumption
- ❑ Automatic tuning for optimal operation in various environments & compensation against sensitivity reducing objects

The IQS904 ProxSense<sup>®</sup> IC is a fully integrated single channel capacitive contact and proximity sensor with built in controller for dimming applications. With market leading sensitivity and automatic tuning of the sense antenna, the IQS904 provides an extremely cost effective minimalist implementation requiring very few external components. The device is ready for use in a large range of AC/DC dimming applications, while programming options allow flexible fine tuning in specialized applications.

### Main Features

- ❑ Single Channel input device
- ❑ IQS904A : AC applications
- ❑ IQS904D : DC applications
- ❑ ATI: Automatic tuning to optimum sensitivity
- ❑ Supply Voltage 2.95V to 5.5V
- ❑ Internal voltage regulator and reference capacitor
- ❑ OTP options
  - ❖ Output Polarity (Active High or Active Low) for IQS904AC
  - ❖ Proximity & Touch Thresholds
  - ❖ FITD time(18s or 5s) for IQS904DC
- ❑ Automatic drift compensation
- ❑ Development and Programming tools available (USBProg)
- ❑ Compact TSOT23-6 Package

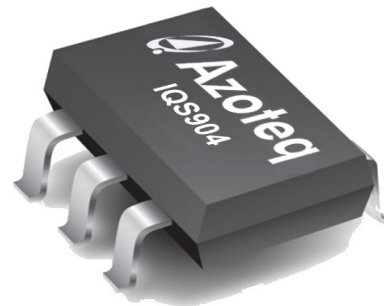

### Applications

- ❑ DC/AC Lamp Dimming
- ❑ Camping Lights
- ❑ Flash Lights
- ❑ Night Lights
- ❑ Under Cabinet Lighting
- ❑ Proximity detection that enables backlighting activation (Patented)
- ❑ Replacement for electromechanical switches

| T <sub>A</sub>              | TSOT23-6 |
|-----------------------------|----------|
| -40°C to 85°C               | IQS904   |
| Current Consumption: 200 µA |          |



## Table of Contents

|                                                                    |           |
|--------------------------------------------------------------------|-----------|
| <b>IQS904 DATASHEET .....</b>                                      | <b>1</b>  |
| <b>UNPARALLELED FEATURES.....</b>                                  | <b>1</b>  |
| <b>MAIN FEATURES .....</b>                                         | <b>1</b>  |
| <b>APPLICATIONS .....</b>                                          | <b>1</b>  |
| <b>FUNCTIONAL OVERVIEW .....</b>                                   | <b>3</b>  |
| <b>1 INTRODUCTION .....</b>                                        | <b>3</b>  |
| 1.1 PIN-OUT.....                                                   | 3         |
| FIGURE 1.1 IQS904 PIN-OUT.....                                     | 3         |
| TABLE 1.1 IQS904 PIN-OUT.....                                      | 3         |
| 1.2 APPLICABILITY.....                                             | 3         |
| <b>2 ANALOGUE FUNCTIONALITY.....</b>                               | <b>3</b>  |
| <b>3 DIGITAL FUNCTIONALITY .....</b>                               | <b>4</b>  |
| <b>4 DETAILED DESCRIPTION.....</b>                                 | <b>5</b>  |
| 4.1 SYSTEM OVERVIEW .....                                          | 5         |
| FIGURE 4.1 SYSTEM OVERVIEW .....                                   | 5         |
| 4.2 TYPICAL CIRCUIT FOR DC APPLICATIONS .....                      | 5         |
| FIGURE 4.2 REFERENCE DESIGN (DC APPLICATION) .....                 | 5         |
| 4.3 TYPICAL CIRCUIT FOR AC APPLICATIONS .....                      | 6         |
| FIGURE 4.3 REFERENCE DESIGN (AC APPLICATION).....                  | 6         |
| <b>5 HIGH SENSITIVITY.....</b>                                     | <b>7</b>  |
| <b>6 USER INTERFACE DESCRIPTION .....</b>                          | <b>7</b>  |
| TABLE 6.1 POWER LEVELS FOR DIFFERENT OPERATIONAL MODES .....       | 7         |
| 6.1 USER INTERFACE: USER SELECTABLE DIMMING LEVEL... 7             |           |
| FIGURE 6.2 DIMMING LEVEL VERSUS PROXIMITY AND TOUCH.....           | 8         |
| <b>7 USER CONFIGURABLE OPTIONS.....</b>                            | <b>9</b>  |
| 7.1 CONFIGURING OF DEVICES .....                                   | 9         |
| <b>7.2 IQS904AC USER OPTIONS.....</b>                              | <b>10</b> |
| <b>7.3 IQS904DC USER OPTIONS.....</b>                              | <b>12</b> |
| <b>8 DESCRIPTION OF USER OPTIONS .....</b>                         | <b>14</b> |
| 8.1 DC/AC.....                                                     | 14        |
| 8.2 ADJUSTABLE PROXIMITY THRESHOLD .....                           | 14        |
| <b>CONFIGURATION: BANK0 BIT1-0 .....</b>                           | <b>14</b> |
| 8.3 ADJUSTABLE TOUCH THRESHOLD.....                                | 14        |
| <b>CONFIGURATION: BANK0 BIT 4-2 .....</b>                          | <b>14</b> |
| 8.4 LOGIC OUTPUT .....                                             | 14        |
| 8.5 PROX ON LOAD ENABLE/DISABLE .....                              | 14        |
| <b>CONFIGURATION: BANK1 BIT1 .....</b>                             | <b>15</b> |
| 8.6 FITD TIME ON LOAD (5s OPTION ONLY AVAILABLE ON IQS904DC) ..... | 15        |
| 8.7 FILTERS USED BY THE IQS904.....                                | 15        |
| 8.7.1 Long Term Average (LTA).....                                 | 15        |
| <b>CONFIGURATION: BANK0 BIT7-6.....</b>                            | <b>15</b> |
| 8.8 ATI .....                                                      | 15        |
| <b>9 ANTENNA TUNING IMPLEMENTATION (ATI).....</b>                  | <b>16</b> |
| 9.1 AUTOMATIC ATI .....                                            | 16        |
| <b>10 ELECTRICAL CHARACTERISTICS.....</b>                          | <b>17</b> |
| 10.1 ABSOLUTE MAXIMUM SPECIFICATIONS.....                          | 17        |
| 10.2 GENERAL CHARACTERISTICS (MEASURED AT 25°C)....                | 17        |
| TABLE 10.1 IQS904 GENERAL OPERATING CONDITIONS ...                 | 17        |
| TABLE 10.2 START-UP AND SHUT-DOWN SLOPE CHARACTERISTICS.....       | 17        |
| 10.3 OUTPUT CHARACTERISTICS (MEASURED AT 25°C) .....               | 18        |
| TABLE 10.3 IQS904DC CHARACTERISTICS .....                          | 18        |
| 10.4 ELECTROMAGNETIC COMPATIBILITY .....                           | 18        |
| 10.4.1 Electrostatic discharge (ESD).....                          | 18        |
| TABLE 10.4 ESD CHARACTERISTICS .....                               | 18        |
| 10.4.2 Static Latch-Up(LU).....                                    | 18        |
| Table 10.5 Static Latch-Up(LU).....                                | 18        |
| 10.5 TIMING CHARACTERISTICS.....                                   | 19        |
| Table 10.6 Main Oscillator.....                                    | 19        |
| <b>11 MECHANICAL DIMENSIONS .....</b>                              | <b>19</b> |
| 11.2 PACKAGE MSL.....                                              | 20        |
| <b>12 REVISION HISTORY .....</b>                                   | <b>21</b> |
| <b>13 DATASHEET AND PART-NUMBER INFORMATION .....</b>              | <b>22</b> |
| 13.1 ORDERING INFORMATION .....                                    | 22        |
| 13.2 STANDERD DEVICES .....                                        | 22        |
| 13.3 DEVICE PACKAGING CONVENTION .....                             | 23        |
| 13.3.1 Top.....                                                    | 23        |
| 13.3.2 Bottom.....                                                 | 23        |
| <b>14 CONTACT INFORMATION.....</b>                                 | <b>24</b> |

## Functional Overview

### 1 Introduction

The IQS904 is a single channel capacitive proximity and touch sensor featuring integrated DC/AC dimming control, internal voltage regulator, power supply zero-cross detection and reference capacitor (Cs).

The device has a single input pin for the connection of the sense antenna (Cx), and dedicated output pin (LOAD) to provide the signal to drive the DC or AC switch. The output pin is digital PWM, with selectable polarity (Active High or Active Low).

The IQS904A use leading edge control to drive a NFET.

The device automatically tracks slow varying environmental changes via various filters, detects noise and has an automatic Antenna Tuning Implementation (ATI) to fine tune the device for optimal sensitivity.

#### 1.1 Pin-out

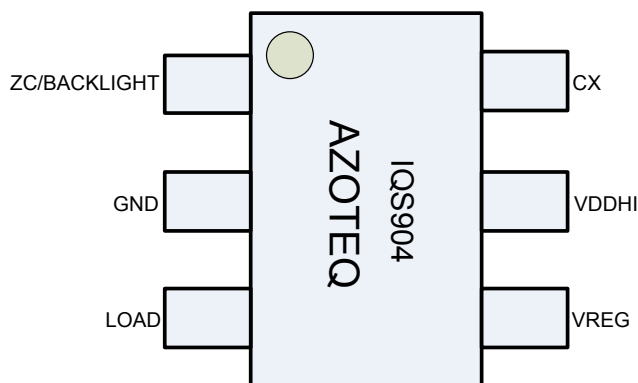


Figure 1.1 IQS904 Pin-out

Table 1.1 IQS904 Pin-out.

| Pin | Standalone |           | Function                       |
|-----|------------|-----------|--------------------------------|
| 1   | AC         | ZC        | Zero-cross Detection           |
|     | DC         | Backlight | Backlight function             |
| 2   | GND        |           | Ground                         |
| 3   | LOAD       |           | Switch Drive Signal            |
| 4   | VREG       |           | Regulator Pin                  |
| 5   | VDDHI      |           | Power Input                    |
| 6   | CX         |           | Sense Electrode Connection Pin |

#### 1.2 Applicability

All specifications, except where specifically mentioned otherwise, provided by this datasheet are applicable to the following ranges:

- ☐ Temperature -40 °C to +85 °C
- ☐ Supply voltage ( $V_{DDHI}$ ) 2.95V to 5.5V

## 2 Analogue Functionality

The analogue circuitry measures the capacitance of the sense antenna attached to the Cx pin through a charge transfer process that is periodically initiated by the digital circuitry. The measuring process is referred to as a conversion and consists of the discharging of Cs and Cx, the charging of Cx and then a series of charge transfers from Cx to Cs until a trip voltage is reached. The number of charge transfers required to reach the trip voltage is referred to as the current sample (CS).



The capacitance measurement circuitry makes use of an internal sampling capacitor.

The analogue circuitry further provides functionality for:

- ☐ Power on reset (POR) detection
- ☐ Brown out detection (BOD)
- ☐ Zero-cross detection


### 3 Digital Functionality

The digital processing functionality is responsible for:

- ☐ Device configuration from OTP settings after POR.
- ☐ Management of BOD and WDT events.
- ☐ Initiation of conversions at the selected rate.
- ☐ Processing of CS and execution of algorithms.
- ☐ Monitoring and automatic execution of the ATI algorithm.
- ☐ Signal processing and digital filtering.
- ☐ Detection of PROX and TOUCH events.
- ☐ Managing outputs of the device.
- ☐ Manage programming of OTP options.


## 4 Detailed Description

## 4.1 System overview

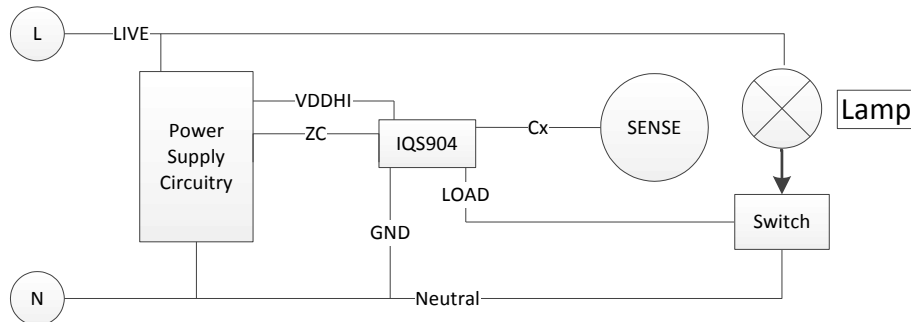

### Figure 4.1 System overview

## 4.2 Typical Circuit for DC Applications

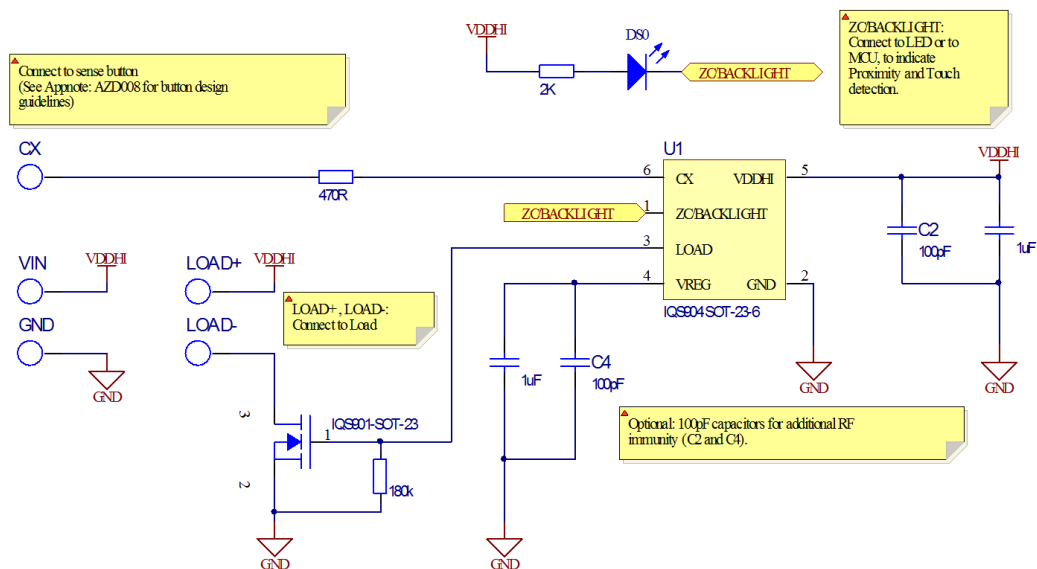

### Figure 4.2 Reference Design (DC Application)

## 4.3 Typical Circuit for AC Applications

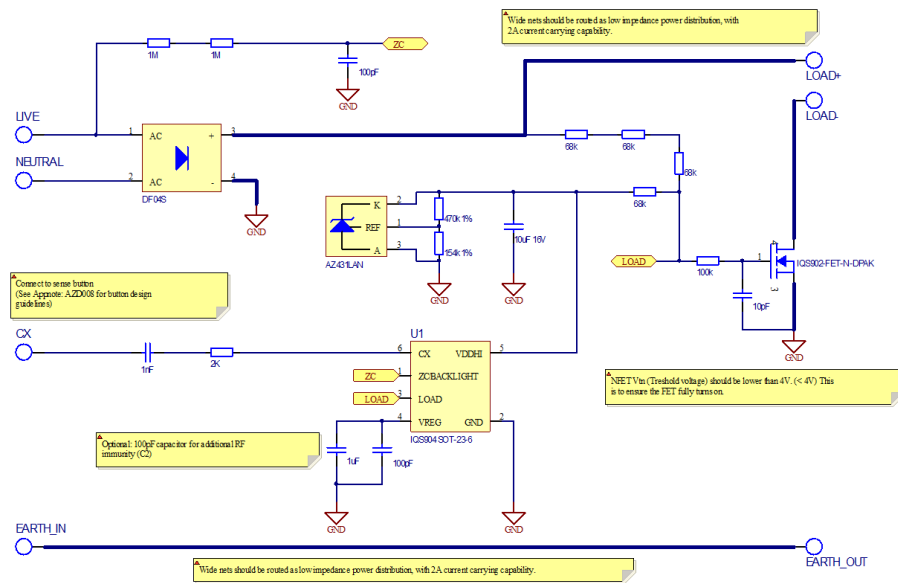


Figure 4.3 Reference Design (AC Application)



## 5 High Sensitivity

Through patented design and advanced signal processing, the device is able to provide extremely high sensitivity to detect proximity. This enables designs to detect proximities at distances that cannot be equalled by most

other products. When the device is used in environments where noise or ground effects exist that lower the sensitivity, a reduced proximity threshold is proposed to ensure reliable functioning of the sensor.

## 6 User Interface Description

The various power levels are summarised in Table 6.1.

**Table 6.1 Power Levels for different operational modes**

| Power                   | POWER % Duty Cycle |       |      |
|-------------------------|--------------------|-------|------|
|                         | 50 Hz              | 60 Hz | DC   |
| FITD (Find-In-The-Dark) | 42.1               | 30.5  | 0.58 |
| Low                     | 47                 | 37.5  | 1    |
| High                    | 100                | 100   | 100  |

### 6.1 User Interface: User Selectable Dimming Level


- ❖ **Long touch:** longer than 1 second.
- ❖ **Short touch:** shorter than 1 second.

#### Operation of UI:

- Proximity detection will switch load on at FITD% for 16 seconds (50/60Hz dependent)
- From initial OFF state, **short touch** goes to full power.
- From any ON state, **long touch** & holding touch will change duty cycle / dimming
- From any OFF state, **long touch** start at low power and increase to full power. Holding touch will change duty cycle / dimming
- From any ON state, **short touch** switches off.
- Any **long touch** held for longer than 60s switches off (This setting can be disabled by setting the halt setting to always halt)

#### Timings:

- Long touch ramp time: 3 seconds.
- Flat top and bottom pause time: 1.5 seconds.
- Total cycle time: 9 seconds.
- Auto-off time: 1 hour
- Automatic dim time after Auto-off: 30 seconds.
- Auto-off is enabled when switched on by **long touch**
- FITD time on Prox trigger: 16 seconds or 5 seconds

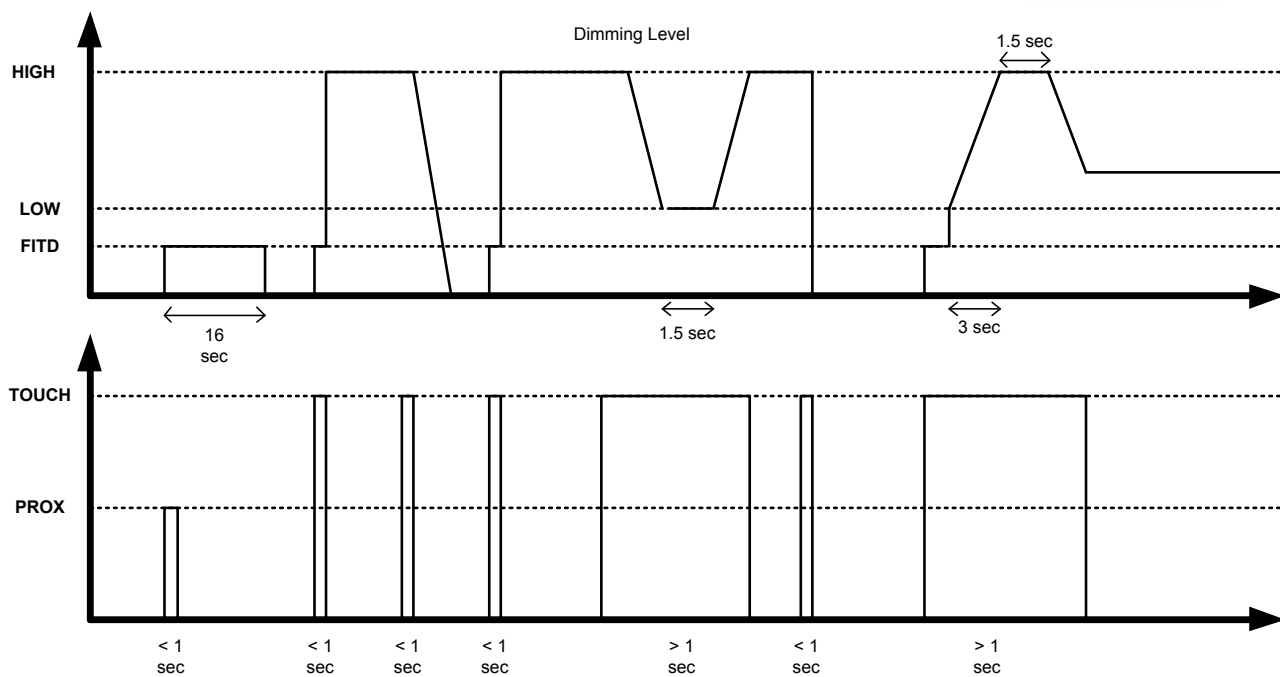

**Figure 6.1 Dimming Level versus Proximity and Touch**



## 7 User Configurable Options

The IQS904 provides One Time Programmable (OTP) user options (each option can be modified only once). The device is fully functional in the default (unconfigured) state. OTP options are intended for specific applications.

The configuration of the device can be done on packaged devices or in-circuit. In-circuit configuration may be limited by values of external components chosen.

### 7.1 Configuring of Devices

Azoteq offers a Configuration Tool (CTxxx) and accompanying software (USBProg.exe)

that can be used to program the OTP user options for prototyping purposes. More details regarding the configuration of the device with the USBProg program is explained by application note: “AZD007 – USBProg Overview” which can be found on the Azoteq website.

Alternate programming solutions of the IQS904 also exist. For further enquiries regarding this matter please contact Azoteq at [ProxSenseSupport@azoteq.com](mailto:ProxSenseSupport@azoteq.com) or the local distributor.



## 7.2 IQS904AC User options

Table 7-1: User Selectable Configuration for IQS904AC Options: Bank 0

| $t_{\text{HALT1}}$ | $t_{\text{HALT0}}$ | AC | $T_{\text{THR2}}$ | $T_{\text{THR1}}$ | $T_{\text{THR0}}$ | $P_{\text{THR1}}$ | $P_{\text{THR0}}$ |
|--------------------|--------------------|----|-------------------|-------------------|-------------------|-------------------|-------------------|
|--------------------|--------------------|----|-------------------|-------------------|-------------------|-------------------|-------------------|

bit 7

bit 0

**Bank 0 bit 7-6**  $t_{\text{HALT1}}:t_{\text{HALT0}}$ : Halt time of Long Term Average

00 = 18 seconds

01 = 60 seconds

10 = Never Halt

11 = Always Halt

**Bank 0: bit 5** **AC**: Selection

1 = AC Mode

**Bank 0: bit 4-2**  $T_{\text{THR2}}:T_{\text{THR0}}$ : Touch Thresholds on CH0

000 = 64

001 = 16 (Most Sensitive)

010 = 32

011 = 124

100 = 188

101 = 250

110 = 375

111 = 500 (Least Sensitive)

**Bank 0: bit 1-0**  $P_{\text{THR1}}:P_{\text{THR0}}$ : Proximity Thresholds

00 = 4

01 = 2 (Most Sensitive)

10 = 8

11 = 32 (Least Sensitive)



**Table 7-2: User Selectable Configuration Options: Bank 1**

|       |   |   |   |   |   |                   |       |
|-------|---|---|---|---|---|-------------------|-------|
| X     | X | X | X | X | X | P <sub>LOAD</sub> | X     |
| bit 7 |   |   |   |   |   |                   | bit 0 |

**Bank 1: bit 1**      **P<sub>LOAD</sub>:** Prox-on-Load Selection

0 = Enabled

1 = Disabled

**Table 7-3: User Selectable Configuration Options: Bank 2**

|       |   |   |   |  |  |  |       |
|-------|---|---|---|--|--|--|-------|
| X     | X | X | X |  |  |  | ATI   |
| bit 7 |   |   |   |  |  |  | bit 0 |

**Bank 2: bit 3**      **ATI:** Auto ATI Selection

0 = Enabled

1 = Disabled



## 7.3 IQS904DC User options

**Table 7-4: User Selectable Configuration for IQS904DC Options: Bank 0**

| $t_{\text{HALT1}}$ | $t_{\text{HALT0}}$ | X | $T_{\text{THR2}}$ | $T_{\text{THR1}}$ | $T_{\text{THR0}}$ | $P_{\text{THR1}}$ | $P_{\text{THR0}}$ |
|--------------------|--------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|
|--------------------|--------------------|---|-------------------|-------------------|-------------------|-------------------|-------------------|

bit 7

bit 0

**Bank 0 bit 7-6**  $t_{\text{HALT1}}:t_{\text{HALT0}}$ : Halt time of Long Term Average

00 = 18 seconds

01 = 60 seconds

10 = Never Halt

11 = Always Halt

**Bank 0: bit 5** Not Used

**Bank 0: bit 4-2**  $T_{\text{THR2}}:T_{\text{THR0}}$ : Touch Thresholds on CH0

000 = 64

001 = 16 (Most Sensitive)

010 = 32

011 = 124

100 = 188

101 = 250

110 = 375

111 = 500 (Least Sensitive)

**Bank 0: bit 1-0**  $P_{\text{THR1}}:P_{\text{THR0}}$ : Proximity Thresholds

00 = 4

01 = 2 (Most Sensitive)

10 = 8

11 = 16 (Least Sensitive)



**Table 7-5: User Selectable Configuration Options: Bank 1**

|   |   |   |   |   |                      |                   |   |
|---|---|---|---|---|----------------------|-------------------|---|
| X | X | X | X | X | FITD <sub>TIME</sub> | P <sub>LOAD</sub> | X |
|---|---|---|---|---|----------------------|-------------------|---|

bit 7

bit 0

**Bank 1: bit 2**      **FITD<sub>TIME</sub>:** Find In The Dark time

0 = 16s

1 = 5s

**Bank 1 : bit 1**      **P<sub>LOAD</sub>:** Prox-on-Load Selection

0 = Enabled

1 = Disabled

**Table 7-6: User Selectable Configuration Options: Bank 2**

|   |   |   |   |  |  |  |     |
|---|---|---|---|--|--|--|-----|
| X | X | X | X |  |  |  | ATI |
|---|---|---|---|--|--|--|-----|

bit 7

bit 0

**Bank 2: bit 3**      **ATI:** Auto ATI Selection

0 = Enabled

1 = Disabled



## 8 Description of User Options

This section describes the individual user programmable options of the IQS904 in more detail.

A number of standard device configurations are available (refer to Chapter 6). Azoteq can supply pre-configured devices for large quantities.

### 8.1 DC/AC

The IQS904 is offered as a AC or DC controller:

IQS904Dxx DC-Dimmer

IQS904Axx AC-Dimmer

### 8.2 Adjustable Proximity Threshold

The IQS904 has 4 proximity threshold settings. The proximity threshold is selected by the designer to obtain the desired sensitivity and noise immunity. The proximity event is triggered based on the selected proximity threshold, the CS and LTA (Long Term Average) The threshold is expressed in terms of counts; the same as CS.

#### Configuration: Bank0 bit1-0

#### PTHR1:PTHR0: Proximity Thresholds

| Bit | Selection                             |
|-----|---------------------------------------|
| 00  | 4                                     |
| 01  | 2 (Most sensitive)                    |
| 10  | 8                                     |
| 11  | 16: <b>IQS904DC</b> (least sensitive) |
| 11  | 32: <b>IQS904AC</b> (least sensitive) |

### 8.3 Adjustable Touch Threshold

The IQS904 has 8 touch threshold settings. The touch threshold is selected by the designer to obtain the desired touch sensitivity. The touch threshold is expressed in terms of counts; the same as CS.

The touch event is triggered based on  $T_{TH}$ , CS and LTA. A touch event is identified when for at least 4 consecutive samples of the following equation holds:

$$T_{TH} \leq LTA - CS$$

The Touch Threshold is set as follows:

#### Configuration: Bank0 bit 4-2

#### TTHR2:TTHR0: Touch Thresholds

| Bit | Selection             |
|-----|-----------------------|
| 000 | 64                    |
| 001 | 16 (Most sensitive)   |
| 010 | 32                    |
| 011 | 124                   |
| 100 | 188                   |
| 101 | 250                   |
| 110 | 375                   |
| 111 | 500 (Least sensitive) |

### 8.4 Logic Output

In the DC and AC devices, the output logic for the load driving signal (PIN 3 on the IQS904 IC) is fixed in ACTIVE HIGH mode.

In DC mode, PIN 1 (ZC/BACKLIGHT) becomes available to indicate when a proximity or touch is detected, and is suitable to be used with a microcontroller or to drive a LED directly. The output logic of this pin is **ACTIVE LOW**. When proximity is detected, the output signal will go low for as long as the  $t_{halt}$  time is selected.

When a touch is detected, the output signal will be a square wave oscillating at 7.5 Hz to give user feedback on touch detected.

### 8.5 Prox on Load Enable/Disable

When a proximity event is detected by the IQS904, it will by default drive the load to turn on in a low power/light mode.

This feature can be disabled by setting bit1 in Bank1, as indicated below.



#### Configuration: Bank1 bit1

Proximity on Load

| Bit | Selection |
|-----|-----------|
| 0   | Enabled   |
| 1   | Disabled  |

### 8.6 FITD time on load (5s Option only available on IQS904DC)

The find in the dark time is selectable between 16s and 5s. This option is available in bank 1 bit 2.

**Logic:** Find in the Dark Time

| Bit | Selection |
|-----|-----------|
| 0   | 16s       |
| 1   | 5s        |

### 8.7 Filters used by the IQS904

The IQS904 devices employ various signal processing functions that includes the execution of various filters as described below.

#### 8.7.1 Long Term Average (LTA)

Capacitive touch devices detect changes in capacitance that are not always related to the intended proximity or touch of a human. This is a result of changes in the environment of the sense plate and other factors. These changes need to be compensated for in various manners in order to reliably detect touch events and especially to detect proximity events. One mechanism the IQS904 employs is the use of a Long Term Averaging filter (IIR type filter) which tracks slow changes in the environment (expressed as changes in the current sample). The result of this filter is a Long Term Average (LTA) value that forms a dynamic reference used for various functions such as identification of proximity and touch events.

The LTA is calculated from the current samples (CS). The filter only executes while no proximity or touch event is detected to ensure compensation only for environmental changes. However there may be instances where sudden changes in the environment or changes in the environment while a proximity

or touch event has been detected may cause the CS to drift away from the LTA. To compensate for these situations a Halt Timer ( $t_{\text{HALT}}$ ) has been defined.

The Halt Timer is started when a proximity or touch event occurs and when it expires the LTA filter is recalibrated. Recalibration causes  $\text{LTA} < \text{CS}$ , thus the disappearance of proximity or touch events.

The designer needs to select a Halt Timer value to best accommodate the required application.

#### Configuration: Bank0 bit7-6

$t_{\text{HALT1}}:t_{\text{HALT0}}$ : Halt time of Long Term Average

| Bit | Selection   |
|-----|-------------|
| 00  | 18 seconds  |
| 01  | 60 seconds  |
| 10  | Never Halt  |
| 11  | Always Halt |

Notes:

- With the Never (bit selection “10”) option, the filter will not halt when any proximity or touch condition occurs.
- With the ‘ALWAYS’ (bit selection “11”) option and the detection of a proximity event the execution of the filter will be halted for only 40 seconds and with the detection of a touch event the execution of the filter will be halted as long as the touch condition applies.

Refer to Application note “AZD024 - Graphical Representation of the IIR Filter” for detail regarding the execution of the LTA filter.

### 8.8 ATI

The built in Auto ATI algorithm fine tunes the sense antenna for maximum sensitivity. It is enabled by default.

## 9 Antenna Tuning Implementation (ATI)

ATI is a sophisticated technology implemented in the latest generation ProxSense™ devices that optimises the performance of the sensor in a wide range of applications and environmental conditions (refer to application note AZD0027 - Antenna Tuning Implementation).

ATI makes adjustments through internal reference capacitors to obtain optimum performance. It adjusts internal circuitry according to two parameters, the ATI multiplier and the ATI compensation. The ATI multiplier can be viewed as a coarse adjustment and the ATI compensation as a fine adjustment.

The adjustment of the ATI parameters will result in variations in the current sample and sensitivity. Sensitivity can be observed as the change in current sample as the result of a fixed change in sensed capacitance. The ATI parameters have been chosen to provide significant overlap. It may therefore be possible to select various combinations of ATI multiplier and ATI compensation settings to obtain the same current sample. The sensitivity of the various options may however be different for the same current sample.

### 9.1 Automatic ATI

The IQS904 implements an automatic ATI algorithm. This algorithm automatically adjusts the ATI parameters to optimise the sensing antenna's connection to the device.

The device will execute the ATI algorithm whenever the device starts-up and when the current samples are not within a predetermined range.

While the Automatic ATI algorithm is in progress proximity and touch events cannot be detected. The device will only briefly remain in this condition and it will be entered only when relatively large shifts in the current sample have been detected.

The automatic ATI function aims to maintain a constant current sample, regardless of the capacitance of the sense antenna (within the maximum range of the device).

The effects of auto-ATI on the application are the following:

- Automatic adjustment of the device configuration and processing parameters for a wide range of PCB and application designs to maintain an optimal configuration for proximity and touch detection.
- Automatic tuning of the sense antenna at start-up to optimise the sensitivity of the application.
- Automatic re-tuning when the device detects changes in the sensing antennas' capacitance to accommodate a large range of changes in the environment of the application that influences the sensing antennas.
- Re-tuning only occurs during device operation when a relatively large sensitivity reduction is detected. This is to ensure smooth operation of the device during operation.
- Re-tuning may temporarily influences the normal functioning of the device, but in most instances the effect will be hardly noticeable.
- Shortly after the completion of the re-tuning process the sensitivity of Proximity detection may be reduced slightly for a few seconds as internal filters stabilises.

Automatic ATI can be implemented so effectively due to:

- Excellent system signal to noise ratio (SNR).
- Effective digital signal processing to remove AC and other noise.
- The very stable core of the devices.
- The built in capability to accommodate a large range of sensing antenna capacitances.



## 10 Electrical Characteristics

### 10.1 Absolute Maximum Specifications

Exceeding these maximum specifications may cause damage to the device.

|                                                               |                   |
|---------------------------------------------------------------|-------------------|
| Operating temperature                                         | -40°C to 85°C     |
| Supply Voltage ( $V_{DDHI} - V_{SS}$ )                        | 5.5V              |
| Maximum pin voltage (ZC/BACKLIGHT, load)                      | $V_{DDHI} + 0.5V$ |
| Pin voltage (Cx)                                              | 2.5V              |
| Minimum pin voltage (VDDHI, VREG,ZC/BACKLIGHT,LOAD, Cx)       | $V_{SS} - 0.5V$   |
| Minimum power-on slope                                        | 100V/s            |
| HBM ESD protection (VDDHI, VREG, $V_{SS}$ , ZC/BACKLIGHT, Cx) | 2Kv               |

### 10.2 General Characteristics (Measured at 25°C)

Standard IQS904 devices are rated for supply voltages between 2.95V and 5V. The low voltage version of the IQS904 is rated for supply voltages between 2.0V and 5V. For supply voltages below 2.95V the device is operating below the voltage required by the internal regulator and some of the characteristics of the device may be different than those for the Standard IQS904.

**Table 10.1** IQS904 General Operating Conditions

| DESCRIPTION               | IC | Conditions                    | PARAMETER        | MIN  | TYP        | MAX        | UNIT    |
|---------------------------|----|-------------------------------|------------------|------|------------|------------|---------|
| Supply voltage            | D  |                               | $V_{DDHI}$       | 2.95 |            | 5.50       | V       |
| Internal regulator output | D  | $2.95 \leq V_{DDHI} \leq 5.0$ | $V_{REG}$        | 2.35 | 2.50       | 2.65       | V       |
| Internal regulator output | D  | $2.0 \leq V_{DDHI} \leq 2.95$ | $V_{REG}$        | 1.80 | $V_{DDHI}$ | $V_{DDHI}$ | V       |
| Normal operating current  | D  | $2.95 \leq V_{DDHI} \leq 5.0$ | $I_{IQS904\_NP}$ |      | 200        |            | $\mu A$ |

**Table 10.2** Start-up and shut-down slope Characteristics

| DESCRIPTION | IC  | Conditions                     | PARAMETER | MIN  | MAX | UNIT |
|-------------|-----|--------------------------------|-----------|------|-----|------|
| POR         | D/S | $V_{DDHI}$ Slope $\geq 100V/s$ | POR       | 1.15 | 1.8 | V    |
| BOD         | D/S |                                | BOD       | 1.2  | 1.8 | V    |



## 10.3 Output Characteristics (measured at 25°C)

Table 10.3 IQS904DC Characteristics

| Symbol    | Description        | I <sub>SINK</sub> (mA) | Conditions               | MIN | TYP  | MAX | UNIT |
|-----------|--------------------|------------------------|--------------------------|-----|------|-----|------|
| BACKLIGHT | Output Low voltage | 3.0                    | V <sub>DDHI</sub> = 5V   | 0.1 | 0.5  |     | V    |
|           |                    | 2.5                    | V <sub>DDHI</sub> = 3.3V | 0.1 | 0.33 |     |      |
|           |                    | 2.5                    | V <sub>DDHI</sub> = 2.5V | 0.1 | 0.25 |     |      |

## 10.4 Electromagnetic Compatibility

### 10.4.1 Electrostatic discharge (ESD)

Table 10.4 ESD Characteristics

| Symbol                    | Ratings                                                 | Conditions                                                                        | Level/ Class | Maximum Value | UNIT |
|---------------------------|---------------------------------------------------------|-----------------------------------------------------------------------------------|--------------|---------------|------|
| V <sub>ESD(HBM)</sub>     | Electrostatic discharge voltage (Human body model)      | T <sub>A</sub> = +25°C, conforming to JESD22-A114                                 | 2            | 2000          | V    |
| V <sub>ESD(CDM)</sub>     | Electrostatic discharge voltage (Charge device model)   | T <sub>A</sub> = +25°C, conforming to JESD22-C101-D                               | IV           | 1000          | V    |
| V <sub>ESD(Product)</sub> | Electrostatic discharge voltage (Product specification) | T <sub>A</sub> = +25°C, conforming to IEC61000-4-2, Air-discharge on all pins     | 4            | ±8            | kv   |
| V <sub>ESD(Product)</sub> | Electrostatic discharge voltage (Product specification) | T <sub>A</sub> = +25°C, conforming to IEC61000-4-2, Contact-discharge on all pins | 3            | ±6            | Kv   |

### 10.4.2 Static Latch-Up(LU)

Table 10.5 Static Latch-Up(LU)


| Class | Symbol | Parameter             | Conditions                                                             |
|-------|--------|-----------------------|------------------------------------------------------------------------|
| A     | LU     | Static latch-up class | T <sub>A</sub> = +25°C, conforming to EIA/JESD 78 IC latch-up standard |

## 10.5 Timing Characteristics

**Table 10.6 Main Oscillator**

| SYMBOL           | DESCRIPTION            | Conditions                 | MIN | TYP | MAX | UNIT |
|------------------|------------------------|----------------------------|-----|-----|-----|------|
| F <sub>OSC</sub> | IQS904 Main oscillator | $3 \leq V_{DDHI} \leq 5.0$ |     | 4   |     | MHz  |

## 11 Mechanical Dimensions

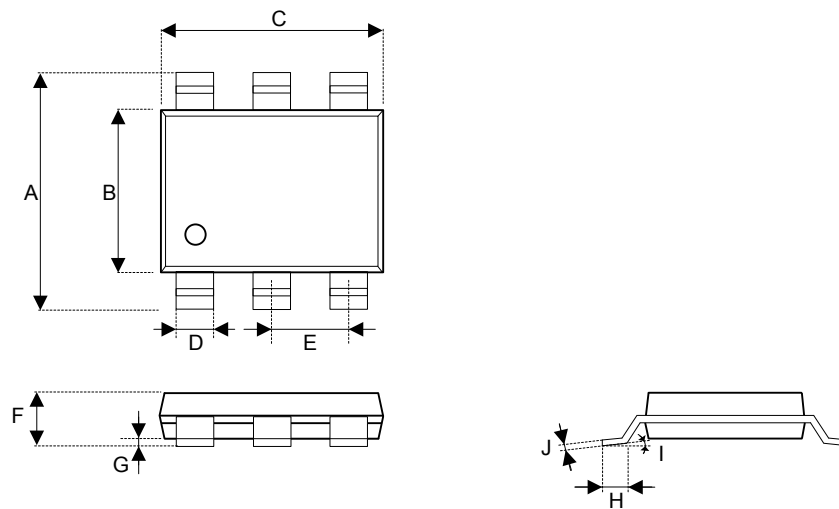

**Figure 11.1 TSOT23-6 Packaging**

**Table 11.1 TSOT23-6 Dimensions**

| Dimension | Min          | Max | Tolerance    |
|-----------|--------------|-----|--------------|
| A         | 2.80 mm typ  |     | Basic        |
| B         | 1.60 mm typ  |     | Basic        |
| C         | 2.90 mm typ  |     | Basic        |
| D         | 0.40 mm      |     | ±0.10mm      |
| E         | 0.95 mm typ  |     | Basic        |
| F         | 1.00mm       |     | Max          |
| G         | 0.05 mm      |     | ±0.05mm      |
| H         | 0.40 mm      |     | ±0.10mm      |
| I         | 4°           |     | ±4°          |
| J         | 0.127 mm typ |     | +0.07/-0.007 |

## 11.2 Package MSL

**Moisture Sensitivity Level** (MSL) relates to the packaging and handling precautions for SMD semiconductors.

**Table 0: MSL**

| Package  | Level (duration) |
|----------|------------------|
| TSOT23-6 | MSL1             |



## 12 Revision History

The changes/limitations for specific revision numbers are described below:

| Revision | Device ID | Package Markings                         | Changes and/or Limitations                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------|-----------|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0        | 1006      | IQS904 AC<br>(Engineering samples)       | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 1.01     | 3801      | IQS904A,xx<br>(Production AC Controller) | <ul style="list-style-type: none"><li>• Lowest sensitivity threshold for Proximity detection changed to 32</li><li>• Polarity output selection removed</li><li>• Prox on Load feature added</li></ul>                                                                                                                                                                                                                                                                            |
| 1.02     | 3802      | IQS904D,xx<br>(Production DC Controller) | <ul style="list-style-type: none"><li>• Lowest sensitivity threshold for Proximity detection changed to 16</li><li>• Change DC Dimmer UI to give 100% uniform dimming to get rid of the 70% to 100% jump.</li><li>• Put an extra option in for the FITD on Load. FG10 = 0 – FITD Delay = 16s FG10 = 10 – FITD Delay = 5s</li><li>• Reseed will be 8 normally and 16 after Load switch off</li><li>• ATI limits during ATI = +-128, ATI Limits normal mode = +128 -148.</li></ul> |
| 1.10     |           |                                          | <ul style="list-style-type: none"><li>• Updated contacts page</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                          |




## 13 Datasheet and Part-number Information

### 13.1 Ordering Information

Orders will be subject to a MOQ (Minimum Order Quantity) of a full reel of 3000. Contact the official distributor for sample quantities. A list of the distributors can be found under the “Distributors” section of [www.azoteq.com](http://www.azoteq.com).

For large orders, Azoteq can provide pre-configured devices.

The Part-number can be generated by using USBProg.exe or the Interactive Part Number generator on the website.

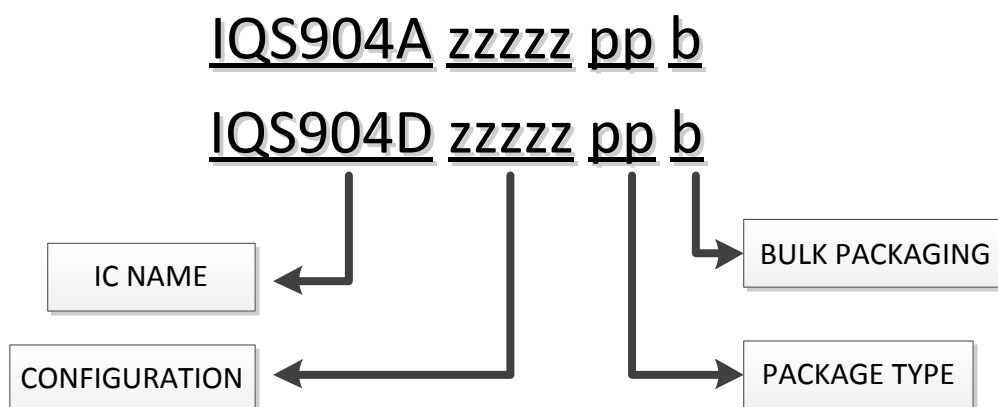

|                       |         |   |                                     |
|-----------------------|---------|---|-------------------------------------|
| <b>IC NAME</b>        | IQS904A | = | <b>AC</b> Dimmer Controller         |
|                       | IQS904D | = | <b>DC</b> Dimmer Controller         |
| <b>CONFIGURATION</b>  | zzzzz   | = | IC Configuration (hexadecimal)      |
| <b>PACKAGE TYPE</b>   | TS      | = | TSOT23-6                            |
| <b>BULK PACKAGING</b> | R       | = | Reel (3000pcs/reel) – MOQ = 3000pcs |


### 13.2 Standard Devices

| Standard Devices | Function |
|------------------|----------|
| IQS904D-00000TSR | Default  |
| IQS904A-00000TSR | Default  |




### 13.3 Device Packaging Convention

#### 13.3.1 Top

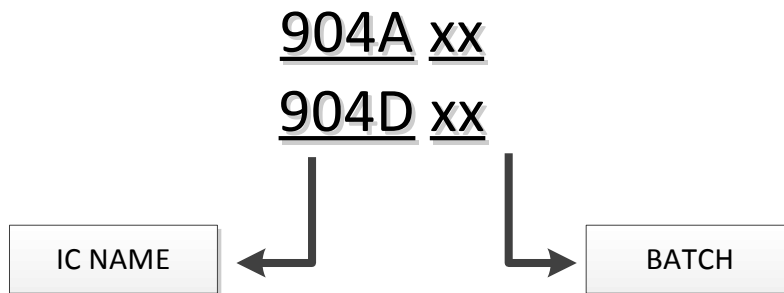

|         |         |                         |
|---------|---------|-------------------------|
| IC Name | IQS904A | IQS904 AC version       |
|         | IQS904D | IQS904 DC version       |
| BATCH   | xx      | Sequential batch number |

#### 13.3.2 Bottom





## 14 Contact Information

|                         | USA                                                                 | Asia                                                                                | South Africa                                     |
|-------------------------|---------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------|
| <b>Physical Address</b> | 6507 Jester Blvd<br>Bldg 5, suite 510G<br>Austin<br>TX 78750<br>USA | Rm2125, Glittery City<br>Shennan Rd<br>Futian District<br>Shenzhen, 518033<br>China | 109 Main Street<br>Paarl<br>7646<br>South Africa |
| <b>Postal Address</b>   | 6507 Jester Blvd<br>Bldg 5, suite 510G<br>Austin<br>TX 78750<br>USA | Rm2125, Glittery City<br>Shennan Rd<br>Futian District<br>Shenzhen, 518033<br>China | PO Box 3534<br>Paarl<br>7620<br>South Africa     |
| <b>Tel</b>              | +1 512 538 1995                                                     | +86 755 83035294<br>ext 808                                                         | +27 21 863 0033                                  |
| <b>Fax</b>              | +1 512 672 8442                                                     |                                                                                     | +27 21 863 1512                                  |
| <b>Email</b>            | kobusm@azoteq.com                                                   | linayu@azoteq.com.cn                                                                | info@azoteq.com                                  |

Please visit [www.azoteq.com](http://www.azoteq.com) for a list of distributors and worldwide representation.

The following patents relate to the device or usage of the device: US 6,249,089 B1; US 6,621,225 B2; US 6,650,066 B2; US 6,952,084 B2; US 6,984,900 B1; US 7,084,526 B2; US 7,084,531 B2; US 7,265,494 B2; US 7,291,940 B2; US 7,329,970 B2; US 7,336,037 B2; US 7,443,101 B2; US 7,466,040 B2 ; US 7,498,749 B2; US 7,528,508 B2; US 7,755,219 B2; US 7,772,781 B2; US 7,781,980 B2; US 7,915,765 B2; US 7,994,726 B2; US 8,035,623 B2; US RE43,606 E; US 8,288,952 B2; US 8,395,395 B2; US 8,531,120 B2; US 8,659,306 B2; US 8,823,273 B2; EP 1 120 018 B2; EP 1 206 168 B1; EP 1 308 913 B1; EP 1 530 178 A1; EP 2 351 220 B1; EP 2 559 164 B1; CN 1330853; CN 1783573; AUS 761094; HK 104 1401

IQ Switch<sup>®</sup>, SwipeSwitch<sup>™</sup>, ProxSense<sup>®</sup>, LightSense<sup>™</sup>, AirButton<sup>™</sup> and the  logo are trademarks of Azoteq.

The information in this Datasheet is believed to be accurate at the time of publication. Azoteq uses reasonable effort to maintain the information up-to-date and accurate, but does not warrant the accuracy, completeness or reliability of the information contained herein. All content and information are provided on an "as is" basis only, without any representations or warranties, express or implied, of any kind, including representations about the suitability of these products or information for any purpose. Azoteq disclaims all warranties and conditions with regard to these products and information, including but not limited to all implied warranties and conditions of merchantability, fitness for a particular purpose, title and non-infringement of any third party intellectual property rights. Azoteq assumes no liability for any damages or injury arising from any use of the information or the product or caused by, without limitation, failure of performance, error, omission, interruption, defect, delay in operation or transmission, even if Azoteq has been advised of the possibility of such damages. The applications mentioned herein are used solely for the purpose of illustration and Azoteq makes no warranty or representation that such applications will be suitable without further modification, nor recommends the use of its products for application that may present a risk to human life due to malfunction or otherwise. Azoteq products are not authorized for use as critical components in life support devices or systems. No licenses to patents are granted, implicitly, express or implied, by estoppel or otherwise, under any intellectual property rights. In the event that any of the abovementioned limitations or exclusions does not apply, it is agreed that Azoteq's total liability for all losses, damages and causes of action (in contract, tort (including without limitation, negligence) or otherwise) will not exceed the amount already paid by the customer for the products. Azoteq reserves the right to alter its products, to make corrections, deletions, modifications, enhancements, improvements and other changes to the content and information, its products, programs and services at any time or to move or discontinue any contents, products, programs or services without prior notification. For the most up-to-date information and binding Terms and Conditions please refer to [www.azoteq.com](http://www.azoteq.com).

[WWW.AZOTEQ.COM](http://WWW.AZOTEQ.COM)

[info@azoteq.com](mailto:info@azoteq.com)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331