

Precision, Analog-to-Digital Converter (ADC) and Digital-to-Analog Converter (DAC) with 8051 Microcontroller and Flash Memory

FEATURES

ANALOG FEATURES

- **MSC1201:**
 - 24 Bits No Missing Codes
 - 22 Bits Effective Resolution At 10Hz
 - Low Noise: 75nV
- **MSC1202:**
 - 16 Bits No Missing Codes
 - 16 Bits Effective Resolution At 200Hz
 - Noise: 600nV
- PGA From 1 to 128
- Precision On-Chip Voltage Reference
- 6 Differential/Single-Ended Channels
- On-Chip Offset/Gain Calibration
- Offset Drift: 0.02ppm/°C
- Gain Drift: 0.5ppm/°C
- On-Chip Temperature Sensor
- Selectable Buffer Input
- Burnout Detect
- 8-Bit Current DAC

DIGITAL FEATURES

Microcontroller Core

- 8051-Compatible
- High-Speed Core:
 - 4 Clocks per Instruction Cycle
- DC to 33MHz
- On-Chip Oscillator
- PLL with 32kHz Capability
- Single Instruction 121ns
- Dual Data Pointer

Memory

- 4kB or 8kB of Flash Memory
- Flash Memory Partitioning
- Endurance 1M Erase/Write Cycles, 100-Year Data Retention
- 256 Bytes Data SRAM
- In-System Serially Programmable
- Flash Memory Security
- 1kB Boot ROM

Peripheral Features

- 16 Digital I/O Pins
- Additional 32-Bit Accumulator
- Two 16-Bit Timer/Counters
- System Timers
- Programmable Watchdog Timer
- Full-Duplex USART
- Basic SPI™
- Basic I²C™
- Power Management Control
- Internal Clock Divider
- Idle Mode Current < 200µA
- Stop Mode Current < 100nA
- Digital Brownout Reset
- Analog Low-Voltage Detect
- 20 Interrupt Sources

GENERAL FEATURES

- Each Device Has Unique Serial Number
- Package: QFN-36
- Low Power: 3mW at 3.0V, 1MHz
- Industrial Temperature Range: –40°C to +125°C
- Power Supply: 2.7V to 5.25V

APPLICATIONS

- Industrial Process Control
- Instrumentation
- Liquid/Gas Chromatography
- Blood Analysis
- Smart Transmitters
- Portable Instruments
- Weigh Scales
- Pressure Transducers
- Intelligent Sensors
- Portable Applications
- DAS Systems



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

SPI is a trademark of Motorola. I²C is a trademark of Philips Corporation. All other trademarks are the property of their respective owners.

PACKAGE/ORDERING INFORMATION(1)

| PRODUCT | FLASH MEMORY (BYTES) | ADC RESOLUTION (BITS) | PACKAGE-LEAD | PACKAGE DESIGNATOR | SPECIFIED TEMPERATURE RANGE | PACKAGE MARKING |
|-----------|----------------------|-----------------------|--------------|--------------------|-----------------------------|-----------------|
| MSC1201Y2 | 4k | 24 | QFN-36 | RHH | -40°C to +125°C | MSC1201Y2 |
| MSC1201Y3 | 8k | 24k | QFN-36 | RHH | -40°C to +125°C | MSC1201Y3 |
| MSC1202Y2 | 4k | 16 | QFN-36 | RHH | -40°C to +125°C | MSC1202Y2 |
| MSC1202Y3 | 8k | 16 | QFN-36 | RHH | -40°C to +125°C | MSC1202Y3 |

(1) For the most current package and ordering information, see the Package Option Addendum located at the end of this datasheet, or refer to our web site at www.ti.com.

MSC1201Yx/MSC1202Yx FAMILY FEATURES

| FEATURES(1) | MSC120xY2(2) | MSC120xY3(2) |
|---------------------------------|--------------|--------------|
| Flash Program Memory (Bytes) | Up to 4k | Up to 8k |
| Flash Data Memory (Bytes) | Up to 2k | Up to 4k |
| Internal Scratchpad RAM (Bytes) | 256 | 256 |

(1) All peripheral features are the same on all devices; the flash memory size is the only difference.

(2) The last digit of the part number (*N*) represents the onboard flash size = (2^N) kBytes.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

ABSOLUTE MAXIMUM RATINGS(1)

| | | MSC1201Yx, MSC1202Yx | UNITS | |
|-----------------------------------|---------------------------------------|------------------------------------------------------|-------|------|
| Analog Inputs | | | | |
| Input current | Momentary | 100 | mA | |
| | Continuous | 10 | mA | |
| Input voltage | | AGND – 0.3 to AV _{DD} + 0.3 | V | |
| Power Supply | | | | |
| DV _{DD} to DGND | | -0.3 to +6 | V | |
| AV _{DD} to AGND | | -0.3 to +6 | V | |
| AGND to DGND | | -0.3 to +0.3 | V | |
| VREF to AGND | | -0.3 to AV _{DD} + 0.3 | V | |
| Digital input voltage to DGND | | -0.3 to DV _{DD} + 0.3 | V | |
| Digital output voltage to DGND | | -0.3 to DV _{DD} + 0.3 | V | |
| Maximum junction temperature | | +150 | °C | |
| Operating temperature range | | -40 to +125 | °C | |
| Storage temperature range | | -65 to +150 | °C | |
| Lead temperature (soldering, 10s) | | +235 | °C | |
| Package power dissipation | | $(T_J \text{ Max} - T_{\text{AMBIENT}})/\theta_{JA}$ | W | |
| Output current, all pins | | 200 | mA | |
| Output pin short-circuit | | 10 | s | |
| Thermal Resistance | Junction to ambient (θ_{JA}) | High K (2s 2p) | 21.9 | °C/W |
| | | Low K (1s) | 103.7 | °C/W |
| | Junction to case (θ_{JC}) | 21.9 | °C/W | |
| Digital Outputs | | | | |
| Output current | Continuous | 100 | mA | |
| I/O source/sink current | | 100 | mA | |
| Power pin maximum | | 300 | mA | |

(1) Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS: $V_{DD} = 5V$

 All specifications from T_{MIN} to T_{MAX} , $DV_{DD} = +2.7V$ to $+5.25V$, $f_{MOD} = 15.625kHz$, $PGA = 1$, Buffer ON, $f_{DATA} = 10Hz$, Bipolar, and $V_{REF} = (REF IN+) - (REF IN-) = +2.5V$, unless otherwise noted.

| PARAMETER | CONDITION | MSC1201Yx, MSC1202Yx | | | UNITS |
|-----------------------------------------|-----------------------------------------------------------|-----------------------------|-----------------------------|-------------------|--------------|
| | | MIN | TYP | MAX | |
| Analog Input (AIN0-AIN5, AINCOM) | | | | | |
| Analog Input Range | Buffer OFF | AGND – 0.1 | | $AV_{DD} + 0.1$ | V |
| | Buffer ON | AGND + 50mV | | $AV_{DD} - 1.5$ | V |
| Full-Scale Input Voltage Range | (In+) – (In–) | | | $\pm V_{REF}/PGA$ | V |
| Differential Input Impedance | Buffer OFF | | $7/PGA^{(1)}$ | | M Ω |
| Input Current | Buffer ON | | 0.5 | | nA |
| Bandwidth | Fast Settling Filter | –3dB | $0.469 \cdot f_{DATA}$ | | |
| | Sinc ² Filter | –3dB | $0.318 \cdot f_{DATA}$ | | |
| | Sinc ³ Filter | –3dB | $0.262 \cdot f_{DATA}$ | | |
| Programmable Gain Amplifier | User-Selectable Gain Range | 1 | | 128 | |
| Input Capacitance | Buffer ON | | 7 | | pF |
| Input Leakage Current | Multiplexer Channel OFF, T = +25°C | | 0.5 | | pA |
| Burnout Current Sources | Buffer ON | | ± 2 | | μA |
| ADC Offset DAC | | | | | |
| Offset DAC Range | | | $\pm V_{REF}/(2 \cdot PGA)$ | | V |
| Offset DAC Resolution | | 8 | | | Bits |
| Offset DAC Full-Scale Gain Error | | | ± 1.0 | | % of Range |
| Offset DAC Full-Scale Gain Error Drift | | | 0.6 | | ppm/°C |
| System Performance | | | | | |
| Resolution | MSC1201 | 24 | | | Bits |
| | MSC1202 | 16 | | | Bits |
| ENOB | MSC1201 | | 22 | | Bits |
| | MSC1202 | | 16 | | Bits |
| Output Noise | | See Typical Characteristics | | | |
| No Missing Codes | MSC1201, Sinc ³ Filter, Decimation > 360 | 24 | | | Bits |
| | MSC1202, Sinc ³ Filter | 16 | | | Bits |
| Integral Nonlinearity | End Point Fit, Differential Input | | ± 0.0004 | ± 0.0015 | % of FSR |
| Offset Error | After Calibration | | 1.5 | | ppm of FS |
| Offset Drift ⁽²⁾ | Before Calibration | | 0.02 | | ppm of FS/°C |
| Gain Error ⁽³⁾ | After Calibration | | 0.005 | | % |
| Gain Error Drift ⁽²⁾ | Before Calibration | | 0.5 | | ppm/°C |
| System Gain Calibration Range | | 80 | | 120 | % of FS |
| System Offset Calibration Range | | –50 | | 50 | % of FS |
| Common-Mode Rejection | At DC | | 120 | | dB |
| | $f_{CM} = 60Hz, f_{DATA} = 10Hz$ | | 130 | | dB |
| | $f_{CM} = 50Hz, f_{DATA} = 50Hz$ | | 120 | | dB |
| | $f_{CM} = 60Hz, f_{DATA} = 60Hz$ | | 120 | | dB |
| Normal-Mode Rejection | $f_{CM} = 50Hz, f_{DATA} = 50Hz$ | | 100 | | dB |
| | $f_{CM} = 60Hz, f_{DATA} = 60Hz$ | | 100 | | dB |
| Power-Supply Rejection | At DC, dB = $-20\log(\Delta V_{OUT}/\Delta V_{DD})^{(4)}$ | | 100 | | dB |

 (1) The input impedance for $PGA = 128$ is the same as that for $PGA = 64$ (that is, $7M\Omega/64$).

(2) Calibration can minimize these errors.

 (3) The gain calibration cannot have a $REF IN+$ of more than $AV_{DD} - 1.5V$ with Buffer ON. To calibrate gain, turn Buffer OFF.

 (4) ΔV_{OUT} is change in digital result.

ELECTRICAL CHARACTERISTICS: $AV_{DD} = 5V$ (continued)

All specifications from T_{MIN} to T_{MAX} , $DV_{DD} = +2.7V$ to $+5.25V$, $f_{MOD} = 15.625kHz$, $PGA = 1$, Buffer ON, $f_{DATA} = 10Hz$, Bipolar, and $V_{REF} \equiv (REF\ IN+) - (REF\ IN-) = +2.5V$, unless otherwise noted.

| PARAMETER | CONDITION | MSC1201Yx, MSC1202Yx | | | UNITS |
|-----------------------------------------|-----------------------------------------|------------------------------------------------------------------------|-----------------|-----------------|-------------------|
| | | MIN | TYP | MAX | |
| Voltage Reference Input | | | | | |
| Reference Input Range | REF IN+, REF IN- | AGND | | $AV_{DD}^{(3)}$ | V |
| ADC V_{REF} | $V_{REF} \equiv (REFIN+) - (REFIN-)$ | 0.1 | 2.5 | AV_{DD} | V |
| V_{REF} Common-Mode Rejection | At DC | | 115 | | dB |
| Input Current | $V_{REF} = 2.5V$, $PGA = 1$ | | 1 | | μA |
| On-Chip Voltage Reference | | | | | |
| Output Voltage | $V_{REFH} = 1$ at $+25^{\circ}C$ | | 2.5 | | V |
| | $V_{REFH} = 0$ | | 1.25 | | V |
| Short-Circuit Current Source | | | 8 | | mA |
| Short-Circuit Current Sink | | | 50 | | mA |
| Short-Circuit Duration | Sink or Source | | Indefinite | | |
| Startup Time from Power ON | $C_{REFOUT} = 0.1\mu F$ | | 8 | | ms |
| Temperature Sensor | | | | | |
| Temperature Sensor Voltage | $T = +25^{\circ}C$ | | 115 | | mV |
| Temperature Sensor Coefficient | | | 345 | | $\mu V/^{\circ}C$ |
| IDAC Output Characteristics | | | | | |
| IDAC Resolution | | | 8 | | Bits |
| Full-Scale Output Current | | | 1 | | mA |
| Maximum Short-Circuit Current Duration | | | Indefinite | | |
| Compliance Voltage | | | $AV_{DD} - 1.5$ | | V |
| Analog Power-Supply Requirements | | | | | |
| Analog Power-Supply Voltage | AV_{DD} | 4.75 | 5.0 | 5.25 | V |
| Analog Power-Supply Current | Analog Current | BOR OFF, External Clock Mode, Analog OFF, ALVD OFF, PDADC = PDIDAC = 1 | | < 1 | nA |
| | ADC Current (I_{ADC}) | $PGA = 1$, Buffer OFF | | 170 | μA |
| | | $PGA = 128$, Buffer OFF | | 430 | μA |
| | | $PGA = 1$, Buffer ON | | 230 | μA |
| | | $PGA = 128$, Buffer ON | | 770 | μA |
| | V_{REF} Supply Current (I_{VREF}) | ADC ON | | 360 | μA |
| IDAC Supply Current (I_{IDAC}) | IDAC = 00h | | 230 | μA | |

(1) The input impedance for $PGA = 128$ is the same as that for $PGA = 64$ (that is, $7M\Omega/64$).

(2) Calibration can minimize these errors.

(3) The gain calibration cannot have a REF IN+ of more than $AV_{DD} - 1.5V$ with Buffer ON. To calibrate gain, turn Buffer OFF.

(4) ΔV_{OUT} is change in digital result.

ELECTRICAL CHARACTERISTICS: $AV_{DD} = 3V$

 All specifications from T_{MIN} to T_{MAX} , $DV_{DD} = +2.7V$ to $+5.25V$, $f_{MOD} = 15.625kHz$, $PGA = 1$, Buffer ON, $f_{DATA} = 10Hz$, Bipolar, and $V_{REF} = (REF\ IN+) - (REF\ IN-) = +1.25V$, unless otherwise noted.

| PARAMETER | CONDITIONS | MSC1201Yx, MSC1202Yx | | | UNITS |
|-----------------------------------------|-----------------------------------------------------------|-----------------------------|-----------------------------|-------------------|--------------|
| | | MIN | TYP | MAX | |
| Analog Input (AIN0-AIN5, AINCOM) | | | | | |
| Analog Input Range | Buffer OFF | AGND – 0.1 | | $AV_{DD} + 0.1$ | V |
| | Buffer ON | AGND + 50mV | | $AV_{DD} - 1.5$ | V |
| Full-Scale Input Voltage Range | (In+) – (In–) | | | $\pm V_{REF}/PGA$ | V |
| Differential Input Impedance | Buffer OFF | | $7/PGA^{(1)}$ | | M Ω |
| Input Current | Buffer ON | | 0.5 | | nA |
| Bandwidth | Fast Settling Filter | –3dB | $0.469 \cdot f_{DATA}$ | | |
| | Sinc ² Filter | –3dB | $0.318 \cdot f_{DATA}$ | | |
| | Sinc ³ Filter | –3dB | $0.262 \cdot f_{DATA}$ | | |
| Programmable Gain Amplifier | User-Selectable Gain Range | 1 | | 128 | |
| Input Capacitance | Buffer ON | | 7 | | pF |
| Input Leakage Current | Multiplexer Channel Off, T = +25°C | | 0.5 | | pA |
| Burnout Current Sources | Buffer ON | | ± 2 | | μA |
| ADC Offset DAC | | | | | |
| Offset DAC Range | | | $\pm V_{REF}/(2 \cdot PGA)$ | | V |
| Offset DAC Resolution | | 8 | | | Bits |
| Offset DAC Full-Scale Gain Error | | | ± 1.5 | | % of Range |
| Offset DAC Full-Scale Gain Error Drift | | | 0.6 | | ppm/°C |
| System Performance | | | | | |
| Resolution | MSC1201 | 24 | | | Bits |
| | MSC1202 | 16 | | | Bits |
| ENOB | MSC1201 | | 22 | | Bits |
| | MSC1202 | | 16 | | Bits |
| Output Noise | | See Typical Characteristics | | | |
| No Missing Codes | MSC1201, Sinc ³ Filter, Decimation > 360 | 24 | | | Bits |
| | MSC1202, Sinc ³ Filter | 16 | | | Bits |
| Integral Nonlinearity | End Point Fit, Differential Input | | ± 0.0004 | ± 0.0015 | % of FSR |
| Offset Error | After Calibration | | 1.3 | | ppm of FS |
| Offset Drift ⁽²⁾ | Before Calibration | | 0.02 | | ppm of FS/°C |
| Gain Error ⁽³⁾ | After Calibration | | 0.005 | | % |
| Gain Error Drift ⁽²⁾ | Before Calibration | | 0.5 | | ppm/°C |
| System Gain Calibration Range | | 80 | | 120 | % of FS |
| System Offset Calibration Range | | –50 | | 50 | % of FS |
| Common-Mode Rejection | At DC | | 130 | | dB |
| | $f_{CM} = 60Hz, f_{DATA} = 10Hz$ | | 130 | | dB |
| | $f_{CM} = 50Hz, f_{DATA} = 50Hz$ | | 120 | | dB |
| | $f_{CM} = 60Hz, f_{DATA} = 60Hz$ | | 120 | | dB |
| Normal-Mode Rejection | $f_{SIG} = 50Hz, f_{DATA} = 50Hz$ | | 100 | | dB |
| | $f_{SIG} = 60Hz, f_{DATA} = 60Hz$ | | 100 | | dB |
| Power-Supply Rejection | At DC, dB = $-20\log(\Delta V_{OUT}/\Delta V_{DD})^{(4)}$ | | 88 | | dB |

 (1) The input impedance for $PGA = 128$ is the same as that for $PGA = 64$ (that is, $7M\Omega/64$).

(2) Calibration can minimize these errors.

 (3) The gain calibration cannot have a $REF\ IN+$ of more than $AV_{DD} - 1.5V$ with Buffer ON. To calibrate gain, turn Buffer OFF.

 (4) ΔV_{OUT} is change in digital result.

ELECTRICAL CHARACTERISTICS: AV_{DD} = 3V (continued)

All specifications from T_{MIN} to T_{MAX}, DV_{DD} = +2.7V to +5.25V, f_{MOD} = 15.625kHz, PGA = 1, Buffer ON, f_{DATA} = 10Hz, Bipolar, and V_{REF} ≡ (REF IN+) – (REF IN-) = +1.25V, unless otherwise noted.

| PARAMETER | CONDITIONS | MSC1201Yx, MSC1202Yx | | | UNITS |
|------------------------------------------------------|------------------------------------------------------|------------------------------------------------------------------------|------------------------|---------------------------------|-------|
| | | MIN | TYP | MAX | |
| Voltage Reference Input | | | | | |
| Reference Input Range | REF IN+, REF IN- | AGND | | AV _{DD} ⁽³⁾ | V |
| ADC V _{REF} | V _{REF} ≡ (REFIN+) – (REFIN-) | 0.1 | 1.25 | AV _{DD} | V |
| V _{REF} Common-Mode Rejection | At DC | | 110 | | dB |
| Input Current | V _{REF} = 1.25V, PGA = 1 | | 0.5 | | μA |
| On-Chip Voltage Reference | | | | | |
| Output Voltage | VREFH = 0 at +25°C | | 1.25 | | V |
| Short-Circuit Current Source | | | 8 | | mA |
| Short-Circuit Current Sink | | | 50 | | μA |
| Short-Circuit Duration | Sink or Source | | Indefinite | | |
| Startup Time from Power ON | C _{REFOUT} | | 8 | | ms |
| Temperature Sensor | | | | | |
| Temperature Sensor Voltage | T = +25°C | | 115 | | mV |
| Temperature Sensor Coefficient | | | 345 | | μV/°C |
| IDAC Output Characteristics | | | | | |
| IDAC Resolution | | | 8 | | Bits |
| Full-Scale Output Current | | | 1 | | mA |
| Maximum Short-Circuit Current Duration | | | Indefinite | | |
| Compliance Voltage | | | AV _{DD} – 1.5 | | V |
| Analog Power-Supply Requirements | | | | | |
| Analog Power-Supply Voltage | AV _{DD} | 2.7 | | 3.6 | V |
| Analog Power-Supply Current | Analog Current | BOR OFF, External Clock Mode, Analog OFF, ALVD OFF, PDADC = PDIDAC = 1 | | < 1 | nA |
| | ADC Current (I _{ADC}) | PGA = 1, Buffer OFF | | 150 | μA |
| | | PGA = 128, Buffer OFF | | 380 | μA |
| | | PGA = 1, Buffer ON | | 200 | μA |
| | | PGA = 128, Buffer ON | | 610 | μA |
| | V _{REF} Supply Current (I _{VREF}) | ADC ON | | 330 | μA |
| I _{DAC} Supply Current (I _{IDAC}) | IDAC = 00h | | 220 | μA | |

(1) The input impedance for PGA = 128 is the same as that for PGA = 64 (that is, 7MΩ/64).

(2) Calibration can minimize these errors.

(3) The gain calibration cannot have a REF IN+ of more than AV_{DD} – 1.5V with Buffer ON. To calibrate gain, turn Buffer OFF.

(4) ΔV_{OUT} is change in digital result.

DIGITAL CHARACTERISTICS: $DV_{DD} = 2.7V$ to $5.25V$

 All specifications from T_{MIN} to T_{MAX} , unless otherwise specified.

| PARAMETER | CONDITIONS | MSC1201Yx, MSC1202Yx | | | UNITS | |
|--------------------------------------------------|----------------------------------------------------|----------------------|---------------------|-----------|---------------------|---|
| | | MIN | TYP | MAX | | |
| Digital Power-Supply Requirements | | | | | | |
| DV_{DD} | | 2.7 | 3.0 | 3.6 | V | |
| Digital Power-Supply Current | Normal Mode, $f_{OSC} = 1MHz$ | | 0.6 | | mA | |
| | Normal Mode, $f_{OSC} = 8MHz$, All Peripherals ON | | 5 | | mA | |
| | Internal Oscillator LF Mode (12.8MHz nominal) | | 7.1 | | mA | |
| | Stop Mode, External Clock OFF | | 100 | | nA | |
| DV_{DD} | | 4.75 | 5.0 | 5.25 | V | |
| Digital Power-Supply Current | Normal Mode, $f_{OSC} = 1MHz$ | | 1.2 | | mA | |
| | Normal Mode, $f_{OSC} = 8MHz$, All Peripherals ON | | 9 | | mA | |
| | Internal Oscillator LF Mode (12.8MHz nominal) | | 15 | | mA | |
| | Internal Oscillator HF Mode (25.6MHz nominal) | | 29 | | mA | |
| | Stop Mode, External Clock OFF | | 100 | | nA | |
| Digital Input/Output (CMOS) | | | | | | |
| Logic Level | V_{IH} (except XIN pin) | | $0.6 \cdot DV_{DD}$ | | DV_{DD} | V |
| | V_{IL} (except XIN pin) | | DGND | | $0.2 \cdot DV_{DD}$ | V |
| Ports 1 and 3, Input Leakage Current, Input Mode | $V_{IH} = DV_{DD}$ or $V_{IH} = 0V$ | | 0 | | μA | |
| I/O Pin Hysteresis | | | 700 | | mV | |
| V_{OL} , Ports 1 and 3, All Output Modes | $I_{OL} = 1mA$ | DGND | | 0.4 | V | |
| | $I_{OL} = 30mA, 3V (20mA)$ | | 1.5 | | V | |
| V_{OH} , Ports 1 and 3, Strong Drive Output | $I_{OH} = 1mA$ | $DV_{DD} - 0.4$ | $DV_{DD} - 0.1$ | DV_{DD} | V | |
| | $I_{OH} = 30mA, 3V (20mA)$ | | $DV_{DD} - 1.5$ | | V | |
| Ports 1 and 3, Pull-Up Resistors | | | 11 | | k Ω | |

FLASH MEMORY CHARACTERISTICS: $DV_{DD} = 2.7V$ to $5.25V$
 $t_{USEC} = 1\mu s$ and $t_{MSEC} = 1ms$

| PARAMETER | CONDITIONS | MSC1201Yx, MSC1202Yx | | | UNITS |
|-----------------------------|----------------------------------------------------------|----------------------|-----------|-----|---------|
| | | MIN | TYP | MAX | |
| Flash Memory Endurance | | 100,000 | 1,000,000 | | cycles |
| Flash Memory Data Retention | | 100 | | | Years |
| Mass and Page Erase Time | Set with FER Value in FTCON, from T_{MIN} to T_{MAX} | 10 | | | ms |
| Flash Memory Write Time | Set with FWR Value in FTCON | 30 | | 40 | μs |

AC ELECTRICAL CHARACTERISTICS(1): $DV_{DD} = 2.7V$ to $5.25V$

| PARAMETER | CONDITION | MSC1201Yx, MSC1202Yx | | | UNITS |
|--------------------------|----------------------------------------------------|----------------------|--------|-----|-------|
| | | MIN | TYP | MAX | |
| PHASE LOCK LOOP (PLL) | | | | | |
| Input Frequency Range | External Crystal/Clock Frequency (f_{OSC}) | | 32.768 | | kHz |
| PLL LF Mode | PLLDIV = 449 (default) | | 14.8 | | MHz |
| PLL HF Mode | PLLDIV = 899 (must be set by user), $DV_{DD} = 5V$ | | 29.5 | | MHz |
| PLL Lock Time | Within 1% | | | 2 | ms |
| INTERNAL OSCILLATOR (IO) | See Typical Characteristics | | | | |
| IO LF Mode | | | 14.7 | | MHz |
| IO HF Mode | $DV_{DD} = 5V$ | | 29.5 | | MHz |
| IO Settling Time | Within 1% | | | 1 | ms |

(1) Parameters are valid over operating temperature range, unless otherwise specified.

EXTERNAL CLOCK DRIVE CLK TIMING: SEE FIGURE 1

| SYMBOL | PARAMETER | 2.7V to 3.6V | | 4.75V to 5.25V | | UNITS |
|---------------------|----------------------------------------------------|--------------|-----|----------------|-----|-------|
| | | MIN | MAX | MIN | MAX | |
| External Clock Mode | | | | | | |
| $f_{OSC}^{(1)}$ | External Crystal Frequency (f_{OSC}) | 1 | 20 | 1 | 33 | MHz |
| $1/f_{OSC}^{(1)}$ | External Clock Frequency (f_{OSC}) | 0 | 20 | 0 | 33 | MHz |
| $f_{OSC}^{(1)}$ | External Ceramic Resonator Frequency (f_{OSC}) | 1 | 12 | 1 | 12 | MHz |
| t_{HIGH} | HIGH Time(2) | 15 | | 10 | | ns |
| t_{LOW} | LOW Time(2) | 15 | | 10 | | ns |
| t_R | Rise Time(2) | | 5 | | 5 | ns |
| t_F | Fall Time(2) | | 5 | | 5 | ns |

(1) $t_{CLK} = 1/f_{OSC}$ = one oscillator clock period for clock divider = 1.
 (2) These values are characterized but not 100% production tested.

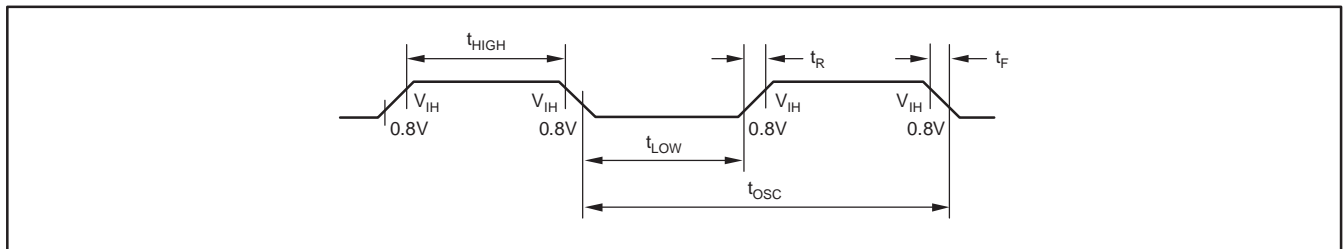


Figure 1. External Clock Drive CLK

SERIAL FLASH PROGRAMMING TIMING: SEE FIGURE 2

| SYMBOL | PARAMETER | MIN | MAX | UNITS |
|-----------|----------------------------------------|-------------|-----|---------|
| t_{RW} | RST width | $2 t_{OSC}$ | — | ns |
| t_{RRD} | RST rise to P1.0 internal pull high | — | 5 | μs |
| t_{RFD} | RST falling to CPU start | — | 18 | ms |
| t_{RS} | Input signal to RST falling setup time | t_{OSC} | — | ns |
| t_{RH} | RST falling to P1.0 hold time | 18 | — | ms |


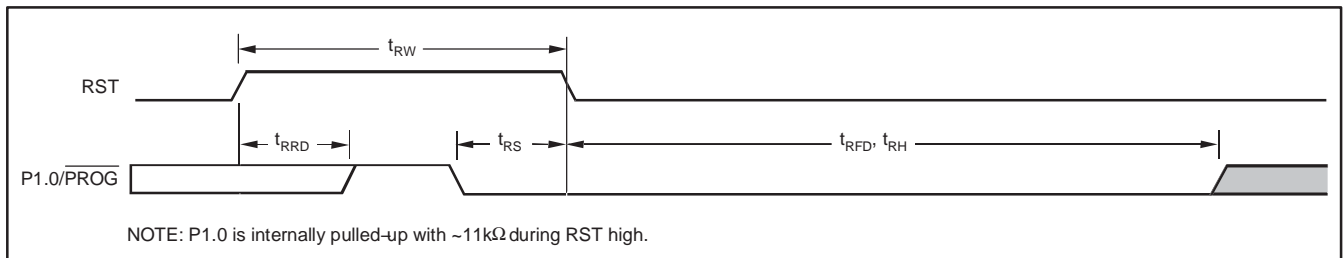


Figure 2. External Clock Drive CLK

PIN CONFIGURATION






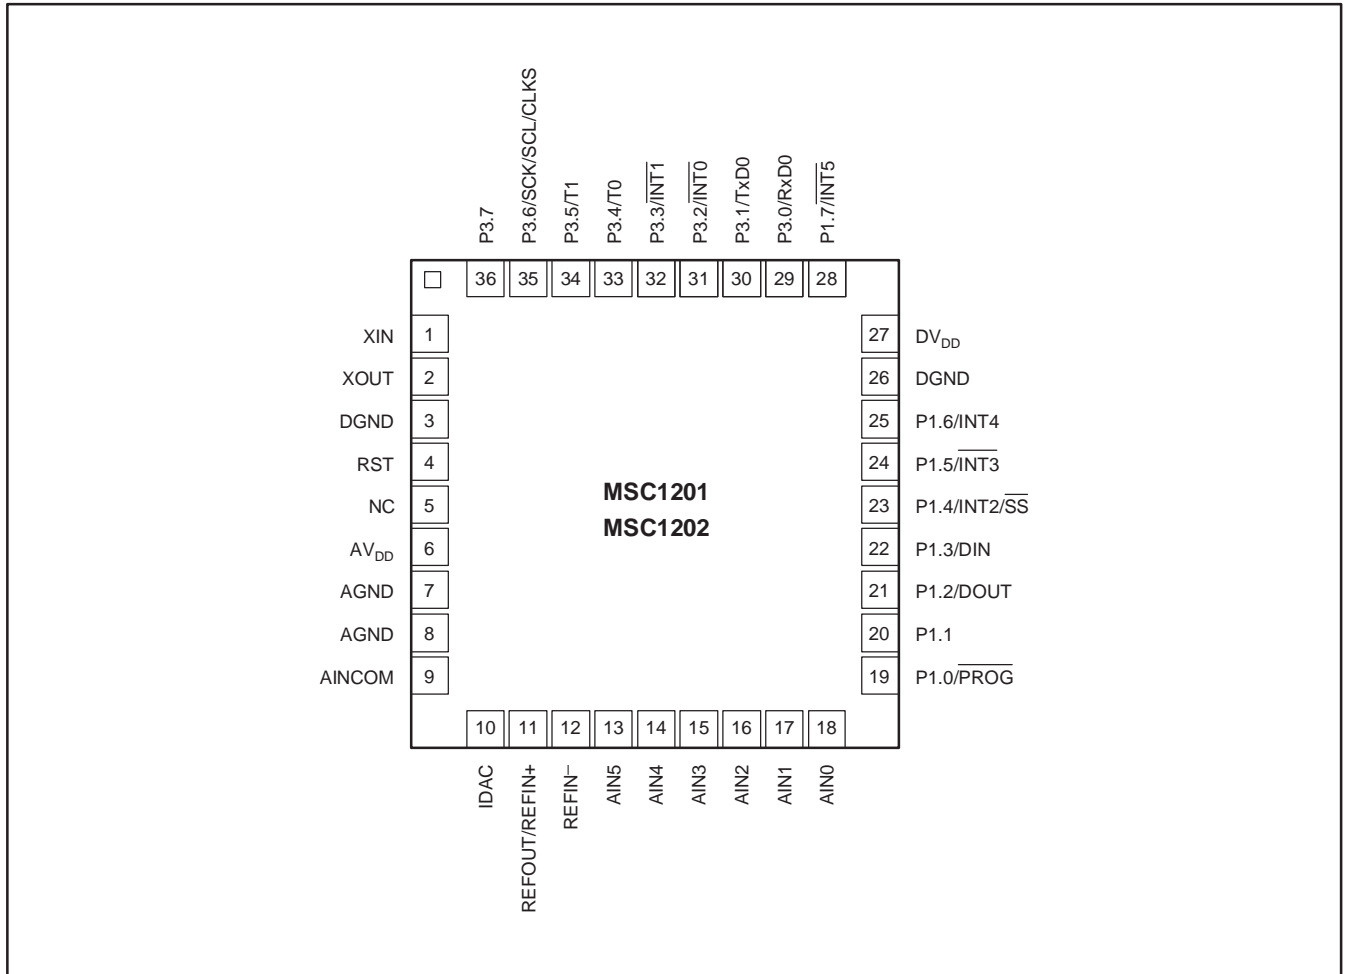


PIN ASSIGNMENTS

| PIN # | NAME | DESCRIPTION | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------------|---------------|------|------|-------------------------|------|------|----------------------|------|-------------------|----------------------|------|-------------------|----------------------|------|-----------------------|-------------------------------------|------|-------------------|------------------------|------|--------------|------------------------------------------------------|------|-------------------|----------------------|
| 1 | XIN | The crystal oscillator pin XIN supports parallel resonant AT cut fundamental frequency crystals and ceramic resonators. XIN can also be an input if there is an external clock source instead of a crystal. XIN must not be left floating. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | XOUT | The crystal oscillator pin XOUT supports parallel resonant AT cut fundamental frequency crystals and ceramic resonators. XOUT serves as the output of the crystal amplifier. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3, 26 | DGND | Digital Ground | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | RST | A HIGH on the reset input for two t_{OSC} periods will reset the device. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | NC | No connection | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | AV _{DD} | Analog Power Supply | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 7, 8 | AGND | Analog Ground | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9 | AINCOM | Analog Input (can be analog common for single-ended inputs or analog input for differential inputs) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10 | IDAC | IDAC Output | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 | REFOUT/REF IN+ | Internal Voltage Reference Output/Voltage Reference Positive Input | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 12 | REF IN- | Voltage Reference Negative Input (tie to AGND for internal voltage reference) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 | AIN5 | Analog Input Channel 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 14 | AIN4 | Analog Input Channel 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 | AIN3 | Analog Input Channel 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 16 | AIN2 | Analog Input Channel 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 | AIN1 | Analog Input Channel 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 18 | AIN0 | Analog Input Channel 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19–25, 28 | P1.0–P1.7 | Port 1 is a bidirectional I/O port (refer to P1DDRL, SFR AEh, and P1DDRH, SFR AFh, for port pin configuration control). The alternate functions for Port 1 are listed below. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Port</th> <th>Alternate Name(s)</th> <th>Alternate Use</th> </tr> </thead> <tbody> <tr> <td>P1.0</td> <td>PROG</td> <td>Serial programming mode</td> </tr> <tr> <td>P1.1</td> <td>N/A</td> <td></td> </tr> <tr> <td>P1.2</td> <td>DOUT</td> <td>Serial data out</td> </tr> <tr> <td>P1.3</td> <td>DIN</td> <td>Serial data in</td> </tr> <tr> <td>P1.4</td> <td>INT2/\overline{SS}</td> <td>External interrupt 2 / Slave Select</td> </tr> <tr> <td>P1.5</td> <td>$\overline{INT3}$</td> <td>External interrupt 3</td> </tr> <tr> <td>P1.6</td> <td>INT4</td> <td>External interrupt 4</td> </tr> <tr> <td>P1.7</td> <td>$\overline{INT5}$</td> <td>External interrupt 5</td> </tr> </tbody> </table> | Port | Alternate Name(s) | Alternate Use | P1.0 | PROG | Serial programming mode | P1.1 | N/A | | P1.2 | DOUT | Serial data out | P1.3 | DIN | Serial data in | P1.4 | INT2/ \overline{SS} | External interrupt 2 / Slave Select | P1.5 | $\overline{INT3}$ | External interrupt 3 | P1.6 | INT4 | External interrupt 4 | P1.7 | $\overline{INT5}$ | External interrupt 5 |
| Port | Alternate Name(s) | Alternate Use | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.0 | PROG | Serial programming mode | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.1 | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.2 | DOUT | Serial data out | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.3 | DIN | Serial data in | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.4 | INT2/ \overline{SS} | External interrupt 2 / Slave Select | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.5 | $\overline{INT3}$ | External interrupt 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.6 | INT4 | External interrupt 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.7 | $\overline{INT5}$ | External interrupt 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 27 | DV _{DD} | Digital Power Supply | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 29–36 | P3.0–P3.7 | Port 3 is a bidirectional I/O port (refer to P3DDRL, SFR B3h, and P3DDRH, SFR B4h, for port pin configuration control). The alternate functions for Port 3 are listed below. | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Port</th> <th>Alternate Name(s)</th> <th>Alternate Use</th> </tr> </thead> <tbody> <tr> <td>P3.0</td> <td>RxD0</td> <td>Serial port 0 input</td> </tr> <tr> <td>P3.1</td> <td>TxD0</td> <td>Serial port 0 output</td> </tr> <tr> <td>P3.2</td> <td>$\overline{INT0}$</td> <td>External interrupt 0</td> </tr> <tr> <td>P3.3</td> <td>$\overline{INT1}$</td> <td>External interrupt 1</td> </tr> <tr> <td>P3.4</td> <td>T0</td> <td>Timer 0 external input</td> </tr> <tr> <td>P3.5</td> <td>T1</td> <td>Timer 1 external input</td> </tr> <tr> <td>P3.6</td> <td>SCK/SCL/CLKS</td> <td>SCK / SCL / various clocks (refer to PASEL, SFR F2h)</td> </tr> <tr> <td>P1.7</td> <td>N/A</td> <td></td> </tr> </tbody> </table> | Port | Alternate Name(s) | Alternate Use | P3.0 | RxD0 | Serial port 0 input | P3.1 | TxD0 | Serial port 0 output | P3.2 | $\overline{INT0}$ | External interrupt 0 | P3.3 | $\overline{INT1}$ | External interrupt 1 | P3.4 | T0 | Timer 0 external input | P3.5 | T1 | Timer 1 external input | P3.6 | SCK/SCL/CLKS | SCK / SCL / various clocks (refer to PASEL, SFR F2h) | P1.7 | N/A | |
| Port | Alternate Name(s) | Alternate Use | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P3.0 | RxD0 | Serial port 0 input | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P3.1 | TxD0 | Serial port 0 output | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P3.2 | $\overline{INT0}$ | External interrupt 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P3.3 | $\overline{INT1}$ | External interrupt 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P3.4 | T0 | Timer 0 external input | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P3.5 | T1 | Timer 1 external input | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P3.6 | SCK/SCL/CLKS | SCK / SCL / various clocks (refer to PASEL, SFR F2h) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P1.7 | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | |






TYPICAL CHARACTERISTICS: MSC1201 ONLY

$AV_{DD} = +5V$, $DV_{DD} = +5V$, $f_{OSC} = 8MHz$, $PGA = 1$, $f_{MOD} = 15.625kHz$, Bipolar, Buffer ON, and $V_{REF} = (REF IN+) - (REF IN-) = +2.5V$, unless otherwise specified.

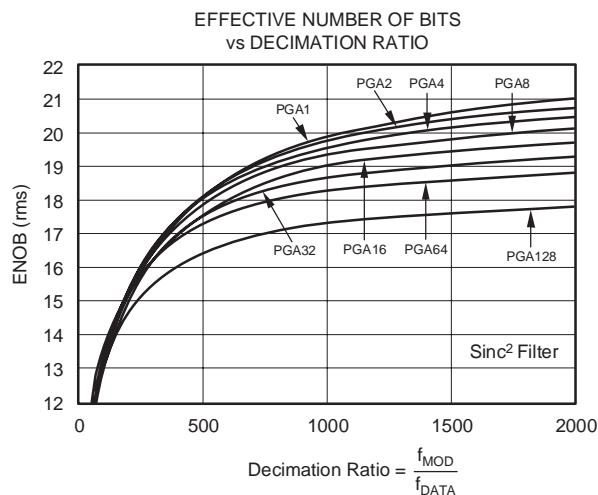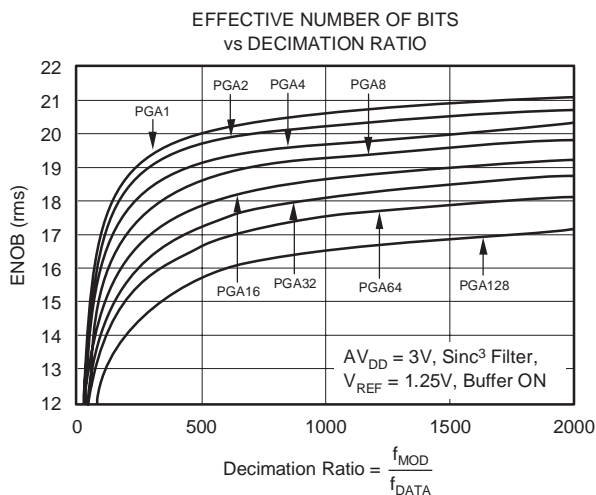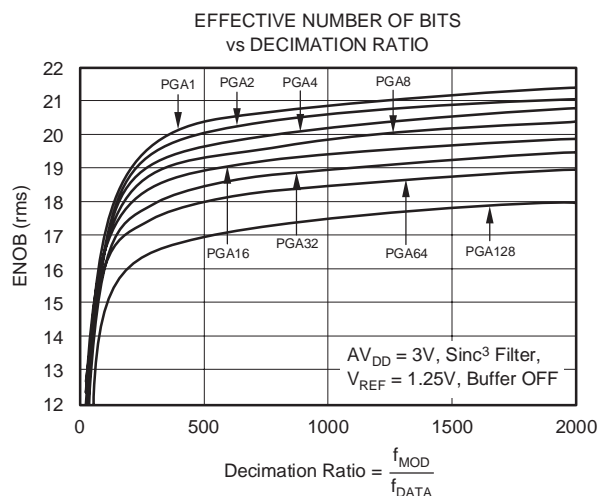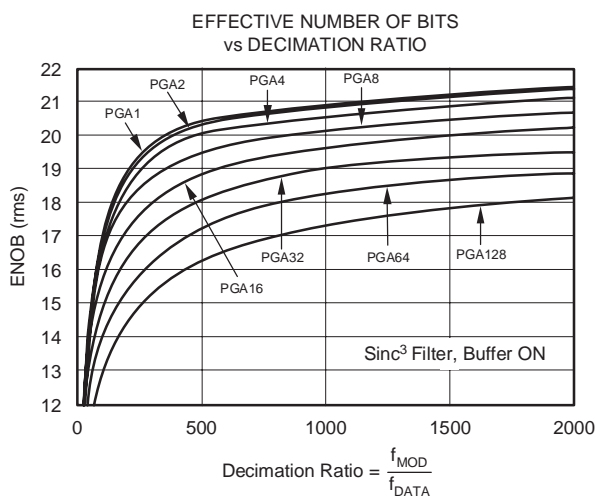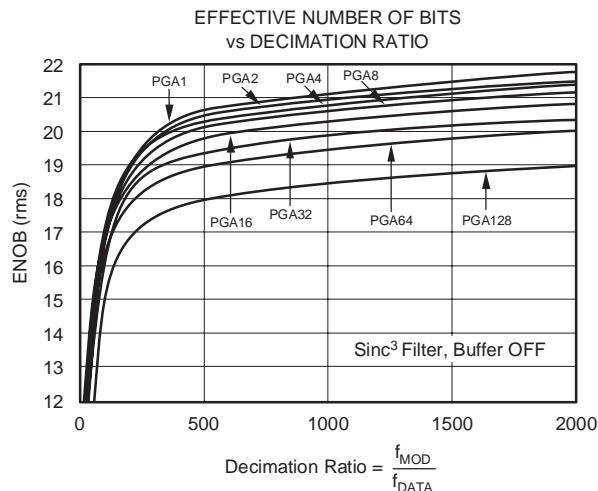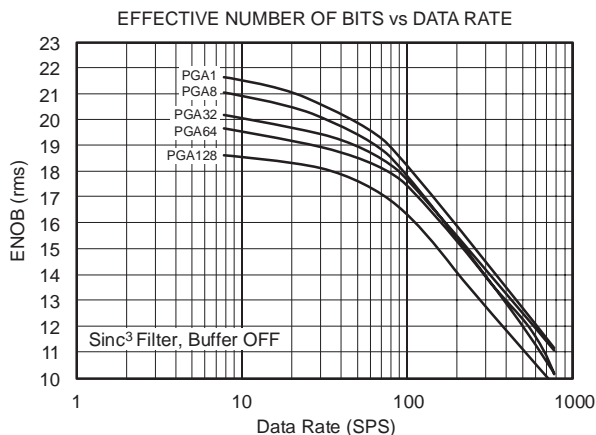







TYPICAL CHARACTERISTICS: MSC1201 ONLY (Continued)

AV_{DD} = +5V, DV_{DD} = +5V, f_{OSC} = 8MHz, PGA = 1, f_{MOD} = 15.625kHz, Bipolar, Buffer ON, and V_{REF} ≡ (REF IN+) – (REF IN-) = +2.5V, unless otherwise specified.

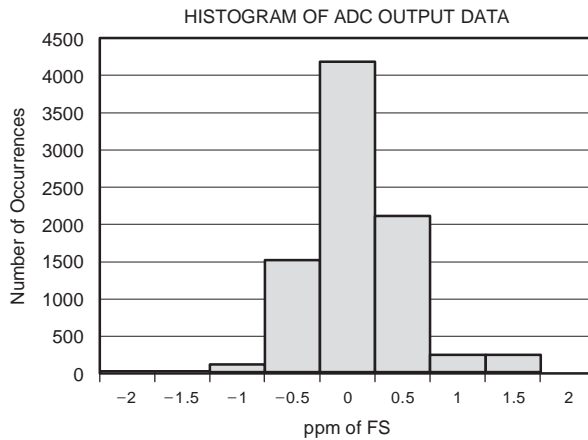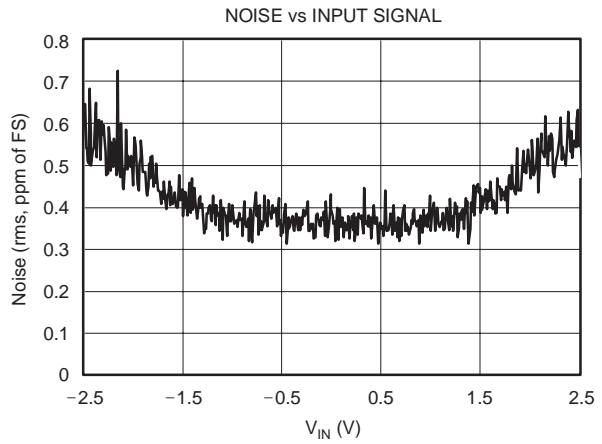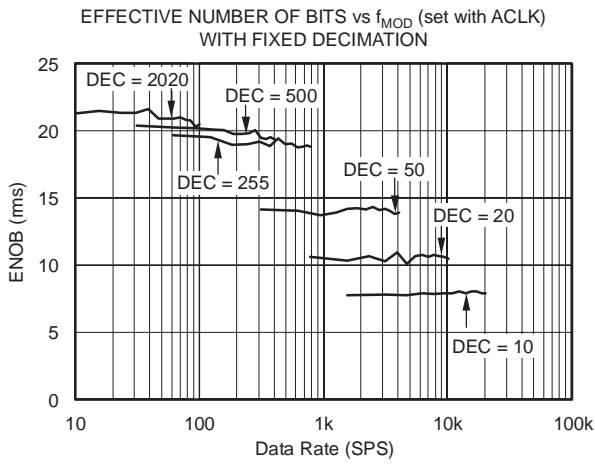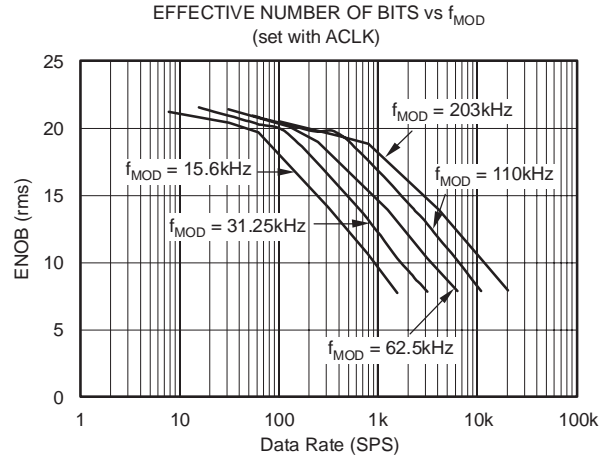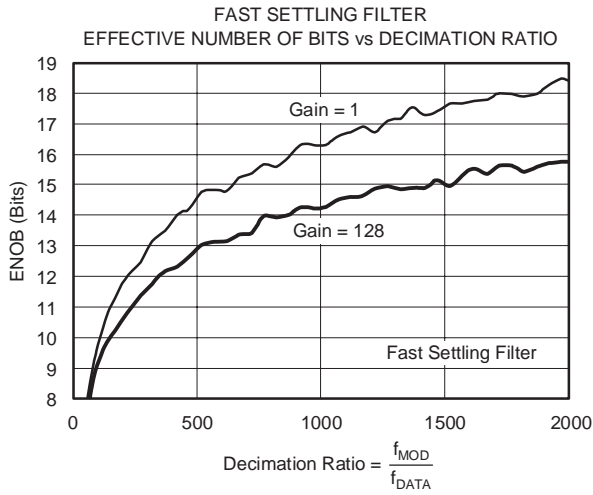




TYPICAL CHARACTERISTICS: MSC1202 ONLY

$A_{V_{DD}} = +5V$, $D_{V_{DD}} = +5V$, $f_{OSC} = 8MHz$, $PGA = 1$, $f_{MOD} = 15.625kHz$, Bipolar, Buffer ON, and $V_{REF} = (REF IN+) - (REF IN-) = +2.5V$, unless otherwise specified.

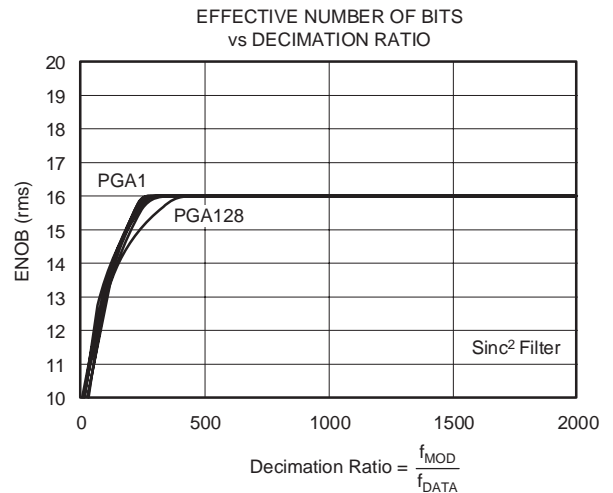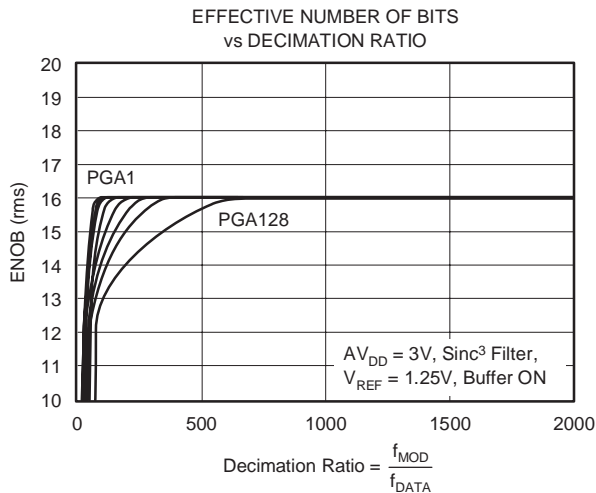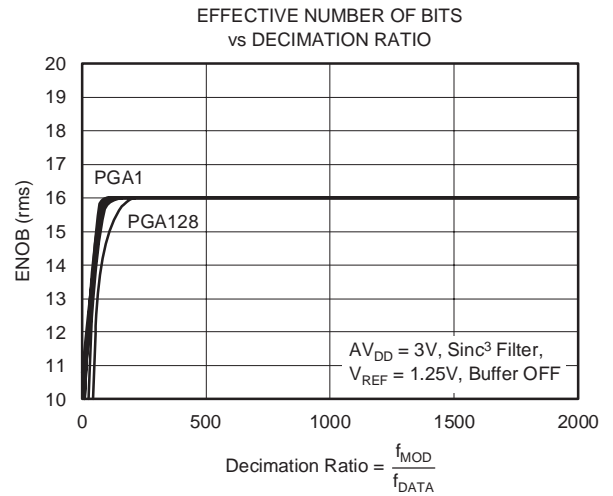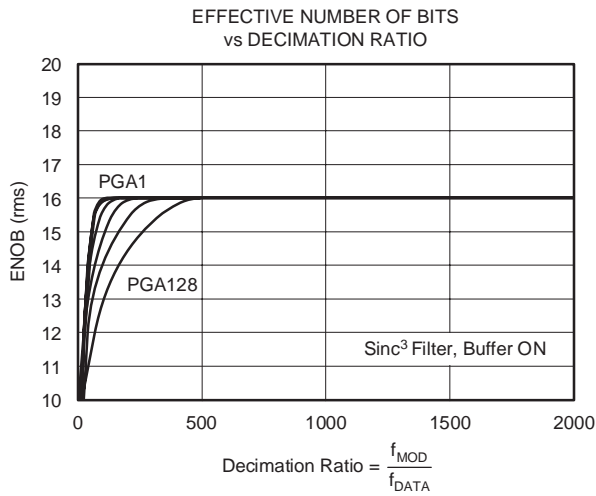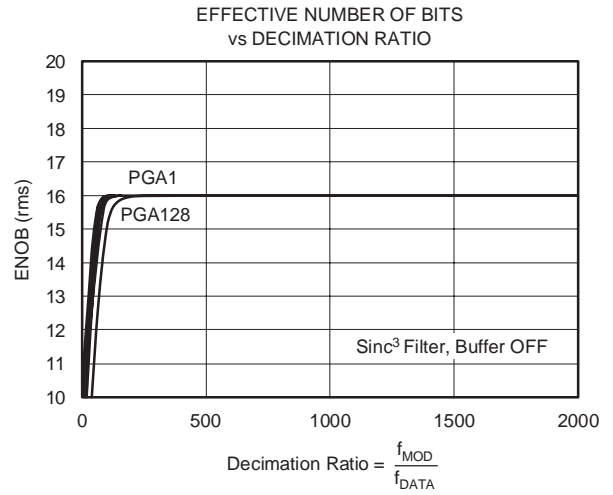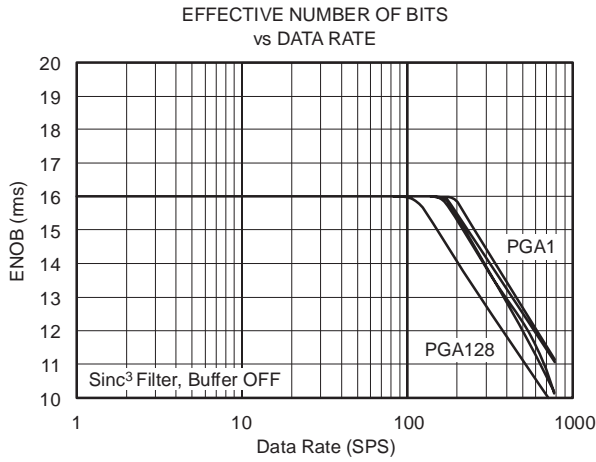







TYPICAL CHARACTERISTICS: MSC1202 ONLY (Continued)

$V_{DD} = +5V$, $DV_{DD} = +5V$, $f_{OSC} = 8MHz$, $PGA = 1$, $f_{MOD} = 15.625kHz$, Bipolar, Buffer ON, and $V_{REF} \equiv (REF IN+) - (REF IN-) = +2.5V$, unless otherwise specified.

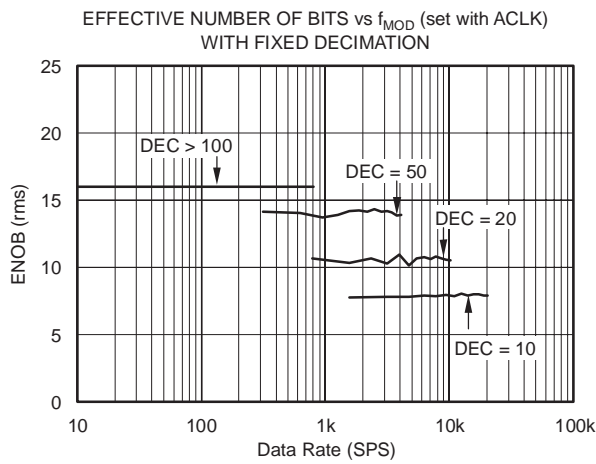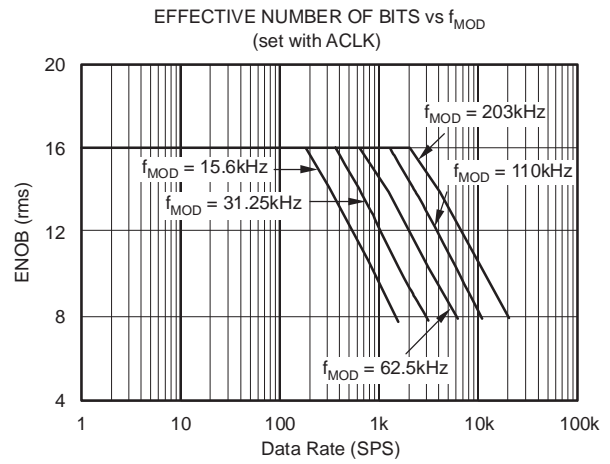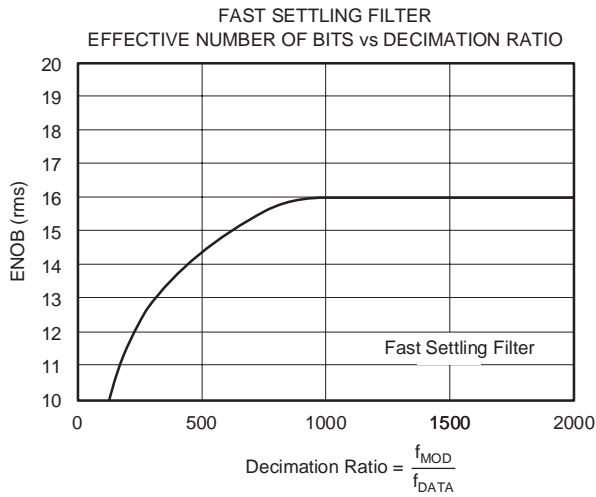







TYPICAL CHARACTERISTICS: MSC1201 AND MSC1202

$V_{DD} = +5V$, $DV_{DD} = +5V$, $f_{OSC} = 8MHz$, $PGA = 1$, $f_{MOD} = 15.625kHz$, Bipolar, Buffer ON, and $V_{REF} = (REF IN+) - (REF IN-) = +2.5V$, unless otherwise specified.

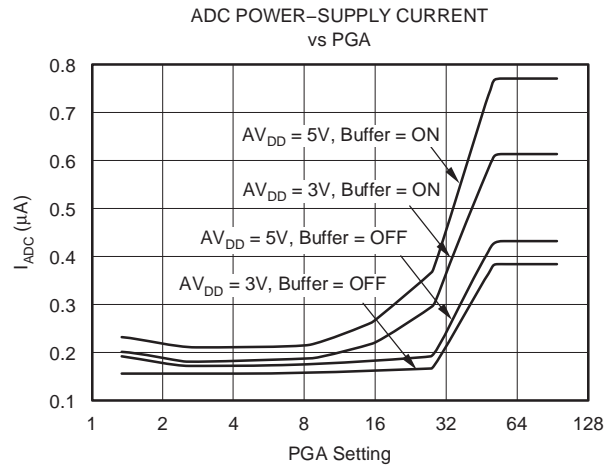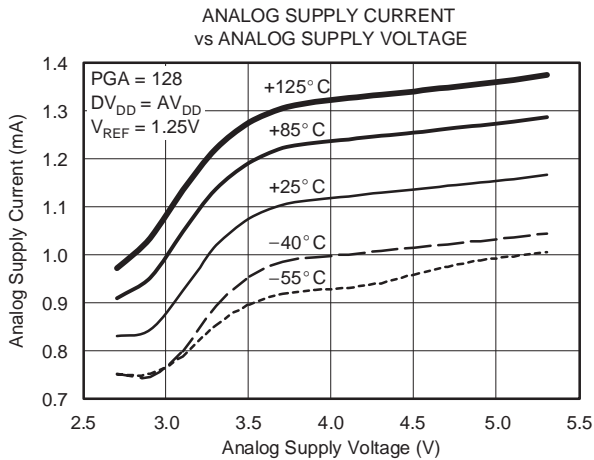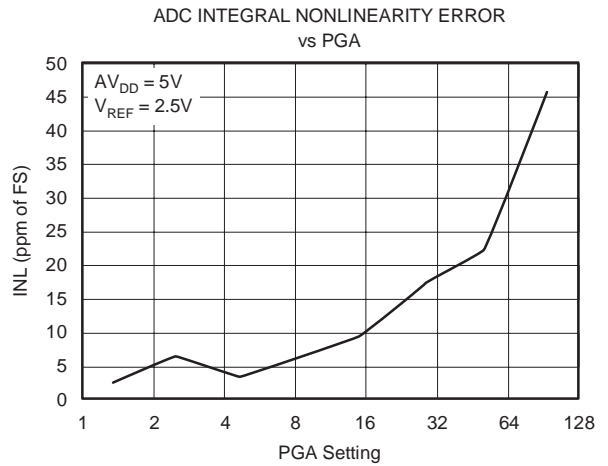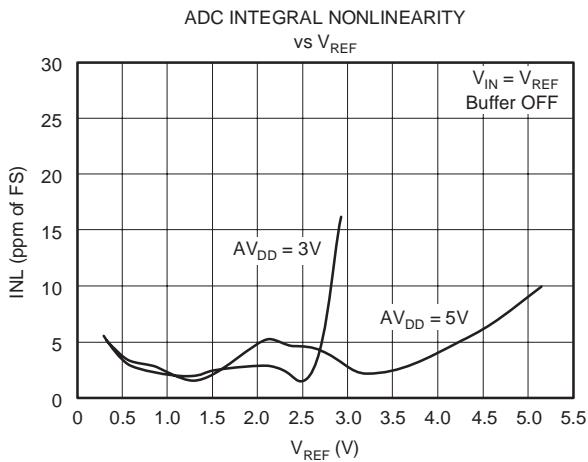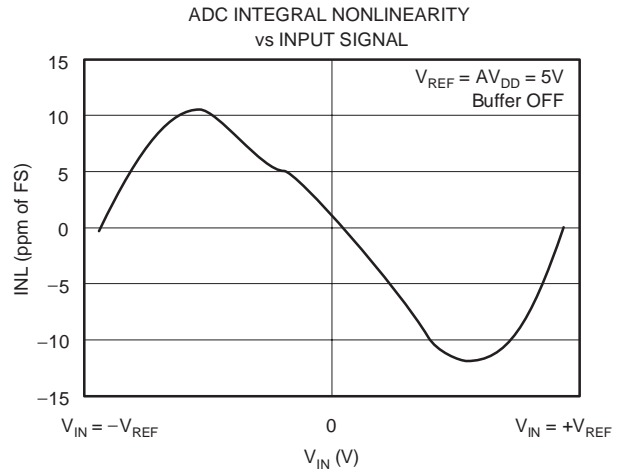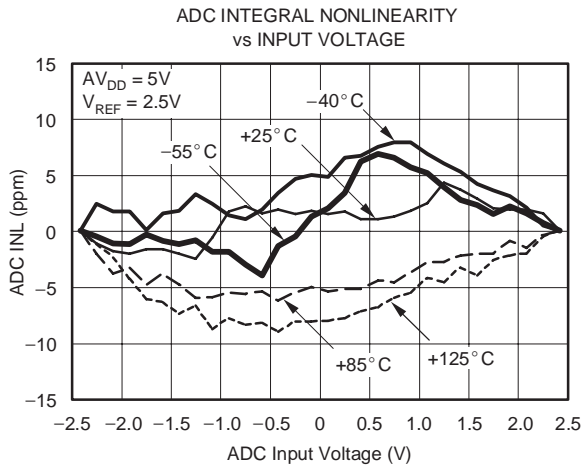







TYPICAL CHARACTERISTICS: MSC1201 AND MSC1202 (Continued)

$V_{DD} = +5V$, $DV_{DD} = +5V$, $f_{OSC} = 8MHz$, $PGA = 1$, $f_{MOD} = 15.625kHz$, Bipolar, Buffer ON, and $V_{REF} \equiv (REF IN+) - (REF IN-) = +2.5V$, unless otherwise specified.

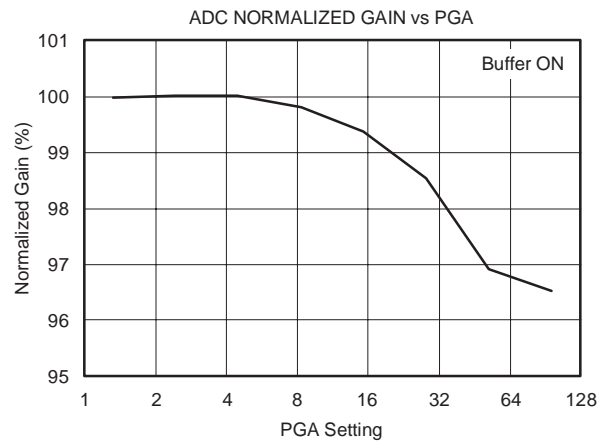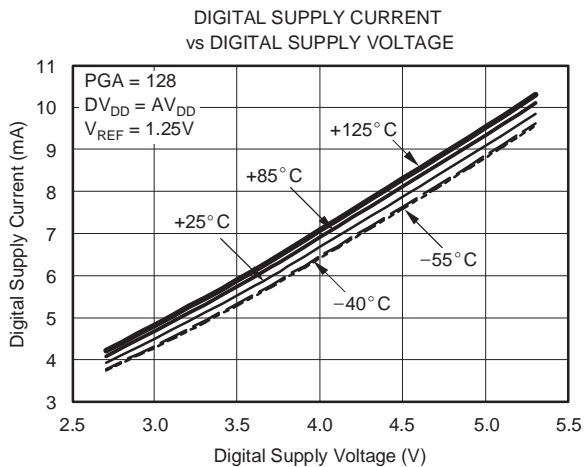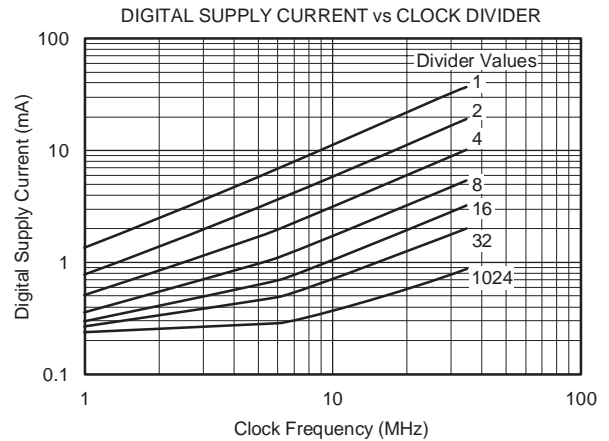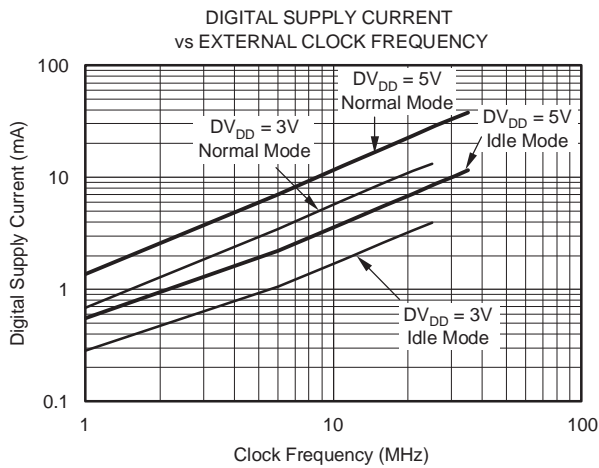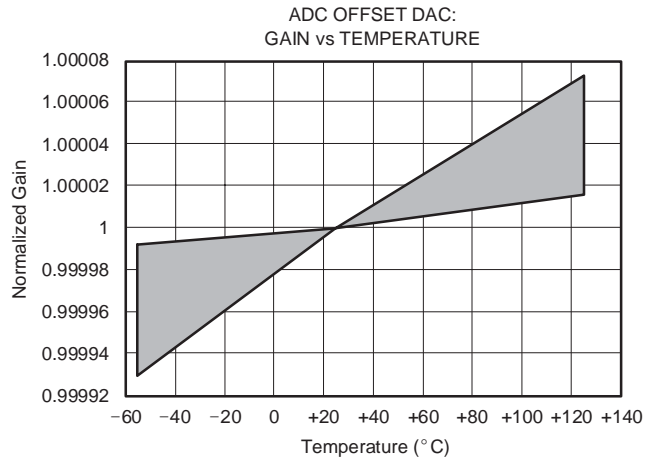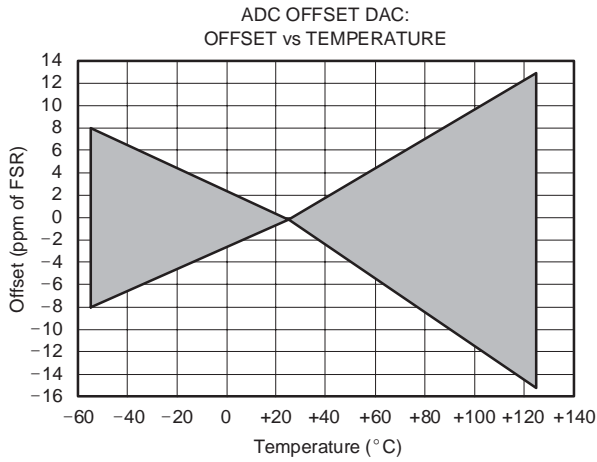

TYPICAL CHARACTERISTICS: MSC1201 AND MSC1202 (Continued)

$A_{V_{DD}} = +5V$, $DV_{DD} = +5V$, $f_{OSC} = 8MHz$, $PGA = 1$, $f_{MOD} = 15.625kHz$, Bipolar, Buffer ON, and $V_{REF} = (REF IN+) - (REF IN-) = +2.5V$, unless otherwise specified.

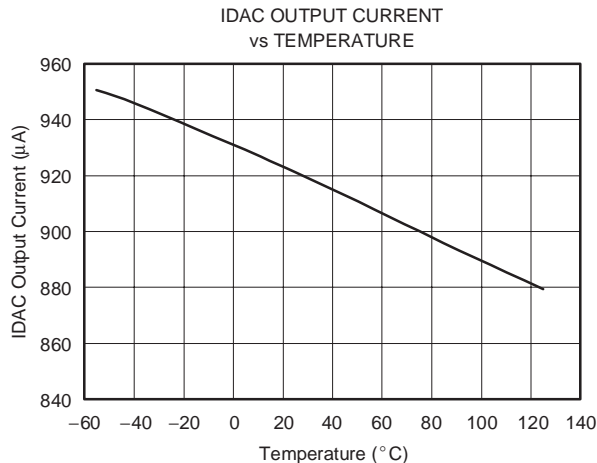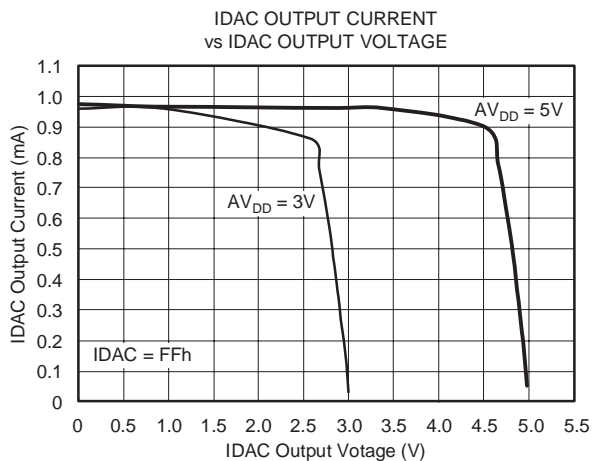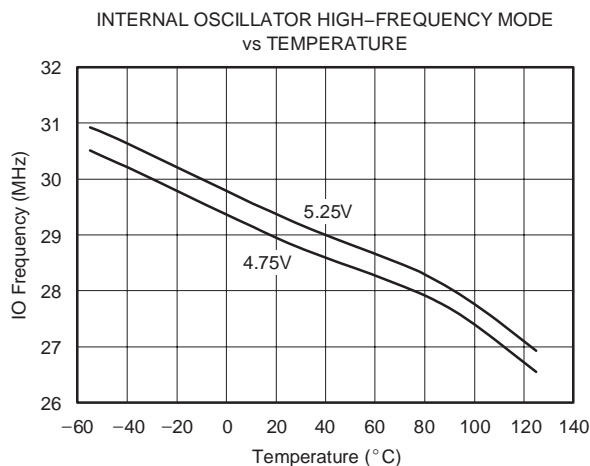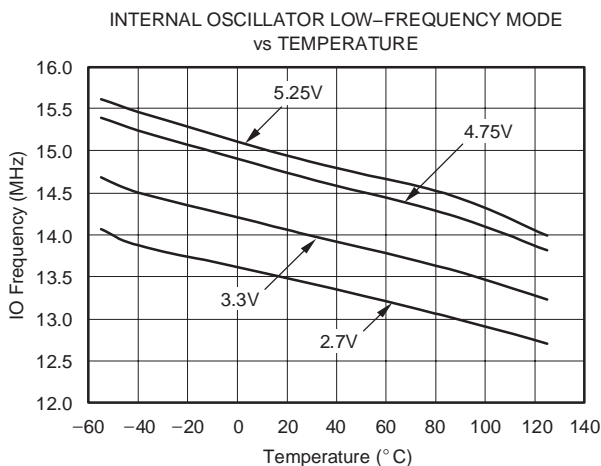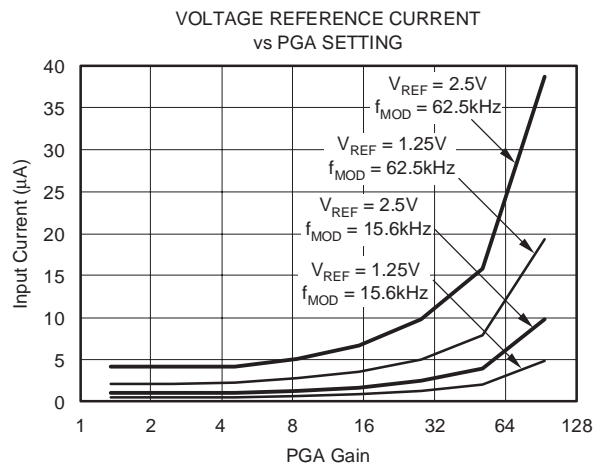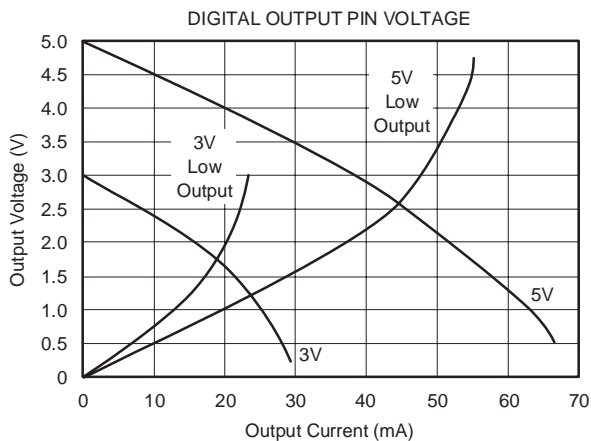

DESCRIPTION

The MSC1201Yx/MSC1202Yx are completely integrated families of mixed-signal devices incorporating a high-resolution, delta-sigma ADC, 8-bit IDAC, 8-channel multiplexer, burnout detect current sources, selectable buffered input, offset DAC, programmable gain amplifier (PGA), temperature sensor, voltage reference, 8-bit microcontroller, Flash Program Memory, Flash Data Memory, and Data SRAM, as shown in Figure 3.

On-chip peripherals include an additional 32-bit accumulator, basic SPI, basic I²C, USART, multiple digital input/output ports, watchdog timer, low-voltage detect, on-chip power-on reset, brownout reset, timer/counters, system clock divider, PLL, on-chip oscillator, and external interrupts.

The devices accept low-level differential or single-ended signals directly from a transducer. The ADC provides 24 bits (MSC1201) or 16 bits (MSC1202) of resolution and 24 bits (MSC1201) or 16 bits (MSC1202) of no-missing-code performance using a Sinc³ filter with a programmable sample rate. The ADC also has a selectable filter that allows for high-resolution single-cycle conversion.

The microcontroller core is 8051 instruction set compatible. The microcontroller core is an optimized 8051 core that executes up to three times faster than the standard 8051 core, given the same clock source. This makes it possible to run the device at a lower external clock frequency and achieve the same performance at lower power than the standard 8051 core.

The MSC1201Yx/MSC1202Yx allow the user to uniquely configure the Flash Memory map to meet the needs of their application. The Flash is programmable down to +2.7V using serial programming. Flash endurance is typically 1M Erase/Write cycles.

The parts have separate analog and digital supplies, which can be independently powered from +2.7V to +5.25V. At +3V operation, the power dissipation for the part is typically less than 3mW. The MSC1201Yx/MSC1202Yx are both packaged in a QFN-36 package.

The MSC1201Yx/MSC1202Yx are designed for high-resolution measurement applications in smart transmitters, industrial process control, weigh scales, chromatography, and portable instrumentation.

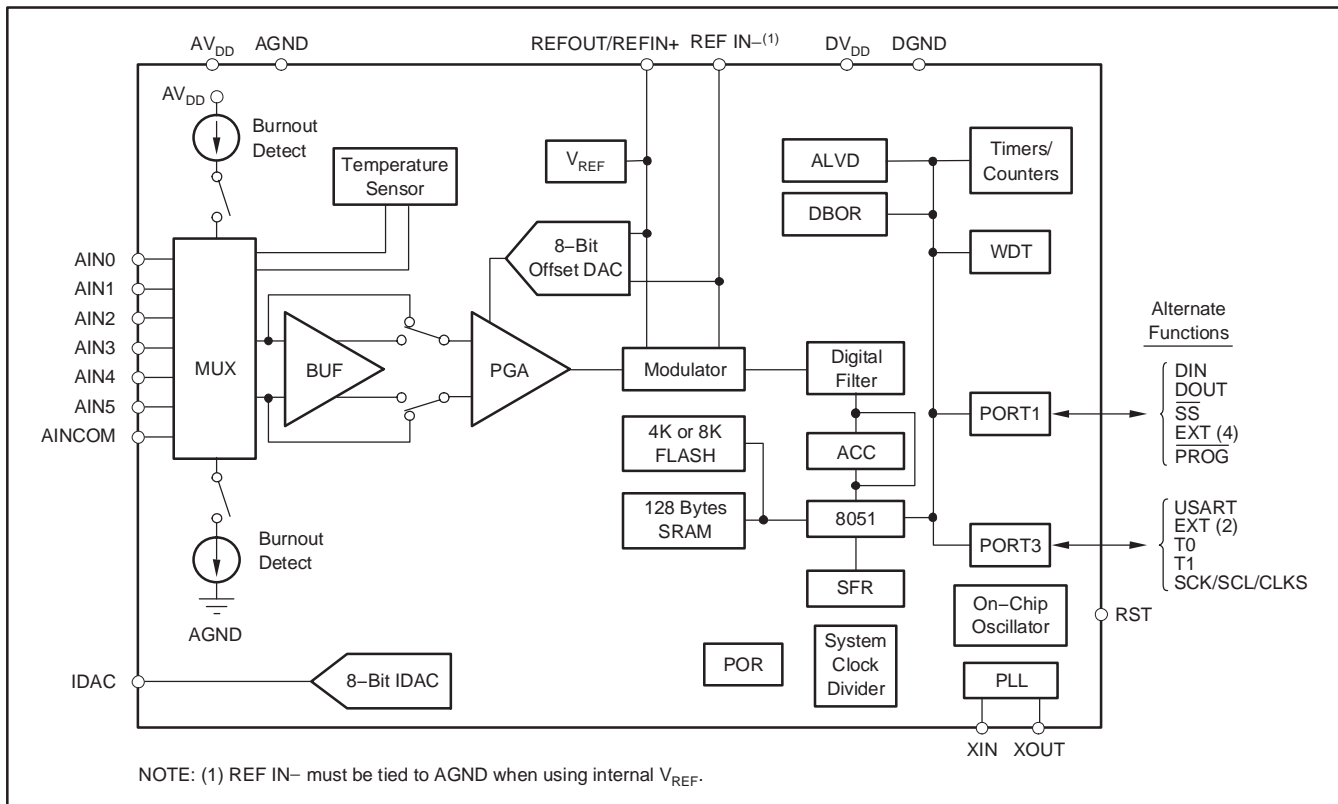


Figure 3. Block Diagram

ENHANCED 8051 CORE

All instructions in the MSC1201/02 families perform exactly the same functions as they would in a standard 8051. The effects on bits, flags, and registers are the same; however, the timing is different. The MSC1201/02 families use an efficient 8051 core that results in an improved instruction execution speed of between 1.5 and 3 times faster than the original core for the same external clock speed (4 clock cycles per instruction versus 12 clock cycles per instruction, as shown in Figure 4). This translates into an effective throughput improvement of more than 2.5 times, using the same code and same external clock speed. Therefore, a device frequency of 33MHz for the MSC1201Yx/MSC1202Yx actually performs at an equivalent execution speed of 82.5MHz compared to the standard 8051 core. This allows the user to run the device at slower clock speeds, which reduces system noise and power consumption, but provides greater throughput. This performance difference can be seen in Figure 5. The timing of software loops will be faster with the MSC1201/02. However, the timer/counter operation of the MSC1201/02 may be maintained at 12 clocks per increment or optionally run at 4 clocks per increment.

The MSC1201Yx/MSC1202Yx also provide dual data pointers (DPTRs).

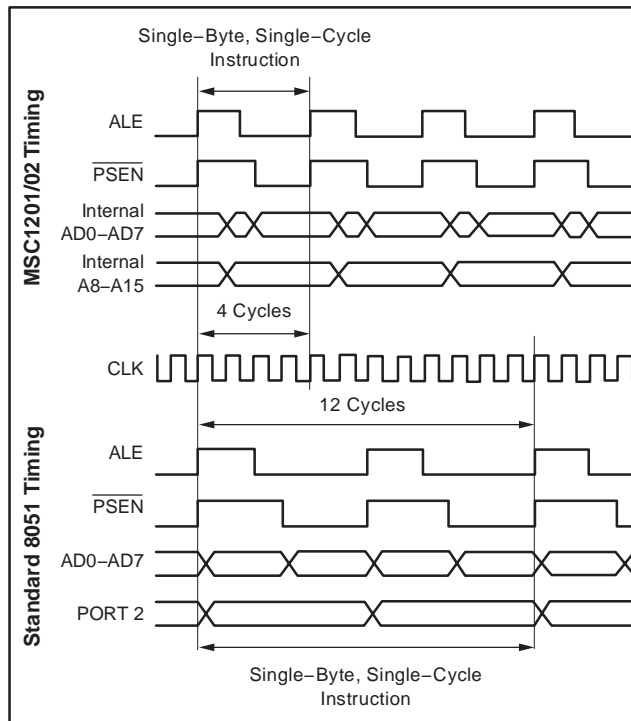


Figure 5. Comparison of MSC1201/02 Timing to Standard 8051 Timing

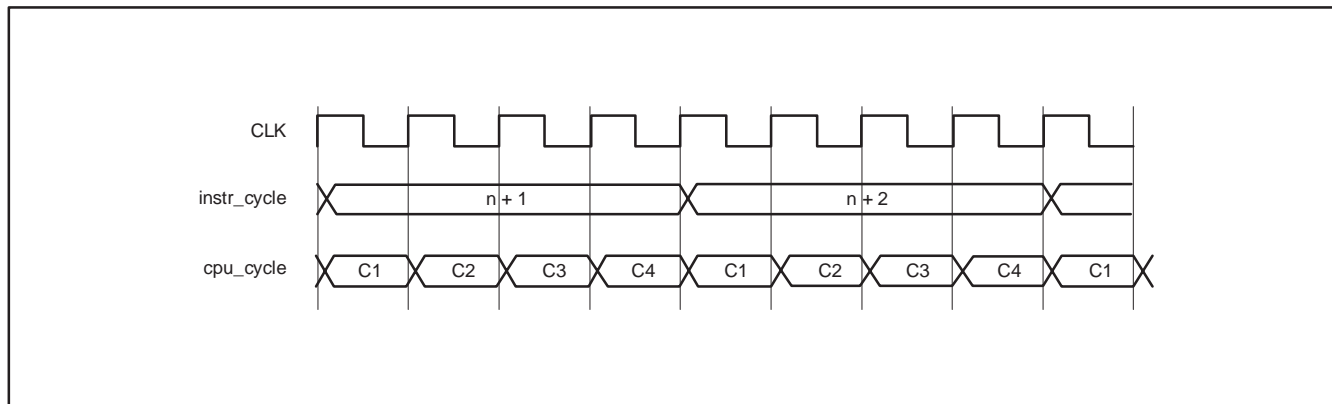


Figure 4. Instruction Timing Cycle

Furthermore, improvements were made to peripheral features that off-load processing from the core, and the user, to further improve efficiency. For instance, 32-bit accumulation can be done through the summation register to significantly reduce the processing overhead for the multiple byte data from the ADC or other sources. This allows for 32-bit addition, subtraction and shifting to be accomplished in a few instruction cycles, compared to hundreds of instruction cycles through software implementation.

Family Device Compatibility

The hardware functionality and pin configuration across the MSC1201/02 families are fully compatible. To the user, the only differences between family members are the memory configuration. This makes migration between family members simple. Code written for the MSC1201Y2 or MSC1202Y2 can be executed directly on an MSC1201Y3 or MSC1202Y3, respectively. This gives the user the ability

to add or subtract software functions and to freely migrate between family members. Thus, the MSC1201/02 can become a standard device used across several application platforms.

Family Development Tools

The MSC1201Yx/MSC1202Yx are fully compatible with the standard 8051 instruction set. This means that the user can develop software for the MSC1201/02 with their existing 8051 development tools. Additionally, a complete, integrated development environment is provided with each demo board, and third-party developers also provide support.

Power-Down Modes

The MSC1201Yx/MSC1202Yx can each power several of the peripherals and put the CPU into IDLE. This is accomplished by shutting off the clocks to those sections, as shown in Figure 6.

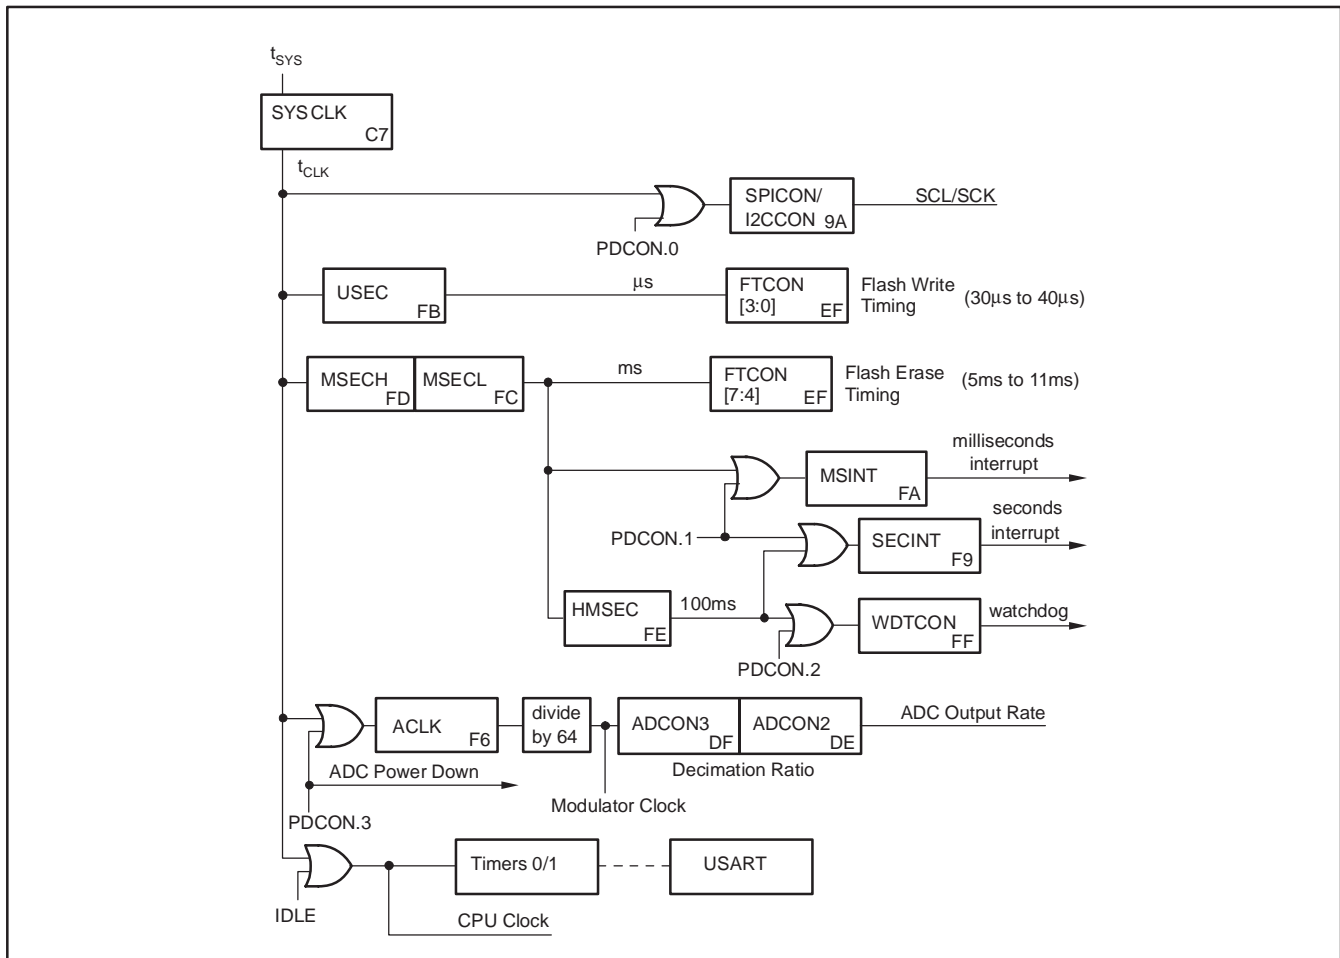


Figure 6. MSC1201/02 Timing Chain and Clock Control

OVERVIEW

The MSC1201/02 ADC structure is shown in Figure 7. The figure lists the components that make up the ADC, along with the corresponding special function register (SFR) associated with each component.

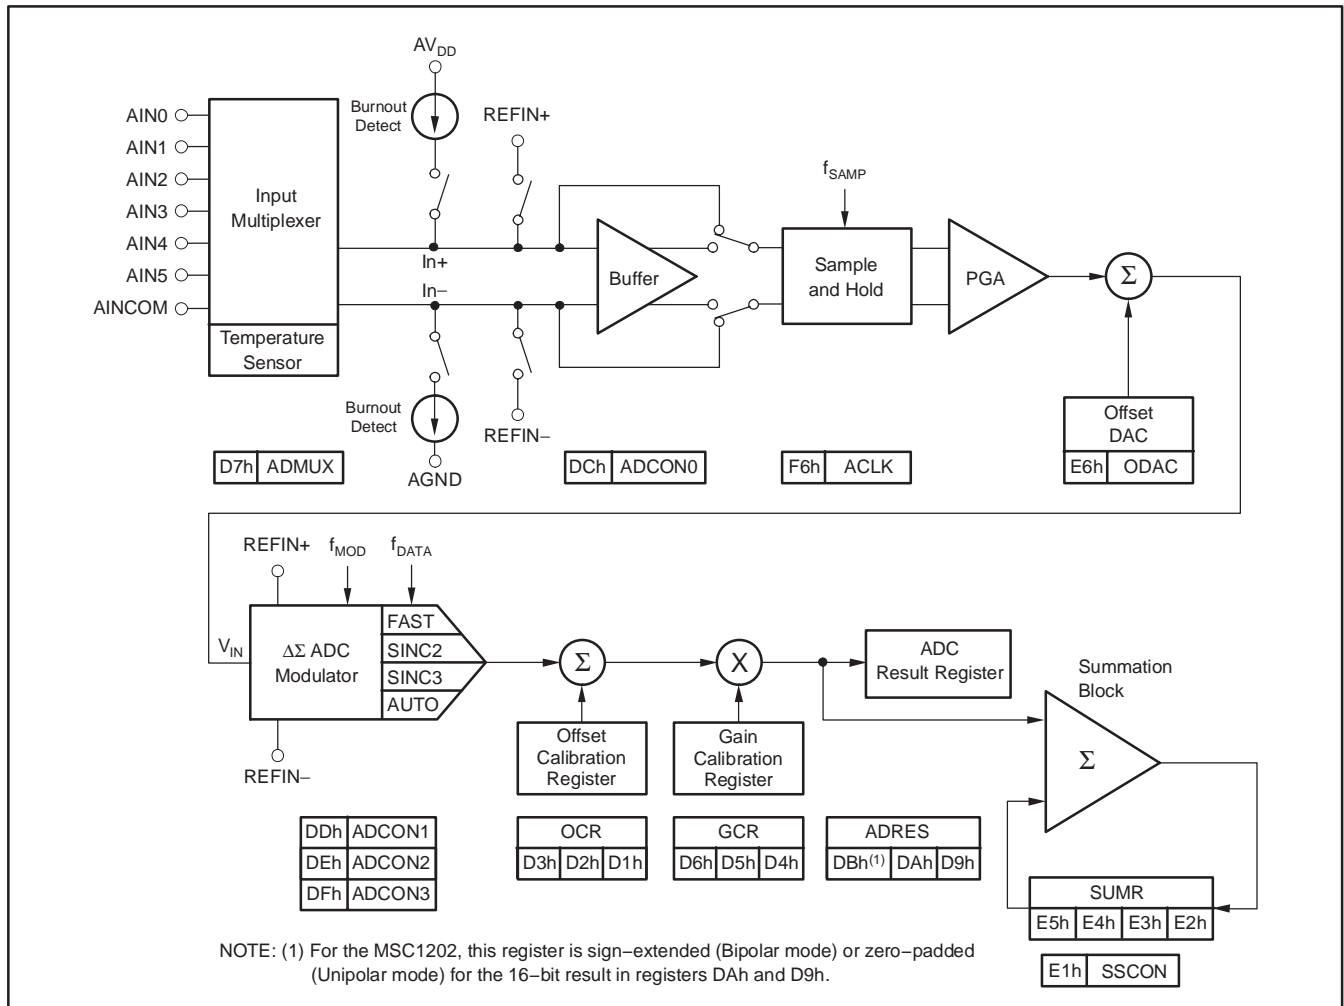


Figure 7. MSC1201/02 ADC Structure

ADC INPUT MULTIPLEXER

The input multiplexer provides for any combination of differential inputs to be selected as the input channel, as shown in Figure 8. If AIN0 is selected as the positive differential input channel, any other channel can be selected as the negative differential input channel. With this method, it is possible to have up to six fully differential input channels. It is also possible to switch the polarity of the differential input pair to negate any offset voltages. In addition, current sources are supplied that will source or sink current to detect open or short circuits on the pins.

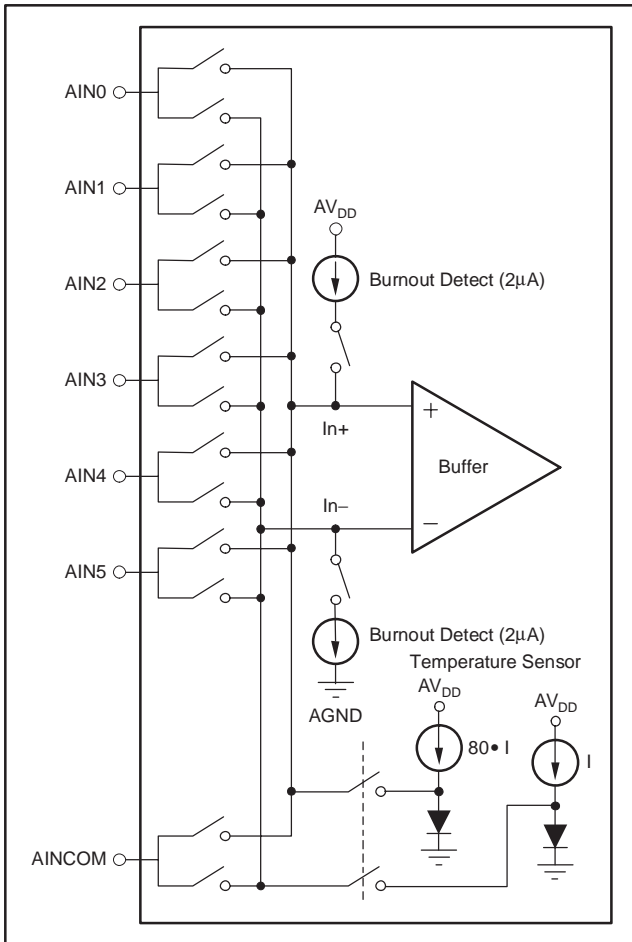


Figure 8. Input Multiplexer Configuration

TEMPERATURE SENSOR

On-chip diodes provide temperature sensing capability. When the configuration register for the input mux is set to all 1s, the diodes are connected to the inputs of the ADC. All other channels are open. The internal device power dissipation affects the temperature sensor reading.

BURNOUT DETECT

When the Burnout Detect (BOD) bit is set in the ADC control configuration register (ADCON0, SFR DCh), two current sources are enabled. The current source on the positive input channel sources approximately 2µA of current. The current source on the negative input channel sinks approximately 2µA. This allows for the detection of an open circuit (full-scale reading) or short circuit (small differential reading) on the selected input differential pair. The buffer should be on for sensor burnout detection.

ADC INPUT BUFFER

The analog input impedance is always high, regardless of PGA setting (when the buffer is enabled). With the buffer enabled, the input voltage range is reduced and the analog power-supply current is higher. If the limitation of input voltage range is acceptable, then the buffer is always preferred.

The input impedance of the MSC1201/02 without the buffer is 7MΩ/PGA. The buffer is controlled by the state of the BUF bit in the ADC control register (ADCON0, SFR DCh).

ADC ANALOG INPUT

When the buffer is not selected, the input impedance of the analog input changes with ACLK clock frequency (ACLK, SFR F6h) and gain (PGA). The relationship is:

$$A_{IN} \text{ Impedance } (\Omega) = \left(\frac{1\text{MHz}}{\text{ACLK Frequency}} \right) \cdot \left(\frac{7\text{M}\Omega}{\text{PGA}} \right)$$

$$\text{where ACLK frequency } (f_{\text{ACLK}}) = \frac{f_{\text{CLK}}}{\text{ACLK} + 1}$$

$$\text{and } f_{\text{MOD}} = \frac{f_{\text{ACLK}}}{64}$$

NOTE: The input impedance for PGA = 128 is the same as that for PGA = 64 (that is, 7MΩ/64).

Figure 9 shows the basic input structure of the MSC1201/02.

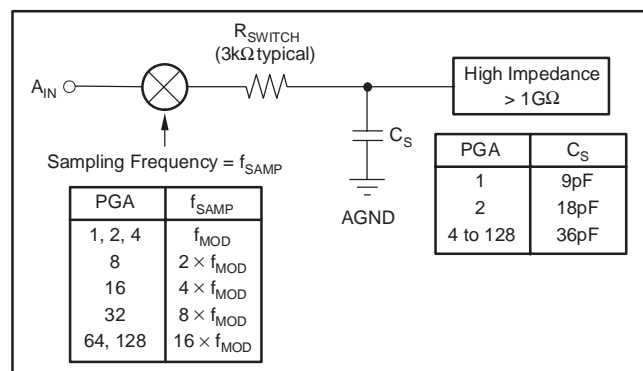


Figure 9. Analog Input Structure (without Buffer)

ADC PGA

The PGA can be set to gains of 1, 2, 4, 8, 16, 32, 64, or 128. Using the PGA can actually improve the effective resolution of the ADC. For instance, with a PGA of 1 on a $\pm 2.5V$ full-scale range (FSR), the ADC can resolve to $1.5\mu V$. With a PGA of 128 on a $\pm 19mV$ FSR, the ADC can resolve to $75nV$. With a PGA of 1 on a $\pm 2.5V$ FSR, it would require a 26-bit ADC to resolve $75nV$, as shown in Table 1.

Table 1. ENOB versus PGA (Bipolar Mode)

| PGA SETTING | FULL-SCALE RANGE (V) | MSC1201 ENOB AT 10HZ (BITS) | MSC1202 ENOB UP TO 200HZ (BITS) | RMS MEASUREMENT RESOLUTION | |
|-------------|----------------------|-----------------------------|---------------------------------|----------------------------|---------------------|
| | | | | MSC1201 (nV) | MSC1202 (μV) |
| 1 | ± 2.5 | 21.7 | 16 | 1468 | 76.3 |
| 2 | ± 1.25 | 21.5 | 15.6 | 843 | 38.1 |
| 4 | ± 0.625 | 21.4 | 15.5 | 452 | 19.1 |
| 8 | ± 0.313 | 21.2 | 15.4 | 259 | 9.5 |
| 16 | ± 0.156 | 20.8 | 15.4 | 171 | 4.8 |
| 32 | ± 0.078 | 20.4 | 15.3 | 113 | 2.4 |
| 64 | ± 0.039 | 20 | 15.2 | 74.5 | 12 |
| 128 | ± 0.019 | 19 | 14.2 | 74.5 | 0.6 |

ADC OFFSET DAC

The analog output from the PGA can be offset by up to half the full-scale input range of the PGA by using the ODAC register (SFR E6h). The ODAC (Offset DAC) register is an 8-bit value; the MSB is the sign and the seven LSBs provide the magnitude of the offset. Since the ODAC introduces an analog (instead of digital) offset to the PGA, using the ODAC does not reduce the range of the ADC.

ADC MODULATOR

The modulator is a single-loop 2nd-order system. The modulator runs at a clock speed (f_{MOD}) that is derived from CLK using the value in the Analog Clock register (ACLK, SFR F6h). The data output rate is:

$$\text{Data Rate} = f_{DATA} = \frac{f_{MOD}}{\text{Decimation Ratio}}$$

$$\text{where } f_{MOD} = \frac{f_{CLK}}{(\text{ACLK} + 1) \cdot 64} = \frac{f_{ACLK}}{64}$$

ADC CALIBRATION

The offset and gain errors in the MSC1201/02, or the complete system, can be reduced with calibration. Calibration is controlled through the ADCON1 register (SFR DDh), bits CAL2:CAL0. Each calibration process takes seven t_{DATA} periods (data conversion time) to complete. Therefore, it takes 14 t_{DATA} periods to complete both an offset and gain calibration.

For system calibration, the appropriate signal must be applied to the inputs. It then computes an offset that will nullify offset in the system. The system gain calibration requires a positive full-scale differential input signal. It then computes a gain value to nullify gain errors in the system. Each of these calibrations will take seven t_{DATA} periods to complete.

Calibration should be performed after power on, a change in temperature, power supply, voltage reference, decimation ratio, buffer, or a change of the PGA.

At the completion of calibration, the ADC Interrupt bit goes high, which indicates the calibration is finished and valid data is available.

ADC DIGITAL FILTER

The Digital Filter can use either the Fast Settling, Sinc², or Sinc³ filter, as shown in Figure 10. In addition, the Auto mode changes the Sinc filter after the input channel or PGA is changed. When switching to a new channel, it will use the Fast Settling filter for the next two conversions, the first of which should be discarded. It will then use the Sinc² followed by the Sinc³ filter to improve noise performance. This combines the low-noise advantage of the Sinc³ filter with the quick response of the Fast Settling Time filter. The frequency response of each filter is shown in Figure 11.

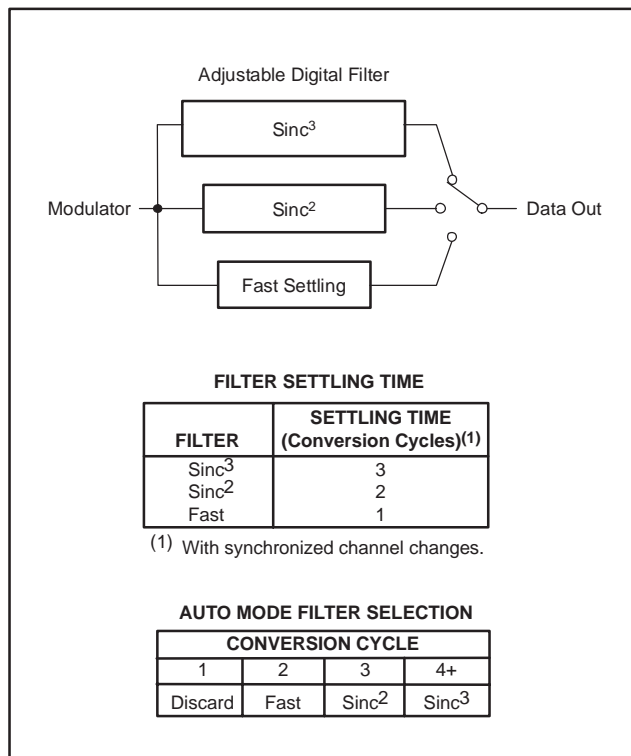


Figure 10. Filter Step Responses

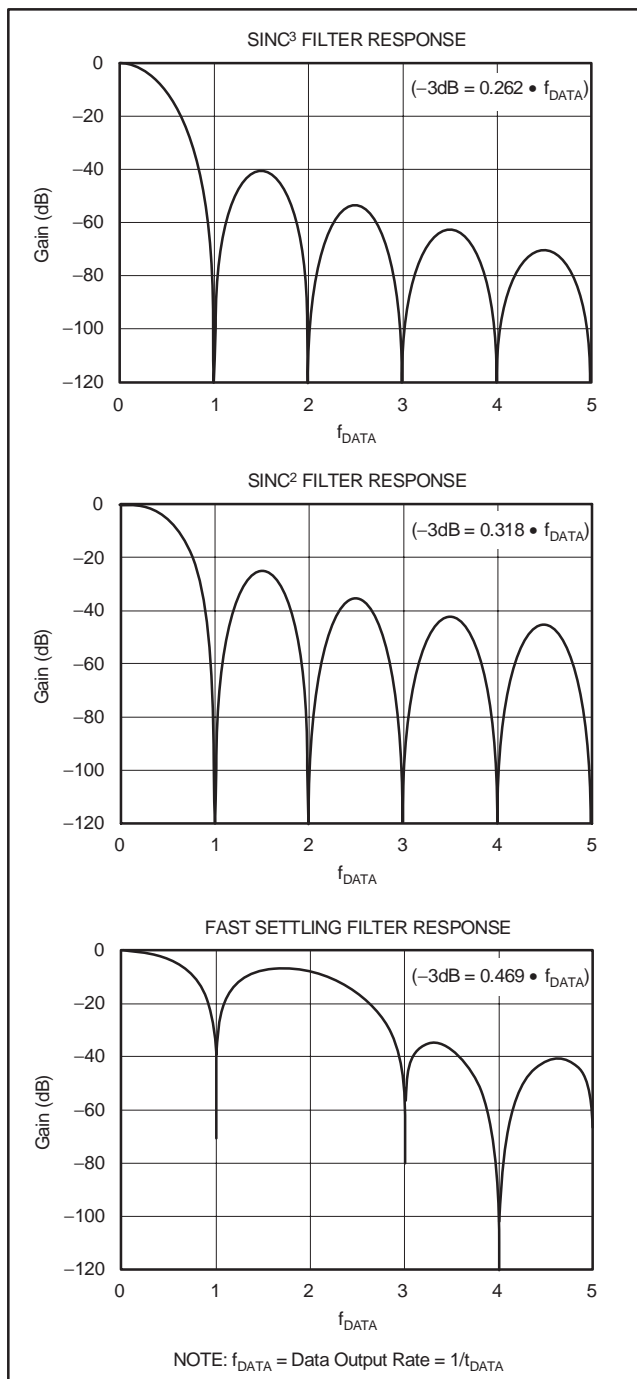


Figure 11. Filter Frequency Responses

VOLTAGE REFERENCE

The MSC1201/02 can use either an internal or external voltage reference. The voltage reference selection is controlled via ADC Control Register 0 (ADCON0, SFR DCh). The default power-up configuration for the voltage reference is 2.5V internal.

The internal voltage reference can be selected as either 1.25V or 2.5V. The analog power supply (AV_{DD}) must be within the specified range for the selected internal voltage reference. The valid ranges are: $V_{REF} = 2.5$ internal ($AV_{DD} = 3.3V$ to $5.25V$) and $V_{REF} = 1.25$ internal ($AV_{DD} = 2.7V$ to $5.25V$). If the internal V_{REF} is selected, then AGND must be connected to REFIN-. The REFOUT/REFIN+ pin should also have a $0.1\mu F$ capacitor connected to AGND as close as possible to the pin. If the internal V_{REF} is not used, then V_{REF} should be disabled in ADCON0.

If the external voltage reference is selected, it can be used as either a single-ended input or differential input, for ratiometric measures. When using an external reference, it is important to note that the input current will increase for V_{REF} with higher PGA settings and with a higher modulator frequency. The external voltage reference can be used over the input range specified in the electrical characteristics section.

IDAC

The 8-bit IDAC in the MSC1201/02 can be used to provide a current source that can be used for ratiometric measurements. The IDAC operates from its own voltage reference and is not dependent on the ADC voltage reference. The full-scale output current of the IDAC is approximately 1mA. The equation for the IDAC output current is:

$$IDAC_{OUT} = IDAC \cdot 3.6\mu A$$

RESET

Taking the RST pin high stops the operation of the device, and taking the RST pin low initiates a reset. The device can also be reset by the Power On Reset circuitry, Digital Brownout Reset, or Software Reset. The timing of the reset operation is shown in the Electrical Characteristic section.

If pin P1.0/ \overline{PROG} is unconnected or tied high, the device will enter User Application mode (UAM) on reset. If P1.0/ \overline{PROG} is tied low during reset, the device will enter Serial Programming mode.

POWER ON RESET

The on-chip Power On Reset (POR) circuitry releases the device from reset at approximately $DV_{DD} = 2.0V$. The POR accommodates power-supply ramp rates as slow as $1V/10ms$. To ensure proper operation, the power supply should ramp monotonically. Note that, as the device is released from reset and program execution begins, the

device current consumption may increase, which may result in a power-supply voltage drop. If the power supply ramps at a slower rate, is not monotonic, or a brownout condition occurs (where the supply does not drop below the 2.0V threshold), then improper device operation may occur. The on-chip Brownout Reset may provide benefit in these conditions. A POR circuit is shown in Figure 12.

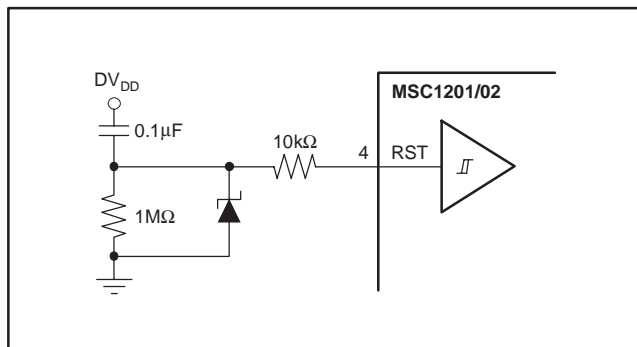


Figure 12. Typical Reset Circuit

DIGITAL BROWNOUT RESET

The Digital Brownout Reset (DBOR) is enabled through Hardware Configuration Register 1 (HCR1). If the conditions for proper POR are not met or the device encounters a brownout condition that does not generate a POR, the DBOR can be used to ensure proper device operation. The DBOR will hold the state of the device when the power supply drops below the threshold level programmed in HCR1, and then generate a reset when the supply rises above the threshold level. Note that, as the device is released from reset and program execution begins, the device current consumption may increase, which can result in a power supply voltage drop, which may initiate another brownout condition. Also, the DBOR comparison is done against an analog reference; therefore, AV_{DD} must be within its valid operating range for DBOR to function.

The DBOR level should be chosen to match closely with the application. That is, with a high external clock frequency, the DBOR level should match the minimum operating voltage range for the device or improper operation may still occur.

ANALOG LOW-VOLTAGE DETECT

The MSC1201/02 contain an analog low-voltage detect. When the analog supply drops below the value programmed in LVDCON (SFR E7h), an interrupt is generated.

CLOCKS

The MSC1201/02 can operate in three separate clock modes: Internal Oscillator mode (IOM), External Clock mode (ECM), and Phase Lock Loop (PLL) mode. A block diagram is shown in Figure 13. The clock mode for the MSC1201/02 is selected via the CLKSEL bits in HCR2. IOM is the default mode for the device.

Serial Flash Programming mode (SFPM) uses IO low-frequency (LF) mode (the HCR2 and CLKSEL bits have no effect). Table 2 shows the active clock mode for the various startup conditions during UAM.

Internal Oscillator

In IOM, the CPU executes either in LF mode (if HCR2, CLKSEL = 111) or high-frequency (HF) mode (if HCR2, CLKSEL = 110). In this mode, XIN must be grounded or tied to supply.

External Clock

In ECM (HCR2, CLKSEL = 011), the CPU can execute from an external crystal, external ceramic resonator, external clock, or external oscillator. If an external clock is detected at startup, then the CPU will begin execution in ECM after startup. If an external clock is not detected at startup, then the device will revert to the mode shown in Table 2.

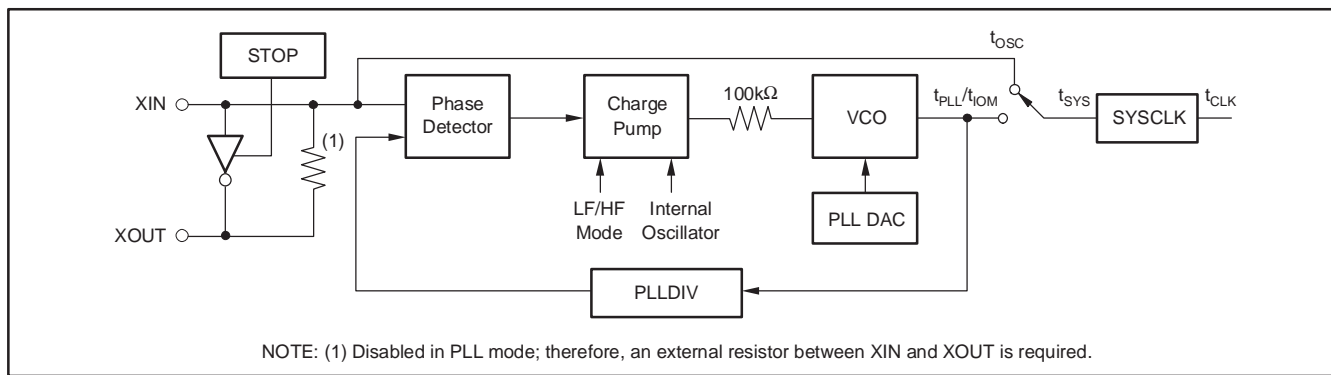


Figure 13. Clock Block Diagram

Table 2. Active Clock Modes

| SELECTED CLOCK MODE (HCR2, CLKCON2:0) | | STARTUP CONDITION ⁽¹⁾ | ACTIVE CLOCK MODE (f _{sys}) |
|-----------------------------------------------|-------------|----------------------------------|---------------------------------------|
| External Clock Mode (ECM) | | Active clock present at XIN | External Clock Mode |
| | | No clock present at XIN | IO LF Mode |
| Internal Oscillator Mode (IOM) ⁽²⁾ | IO LF Mode | N/A | IO LF Mode |
| | IO HF Mode | N/A | IO HF Mode |
| PLL ⁽³⁾ | PLL LF Mode | Active 32.768kHz clock at XIN | PLL LF Mode |
| | | No clock present at XIN | Nominal 50% of IO LF Mode |
| | PLL HF Mode | Active 32.768kHz clock at XIN | PLL HF Mode |
| | | No clock present at XIN | Nominal 50% of IO HF Mode |

(1) Clock detection is only done at startup; refer to Electrical Characteristics parameter t_{RFD} in Figure 2.

(2) XIN must not be left floating; it must be tied high or low.

(3) PLL operation requires that both AVDD and DVDD are within their specified ranges.

PLL

In PLL mode (HCR2, CLKSEL = 101 or HCR2, CLKSEL = 100), the CPU can execute from an external 32.768kHz crystal. This mode enables the use of a PLL circuit that synthesizes the selected clock frequencies (PLL LF mode or PLL HF mode). If an external clock is detected at startup, then the CPU will begin execution in PLL mode after startup. If an external clock is not detected at startup, then the device will revert to the mode shown in Table 2. The status of the PLL can be determined by first writing the PLLLOCK bit (enable) and then reading the PLLLOCK status bit in the PLLH SFR.

The frequency of the PLL is preloaded with default trimmed values. However, the PLL frequency can be fine-tuned by writing to the PLLDIV1 and PLLDIV0 SFRs. The equation for the PLL frequency is:

$$\text{PLL Frequency} = ((\text{PLLDIV9}:\text{PLLDIV0}) + 1) \cdot f_{\text{OSC}}$$

where $f_{\text{OSC}} = 32.768\text{kHz}$.

The default value for PLL LF mode is automatically loaded into the PLLDIV SFR. For PLL HF mode, PLLDIV must be loaded with the appropriate value.

For different connections to external clocks, see Figure 14, Figure 15, and Figure 16.

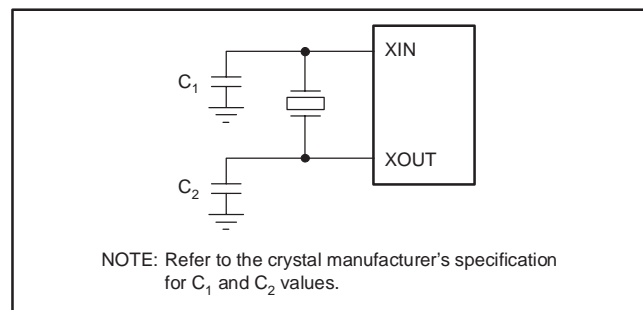


Figure 14. External Crystal Connection

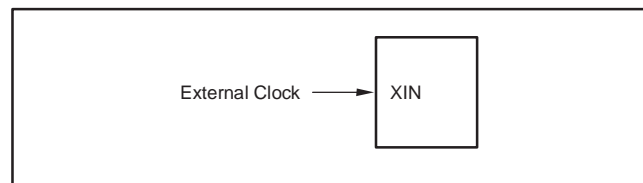


Figure 15. External Clock Connection

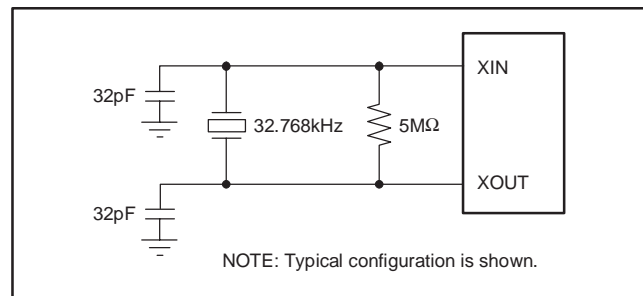


Figure 16. PLL Connection

SPI

The MSC1201/02 implement a basic SPI interface that includes the hardware for simple serial data transfers. Figure 17 shows a block diagram of the SPI. The peripheral supports master and slave modes, full duplex data transfers, both clock polarities, both clock phases, bit order, and slave select.

The timing diagram for supported SPI data transfers is shown in Figure 18.

The I/O pins needed for data transfer are Data In (DIN), Data Out (DOUT) and serial clock (SCK). The slave select (\overline{SS}) pin can also be used to control the output of data on DOUT.

The DIN pin is used for shifting data in for both master and slave modes.

The DOUT pin is used for shifting data out for both master and slave modes.

The SCK pin is used to synchronize the transfer of data for both master and slave modes. SCK is always generated by the master. The generation of SCK in master mode can be done either in software by simply toggling the port pin, or by configuring the output on the SCK pin via PASEL (SFR F2h). A list of the most common methods of generating SCK follows, but the complete list of clock sources can be found by referring to the PASEL SFR.

- Toggle SCK by setting and clearing the port pin.
- Memory Write Pulse (\overline{WR}) that is idle high. Whenever an external memory write command (MOVX) is executed, a pulse is seen on P3.6. This method can be used only if CPOL is set to '1'.
- Memory Write Pulse toggle version. In this mode, SCK toggles whenever an external write command (MOVX) is executed.
- T0_Out signal can be used as a clock. A pulse is generated on SCK whenever Timer 0 expires. The idle state of the signal is low, so this can be used only if CPOL is cleared to '0'.
- T0_Out toggle. SCK toggles whenever Timer 0 expires.
- T1_Out signal can be used as a clock. A pulse is generated whenever Timer 1 expires. The idle state of the signal is low, so this can be used only if CPOL is cleared to '0'.
- T1_Out toggle. SCK toggles whenever Timer 1 expires.

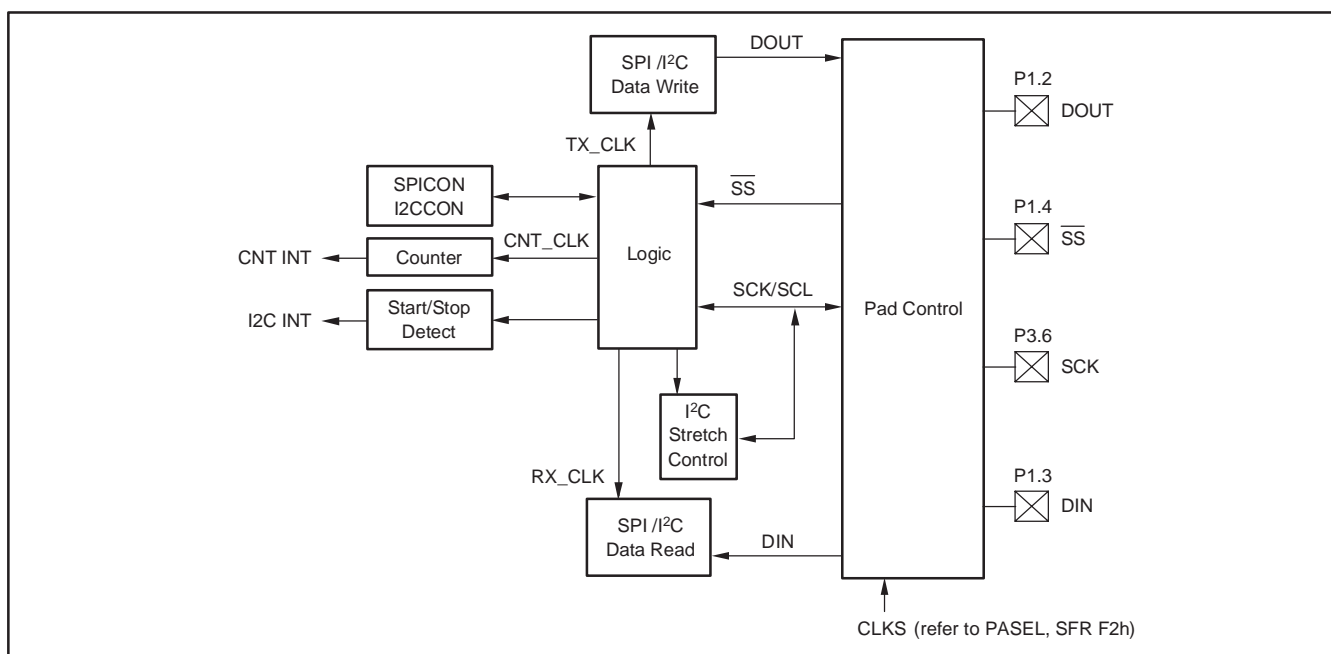


Figure 17. SPI/I²C Block Diagram

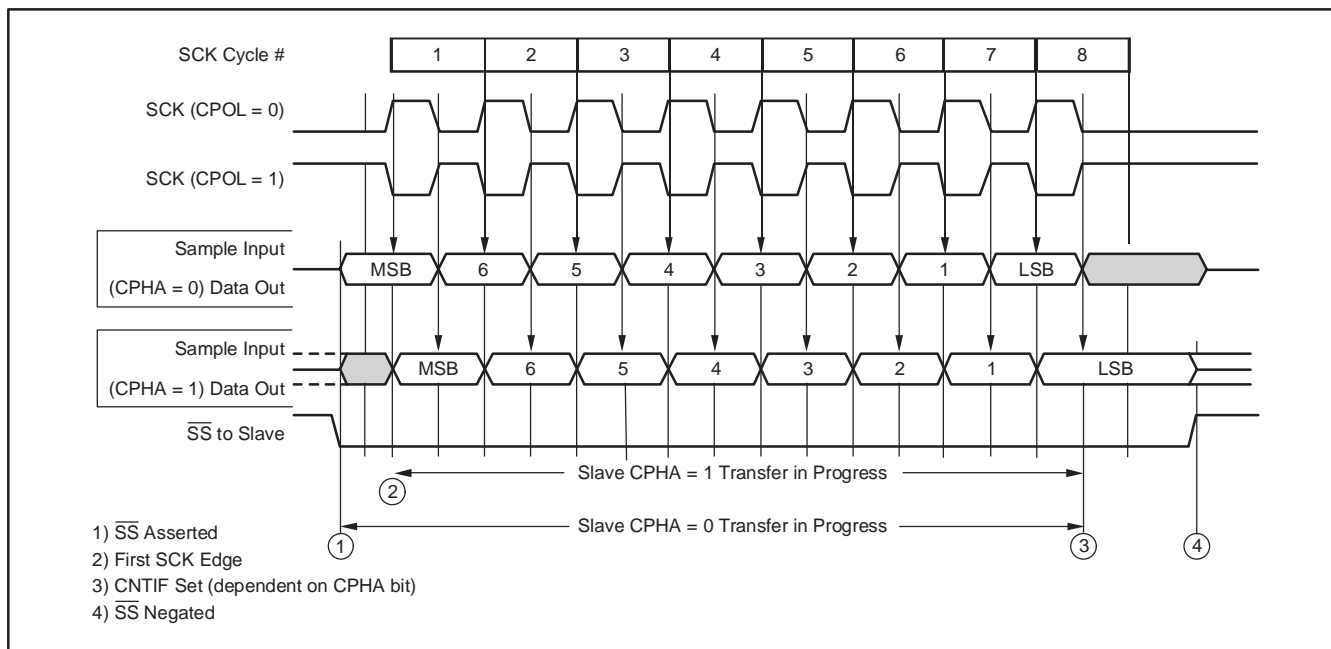


Figure 18. SPI Timing Diagram

The \overline{SS} pin can be used to control the output of data on DOUT when the MSC1201/02 is in slave mode. The \overline{SS} function is enabled or disabled by the ESS bit of the SPICON SFR. When enabled, the \overline{SS} input of a slave device must be externally asserted before a master device can exchange data with the slave device. \overline{SS} must be low before data transactions and must stay low for the duration of the transaction. When \overline{SS} is high, data will not be shifted into the shift register nor will the counter increment. When SPI is enabled, \overline{SS} also controls the drive of the line DOUT (P1.2). When \overline{SS} is low in slave mode, the DOUT pin will be driven and when \overline{SS} is high, DOUT will be high impedance.

The SPI generates interrupt ECNT (AIE.2) to indicate that the transfer/reception of the byte is complete. The interrupt goes high whenever the counter value is equal to 8 (indicating that eight SCKs have occurred). The interrupt is cleared on reading or writing to the SPIDATA register. During the data transfer, the actual counter value can be read from the SPICON SFR.

Power Down

The SPI is powered down by the PDSPI bit in the power control register (PDCON). This bit needs to be cleared to enable the SPI function. When the SPI is powered down, pins P1.2, P1.3, P1.4, and P3.6 revert to general-purpose I/O pins.

Application Flow

This section explains the typical application usage flow of SPI in master and slave modes.

Master Mode Application Flow

1. Configure the port pins.
2. Configure the SPI.
3. Assert \overline{SS} to enable slave communication (if applicable).
4. Write data to SPIDATA.
5. Generate eight SCKs.
6. Read the received data from SPIDATA.

Slave Mode Application Flow

1. Configure the ports pins.
2. Enable \overline{SS} (if applicable).
3. Configure the SPI.
4. Write data to SPIDATA.
5. Wait for the Count Interrupt (eight SCKs).
6. Read the data from SPIDATA.

CAUTION:

If SPIDATA is not read before the next SPI transaction, the ECNT interrupt will be removed and the previous data will be lost.

I²C

The I/O pins needed for I²C transfer are serial clock (SCL) and serial data (SDA—implemented by connecting DIN and DOUT externally). The I²C transfer timing is shown in Figure 19.

The MSC1201/02 I²C supports:

1. Master or slave I²C operation (control in software)
2. Standard or fast modes of transfer
3. Clock stretching
4. General call

When used in I²C mode, pins DIN (P1.3) and DOUT (P1.2) should be tied together externally. The DIN pin should be configured as an input pin and the DOUT pin should be configured as open drain or standard 8051 by setting the P1DDR (DOUT should be set high so that the bus is not pulled low).

The MSC1201/02 I²C can generate two interrupts:

1. I²C interrupt for START/STOP interrupt (AIE.3)
2. CNT interrupt for bit counter interrupt (AIE.2)

The START/STOP interrupt is generated when a START condition or STOP condition is detected on the bus. The bit counter generates an interrupt on a complete (8-bit) data transfer and also after the transfer of the ACK/NACK.

The bit counter for serial transfer is always incremented on the falling edge of SCL and can be reset by reading or writing to I2CDATA (SFR 9Bh) or when a START/STOP condition is detected. The bit counter can be polled or used as an interrupt. The bit counter interrupt occurs when the bit counter value is equal to 8, indicating that eight bits of data have been transferred. I²C mode also allows for

interrupt generation on one bit of data transfer (I2CCON.CNTSEL). This can be used for ACK/NACK interrupt generation. For instance, the I²C interrupt can be configured for 8-bit interrupt detection; on the eighth bit, the interrupt is generated. Following this interrupt, the clock is stretched (SCL held low). The interrupt can then be configured for 1-bit detection, which will terminate clock stretching. The ACK/NACK can be written by the software, which will terminate clock stretching. The next interrupt will be generated after the ACK/NACK has been latched by the receiving device. The interrupt is cleared on reading or writing to the I2CDATA register. If I2CDATA is not read before the next data transfer, the interrupt will be removed and the previous data will be lost.

Master Operation

The source for the SCL is controlled in the PASEL register or can be generated in software.

Transmit

The serial data must be stable on the bus while SCL is high. Therefore, the writing of serial data to I2CDATA must be coordinated with the generation of the SCL, since SDA transitions on the bus may be interpreted as a START or STOP while SCL is high. The START and STOP conditions on the bus must be generated in software. After the serial data has been transmitted, the generation of the ACK/NACK clock must be enabled by writing 0xFFh to I2CDATA. This allows the master to read the state of ACK/NACK.

Receive

The serial data is latched into the receive buffer on the rising edge of SCL. After the serial data has been received, ACK/NACK is generated by writing 0x7Fh (for ACK) or 0xFFh (for NACK) to I2CDATA.

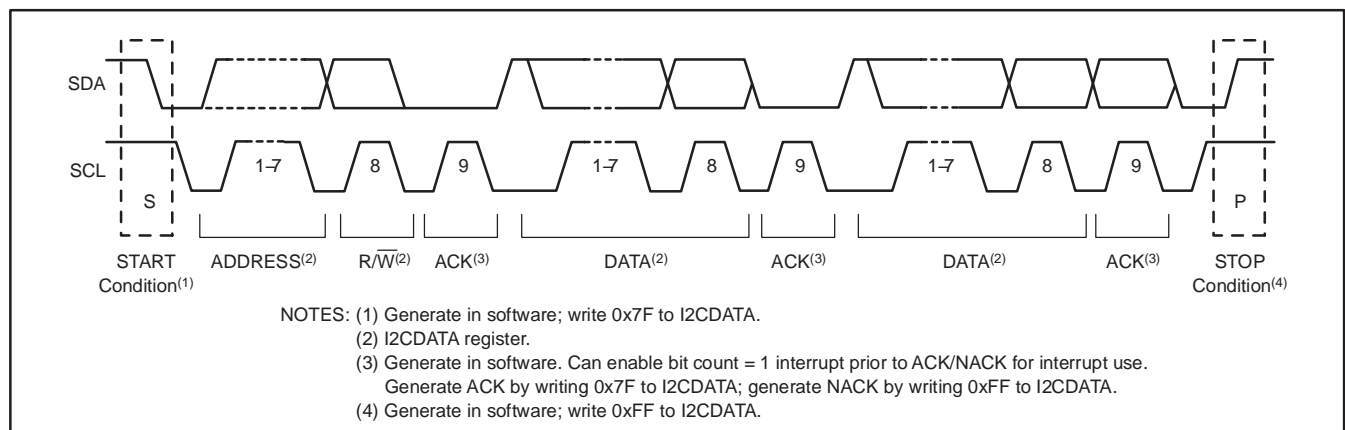


Figure 19. Timing Diagram for I²C Transmission and Reception

Slave Operation

Slave operation is supported, but address recognition, R/\overline{W} determination, and ACK/NACK must be done under software control. The Disable Clock Stretch (DCS) bit can be set to disable clock stretching. When the DCS bit is set, the device will no longer stretch the clock and will not generate interrupts. This bit can be used to disable clock stretch interrupts when there is no address match. This bit is automatically cleared when a start or repeated start condition occurs.

Transmit

Once address recognition, R/\overline{W} determination, and ACK/NACK are complete, the serial data to be transferred can be written to I2CDATA. The data is automatically shifted out based on the master SCL. After data transmission, CNTIF is generated and SCL is stretched by the MSC1201/02 until the I2CDATA register is written with a 0xFFh. The ACK/NACK from the master can then be read.

Receive

Once address recognition, R/\overline{W} determination, and ACK/NACK are complete, I2CDATA must be written with 0xFFh to enable data reception. Upon completion of the data shift, the MSC1201/02 generates the CNT interrupt and stretches SCL. Received data can then be read from I2CDATA. After the serial data has been received, ACK/NACK is generated by writing 0x7Fh (for ACK) or 0xFFh (for NACK) to I2CDATA. The write to I2CDATA clears the CNT interrupt and clock stretch.

MEMORY MAP

The MSC1201/02 contain on-chip SFR, Flash Memory, Scratchpad SRAM Memory, and Boot ROM. The SFR registers are primarily used for control and status. The standard 8051 features and additional peripheral features of the MSC1201/02 are controlled through the SFR. Reading from an undefined SFR will return zero. Writing to undefined SFR registers is not recommended and will have indeterminate effects.

Flash Memory is used for both Program Memory and Data Memory. Program/Data Memory partition size is selectable. The partition size is set through hardware configuration bits, which are programmed serially. Both Program and Data Flash Memories are erasable and writable (programmable) in User Application mode. However, program execution can only occur from Program Memory. As an added precaution, a lock feature can be

activated through the hardware configuration bits, which disables erase/write operation to 4kB of Program Flash Memory or the entire Program Flash Memory in User Application mode.

FLASH MEMORY

The MSC1201/02 use a memory addressing scheme that separates Program Memory (FLASH/ROM) from Data Memory (FLASH/RAM). The program and data segments can overlap since they are accessed by different instructions. Program Memory is fetched by the microcontroller automatically. MOVC is the one instruction that is used to explicitly read the program area, and is commonly used to read lookup tables.

The MSC1201/02 have three Hardware (HW) Configuration registers (HCR0, HCR1, and HCR2) that are programmable only during Flash Memory Programming mode.

The MSC1201/02 allow the user to partition the Flash Memory between Program Memory and Data Memory. For instance, the MSC1201Y3/MSC1202Y3 contain 8kB of Flash Memory on-chip. Through the HW configuration registers, the user can define the partition between Program Memory (PM) and Data Memory (DM), as shown in Table 3, Table 4, and Figure 20. The MSC1201/02 families offer two memory configurations.

Table 3. Flash Memory Partitioning

| HCR0 | MSC1201/02Y2 | | MSC1201/02Y3 | |
|-----------------|--------------|-----|--------------|-----|
| DFSEL | PM | DM | PM | DM |
| 00 | 2kB | 2kB | 4kB | 4kB |
| 01 | 2kB | 2kB | 6kB | 2kB |
| 10 | 3kB | 1kB | 7kB | 1kB |
| 11 (default) | 4kB | 0kB | 8kB | 0kB |

Table 4. Flash Memory Partitioning Addresses

| HCR0 | MSC1201/02Y2 | | MSC1201/02Y3 | |
|-----------------|--------------|-----------|--------------|-----------|
| DFSEL | PM | DM | PM | DM |
| 00 | 0000–07FF | 0400–0BFF | 0000–0FFF | 0400–13FF |
| 01 | 0000–07FF | 0400–0BFF | 0000–17FF | 0400–0BFF |
| 10 | 0000–0BFF | 0400–07FF | 0000–1BFF | 0400–07FF |
| 11 (default) | 0000–0FFF | 0000 | 0000–1FFF | 0000 |

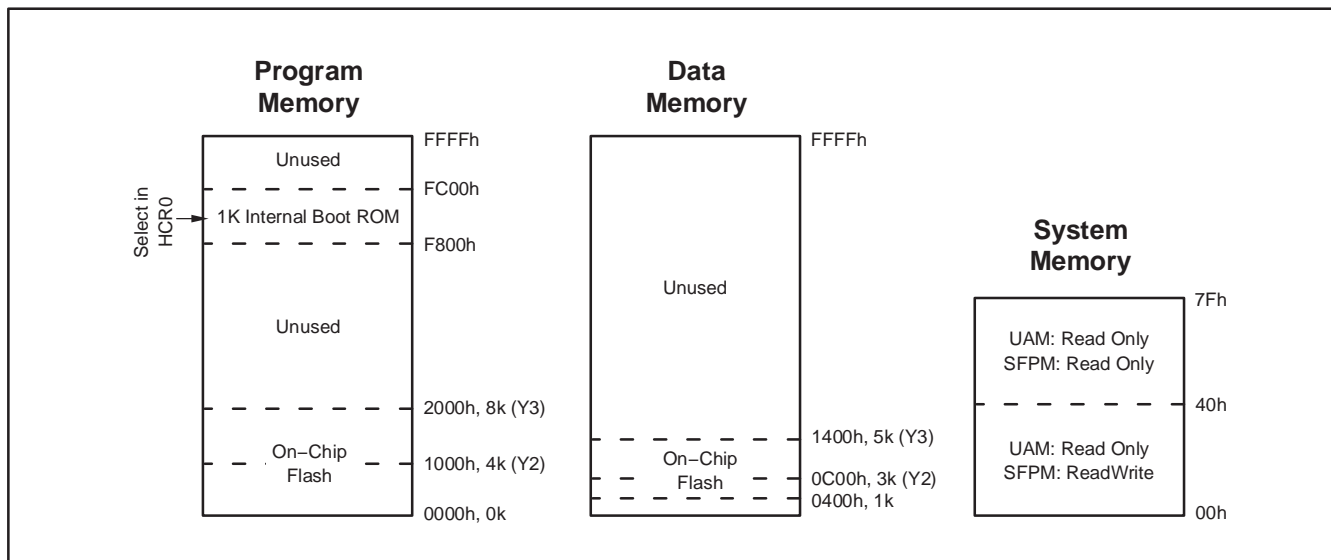


Figure 20. Memory Map

It is important to note that the Flash Memory is readable and writable (depending on the MXWS bit in the MWS SFR) by the user through the MOVX instruction when configured as either Program or Data Memory. This means that the user may partition the device for maximum Flash Program Memory size (no Flash Data Memory) and use Flash Program Memory as Flash Data Memory. This may lead to undesirable behavior if the PC points to an area of Flash Program Memory that is being used for data storage. Therefore, it is recommended to use Flash partitioning when Flash Memory is used for data storage. Flash partitioning prohibits execution of code from Data Flash Memory. Additionally, the Program Memory erase/write can be disabled through hardware configuration bits (HCR0), while still providing access (read/write/erase) to Data Flash Memory.

The effect of memory mapping on Program and Data Memory is straightforward. The Program Memory is decreased in size from the top of Flash Memory. To maintain compatibility with the MSC121x, the Flash Data

Memory maps to addresses 0400h. Therefore, access to Data Memory (through MOVX) will access Flash Memory for the addresses shown in Table 4.

Data Memory

The MSC1201/02 has on-chip Flash Data Memory, which is readable and writable (depending on Memory Write Select register) during normal operation (full V_{DD} range). This memory is mapped into the external Data Memory space, which requires the use of the MOVX instruction to program. Note that the page size is 64 bytes for both Program and Data Memory and the page must be erased before it can be written.

System Memory

The System Memory is nonvolatile memory that can be read in User Application mode through the **faddr_data_read** Boot ROM routine. In Serial Flash Programming mode, the lower 64 bytes can be written. The lower 64 bytes include the Hardware Configuration registers.

REGISTER MAP

The Register Map is illustrated in Figure 21. It is entirely separate from the Program and Data Memory areas mentioned before. A separate class of instructions is used to access the registers. There are 256 potential register locations. In practice, the MSC1201/02 have 256 bytes of Scratchpad RAM and up to 128 SFRs. This is possible, since the upper 128 Scratchpad RAM locations can only be accessed indirectly. Thus, a direct reference to one of the upper 128 locations must be an SFR access. Direct RAM is reached at locations 0 to 7Fh (0 to 127).

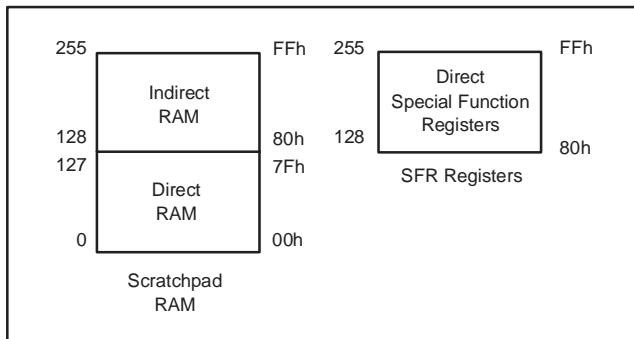


Figure 21. Register Map

SFRs are accessed directly between 80h and FFh (128 to 255). The RAM locations between 128 and 255 can be reached through an indirect reference to those locations. Scratchpad RAM is available for general-purpose data storage. Within the 128 bytes of RAM, there are several special-purpose areas.

Bit Addressable Locations

In addition to direct register access, some individual bits are also accessible. These are individually addressable bits in both the RAM and SFR area. In the Scratchpad RAM area, registers 20h to 2Fh are bit-addressable. This provides 128 (16 • 8) individual bits available to software. A bit access is distinguished from a full-register access by the type of instruction. In the SFR area, any register location ending in a 0h or 8h is bit-addressable. Figure 22 shows details of the on-chip RAM addressing including the locations of individual RAM bits.

Working Registers

As part of the lower 128 bytes of RAM, there are four banks of Working Registers, as shown in Figure 20. The Working Registers are general-purpose RAM locations that can be addressed in a special way. They are designated R0 through R7. Since there are four banks, the currently selected bank will be used by any instruction using R0–R7. This allows software to change context by simply switching banks. This is controlled via the Program Status

Word register (PSW; 0D0h) in the SFR area described below. The 16 bytes immediately above the R0–R7 registers are bit-addressable, so any of the 128 bits in this area can be directly accessed using bit-addressable instructions.

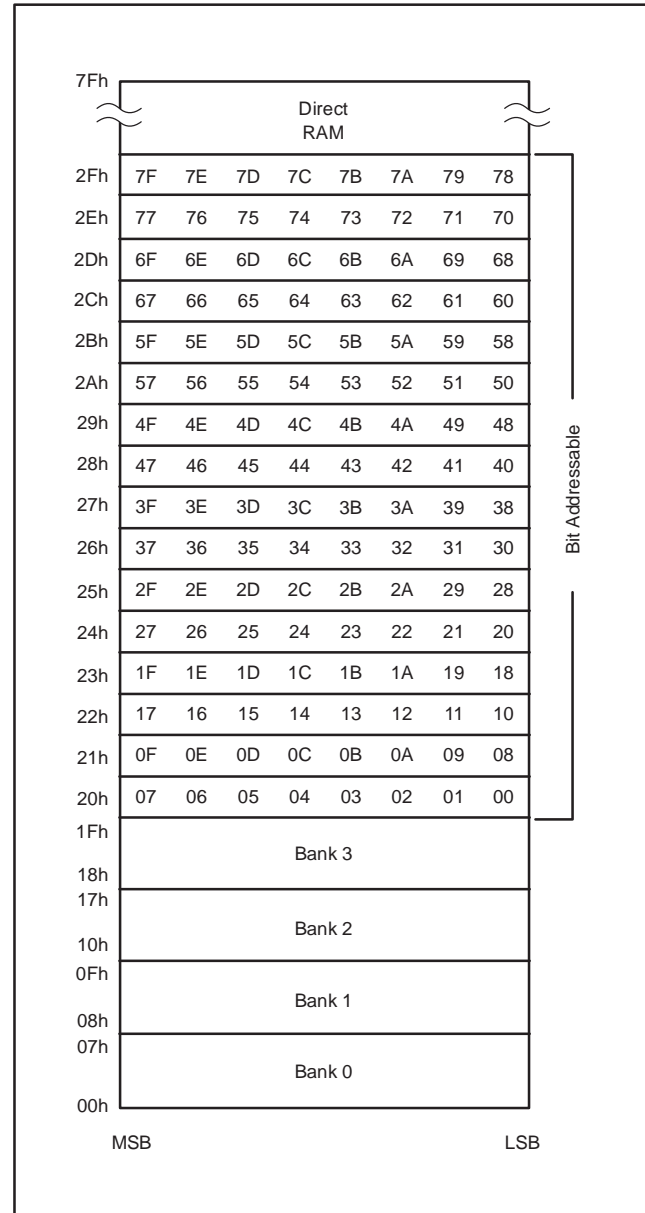


Figure 22. Scratchpad Register Addressing

Thus, an instruction can designate the value stored in R0 (for example) to address the upper RAM. The 16 bytes immediately above these registers are bit-addressable, so any of the 128 bits in this area can be directly accessed using bit-addressable instructions.

Stack

Another use of the Scratchpad area is for the programmer's stack. This area is selected using the Stack Pointer (SP, SFR 81h). Whenever a call or interrupt is invoked, the return address is placed on the Stack. It also is available to the programmer for variables, etc., since the Stack can be moved and there is no fixed location within the RAM designated as Stack. The Stack Pointer defaults to 07h on reset and the user can then move it as needed. The SP will point to the last used value. Therefore, the next value placed on the Stack is put at SP + 1. Each PUSH or CALL increments the SP by the appropriate value and each POP or RET decrements it.

Program Memory

After reset, the CPU begins execution from Program Memory location 0000h. The standard internal Program Memory size for MSC1201/02 family members is shown in Table 5. If enabled, the Boot ROM will appear from address F800h to FFFFh.

Table 5. MSC1201/02 Maximum Internal Program Memory Sizes

| MODEL NUMBER | STANDARD INTERNAL PROGRAM MEMORY SIZE (BYTES) |
|---------------------|-----------------------------------------------|
| MSC1201Y2/MSC1202Y2 | 8k |
| MSC1201Y3/MSC1202Y3 | 4k |

Boot ROM

There is a 1kB Boot ROM that controls operation during serial programming. Additionally, the Boot ROM routines shown in Table 6 can be accessed during the user mode, if it is enabled. When enabled, the Boot ROM routines will be located at memory addresses F800h–FBFFh during user mode.

Table 6. MSC1201/02 Boot ROM Routines

| HEX ADDRESS | ROUTINE | C DECLARATIONS | DESCRIPTION |
|-------------|------------------|--------------------------------------------------------|-----------------------------------------------------------------------------------------|
| F802 | sfr_rd | char sfr_rd(void); | Return SFR value pointed to by CADDR ⁽¹⁾ |
| F805 | sfr_wr | void sfr_wr(char d); | Write to SFR pointed to by CADDR ⁽¹⁾ |
| FBD8 | monitor_isr | void monitor_isr() interrupt 6; | Push registers and call cmd_parser |
| FBDA | cmd_parser | void cmd_parser(void); | See application note SBAA076, <i>Programming the MSC1210</i> , available at www.ti.com. |
| FBDC | put_string | void put_string(char code *string); | Output string |
| FBDE | page_erase | char page_erase(int faddr, char fdata, char fdm); | Erase flash page |
| FBE0 | write_flash | Assembly only; DPTR = address, ACC = data | Flash write ⁽²⁾ |
| FBE2 | write_flash_chk | char write_flash_chk(int faddr, char fdata, char fdm); | Write flash byte, verify |
| FBE4 | write_flash_byte | void write_flash_byte(int faddr, char fdata); | Write flash byte ⁽²⁾ |
| FBE6 | faddr_data_read | char faddr_data_read(char faddr); | Read System Memory byte from faddr |
| FBE8 | data_x_c_read | char data_x_c_read(int faddr, char fdm); | Read xdata or code byte |
| FBEA | tx_byte | void tx_byte(char); | Send byte to USART0 |
| FBEC | tx_hex | void tx_hex(char); | send hex value to USART0 |
| FBEE | putx | void putx(void); | send "x" to USART0 on R7 = 1 |
| FBF0 | rx_byte | char rx_byte(void); | Read byte from USART0 |
| FBF2 | rx_byte_echo | char rx_byte_echo(void); | Read and echo byte on USART0 |
| FBF4 | rx_hex_echo | char rx_hex_echo(void); | Read and echo hex on USART0 |
| FBF6 | rx_hex_dbl_echo | int rx_hex_dbl_echo(void); | Read int as hex and echo: USART0 |
| FBF8 | rx_hex_word_echo | int rx_hex_word_echo(void); | Read int reversed as hex and echo: USART0 |
| FBFA | autobaud | void autobaud(void); | Set baud with received CR ⁽³⁾ |
| FBFC | putspace1 | void putspace1(void); | Output 1 space to USART0 |
| FBFE | putc | void putc(void); | Output CR, LF to USART0 |

(1) CADDR must be set using the faddr_data_read routine.

(2) MWS register (SFR 8Fh) defines Data Memory or Program Memory write.

(3) SFR registers CKCON and TCON must be initialized: CKCON = 0x10 and TCON = 0x00.

Serial Flash Programming Mode

Serial Flash Programming mode is initiated by holding the P1.0/PROG pin low during reset, as shown in Figure 23. User Application mode also allows for Flash programming. Code execution from Flash Memory cannot occur in this mode while programming, but code execution can occur from Boot ROM while programming.

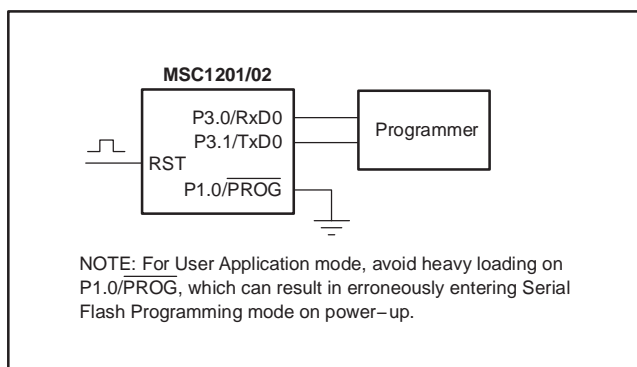


Figure 23. Serial Flash Programming Mode

INTERRUPTS

The MSC1201/02 use a three-priority interrupt system. As shown in Table 7, each interrupt source has an independent priority bit, flag, interrupt vector, and enable (except that nine interrupts share the Auxiliary Interrupt, AI, at the highest priority). In addition, interrupts can be globally enabled or disabled. The interrupt structure is compatible with the original 8051 family. All of the standard interrupts are available.

HARDWARE CONFIGURATION MEMORY

The 64 configuration bytes can only be written during the program mode. The bytes are accessed through SFR registers CADDR (SFR 93h) and CDATA (SFR 94h) by using the **faddr_data_read** Boot-ROM routine. Three of the configuration bytes control Flash partitioning and system control. If the security bit is set, these bits cannot be changed except with a Mass Erase command that erases all of the Flash Memory, including the 64 configuration bytes.

Table 7. Interrupt Summary

| INTERRUPT/EVENT | INTERRUPT | | PRIORITY | FLAG | ENABLE | PRIORITY CONTROL |
|-------------------------------------|-----------|-----|-----------|----------------------------------|------------------------------|------------------|
| | ADDR | NUM | | | | |
| AV _{DD} Low Voltage Detect | 33h | 6 | HIGH 0 | ALVDIP (AIPOL.1) ⁽¹⁾ | EALV (AIE.1) ⁽¹⁾ | N/A |
| Count (SPI/I ² C) | 33h | 6 | 0 | CNTIP (AIPOL.2) ⁽¹⁾ | ECNT (AIE.2) ⁽¹⁾ | N/A |
| I ² C Start/Stop | 33h | 6 | 0 | I2CIP (AIPOL.3) ⁽¹⁾ | EI2C (AIE.3) ⁽¹⁾ | N/A |
| Milliseconds Timer | 33h | 6 | 0 | MSECIP (AIPOL.4) ⁽¹⁾ | EMSEC (AIE.4) ⁽¹⁾ | N/A |
| ADC | 33h | 6 | 0 | ADCIP (AIPOL.5) ⁽¹⁾ | EADC (AIE.5) ⁽¹⁾ | N/A |
| Summation Register | 33h | 6 | 0 | SUMIP (AIPOL.6) ⁽¹⁾ | ESUM (AIE.6) ⁽¹⁾ | N/A |
| Seconds Timer | 33h | 6 | 0 | SECIP (AIPOL.7) ⁽¹⁾ | ESEC (AIE.7) ⁽¹⁾ | N/A |
| External Interrupt 0 | 03h | 0 | 1 | IE0 (TCON.1) ⁽²⁾ | EX0 (IE.0) ⁽⁴⁾ | PX0 (IP.0) |
| Timer 0 Overflow | 0Bh | 1 | 2 | TF0 (TCON.5) ⁽³⁾ | ET1 (IE.1) ⁽⁴⁾ | PT0 (IP.1) |
| External Interrupt 1 | 13h | 2 | 3 | IE1 (TCON.3) ⁽²⁾ | EX1 (IE.2) ⁽⁴⁾ | PX1 (IP.2) |
| Timer 1 Overflow | 1Bh | 3 | 4 | TF1 (TCON.7) ⁽³⁾ | ET1 (IE.3) ⁽⁴⁾ | PT1 (IP.3) |
| Serial Port 0 | 23h | 4 | 5 | RI_0 (SCON0.0) TI_0 (SCON0.1) | ES0 (IE.4) ⁽⁴⁾ | PS0 (IP.4) |
| External Interrupt 2 | 43h | 8 | 6 | IE2 (EXIF.4) | EX2 (EIE.0) ⁽⁴⁾ | PX2 (EIP.0) |
| External Interrupt 3 | 4Bh | 9 | 7 | IE3 (EXIF.5) | EX3 (EIE.1) ⁽⁴⁾ | PX3 (EIP.1) |
| External Interrupt 4 | 53h | 10 | 8 | IE4 (EXIF.6) | EX4 (EIE.2) ⁽⁴⁾ | PX4 (EIP.2) |
| External Interrupt 5 | 5Bh | 11 | 9 | IE5 (EXIF.7) | EX5 (EIE.3) ⁽⁴⁾ | PX5 (EIP.3) |
| Watchdog | 63h | 12 | 10 LOW | WDTI (EICON.3) | EWDI (EIE.4) ⁽⁴⁾ | PWDI (EIP.4) |

(1) These interrupts set the AI flag (EICON.4) and are enabled by EAI (EICON.5).

(2) If edge-triggered, cleared automatically by hardware when the service routine is vectored to. If level-triggered, the flag follows the state of the pin.

(3) Cleared automatically by hardware when interrupt vector occurs.

(4) Globally enabled by EA (IE.7).

Hardware Configuration Register 0 (HCR0)—Accessed Using SFR Registers CADDR and CDATA.

| | bit 7 | bit 6 | bit 5 | bit 4 | bit 3 | bit 2 | bit 1 | bit 0 |
|-----------|-------|-------|-------|-------|-------|-------|--------|--------|
| CADDR 3Fh | EPMA | PML | RSL | EBR | EWDR | 1 | DFSEL1 | DFSEL0 |

EPMA Enable Programming Memory Access (Security Bit).

bit 7 0: After reset in programming modes, Flash Memory can only be accessed in UAM until a mass erase is done.
1: Fully Accessible (default)

PML Program Memory Lock (PML has Priority Over RSL).

bit 6 0: Enable read and write for Program Memory in UAM.
1: Enable Read-Only mode for Program Memory in UAM (default).

RSL Reset Sector Lock. The reset sector can be used to provide another method of Flash Memory programming. This will allow Program Memory updates without changing the jumpers for in-circuit code updates or program development. The code in this boot sector would then provide the monitor and programming routines with the ability to jump into the main Flash code when programming is finished.

bit 5 0: Enable Reset Sector Writing
1: Enable Read-Only mode for reset sector (4kB) (default). Same effect as PML for the MSC1201Y2/MSC1202Y2.

EBR Enable Boot ROM. Boot ROM is 1kB of code located in ROM, not to be confused with the 4kB Boot Sector located in Flash Memory.

bit 4 0: Disable Internal Boot ROM
1: Enable Internal Boot ROM (default)

EWDR Enable Watchdog Reset.

bit 3 0: Disable Watchdog Reset
1: Enable Watchdog Reset (default)

DFSEL1–0 Data Flash Memory Size (See Table 3).

bits 1–0 00: 4kB Data Flash Memory (MSC1201Y3/MSC1202Y3 Only)
01: 2kB Data Flash Memory
10: 1kB Data Flash Memory
11: No Data Flash Memory (default)

Hardware Configuration Register 1 (HCR1)

| | bit 7 | bit 6 | bit 5 | bit 4 | bit 3 | bit 2 | bit 1 | bit 0 |
|-----------|-------|-------|-------|-------|-------|-------|-------|-------|
| CADDR 3Eh | 1 | 1 | 1 | 1 | 1 | DDB | 1 | 1 |

DDB **Disable Digital Brownout Detection.**
bit 2 0: Enable Digital Brownout Detection (2.7V)
 1: Disable Digital Brownout Detection (default)

Hardware Configuration Register 2 (HCR2)

| | bit 7 | bit 6 | bit 5 | bit 4 | bit 3 | bit 2 | bit 1 | bit 0 |
|-----------|-------|-------|-------|-------|-------|---------|---------|---------|
| CADDR 3Dh | 0 | 0 | 0 | 0 | 0 | CLKSEL2 | CLKSEL1 | CLKSEL0 |

CLKSEL2–1 **Clock Select.**
bits 2–0 000: Reserved
 001: Reserved
 010: Reserved
 011: External Clock Mode
 100: PLL High-Frequency (HF) Mode
 101: PLL Low-Frequency (LF) Mode
 110: Internal Oscillator High-Frequency (HF) Mode
 111: Internal Oscillator Low-Frequency (LF) Mode

SFR DEFINITIONS

| ADDRESS | REGISTER | BIT 7 | BIT 6 | BIT 5 | BIT 4 | BIT 3 | BIT 2 | BIT 1 | BIT 0 | RESET VALUE | |
|---------|--------------------|---------------------|----------------|----------------|-----------------|---------------------|---------------|------------|----------------|-------------|-----|
| 80h | | | | | | | | | | | |
| 81h | SP | | | | | | | | | 07h | |
| 82h | DPL0 | | | | | | | | | 00h | |
| 83h | DPH0 | | | | | | | | | 00h | |
| 84h | DPL1 | | | | | | | | | 00h | |
| 85h | DPH1 | | | | | | | | | 00h | |
| 86h | DPS | 0 | 0 | 0 | 0 | 0 | 0 | 0 | SEL | 00h | |
| 87h | PCON | SMOD | 0 | 1 | 1 | GF1 | GF0 | STOP | IDLE | 30h | |
| 88h | TCON | TF1 | TR1 | TF0 | TR0 | IE1 | IT1 | IE0 | IT0 | 00h | |
| 89h | TMOD | ----- Timer 1 ----- | | | | ----- Timer 0 ----- | | | | | 00h |
| | | GATE | C/T | M1 | M0 | GATE | C/T | M1 | M0 | | |
| 8Ah | TL0 | | | | | | | | | 00h | |
| 8Bh | TL1 | | | | | | | | | 00h | |
| 8Ch | TH0 | | | | | | | | | 00h | |
| 8Dh | TH1 | | | | | | | | | 00h | |
| 8Eh | CKCON | 0 | 0 | 0 | T1M | T0M | MD2 | MD1 | MD0 | 01h | |
| 8Fh | MWS | 0 | 0 | 0 | 0 | 0 | 0 | 0 | MXWS | 00h | |
| 90h | P1 | P1.7 INT5 | P1.6 INT4 | P1.5 INT3 | P1.4 INT2/SS | P1.3 DIN | P1.2 DOUT | P1.1 | P1.0 PROG | FFh | |
| 91h | EXIF | IE5 | IE4 | IE3 | IE2 | 1 | 0 | 0 | 0 | 08h | |
| 92h | MPAGE | | | | | | | | | | |
| 93h | CADDR | | | | | | | | | 00h | |
| 94h | CDATA | | | | | | | | | 00h | |
| 95h | | | | | | | | | | | |
| 96h | | | | | | | | | | | |
| 97h | | | | | | | | | | | |
| 98h | SCON0 | SM0_0 | SM1_0 | SM2_0 | REN_0 | TB8_0 | RB8_0 | TI_0 | RI_0 | 00h | |
| 99h | SBUF0 | | | | | | | | | 00h | |
| 9Ah | SPICON I2CCON | SBIT3 SBIT3 | SBIT2 SBIT2 | SBIT1 SBIT1 | SBIT0 SBIT0 | ORDER STOP | CPHA START | ESS DCS | CPOL CNTSEL | 00h | |
| 9Bh | SPIDATA I2CDATA | | | | | | | | | 00h | |
| 9Ch | | | | | | | | | | | |
| 9Dh | | | | | | | | | | | |
| 9Eh | | | | | | | | | | | |
| 9Fh | | | | | | | | | | | |
| A0h | | | | | | | | | | | |
| A1h | | | | | | | | | | | |
| A2h | | | | | | | | | | | |
| A3h | | | | | | | | | | | |
| A4h | AIPOL | SECIP | SUMIP | ADCIP | MSECIP | I2CIP | CNTIP | ALVDIP | 0 | 00h | |
| A5h | PAI | 0 | 0 | 0 | 0 | PAI3 | PAI2 | PAI1 | PAI0 | 00h | |
| A6h | AIE | ESEC | ESUM | EADC | EMSEC | EI2C | ECNT | EALV | 0 | 00h | |
| A7h | AISTAT | SEC | SUM | ADC | MSEC | I2C | CNT | ALVD | 0 | 00h | |
| A8h | IE | EA | 0 | 0 | ES0 | ET1 | EX1 | ET0 | EX0 | 00h | |
| A9h | | | | | | | | | | | |

SFR DEFINITIONS (continued)

| ADDRESS | REGISTER | BIT 7 | BIT 6 | BIT 5 | BIT 4 | BIT 3 | BIT 2 | BIT 1 | BIT 0 | RESET VALUE |
|---------|----------|-------|----------------------|------------|------------|--------------|--------------|--------------|--------------|-------------|
| AAh | | | | | | | | | | |
| ABh | | | | | | | | | | |
| ACh | | | | | | | | | | |
| ADh | | | | | | | | | | |
| A Eh | P1DDRL | P13H | P13L | P12H | P12L | P11H | P11L | P10H | P10L | 00h |
| AFh | P1DDRH | P17H | P17L | P16H | P16L | P15H | P15L | P14H | P14L | 00h |
| B0h | P3 | P3.7 | P3.6 SCK/SCU/CLKS | P3.5 T1 | P3.4 T0 | P3.3 INT1 | P3.2 INT0 | P3.1 TXD0 | P3.0 RXD0 | FFh |
| B1h | | | | | | | | | | |
| B2h | | | | | | | | | | |
| B3h | P3DDRL | P33H | P33L | P32H | P32L | P31H | P31L | P30H | P30L | 00h |
| B4h | P3DDRH | P37H | P37L | P36H | P36L | P35H | P35L | P34H | P34L | 00h |
| B5h | IDAC | | | | | | | | | 00h |
| B6h | | | | | | | | | | |
| B7h | | | | | | | | | | |
| B8h | IP | 1 | 0 | 0 | PS0 | PT1 | PX1 | PT0 | PX0 | 80h |
| B9h | | | | | | | | | | |
| BAh | | | | | | | | | | |
| BBh | | | | | | | | | | |
| BCh | | | | | | | | | | |
| BDh | | | | | | | | | | |
| BEh | | | | | | | | | | |
| BFh | | | | | | | | | | |
| C0h | | | | | | | | | | |
| C1h | | | | | | | | | | |
| C2h | | | | | | | | | | |
| C3h | | | | | | | | | | |
| C4h | | | | | | | | | | |
| C5h | | | | | | | | | | |
| C6h | EWU | | | | | | EWUWDT | EWUEX1 | EWUEX0 | 00h |
| C7h | SYSCLK | 0 | 0 | DIVMOD1 | DIVMOD0 | 0 | DIV2 | DIV1 | DIV0 | 00h |
| C8h | | | | | | | | | | |
| C9h | | | | | | | | | | |
| CAh | | | | | | | | | | |
| CBh | | | | | | | | | | |
| CCh | | | | | | | | | | |
| CDh | | | | | | | | | | |
| CEh | | | | | | | | | | |
| CFh | | | | | | | | | | |
| D0h | PSW | CY | AC | F0 | RS1 | RS0 | OV | F1 | P | 00h |
| D1h | OCL | | | | | | | | LSB | 00h |
| D2h | OCM | | | | | | | | | 00h |
| D3h | OCH | MSB | | | | | | | | 00h |
| D4h | GCL | | | | | | | | LSB | 5Ah |
| D5h | GCM | | | | | | | | | ECh |
| D6h | GCH | MSB | | | | | | | | 5Fh |

SFR DEFINITIONS (continued)

| ADDRESS | REGISTER | BIT 7 | BIT 6 | BIT 5 | BIT 4 | BIT 3 | BIT 2 | BIT 1 | BIT 0 | RESET VALUE |
|---------|-----------------------|--------------------|---------|---------|---------|---------|---------|---------|--------------------|--------------------|
| D7h | ADMUX | INP3 | INP2 | INP1 | INP0 | INN3 | INN2 | INN1 | INN0 | 01h |
| D8h | EICON | 0 | 1 | EAI | AI | WDT1 | 0 | 0 | 0 | 40h |
| D9h | ADRESL ⁽¹⁾ | | | | | | | | LSB ⁽¹⁾ | 00h |
| DAh | ADRESM ⁽¹⁾ | MSB ⁽¹⁾ | | | | | | | | 00h |
| DBh | ADRESH ⁽¹⁾ | MSB ⁽¹⁾ | | | | | | | | 00h |
| DCh | ADCON0 | | BOD | EVREF | VREFH | EBUF | PGA2 | PGA1 | PGA0 | 30h |
| DDh | ADCON1 | OF_UF | POL | SM1 | SM0 | — | CAL2 | CAL1 | CAL0 | 00h |
| DEh | ADCON2 | DR7 | DR6 | DR5 | DR4 | DR3 | DR2 | DR1 | DR0 | 1Bh |
| DFh | ADCON3 | 0 | 0 | 0 | 0 | 0 | DR10 | DR9 | DR8 | 06h |
| E0h | ACC | ACC.7 | ACC.6 | ACC.5 | ACC.4 | ACC.3 | ACC.2 | ACC.1 | ACC.0 | 00h |
| E1h | SSCON | SSCON1 | SSCON0 | SCNT2 | SCNT1 | SCNT0 | SHF2 | SHF1 | SHF0 | 00h |
| E2h | SUMR0 | | | | | | | | LSB | 00h |
| E3h | SUMR1 | | | | | | | | | 00h |
| E4h | SUMR2 | | | | | | | | | 00h |
| E5h | SUMR3 | MSB | | | | | | | | 00h |
| E6h | ODAC | | | | | | | | | 00h |
| E7h | LVDCON | ALVDIS | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 8Fh |
| E8h | EIE | 1 | 1 | 1 | EWDI | EX5 | EX4 | EX3 | EX2 | E0h |
| E9h | HWPC0 | 0 | 0 | 0 | 0 | 0 | 0 | DEVICE | MEMORY | 0000_00xxb |
| EAh | HWPC1 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 20h |
| EBh | HWVER | | | | | | | | | |
| ECh | Reserved | | | | | | | | | |
| EDh | Reserved | | | | | | | | | |
| EEh | FMCON | 0 | PGERA | 0 | FRCM | 0 | BUSY | 1 | 0 | 02h |
| EFh | FTCON | FER3 | FER2 | FER1 | FER0 | FWR3 | FWR2 | FWR1 | FWR0 | A5h |
| F0h | B | | | | | | | | | 00h |
| F1h | PDCON | PDICLK | PDIDAC | PDI2C | 0 | PDADC | PDWDT | PDST | PDSPI | 6Fh |
| F2h | PASEL | PSEN4 | PSEN3 | PSEN2 | PSEN1 | PSEN0 | 0 | 0 | 0 | 00h |
| F3h | Reserved | | | | | | | | | |
| F4h | PLLL | PLL7 | PLL6 | PLL5 | PLL4 | PLL3 | PLL2 | PLL1 | PLL0 | xxh ⁽²⁾ |
| F5h | PLLH | CKSTAT2 | CKSTAT1 | CKSTAT0 | PLLLOCK | 0 | 0 | PLL9 | PLL8 | xxh ⁽²⁾ |
| F6h | ACLK | 0 | FREQ6 | FREQ5 | FREQ4 | FREQ3 | FREQ2 | FREQ1 | FREQ0 | 03h |
| F7h | SRST | 0 | 0 | 0 | 0 | 0 | 0 | 0 | RSTREQ | 00h |
| F8h | EIP | 1 | 1 | 1 | PWDI | PX5 | PX4 | PX3 | PX2 | E0h |
| F9h | SECINT | WRT | SECINT6 | SECINT5 | SECINT4 | SECINT3 | SECINT2 | SECINT1 | SECINT0 | 7Fh |
| FAh | MSINT | WRT | MSINT6 | MSINT5 | MSINT4 | MSINT3 | MSINT2 | MSINT1 | MSINT0 | 7Fh |
| FBh | USEC | 0 | 0 | FREQ5 | FREQ4 | FREQ3 | FREQ2 | FREQ1 | FREQ0 | 03h |
| FCh | MSECL | MSECL7 | MSECL6 | MSECL5 | MSECL4 | MSECL3 | MSECL2 | MSECL1 | MSECL0 | 9Fh |
| FDh | MSECH | MSECH7 | MSECH6 | MSECH5 | MSECH4 | MSECH3 | MSECH2 | MSECH1 | MSECH0 | 0Fh |
| FEh | HMSEC | HMSEC7 | HMSEC6 | HMSEC5 | HMSEC4 | HMSEC3 | HMSEC2 | HMSEC1 | HMSEC0 | 63h |
| FFh | WDTCON | EWDT | DWDT | RWDT | WDCNT4 | WDCNT3 | WDCNT2 | WDCNT1 | WDCNT0 | 00h |

(1) For the MSC1201, the ADC result is contained in ADRESH, ADRESM, and ADRESL. For the MSC1202, the ADC result is contained in ADRESM and ADRESL (that is, shifted right one byte) and the MSB is sign-extended (Bipolar mode) or zero-padded (Unipolar mode) in ADRESH. Therefore, when migrating between the MSC1201 and MSC1202, the ADC result calculation must be adjusted accordingly. For both the MSC1201 and MSC1202, the ADC interrupt is cleared by reading ADRESL.

(2) Dependent on HCR2 value.

Stack Pointer (SP)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|------|------|------|------|------|-------------|
| SFR 81h | SP.7 | SP.6 | SP.5 | SP.4 | SP.3 | SP.2 | SP.1 | SP.0 | 07h |

SP.7–0 Stack Pointer. The stack pointer identifies the location where the stack will begin. The stack pointer is incremented before every PUSH or CALL operation and decremented after each POP or RET/RETI. This register defaults to 07h after reset.

Data Pointer Low 0 (DPL0)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| SFR 82h | DPL0.7 | DPL0.6 | DPL0.5 | DPL0.4 | DPL0.3 | DPL0.2 | DPL0.1 | DPL0.0 | 00h |

DPL0.7–0 Data Pointer Low 0. This register is the low byte of the standard 8051 16-bit data pointer. DPL0 and DPH0 are used to point to non-scratchpad data RAM. The current data pointer is selected by DPS (SFR 86h).

Data Pointer High 0 (DPH0)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| SFR 83h | DPH0.7 | DPH0.6 | DPH0.5 | DPH0.4 | DPH0.3 | DPH0.2 | DPH0.1 | DPH0.0 | 00h |

DPH0.7–0 Data Pointer High 0. This register is the high byte of the standard 8051 16-bit data pointer. DPL0 and DPH0 are used to point to non-scratchpad data RAM. The current data pointer is selected by DPS (SFR 86h).

Data Pointer Low 1 (DPL1)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| SFR 84h | DPL1.7 | DPL1.6 | DPL1.5 | DPL1.4 | DPL1.3 | DPL1.2 | DPL1.1 | DPL1.0 | 00h |

DPL1.7–0 Data Pointer Low 1. This register is the low byte of the auxiliary 16-bit data pointer. When the SEL bit (DPS.0) (SFR 86h) is set, DPL1 and DPH1 are used in place of DPL0 and DPH0 during DPTR operations.

Data Pointer High 1 (DPH1)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| SFR 85h | DPH1.7 | DPH1.6 | DPH1.5 | DPH1.4 | DPH1.3 | DPH1.2 | DPH1.1 | DPH1.0 | 00h |

DPH1.7–0 Data Pointer High. This register is the high byte of the auxiliary 16-bit data pointer. When the SEL bit (DPS.0) (SFR 86h) is set, DPL1 and DPH1 are used in place of DPL0 and DPH0 during DPTR operations.

Data Pointer Select (DPS)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|-----|-------------|
| SFR 86h | 0 | 0 | 0 | 0 | 0 | 0 | 0 | SEL | 00h |

SEL Data Pointer Select. This bit selects the active data pointer.

bit 0 0: Instructions that use the DPTR will use DPL0 and DPH0.

1: Instructions that use the DPTR will use DPL1 and DPH1.

Power Control (PCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|---|---|---|-----|-----|------|------|-------------|
| SFR 87h | SMOD | 0 | 1 | 1 | GF1 | GF0 | STOP | IDLE | 30h |

SMOD Serial Port 0 Baud Rate Doubler Enable. The serial baud rate doubling function for Serial Port 0.

- bit 7 0: Serial Port 0 baud rate will be a standard baud rate.
 1: Serial Port 0 baud rate will be double that defined by baud rate generation equation.

GF1 General-Purpose User Flag 1. This is a general-purpose flag for software control.

bit 3

GF0 General-Purpose User Flag 0. This is a general-purpose flag for software control.

bit 2

STOP Stop Mode Select. Setting this bit will halt the internal oscillator and block external clocks. This bit will always read as 0. Exit with RESET. In this mode, internal peripherals are frozen and I/O pins are held in their current state. The ADC is frozen, but IDAC and VREF remain active.

bit 1

IDLE Idle Mode Select. Setting this bit will freeze the CPU, Timer 0 and 1, and the USART; other peripherals remain active. This bit will always be read as a 0. Exit with AIE (A6h) and EWU (C6h) interrupts (refer to Figure 6 for clocks affected during IDLE).

bit 0

Timer/Counter Control (TCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|
| SFR 88h | TF1 | TR1 | TF0 | TR0 | IE1 | IT1 | IE0 | IT0 | 00h |

TF1 Timer 1 Overflow Flag. This bit indicates when Timer 1 overflows its maximum count as defined by the current mode. This bit can be cleared by software and is automatically cleared when the CPU vectors to the Timer 1 interrupt service routine.

bit 7

- 0: No Timer 1 overflow has been detected.
 1: Timer 1 has overflowed its maximum count.

TR1 Timer 1 Run Control. This bit enables/disables the operation of Timer 1. Halting this timer will preserve the current bit 6 count in TH1, TL1.

bit 6

- 0: Timer is halted.
 1: Timer is enabled.

TF0 Timer 0 Overflow Flag. This bit indicates when Timer 0 overflows its maximum count as defined by the current mode. This bit can be cleared by software and is automatically cleared when the CPU vectors to the Timer 0 interrupt service routine.

bit 5

- 0: No Timer 0 overflow has been detected.
 1: Timer 0 has overflowed its maximum count.

TR0 Timer 0 Run Control. This bit enables/disables the operation of Timer 0. Halting this timer will preserve the current count in TH0, TL0.

bit 4

- 0: Timer is halted.
 1: Timer is enabled.

IE1 Interrupt 1 Edge Detect. This bit is set when an edge/level of the type defined by IT1 is detected. If IT1 = 1, this bit will remain set until cleared in software or the start of the External Interrupt 1 service routine. If IT1 = 0, this bit will inversely reflect the state of the $\overline{\text{INT1}}$ pin.

bit 3

IT1 Interrupt 1 Type Select. This bit selects whether the $\overline{\text{INT1}}$ pin will detect edge- or level-triggered interrupts.

bit 2

- 0: $\overline{\text{INT1}}$ is level triggered.
 1: $\overline{\text{INT1}}$ is edge triggered.

IE0 Interrupt 0 Edge Detect. This bit is set when an edge/level of the type defined by IT0 is detected. If IT0 = 1, this bit will remain set until cleared in software or the start of the External Interrupt 0 service routine. If IT0 = 0, this bit will inversely reflect the state of the $\overline{\text{INT0}}$ pin.

bit 1

IT0 Interrupt 0 Type Select. This bit selects whether the $\overline{\text{INT0}}$ pin will detect edge- or level-triggered interrupts.

bit 0

- 0: $\overline{\text{INT0}}$ is level triggered.
 1: $\overline{\text{INT0}}$ is edge triggered.

Timer Mode Control (TMOD)

| | | | | | | | | | |
|---------|---------|-----|----|----|---------|-----|----|----|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR 89h | TIMER 1 | | | | TIMER 0 | | | | 00h |
| | GATE | C/T | M1 | M0 | GATE | C/T | M1 | M0 | |

GATE **Timer 1 Gate Control.** This bit enables/disables the ability of Timer 1 to increment.
bit 7
0: Timer 1 will clock when TR1 = 1, regardless of the state of pin $\overline{\text{INT1}}$.
1: Timer 1 will clock only when TR1 = 1 and pin $\overline{\text{INT1}}$ = 1.

C/T **Timer 1 Counter/Timer Select.**
bit 6
0: Timer is incremented by internal clocks.
1: Timer is incremented by pulses on T1 pin when TR1 (TCON.6, SFR 88h) is 1.

M1, M0 **Timer 1 Mode Select.** These bits select the operating mode of Timer 1.
bits 5–4

| M1 | M0 | MODE |
|----|----|-------------------------------------------------|
| 0 | 0 | Mode 0: 8-bit counter with 5-bit prescale. |
| 0 | 1 | Mode 1: 16 bits. |
| 1 | 0 | Mode 2: 8-bit counter with auto reload. |
| 1 | 1 | Mode 3: Timer 1 is halted, but holds its count. |

GATE **Timer 0 Gate Control.** This bit enables/disables the ability of Timer 0 to increment.
bit 3
0: Timer 0 will clock when TR0 = 1, regardless of the state of pin $\overline{\text{INT0}}$ (software control).
1: Timer 0 will clock only when TR0 = 1 and pin $\overline{\text{INT0}}$ = 1 (hardware control).

C/T **Timer 0 Counter/Timer Select.**
bit 2
0: Timer is incremented by internal clocks.
1: Timer is incremented by pulses on pin T0 when TR0 (TCON.4, SFR 88h) is 1.

M1, M0 **Timer 0 Mode Select.** These bits select the operating mode of Timer 0.
bits 1–0

| M1 | M0 | MODE |
|----|----|--------------------------------------------|
| 0 | 0 | Mode 0: 8-bit counter with 5-bit prescale. |
| 0 | 1 | Mode 1: 16 bits. |
| 1 | 0 | Mode 2: 8-bit counter with auto reload. |
| 1 | 1 | Mode 3: Two 8-bit counters. |

Timer 0 LSB (TL0)

| | | | | | | | | | |
|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR 8Ah | TL0.7 | TL0.6 | TL0.5 | TL0.4 | TL0.3 | TL0.2 | TL0.1 | TL0.0 | 00h |

TL0.7–0 **Timer 0 LSB.** This register contains the least significant byte of Timer 0.
bits 7–0

Timer 1 LSB (TL1)

| | | | | | | | | | |
|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR 8Bh | TL1.7 | TL1.6 | TL1.5 | TL1.4 | TL1.3 | TL1.2 | TL1.1 | TL1.0 | 00h |

TL1.7–0 **Timer 1 LSB.** This register contains the least significant byte of Timer 1.
bits 7–0

Timer 0 MSB (TH0)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| SFR 8Ch | TH0.7 | TH0.6 | TH0.5 | TH0.4 | TH0.3 | TH0.2 | TH0.1 | TH0.0 | 00h |

TH0.7–0 Timer 0 MSB. This register contains the most significant byte of Timer 0.
bits 7–0

Timer 1 MSB (TH1)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| SFR 8Dh | TH1.7 | TH1.6 | TH1.5 | TH1.4 | TH1.3 | TH1.2 | TH1.1 | TH1.0 | 00h |

TH1.7–0 Timer 1 MSB. This register contains the most significant byte of Timer 1.
bits 7–0

Clock Control (CKCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|-----|-----|-----|-----|-----|-------------|
| SFR 8Eh | 0 | 0 | 0 | T1M | T0M | MD2 | MD1 | MD0 | 01h |

T1M **Timer 1 Clock Select.** This bit controls the division of the system clock that drives Timer 1. Clearing this bit to 0 maintains 8051 compatibility. This bit has no effect on instruction cycle timing.
bit 4
0: Timer 1 uses a divide-by-12 of the crystal frequency.
1: Timer 1 uses a divide-by-4 of the crystal frequency.

T0M **Timer 0 Clock Select.** This bit controls the division of the system clock that drives Timer 0. Clearing this bit to 0 maintains 8051 compatibility. This bit has no effect on instruction cycle timing.
bit 3
0: Timer 0 uses a divide-by-12 of the crystal frequency.
1: Timer 0 uses a divide-by-4 of the crystal frequency.

MD2, MD1, MD0 **Stretch MOVX Select.** These bits select the time by which external MOVX cycles are to be stretched. Since the MSC1201/02 does not allow external memory access, these bits should be set to 000_B to allow for the fastest Flash Data Memory access.
bits 2–0

Memory Write Select (MWS)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|------|-------------|
| SFR 8Fh | 0 | 0 | 0 | 0 | 0 | 0 | 0 | MXWS | 00h |

MXWS **MOVX Write Select.** This allows writing to the internal Flash Program Memory.
bit 0
0: No writes are allowed to the internal Flash Program Memory.
1: Writing is allowed to the internal Flash Program Memory, unless PML or RSL (HCR0, CADDR 3Fh) are on.

Port 1 (P1)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------------------------------------------------------|--------------|------------------------------------------------------|----------------------------------------------------------|-------------|--------------|------|------------------------------------------------------|-------------|
| SFR 90h | $\overline{\text{P1.7}}$ $\overline{\text{INT5}}$ | P1.6 INT4 | $\overline{\text{P1.5}}$ $\overline{\text{INT3}}$ | $\overline{\text{P1.4}}$ INT2/ $\overline{\text{SS}}$ | P1.3 DIN | P1.2 DOUT | P1.1 | $\overline{\text{P1.0}}$ $\overline{\text{PROG}}$ | FFh |

P1.7–0 bits 7–0 **General-Purpose I/O Port 1.** This register functions as a general-purpose I/O port. In addition, all the pins have an alternative function listed below. Each of the functions is controlled by several other SFRs. The associated Port 1 latch bit must contain a logic '1' before the pin can be used in its alternate function capacity. To use the alternate function, set the appropriate mode in P1DDRL (SFR AEh), P1DDRH (SFR AFh).

$\overline{\text{INT5}}$ bit 7 **External Interrupt 5.** A falling edge on this pin will cause an external interrupt 5 if enabled.

INT4 bit 6 **External Interrupt 4.** A rising edge on this pin will cause an external interrupt 4 if enabled.

$\overline{\text{INT3}}$ bit 5 **External Interrupt 3.** A falling edge on this pin will cause an external interrupt 3 if enabled.

INT2/ $\overline{\text{SS}}$ bit 4 **External Interrupt 2.** A rising edge on this pin will cause an external interrupt 2 if enabled. This pin can be used as slave select ($\overline{\text{SS}}$) in SPI slave mode.

DIN bit 3 **Serial Data In.** This pin receives serial data in SPI and I²C modes (in I²C mode, this pin should be configured as an input) or standard 8051.

DOUT bit 2 **Serial Data Out.** This pin transmits serial data in SPI and I²C modes (in I²C mode, this pin should be configured as an open drain) or standard 8051.

$\overline{\text{PROG}}$ bit 0 **Program Mode.** When this pin is pulled low at power-up, the device enters Serial Programming mode (refer to Figure 2).

External Interrupt Flag (EXIF)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-----|-----|-----|-----|---|---|---|---|-------------|
| SFR 91h | IE5 | IE4 | IE3 | IE2 | 1 | 0 | 0 | 0 | 08h |

IE5 bit 7 **External Interrupt 5 Flag.** This bit will be set when a falling edge is detected on $\overline{\text{INT5}}$. This bit must be cleared manually by software. Setting this bit in software will cause an interrupt if enabled.

IE4 bit 6 **External Interrupt 4 Flag.** This bit will be set when a rising edge is detected on INT4. This bit must be cleared manually by software. Setting this bit in software will cause an interrupt if enabled.

IE3 bit 5 **External Interrupt 3 Flag.** This bit will be set when a falling edge is detected on $\overline{\text{INT3}}$. This bit must be cleared manually by software. Setting this bit in software will cause an interrupt if enabled.

IE2 bit 4 **External Interrupt 2 Flag.** This bit will be set when a rising edge is detected on INT2. This bit must be cleared manually by software. Setting this bit in software will cause an interrupt if enabled.

Configuration Address Register (CADDR) (write-only)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR 93h | | | | | | | | | 00h |

CADDR **Configuration Address Register.** This register supplies the address for reading bytes in the 64 bytes of Flash Configuration Memory. Always use the Boot ROM CADDR access routine (**faddr_data_read**). This register is also used for SFR read and write routines.

CAUTION: If this register is written to while executing from Flash Memory, the CADDR register will be incorrect.

Configuration Data Register (CDATA) (read-only)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR 94h | | | | | | | | | 00h |

CDATA **Configuration Data Register.** This register will contain the data in the 64 bytes of Flash Configuration Memory that is located at the last written address in the CADDR register. This is a read-only register.

Serial Port 0 Control (SCON0)

| | | | | | | | | | |
|---------|-------|-------|-------|-------|-------|-------|------|------|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR 98h | SM0_0 | SM1_0 | SM2_0 | REN_0 | TB8_0 | RB8_0 | TI_0 | RI_0 | 00h |

SM0–2 **Serial Port 0 Mode.** These bits control the mode of serial Port 0. Modes 1, 2, and 3 have 1 start and 1 stop bit in addition to the 8 or 9 data bits.

| MODE | SM0 | SM1 | SM2 | FUNCTION | LENGTH | PERIOD |
|------|-----|-----|-----|---------------------------------------------------------------|---------|------------------------------------------------------------------------|
| 0 | 0 | 0 | 0 | Synchronous | 8 bits | 12 PCLK ⁽¹⁾ |
| 0 | 0 | 0 | 1 | Synchronous | 8 bits | 4 PCLK ⁽¹⁾ |
| 1 | 0 | 1 | 0 | Asynchronous | 10 bits | Timer 1 Baud Rate Equation |
| 1 | 0 | 1 | 1 | Asynchronous–Valid Stop Required ⁽²⁾ | 10 bits | Timer 1 Baud Rate Equation |
| 2 | 1 | 0 | 0 | Asynchronous | 11 bits | 64 PCLK ⁽¹⁾ (SMOD = 0) 32 PCLK ⁽¹⁾ (SMOD = 1) |
| 2 | 1 | 0 | 1 | Asynchronous with Multiprocessor Communication | 11 bits | 64 PCLK ⁽¹⁾ (SMOD = 0) 32 PCLK ⁽¹⁾ (SMOD = 1) |
| 3 | 1 | 1 | 0 | Asynchronous | 11 bits | Timer 1 Baud Rate Equation |
| 3 | 1 | 1 | 1 | Asynchronous with Multiprocessor Communication ⁽³⁾ | 11 bits | Timer 1 Baud Rate Equation |

(1) PCLK will be equal to tCLK, except that PCLK will stop for IDLE.
(2) RI_0 will only be activated when a valid STOP is received.
(3) RI_0 will not be activated if bit 9 = 0.

REN_0 **Receive Enable.** This bit enables/disables the serial Port 0 received shift register.

bit 4 0: Serial Port 0 reception disabled.

1: Serial Port 0 received enabled (modes 1, 2, and 3). Initiate synchronous reception (mode 0).

TB8_0 **9th Transmission Bit State.** This bit defines the state of the 9th transmission bit in serial Port 0 modes 2 and 3.

bit 3

RB8_0 **9th Received Bit State.** This bit identifies the state of the 9th reception bit of received data in serial Port 0 modes 2 and 3. In serial port mode 1, when SM2_0 = 0, RB8_0 is the state of the stop bit. RB8_0 is not used in mode 0.

bit 2

TI_0 **Transmitter Interrupt Flag.** This bit indicates that data in the serial Port 0 buffer has been completely shifted out. In serial port mode 0, TI_0 is set at the end of the 8th data bit. In all other modes, this bit is set at the end of the last data bit. This bit must be manually cleared by software.

bit 1

RI_0 **Receiver Interrupt Flag.** This bit indicates that a byte of data has been received in the serial Port 0 buffer. In serial port mode 0, RI_0 is set at the end of the 8th bit. In serial port mode 1, RI_0 is set after the last sample of the incoming stop bit subject to the state of SM2_0. In modes 2 and 3, RI_0 is set after the last sample of RB8_0. This bit must be manually cleared by software.

bit 0

Serial Data Buffer 0 (SBUF0)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR 99h | | | | | | | | | 00h |

SBUF0 **Serial Data Buffer 0.** Data for Serial Port 0 is read from or written to this location. The serial transmit and receive bits 7–0 buffers are separate registers, but both are addressed at this location.

SPI Control (SPICON)

| | | | | | | | | | |
|---------|-------|-------|-------|-------|-------|------|-----|------|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR 9Ah | SBIT3 | SBIT2 | SBIT1 | SBIT0 | ORDER | CPHA | ESS | CPOL | 00h |

SBIT3–0 **Serial Bit Count.** Number of bits transferred (read-only). bits 7–4

| SBIT3:0 | COUNT |
|---------|-------|
| 0x00 | 0 |
| 0x01 | 1 |
| 0x03 | 2 |
| 0x02 | 3 |
| 0x06 | 4 |
| 0x07 | 5 |
| 0x05 | 6 |
| 0x04 | 7 |
| 0x0C | 8 |

ORDER **Set Bit Order for Transmit and Receive.**

bit 3
0: Most Significant Bits First
1: Least Significant Bits First

CPHA **Serial Clock Phase Control.**

bit 2
0: Valid data starting from half SCK period before the first edge of SCK
1: Valid data starting from the first edge of SCK

ESS **Enable Slave Select.**

bit 1
0: \overline{SS} (P1.4) is configured as a general-purpose I/O (default).
1: \overline{SS} (P1.4) is configured as \overline{SS} for SPI mode. DOUT (P1.2) drives when \overline{SS} is low, and DOUT (P1.2) is high-impedance when \overline{SS} is high.

CPOL **Serial Clock Polarity.**

bit 0
0: SCK idle at logic LOW
1: SCK idle at logic HIGH

I²C Control (I2CCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-------|-------|-------|-------|------|-------|-----|--------|-------------|
| SFR 9Ah | SBIT3 | SBIT2 | SBIT1 | SBIT0 | STOP | START | DCS | CNTSEL | 00h |

SBIT3–0 Serial Bit Count. Number of bits transferred (read-only).

bits 7–4

| SBIT3:0 | COUNT |
|---------|-------|
| 0x00 | 0 |
| 0x01 | 1 |
| 0x03 | 2 |
| 0x02 | 3 |
| 0x06 | 4 |
| 0x07 | 5 |
| 0x05 | 6 |
| 0x04 | 7 |
| 0x0C | 8 |

STOP Stop-Bit Status.

bit 3

0: No Stop

1: Stop Condition Received and I2CCNT set (cleared on write to I2CDATA)

START Start-Bit Status.

bit 2

0: No Stop

1: Start or Repeated Start Condition Received and I2CCNT set (cleared on write to I2CDATA)

DCS Disable Serial Clock Stretch.

bit 1

0: Enable SCL Stretch (cleared by firmware or START condition)

1: Disable SCL Stretch

CNTSEL Counter Select.

bit 0

0: Counter IRQ Set for Bit Counter = 8 (default)

1: Counter IRQ Set for Bit Counter = 1 (default)

SPI Data Register (SPIDATA) / I²C Data Register (I2CDATA)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|---|-------------|
| SFR 9Bh | | | | | | | | | 00h |

SPIDATA SPI Data Register. Data for SPI is read from or written to this location. The SPI transmit and receive buffers are separate registers, but both are addressed at this location. Read to clear the receive interrupt and write to clear the transmit interrupt.

I2CDATA I²C Data Register. Data for I²C is read from or written to this location. The I²C transmit and receive buffers are separate registers, but both are addressed at this location.

Auxiliary Interrupt Poll (AIPOL)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-------|-------|-------|--------|-------|-------|--------|---|-------------|
| SFR A4h | SECIP | SUMIP | ADCIP | MSECIP | I2CIP | CNTIP | ALVDIP | 0 | 00h |

Interrupts are enabled by EICON.4 (SFR D8h). The other interrupts are controlled by the IE and EIE registers.

SECIP Second System Timer Interrupt Poll (before IRQ masking).

bit 7 0 = Second System Timer Interrupt Poll Inactive
1 = Second System Timer Interrupt Poll Active

SUMIP Accumulator Interrupt Poll (before IRQ masking).

bit 6 0 = Accumulator Interrupt Poll Inactive
1 = Accumulator Interrupt Poll Active

ADCIP ADC Interrupt Poll (before IRQ masking).

bit 5 0 = ADC Interrupt Poll Inactive
1 = ADC Interrupt Poll Active

MSECIP Millisecond System Timer Interrupt Poll (before IRQ masking).

bit 4 0 = Millisecond System Timer Interrupt Poll Inactive
1 = Millisecond System Timer Interrupt Poll Active

I2CIP I²C Interrupt Poll (before IRQ masking).

bit 3 0 = I²C Interrupt Poll Inactive
1 = I²C Interrupt Poll Active

CNTIP Serial Bit Count Interrupt Poll (before IRQ masking).

bit 2 0 = Serial Bit Count Interrupt Poll Inactive
1 = Serial Bit Count Interrupt Poll Active

ALVDIP Analog Low Voltage Detect Interrupt Poll (before IRQ masking).

bit 1 0 = Analog Low Voltage Detect Interrupt Poll Inactive
1 = Analog Low Voltage Detect Interrupt Poll Active

Pending Auxiliary Interrupt (PAI)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|------|------|------|------|-------------|
| SFR A5h | 0 | 0 | 0 | 0 | PAI3 | PAI2 | PAI1 | PAI0 | 00h |

PAI Pending Auxiliary Interrupt Register. The results of this register can be used as an index to vector to the appropriate interrupt routine. All of these interrupts vector through address 0033h.

| PAI3 | PAI2 | PAI1 | PAI0 | AUXILIARY INTERRUPT STATUS |
|------|------|------|------|--------------------------------------------------------------------|
| 0 | 0 | 0 | 0 | No Pending Auxiliary IRQ. |
| 0 | 0 | 0 | 1 | Reserved. |
| 0 | 0 | 1 | 0 | Analog Low Voltage Detect IRQ and Possible Lower Priority Pending. |
| 0 | 0 | 1 | 1 | I ² C IRQ and Possible Lower Priority Pending. |
| 0 | 1 | 0 | 0 | Serial Bit Count Interrupt and Possible Lower Priority Pending. |
| 0 | 1 | 0 | 1 | Millisecond System Timer IRQ and Possible Lower Priority Pending. |
| 0 | 1 | 1 | 0 | ADC IRQ and Possible Lower Priority Pending. |
| 0 | 1 | 1 | 1 | Accumulator IRQ and Possible Lower Priority Pending. |
| 1 | 0 | 0 | 0 | Second System Timer IRQ and Possible Lower Priority Pending. |

Auxiliary Interrupt Enable (AIE)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|-------|------|------|------|---|-------------|
| SFR A6h | ESEC | ESUM | EADC | EMSEC | EI2C | ECNT | EALV | 0 | 00h |

Interrupts are enabled by EICON.4 (SFR D8h). The other interrupts are controlled by the IE and EIE registers.

ESEC Enable Second System Timer Interrupt (lowest priority auxiliary interrupt).

bit 7 Write: Set mask bit for this interrupt; 0 = masked, 1 = enabled.

Read: **Second Timer Interrupt** mask.

ESUM Enable Summation Interrupt.

bit 6 Write: Set mask bit for this interrupt; 0 = masked, 1 = enabled.

Read: **Summation Interrupt** mask.

EADC Enable ADC Interrupt.

bit 5 Write: Set mask bit for this interrupt; 0 = masked, 1 = enabled.

Read: **ADC Interrupt** mask.

EMSEC Enable Millisecond System Timer Interrupt.

bit 4 Write: Set mask bit for this interrupt; 0 = masked, 1 = enabled.

Read: **Millisecond System Timer Interrupt** mask.

ESPIT Enable I²C Start/Stop Bit.

bit 3 Write: Set mask bit for this interrupt; 0 = masked, 1 = enabled.

Read: **I²C Start/Stop Bit** mask.

ECNT Enable Serial Bit Count Interrupt.

bit 2 Write: Set mask bit for this interrupt; 0 = masked, 1 = enabled.

Read: **Serial Bit Count Interrupt** mask.

EALV Enable Analog Low Voltage Interrupt.

bit 1 Write: Set mask bit for this interrupt; 0 = masked, 1 = enabled.

Read: **Analog Low Voltage Detect Interrupt** mask.

Auxiliary Interrupt Status Register (AISTAT)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-----|-----|-----|------|-----|-----|------|---|-------------|
| SFR A6h | SEC | SUM | ADC | MSEC | I2C | CNT | ALVD | 0 | 00h |

SEC Second System Timer Interrupt Status Flag (lowest priority AI).

bit 7
0: SEC interrupt cleared or masked.
1: SEC Interrupt active (it is cleared by reading SECINT, SFR F9h).

SUM Summation Register Interrupt Status Flag.

bit 6
0: SUM interrupt cleared or masked.
1: SUM interrupt active (it is cleared by reading the lowest byte of SUMR0, SFR E2h).

ADC ADC Interrupt Status Flag.

bit 5
0: ADC interrupt cleared or masked.
1: ADC interrupt active (it is cleared by reading the lowest byte of ADRESL, SFR D9h; if active, no new data will be written to the ADC Results registers).

MSEC Millisecond System Timer Interrupt Status Flag.

bit 4
0: MSEC interrupt cleared or masked.
1: MSEC interrupt active (it is cleared by reading MSINT, SFR FAh).

I2C I²C Start/Stop Interrupt Status Flag.

bit 3
0: I²C Start/stop interrupt cleared or masked.
1: I²C Start/stop interrupt active (it is cleared by writing to I2CDATA, SFR 9Bh).

CNT CNT Interrupt Status Flag.

bit 2
0: CNT Interrupt cleared or masked.
1: CNT Interrupt active (it is cleared by reading from or writing to SPIDATA/I2CDATA, SFR 9Bh).

ALVD Analog Low Voltage Detect Interrupt Status Flag.

bit 1
0: ALVD Interrupt cleared or masked.
1: ALVD Interrupt active (cleared in HW if AV_{DD} exceeds ALVD threshold).

NOTE: If an interrupt is masked, the status can be read in AIPOL (SFR A4h).

Interrupt Enable (IE)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|----|---|---|-----|-----|-----|-----|-----|-------------|
| SFR A8h | EA | 0 | 0 | ES0 | ET1 | EX1 | ET0 | EX0 | 00h |

EA **Global Interrupt Enable.** This bit controls the global masking of all interrupts except those in AIE (SFR A6h).
bit 7 0: Disable interrupt sources. This bit overrides individual interrupt mask settings for this register.
 1: Enable all individual interrupt masks. Individual interrupts in this register will occur if enabled.

ES0 **Enable Serial port 0 Interrupt.** This bit controls the masking of the serial Port 0 interrupt.
bit 4 0: Disable all serial Port 0 interrupts.
 1: Enable interrupt requests generated by the RI_0 (SCON0.0, SFR 98h) or TI_0 (SCON0.1, SFR 98h) flags.

ET1 **Enable Timer 1 Interrupt.** This bit controls the masking of the Timer 1 interrupt.
bit 3 0: Disable Timer 1 interrupt.
 1: Enable interrupt requests generated by the TF1 flag (TCON.7, SFR 88h).

EX1 **Enable External Interrupt 1.** This bit controls the masking of external interrupt 1.
bit 2 0: Disable external interrupt 1.
 1: Enable interrupt requests generated by the $\overline{\text{INT1}}$ pin.

ET0 **Enable Timer 0 Interrupt.** This bit controls the masking of the Timer 0 interrupt.
bit 1 0: Disable all Timer 0 interrupts.
 1: Enable interrupt requests generated by the TF0 flag (TCON.5, SFR 88h).

EX0 **Enable External Interrupt 0.** This bit controls the masking of external interrupt 0.
bit 0 0: Disable external interrupt 0.
 1: Enable interrupt requests generated by the $\overline{\text{INT0}}$ pin.

Port 1 Data Direction Low Register (P1DDRL)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|------|------|------|------|------|-------------|
| SFR AEh | P13H | P13L | P12H | P12L | P11H | P11L | P10H | P10L | 00h |

P1.3 Port 1 bit 3 control.

bits 7–6

| P13H | P13L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P1.2 Port 1 bit 2 control.

bits 5–4

| P12H | P12L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P1.1 Port 1 bit 1 control.

bits 3–2

| P11H | P11L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P1.0 Port 1 bit 0 control.

bits 1–0

| P10H | P10L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

Port 1 Data Direction High Register (P1DDRH)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|------|------|------|------|------|-------------|
| SFR AFh | P17H | P17L | P16H | P16L | P15H | P15L | P14H | P14L | 00h |

P1.7 Port 1 bit 7 control.

bits 7–6

| P17H | P17L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P1.6 Port 1 bit 6 control.

bits 5–4

| P16H | P16L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P1.5 Port 1 bit 5 control.

bits 3–2

| P15H | P15L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P1.4 Port 1 bit 4 control.

bits 1–0

| P14H | P14L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

Port 3 (P3)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|----------------------|------------|------------|--------------|--------------|--------------|--------------|-------------|
| SFR B0h | P3.7 | P3.6 SCK/SCL/CLKS | P3.5 T1 | P3.4 T0 | P3.3 INT1 | P3.2 INT0 | P3.1 TXD0 | P3.0 RXD0 | FFh |

P3.7–0 **General-Purpose I/O Port 3.** This register functions as a general-purpose I/O port. In addition, all the pins have an alternative function listed below. Each of the functions is controlled by several other SFRs. The associated Port 3 latch bit must contain a logic '1' before the pin can be used in its alternate function capacity.

SCK/SCL/CLKS Clock Source Select. Refer to PASEL (SFR F2h).

bit 6

T1 **Timer/Counter 1 External Input.** A 1 to 0 transition on this pin will increment Timer 1.

bit 5

T0 **Timer/Counter 0 External Input.** A 1 to 0 transition on this pin will increment Timer 0.

bit 4

INT1 **External Interrupt 1.** A falling edge/low level on this pin will cause an external interrupt 1 if enabled.

bit 3

INT0 **External Interrupt 0.** A falling edge/low level on this pin will cause an external interrupt 0 if enabled.

bit 2

TXD0 **Serial Port 0 Transmit.** This pin transmits the serial Port 0 data in serial port modes 1, 2, 3, and emits the synchronizing clock in serial port mode 0.

bit 1

RXD0 **Serial Port 0 Receive.** This pin receives the serial Port 0 data in serial port modes 1, 2, 3, and is a bidirectional data transfer pin in serial port mode 0.

bit 0

Port 3 Data Direction Low Register (P3DDRL)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|------|------|------|------|------|-------------|
| SFR B3h | P33H | P33L | P32H | P32L | P31H | P31L | P30H | P30L | 00h |

P3.3 Port 3 bit 3 control.

bits 7–6

| P33H | P33L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P3.2 Port 3 bit 2 control.

bits 5–4

| P32H | P32L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P3.1 Port 3 bit 1 control.

bits 3–2

| P31H | P31L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P3.0 Port 3 bit 0 control.

bits 1–0

| P30H | P30L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

Port 3 Data Direction High Register (P3DDRH)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|------|------|------|------|------|-------------|
| SFR B4h | P37H | P37L | P36H | P36L | P35H | P35L | P34H | P34L | 00h |

P3.7 Port 3 bit 7 control.

bits 7–6

| P37H | P37L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

NOTE: Port 3.7 also controlled by \overline{EA} and Memory Access Control HCR1.1.

P3.6 Port 3 bit 6 control.

bits 5–4

| P36H | P36L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

NOTE: Port 3.6 also controlled by \overline{EA} and Memory Access Control HCR1.1.

P3.5 Port 3 bit 5 control.

bits 3–2

| P35H | P35L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

P3.4 Port 3 bit 4 control.

bits 1–0

| P34H | P34L | |
|------|------|-------------------|
| 0 | 0 | Standard 8051 |
| 0 | 1 | CMOS Output |
| 1 | 0 | Open Drain Output |
| 1 | 1 | Input |

IDAC Register

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|---|-------------|
| SFR B5h | | | | | | | | | 00h |

IDAC IDAC Register.

bits 7–0 IDAC_{OUT} = IDAC • 3.8μA (~1mA full-scale). Setting (PDCON.PDIDAC) will shut down IDAC and float the IDAC pin.

Interrupt Priority (IP)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|-----|-----|-----|-----|-----|-------------|
| SFR B8h | 1 | 0 | 0 | PS0 | PT1 | PX1 | PT0 | PX0 | 80h |

PS0 Serial Port 0 Interrupt.

bit 4 0 = Serial Port 0 priority is determined by the natural priority order.
1 = Serial Port 0 is a high priority interrupt.

PT1 Timer 1 Interrupt.

bit 3 0 = Timer 1 priority is determined by the natural priority order.
1 = Timer 1 priority is a high priority interrupt.

PX1 External Interrupt 1.

bit 2 0 = External interrupt 1 priority is determined by the natural priority order.
1 = External interrupt 1 is a high priority interrupt.

PT0 Timer 0 Interrupt.

bit 1 0 = Timer 0 priority is determined by the natural priority order.
1 = Timer 0 priority is a high priority interrupt.

PX0 External Interrupt 0.

bit 0 0 = External interrupt 0 priority is determined by the natural priority order.
1 = External interrupt 0 is a high priority interrupt.

Enable Wake Up (EWU) Waking Up from IDLE Mode

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|--------|--------|--------|-------------|
| SFR C6h | — | — | — | — | — | EWUWDT | EWUEX1 | EWUEX0 | 00h |

Auxiliary interrupts will wake up from IDLE. They are enabled with EAI (EICON.5).

EWUWDT Enable Wake Up Watchdog Timer.

bit 2 0 = Do not wake up on watchdog timer interrupt.
1 = Wake up on watchdog timer interrupt.

EWUEX1 Enable Wake Up External 1.

bit 1 0 = Do not wake up on external interrupt source 1.
1 = Wake up on external interrupt source 1.

EWUEX0 Enable Wake Up External 0.

bit 0 0 = Do not wake up on external interrupt source 0.
1 = Wake up on external interrupt source 0.

System Clock Divider Register (SYSCLK)

| | | | | | | | | | |
|---------|---|---|---------|---------|---|------|------|------|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR C7h | 0 | 0 | DIVMOD1 | DIVMOD0 | 0 | DIV2 | DIV1 | DIV0 | 00h |

DIVMOD1–0 Clock Divide Mode

bits 5–4 Write:

| DIVMOD | DIVIDE MODE |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 00 | Normal mode (default, no divide). |
| 01 | Immediate mode: start divide immediately; return to Normal mode on IDLE wakeup condition or Normal mode write. |
| 10 | Delay mode: same as Immediate mode, except that the mode changes with the millisecond interrupt (MSINT). If MSINT is enabled, the divide will start on the next MSINT and return to normal mode on the following MSINT. If MSINT is not enabled, the divide will start on the next MSINT condition (even if masked) but will not leave the divide mode until the MSINT counter overflows, which follows a wakeup condition. Can exit on Normal mode write. |
| 11 | Manual mode: start divide immediately; exit mode only on write to DIVMOD. |

Read:

| DIVMOD | DIVISION MODE STATUS |
|--------|------------------------------|
| 00 | No divide |
| 01 | Divider is in Immediate mode |
| 10 | Divider is in Delay mode |
| 11 | Medium mode |

DIV2–0 Divide Mode

bit 2–0

| DIV | DIVISOR | |
|-----|-----------------------|--------------------------|
| 000 | Divide by 2 (default) | $f_{CLK} = f_{SYS}/2$ |
| 001 | Divide by 4 | $f_{CLK} = f_{SYS}/4$ |
| 010 | Divide by 8 | $f_{CLK} = f_{SYS}/8$ |
| 011 | Divide by 16 | $f_{CLK} = f_{SYS}/16$ |
| 100 | Divide by 32 | $f_{CLK} = f_{SYS}/32$ |
| 101 | Divide by 1024 | $f_{CLK} = f_{SYS}/1024$ |
| 110 | Divide by 2048 | $f_{CLK} = f_{SYS}/2048$ |
| 111 | Divide by 4096 | $f_{CLK} = f_{SYS}/4096$ |

Program Status Word (PSW)

| | | | | | | | | | |
|---------|----|----|----|-----|-----|----|----|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR D0h | CY | AC | F0 | RS1 | RS0 | OV | F1 | P | 00h |

CY bit 7 **Carry Flag.** This bit is set when the last arithmetic operation resulted in a carry (during addition) or a borrow (during subtraction). Otherwise it is cleared to 0 by all arithmetic operations.

AC bit 6 **Auxiliary Carry Flag.** This bit is set to 1 if the last arithmetic operation resulted in a carry into (during addition), or a borrow (during subtraction) from the high order nibble. Otherwise it is cleared to 0 by all arithmetic operations.

F0 bit 5 **User Flag 0.** This is a bit-addressable, general-purpose flag for software control.

RS1, RS0 bits 4–3 **Register Bank Select 1–0.** These bits select which register bank is addressed during register accesses.

| RS1 | RS0 | REGISTER BANK | ADDRESS |
|-----|-----|---------------|-----------|
| 0 | 0 | 0 | 00h – 07h |
| 0 | 1 | 1 | 08h – 0Fh |
| 1 | 0 | 2 | 10h – 17h |
| 1 | 1 | 3 | 18h – 1Fh |

OV bit 2 **Overflow Flag.** This bit is set to 1 if the last arithmetic operation resulted in a carry (addition), borrow (subtraction), or overflow (multiply or divide). Otherwise it is cleared to 0 by all arithmetic operations.

F1 bit 1 **User Flag 1.** This is a bit-addressable, general-purpose flag for software control.

P bit 0 **Parity Flag.** This bit is set to 1 if the modulo-2 sum of the 8 bits of the accumulator is 1 (odd parity); and cleared to 0 on even parity.

ADC Offset Calibration Register Low Byte (OCL)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|-----|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR D1h | | | | | | | | LSB | 00h |

Both the MSC1201 and MSC1202 support 24-bit calibration values.

OCL **ADC Offset Calibration Register Low Byte.** This is the low byte of the 24-bit word that contains the ADC offset bits 7–0 calibration. A value that is written to this location will set the ADC offset calibration value.

ADC Offset Calibration Register Middle Byte (OCM)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR D2h | | | | | | | | | 00h |

Both the MSC1201 and MSC1202 support 24-bit calibration values.

OCM **ADC Offset Calibration Register Middle Byte.** This is the middle byte of the 24-bit word that contains the ADC offset bits 7–0 calibration. A value that is written to this location will set the ADC offset calibration value.

ADC Offset Calibration Register High Byte (OCH)

| | | | | | | | | | |
|---------|-----|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR D3h | MSB | | | | | | | | 00h |

Both the MSC1201 and MSC1202 support 24-bit calibration values.

OCH **ADC Offset Calibration Register High Byte.** This is the high byte of the 24-bit word that contains the ADC offset bits 7–0 calibration. A value that is written to this location will set the ADC offset calibration value.

ADC Gain Calibration Register Low Byte (GCL)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|-----|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR D4h | | | | | | | | LSB | 5Ah |

Both the MSC1201 and MSC1202 support 24-bit calibration values.

GCL **ADC Gain Calibration Register Low Byte.** This is the low byte of the 24-bit word that contains the ADC gain bits 7–0 calibration. A value that is written to this location will set the ADC gain calibration value.

ADC Gain Calibration Register Middle Byte (GCM)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR D5h | | | | | | | | | ECh |

Both the MSC1201 and MSC1202 support 24-bit calibration values.

GCM **ADC Gain Calibration Register Middle Byte.** This is the middle byte of the 24-bit word that contains the ADC gain bits 7–0 calibration. A value that is written to this location will set the ADC gain calibration value.

ADC Gain Calibration Register High Byte (GCH)

| | | | | | | | | | |
|---------|-----|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR D6h | MSB | | | | | | | | 5Fh |

Both the MSC1201 and MSC1202 support 24-bit calibration values.

GCH **ADC Gain Calibration Register High Byte.** This is the high byte of the 24-bit word that contains the ADC gain bits 7–0 calibration. A value that is written to this location will set the ADC gain calibration value.

ADC Input Multiplexer Register (ADMUX)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|------|------|------|------|------|-------------|
| SFR D7h | INP3 | INP2 | INP1 | INP0 | INN3 | INN2 | INN1 | INN0 | 01h |

INP3–0 **Input Multiplexer Positive Input.** This selects the positive signal input.
bits 7–4

| INP3 | INP2 | INP1 | INP0 | POSITIVE INPUT |
|------|------|------|------|-------------------------------------------|
| 0 | 0 | 0 | 0 | AIN0 (default) |
| 0 | 0 | 0 | 1 | AIN1 |
| 0 | 0 | 1 | 0 | AIN2 |
| 0 | 0 | 1 | 1 | AIN3 |
| 0 | 1 | 0 | 0 | AIN4 |
| 0 | 1 | 0 | 1 | AIN5 |
| 0 | 1 | 1 | 0 | REFIN– |
| 0 | 1 | 1 | 1 | REFIN– |
| 1 | 0 | 0 | 0 | AINCOM |
| 1 | 1 | 1 | 1 | Temperature Sensor (requires ADMUX = FFh) |

INN3–0 **Input Multiplexer Negative Input.** This selects the negative signal input.
bits 3–0

| INN3 | INN2 | INN1 | INN0 | NEGATIVE INPUT |
|------|------|------|------|-------------------------------------------|
| 0 | 0 | 0 | 0 | AIN0 |
| 0 | 0 | 0 | 1 | AIN1 (default) |
| 0 | 0 | 1 | 0 | AIN2 |
| 0 | 0 | 1 | 1 | AIN3 |
| 0 | 1 | 0 | 0 | AIN4 |
| 0 | 1 | 0 | 1 | AIN5 |
| 0 | 1 | 1 | 0 | REFIN– |
| 0 | 1 | 1 | 1 | REFIN– |
| 1 | 0 | 0 | 0 | AINCOM |
| 1 | 1 | 1 | 1 | Temperature Sensor (requires ADMUX = FFh) |

Enable Interrupt Control (EICON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|-----|----|------|---|---|---|-------------|
| SFR D8h | 0 | 1 | EAI | AI | WDTI | 0 | 0 | 0 | 40h |

EAI bit 5 **Enable Auxiliary Interrupt.** The Auxiliary Interrupt accesses nine different interrupts which are masked and identified by SFR registers PAI (SFR A5h), AIE (SFR A6h), and AISTAT (SFR A7h).

0 = Auxiliary Interrupt disabled (default).
1 = Auxiliary Interrupt enabled.

AI bit 4 **Auxiliary Interrupt Flag.** AI must be cleared by software before exiting the interrupt service routine, after the source of the interrupt is cleared. Otherwise, the interrupt occurs again. Setting AI in software generates an Auxiliary Interrupt, if enabled.

0 = No Auxiliary Interrupt detected (default).
1 = Auxiliary Interrupt detected.

WDTI bit 3 **Watchdog Timer Interrupt Flag.** WDTI must be cleared by software before exiting the interrupt service routine. Otherwise, the interrupt occurs again. Setting WDTI in software generates a watchdog time interrupt, if enabled. The Watchdog timer can generate an interrupt or reset. The interrupt is available only if the reset action is disabled in HCR0.

0 = No Watchdog Timer Interrupt Detected (default).
1 = Watchdog Timer Interrupt Detected.

ADC Results Register Low Byte (ADRESL)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|-----|-------------|
| SFR D9h | | | | | | | | LSB | 00h |

ADRESL bits 7–0 **The ADC Results Low Byte.** This is the low byte of the ADC results. Reading from this register clears the ADC interrupt; however, AI in EICON (SFR D8) must also be cleared.

ADC Results Register Middle Byte (ADRESM)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|---|-------------|
| SFR DAh | | | | | | | | | 00h |

ADRESM bits 7–0 **The ADC Results Middle Byte.** This is the middle byte of the ADC results for the MSC1201 and the most significant byte for the MSC1202.

ADC Results Register High Byte (ADRESH)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-----|---|---|---|---|---|---|---|-------------|
| SFR DBh | MSB | | | | | | | | 00h |

ADRESH bits 7–0 **The ADC Results High Byte.** This is the high byte and most significant byte of the ADC results for the MSC1201. This is a sign-extended (Bipolar mode) or zero-padded (Unipolar mode) byte for the MSC1202 (that is, all 0s for positive ADC or unipolar results and all 1s for negative ADC results).

ADC Control Register 0 (ADCON0)

| | | | | | | | | | |
|---------|----------|----------|----------|----------|----------|----------|----------|----------|--------------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR DCh | — | BOD | EVREF | VREFH | EBUF | PGA2 | PGA1 | PGA0 | 30h |

BOD **Burnout Detect.** When enabled, this connects a positive current source to the positive channel and a negative current source to the negative channel. If the channel is open circuit, then the ADC results will be full-scale (buffer must be enabled).

bit 6
 0 = Burnout Current Sources Off (default).
 1 = Burnout Current Sources On.

EVREF **Enable Internal Voltage Reference.** If an external voltage is used, the internal voltage reference should be disabled.

bit 5
 0 = Internal Voltage Reference Off for external reference.
 1 = Internal Voltage Reference On (default). Note that REFIN– must be connected to AGND.

VREFH **Voltage Reference High Select.** The internal voltage reference can be selected to be 2.5V or 1.25V.

bit 4
 0 = REFOUT/REF IN+ is 1.25V.
 1 = REFOUT/REF IN+ is 2.5V (default).

EBUF **Enable Buffer.** Enables the input buffer to provide higher input impedance but limits the input voltage range and dissipates more power.

bit 3
 0 = Buffer disabled (default).
 1 = Buffer enabled. Input signal limited to $AV_{DD} - 1.5V$.

PGA2–0 **Programmable Gain Amplifier.** Sets the gain for the PGA from 1 to 128.

bits 2–0

| PGA2 | PGA1 | PGA0 | GAIN |
|------|------|------|-------------|
| 0 | 0 | 0 | 1 (default) |
| 0 | 0 | 1 | 2 |
| 0 | 1 | 0 | 4 |
| 0 | 1 | 1 | 8 |
| 1 | 0 | 0 | 16 |
| 1 | 0 | 1 | 32 |
| 1 | 1 | 0 | 64 |
| 1 | 1 | 1 | 128 |

ADC Control Register 1 (ADCON1)

| | | | | | | | | | |
|---------|-------|-----|-----|-----|---|------|------|------|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR DDh | OF_UF | POL | SM1 | SM0 | — | CAL2 | CAL1 | CAL0 | 00h |

OF_UF **Overflow/Underflow.** If this bit is set, the data in the Summation register is invalid; either an overflow or underflow occurred. This bit is cleared by writing a '0' to it.
bit 6

POL **Polarity.** Polarity of the ADC result and Summation register.
bit 6
0 = Bipolar.
1 = Unipolar.

| POL | ANALOG INPUT | DIGITAL OUTPUT | |
|-----|--------------|----------------|------------------------|
| | | MSC1201 | MSC1202 ⁽¹⁾ |
| 0 | +FSR | 0x7FFFFFFF | 0x7FFF |
| | ZERO | 0x000000 | 0x0000 |
| | -FSR | 0x800000 | 0x8000 |
| 1 | +FSR | 0xFFFFFFFF | 0xFFFF |
| | ZERO | 0x000000 | 0x0000 |
| | -FSR | 0x000000 | 0x0000 |

(1) The MSC1202 ADC result is sign-extended into ADRESH.

SM1–0 **Settling Mode.** Selects the type of filter or auto select which defines the digital filter settling characteristics.
bits 5–4

| SM1 | SM0 | SETTLING MODE |
|-----|-----|--------------------------|
| 0 | 0 | Auto |
| 0 | 1 | Fast Settling Filter |
| 1 | 0 | Sinc ² Filter |
| 1 | 1 | Sinc ³ Filter |

CAL2–0 **Calibration Mode Control Bits.** Writing to this register initiates calibration.
bits 2–0

| CAL2 | CAL1 | CAL0 | CALIBRATION MODE |
|------|------|------|----------------------------------------------------------------|
| 0 | 0 | 0 | No Calibration (default) |
| 0 | 0 | 1 | Self-Calibration, Offset and Gain |
| 0 | 1 | 0 | Self-Calibration, Offset only |
| 0 | 1 | 1 | Self-Calibration, Gain only |
| 1 | 0 | 0 | System Calibration, Offset only (requires external connection) |
| 1 | 0 | 1 | System Calibration, Gain only (requires external connection) |
| 1 | 1 | 0 | Reserved |
| 1 | 1 | 1 | Reserved |

NOTE: Read value—000_B.

ADC Control Register 2 (ADCON2)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|
| SFR DEh | DR7 | DR6 | DR5 | DR4 | DR3 | DR2 | DR1 | DR0 | 1Bh |

DR7–0 Decimation Ratio LSB (refer to ADCON3, SFR DFh).

bits 7–0

ADC Control Register 3 (ADCON3)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|------|-----|-----|-------------|
| SFR DFh | — | — | — | — | — | DR10 | DR9 | DR8 | 06h |

DR10–8 Decimation Ratio Most Significant 3 Bits.

bits 2–0 The ADC output data rate is: $\frac{f_{\text{MOD}}}{\text{Decimation Ratio}}$ where $f_{\text{MOD}} = \frac{f_{\text{CLK}}}{(\text{ACLK} + 1) \cdot 64}$.

Accumulator (A or ACC)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-------|-------|-------|-------|-------|-------|-------|-------|-------------|
| SFR E0h | ACC.7 | ACC.6 | ACC.5 | ACC.4 | ACC.3 | ACC.2 | ACC.1 | ACC.0 | 00h |

ACC.7–0 Accumulator. This register serves as the accumulator for arithmetic and logic operations.

bits 7–0

Summation/Shifter Control (SSCON)

| | | | | | | | | | |
|---------|--------|--------|-------|-------|-------|------|------|------|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR E1h | SSCON1 | SSCON0 | SCNT2 | SCNT1 | SCNT0 | SHF2 | SHF1 | SHF0 | 00h |

The Summation register is powered down when the ADC is powered down. If all zeroes are written to this register the 32-bit SUMR3–0 registers will be cleared. The Summation registers will do sign extend if Bipolar Mode is selected in ADCON1.

SSCON1–0 Summation/Shift Count.

bits 7–6

| SSCON1 | SSCON0 | SCNT2 | SCNT1 | SCNT0 | SHF2 | SHF1 | SHF0 | DESCRIPTION |
|--------|--------|----------|----------|----------|----------|----------|----------|-------------------------------------------------------------|
| 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Clear Summation Register |
| 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | CPU Summation on Write to SUMR0 (sum count/shift ignored) |
| 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | CPU Subtraction on Write to SUMR0 (sum count/shift ignored) |
| 1 | 0 | x | x | x | Note (1) | Note (1) | Note (1) | CPU Shift only |
| 0 | 1 | Note (1) | Note (1) | Note (1) | x | x | x | ADC Summation only |
| 1 | 1 | Note (1) | Note (1) | Note (1) | Note (1) | Note (1) | Note (1) | ADC Summation completes then shift completes |

(1) Refer to register bit definition.

SCNT2–0 Summation Count. When the summation is complete an interrupt will be generated unless masked. Reading the SUMR0 register clears the interrupt.

bits 5–3

| SCNT2 | SCNT1 | SCNT0 | SUMMATION COUNT |
|-------|-------|-------|-----------------|
| 0 | 0 | 0 | 2 |
| 0 | 0 | 1 | 4 |
| 0 | 1 | 0 | 8 |
| 0 | 1 | 1 | 16 |
| 1 | 0 | 0 | 32 |
| 1 | 0 | 1 | 64 |
| 1 | 1 | 0 | 128 |
| 1 | 1 | 1 | 256 |

SHF2–0 Shift Count.

bits 2–0

| SHF2 | SHF1 | SHF0 | SHIFT | DIVIDE |
|------|------|------|-------|--------|
| 0 | 0 | 0 | 1 | 2 |
| 0 | 0 | 1 | 2 | 4 |
| 0 | 1 | 0 | 3 | 8 |
| 0 | 1 | 1 | 4 | 16 |
| 1 | 0 | 0 | 5 | 32 |
| 1 | 0 | 1 | 6 | 64 |
| 1 | 1 | 0 | 7 | 128 |
| 1 | 1 | 1 | 8 | 256 |

Summation Register 0 (SUMR0)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|-----|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR E2h | | | | | | | | LSB | 00h |

SUMR0 **Summation Register 0.** This is the least significant byte of the 32-bit summation register or bits 0 to 7.
 bits 7–0 Write: Will cause values in SUMR3–0 to be added to the summation register.
 Read: Will clear the Summation Interrupt.

Summation Register 1 (SUMR1)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR E3h | | | | | | | | | 00h |

SUMR1 **Summation Register 1.** This is the most significant byte of the lowest 16 bits of the summation register or bits 8–15.
 bits 7–0

Summation Register 2 (SUMR2)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR E4h | | | | | | | | | 00h |

SUMR2 **Summation Register 2.** This is the most significant byte of the lowest 24 bits of the summation register or bits 16–23.
 bits 7–0

Summation Register 3 (SUMR3)

| | | | | | | | | | |
|---------|-----|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR E5h | MSB | | | | | | | | 00h |

SUMR3 **Summation Register 3.** This is the most significant byte of the 32-bit summation register or bits 24–31.
 bits 7–0

Offset DAC Register (ODAC)

| | | | | | | | | | |
|---------|---|---|---|---|---|---|---|---|-------------|
| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
| SFR E6h | | | | | | | | | 00h |

ODAC **Offset DAC Register.** This register will shift the input by up to half of the ADC full-scale input range. The Offset DAC value is summed into the ADC prior to conversion. Writing 00h or 80h to ODAC turns off the Offset DAC.

bit 7 Offset DAC Sign Bit.
 0 = Positive
 1 = Negative

bit 6–0
$$\text{Offset} = \frac{-V_{\text{REF}}}{2 \cdot \text{PGA}} \cdot \left(\frac{\text{ODAC} [6 : 0]}{127} \right) \cdot (-1)^{\text{bit}7}$$

Low Voltage Detect Control (LVDCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|---|---|---|---|---|---|---|-------------|
| SFR E7h | ALVDIS | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 8Fh |

ALVDIS Analog Low Voltage Detect Disable.

bit 7 0 = Enable Detection of Low Analog Supply Voltage (ALVD flag and interrupt are set when $AV_{DD} < 2.8V$).
1 = Disable Detection of Low Analog Supply Voltage.

Extended Interrupt Enable (EIE)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|------|-----|-----|-----|-----|-------------|
| SFR E8h | 1 | 1 | 1 | EWDI | EX5 | EX4 | EX3 | EX2 | E0h |

EWDI Enable Watchdog Interrupt.

This bit enables/disables the watchdog interrupt. The Watchdog timer is enabled by the WDTCON (SFR FFh) and PDCON (SFR F1h) registers.

bit 4 0 = Disable the Watchdog Interrupt
1 = Enable Interrupt Request Generated by the Watchdog Timer

EX5 External Interrupt 5 Enable.

This bit enables/disables external interrupt 5.

bit 3 0 = Disable External Interrupt 5
1 = Enable External Interrupt 5

EX4 External Interrupt 4 Enable.

This bit enables/disables external interrupt 4.

bit 2 0 = Disable External Interrupt 4
1 = Enable External Interrupt 4

EX3 External Interrupt 3 Enable.

This bit enables/disables external interrupt 3.

bit 1 0 = Disable External Interrupt 3
1 = Enable External Interrupt 3

EX2 External Interrupt 2 Enable.

This bit enables/disables external interrupt 2.

bit 0 0 = Disable External Interrupt 2
1 = Enable External Interrupt 2

Hardware Product Code Register 0 (HWPC0) (read-only)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|--------|--------|-------------|
| SFR E9h | 0 | 0 | 0 | 0 | 0 | 0 | DEVICE | MEMORY | 0000_00xxb |

HWPC0.7–0 Hardware Product Code LSB. Read-only.

bits 7–0

| DEVICE | MEMORY | MODEL | FLASH MEMORY |
|--------|--------|-----------|--------------|
| 0 | 0 | MSC1201Y2 | 4kB |
| 0 | 1 | MSC1201Y3 | 8kB |
| 1 | 0 | MSC1202Y2 | 4kB |
| 1 | 1 | MSC1202Y3 | 8kB |

Hardware Product Code Register 1 (HWPC1) (read-only)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|---|-------------|
| SFR EAh | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 20h |

HWPC1.7–0 Hardware Product Code MSB. Read-only.

bits 7–0

Hardware Version Register (HWVER)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|---|-------------|
| SFR EBh | | | | | | | | | |

Flash Memory Control (FMCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|-------|---|------|---|------|---|---|-------------|
| SFR EEh | 0 | PGERA | 0 | FRCM | 0 | BUSY | 1 | 0 | 02h |

PGERA **Page Erase.** Available in both user and program modes.

bit 6 0 = Disable Page Erase Mode
 1 = Enable Page Erase Mode

FRCM **Frequency Control Mode.** The bypass is only used for slow clocks to save power.

bit 4 0 = Bypass (default)
 1 = Use Delay Line. Saves power (recommended).

BUSY **Write/Erase BUSY Signal.**

bit 2 0 = Idle or Available
 1 = Busy

Flash Memory Timing Control Register (FTCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|------|------|------|------|------|-------------|
| SFR EFh | FER3 | FER2 | FER1 | FER0 | FWR3 | FWR2 | FWR1 | FWR0 | A5h |

Refer to Flash Timing Characteristics

FER3–0 **Set Erase.** Flash Erase Time = $(1 + FER) \cdot (MSEC + 1) \cdot t_{CLK}$.

bits 7–4 11ms industrial temperature range.
 5ms commercial temperature range.

FWR3–0 **Set Write.** Set Flash Write Time = $(1 + FWR) \cdot (USEC + 1) \cdot 5 \cdot t_{CLK}$.

bits 3–0 30μs to 40μs.

B Register (B)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|---|-------------|
| SFR F0h | | | | | | | | | 00h |

B.7–0 **B Register.** This register serves as a second accumulator for certain arithmetic operations.

bits 7–0

Power-Down Control Register (PDCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|--------|-------|---|-------|-------|------|-------|-------------|
| SFR F1h | PDICLK | PDIDAC | PDI2C | 0 | PDADC | PDWDT | PDST | PDSPI | 6Fh |

Turning peripheral modules off puts the MSC1201/02 in the lowest power mode.

PDICLK Internal Clock Control.

bit 6 0 = Internal Oscillator and PLL On (Internal Oscillator or PLL mode)
1 = Internal Oscillator and PLL Power Down (External Clock mode)

PDIDAC IDAC Control.

bit 6 0 = IDAC On
1 = IDAC Power Down (default)

PDI2C I2C Control.

bit 5 0 = I²C On (only when PDSPI = 1)
1 = I²C Power Down (default)

PDADC ADC Control.

bit 3 0 = ADC On
1 = ADC, V_{REF} and Summation registers are powered down (default).

PDWDT Watchdog Timer Control.

bit 2 0 = Watchdog Timer On
1 = Watchdog Timer Power Down (default)

PDST System Timer Control.

bit 1 0 = System Timer On
1 = System Timer Power Down (default)

PDSPI SPI System Control.

bit 0 0 = SPI System On
1 = SPI System Power Down (default)

PSEN/ALE Select (PASEL)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-------|-------|-------|-------|-------|---|---|---|-------------|
| SFR F2h | PSEN4 | PSEN3 | PSEN2 | PSEN1 | PSEN0 | 0 | 0 | 0 | 00h |

PSEN2–0 PSEN Mode Select. Defines the output on P3.6 in User Application mode or Serial Flash Programming mode.

- bits 7–3
- 00000: General-purpose I/O (default)
 - 00001: SYSCLK
 - 00011: Internal $\overline{\text{PSEN}}$ (refer to Figure 5 for timing)
 - 00101: Internal ALE (refer to Figure 5 for timing)
 - 00111: f_{OSC} (buffered XIN oscillator clock)
 - 01001: Memory $\overline{\text{WR}}$ (MOVX write)
 - 01011: T0 Out (overflow)⁽¹⁾
 - 01101: T1 Out (overflow)⁽¹⁾
 - 01111: f_{MOD} ⁽²⁾
 - 10001: SYSCLK/2 (toggles on rising edge)⁽²⁾
 - 10011: Internal $\overline{\text{PSEN}}/2$ ⁽²⁾
 - 10101: Internal ALE/2⁽²⁾
 - 10111: f_{OSC} ⁽²⁾
 - 11001: Memory $\overline{\text{WR}}/2$ (MOVX write)⁽²⁾
 - 11011: T0 Out/2 (overflow)⁽²⁾
 - 11101: T1 Out/2 (overflow)⁽²⁾
 - 11111: $f_{\text{MOD}}/2$ ⁽²⁾

(1) One period of these signals equal to t_{CLK} .

(2) Duty cycle is 50%.

Phase Lock Loop Low Register (PLLL)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|------|------|------|------|------|-------------|
| SFR F4h | PLL7 | PLL6 | PLL5 | PLL4 | PLL3 | PLL2 | PLL1 | PLL0 | xxh |

PLL7–0 PLL Counter Value Least Significant Bit.

bits 7–0 PLL Frequency = External Crystal Frequency • PLL9:0.

Phase Lock Loop High Register (PLLH)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|----------|----------|----------|---------|---|---|------|------|-------------|
| SFR F5h | CLKSTAT2 | CLKSTAT1 | CLKSTAT0 | PLLLOCK | 0 | 0 | PLL9 | PLL8 | xxh |

CLKSTAT2–0 Active Clock Status (read-only). Derived from HCR2 setting; refer to Table 3.

- bits 7–5 000: Reserved
 001: Reserved
 010: Reserved
 011: External Clock Mode
 100: PLL High-Frequency (HF) Mode (must read PLLLOCK to determine active clock status)
 101: PLL Low-Frequency (LF) Mode (must read PLLLOCK to determine active clock status)
 110: Internal Oscillator High-Frequency (HF) Mode
 111: Internal Oscillator Low-Frequency (LF) Mode

PLLLOCK PLL Lock Status and Status Enable.

- bit 4 For Write (PLL Lock Status Enable):
 0 = No Effect
 1 = Enable PLL Lock Detection (must wait 20ms before PLLLOCK read status is valid).
 For Read (PLL Lock Status):
 0 = PLL Not Locked (PLL may be inactive; refer to Table 3 for active clock mode)
 1 = PLL Locked (PLL is active clock).

PLL9–8 PLL Counter Value Most Significant 2 Bits (refer to PLLL, SFR F4h).

bits 1–0

Analog Clock (ACLK)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|-------|-------|-------|-------|-------|-------|-------|-------------|
| SFR F6h | 0 | FREQ6 | FREQ5 | FREQ4 | FREQ3 | FREQ2 | FREQ1 | FREQ0 | 03h |

FREQ6–0 Clock Frequency – 1. This value + 1 divides the system clock to create the ADC clock.

bits 6–0

$$f_{\text{ACLK}} = \frac{f_{\text{CLK}}}{\text{ACLK} + 1}, \text{ where } f_{\text{CLK}} = \frac{f_{\text{OSC}}}{\text{SYSCLK divider}}$$

$$f_{\text{MOD}} = \frac{f_{\text{ACLK}}}{64}$$

$$\text{ADC Data Rate} = f_{\text{DATA}} = \frac{f_{\text{MOD}}}{\text{Decimation Ratio}}$$

System Reset Register (SRST)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|---|---|---|---|--------|-------------|
| SFR F7h | 0 | 0 | 0 | 0 | 0 | 0 | 0 | RSTREQ | 00h |

RSTREQ Reset Request. Setting this bit to 1 and then clearing to 0 will generate a system reset.

bit 0

Extended Interrupt Priority (EIP)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|---|------|-----|-----|-----|-----|-------------|
| SFR F8h | 1 | 1 | 1 | PWDI | PX5 | PX4 | PX3 | PX2 | E0h |

PWDI **Watchdog Interrupt Priority.** This bit controls the priority of the watchdog interrupt.

bit 4 0 = The watchdog interrupt is low priority.
 1 = The watchdog interrupt is high priority.

PX5 **External Interrupt 5 Priority.** This bit controls the priority of external interrupt 5.

bit 3 0 = External interrupt 5 is low priority.
 1 = External interrupt 5 is high priority.

PX4 **External Interrupt 4 Priority.** This bit controls the priority of external interrupt 4.

bit 2 0 = External interrupt 4 is low priority.
 1 = External interrupt 4 is high priority.

PX3 **External Interrupt 3 Priority.** This bit controls the priority of external interrupt 3.

bit 1 0 = External interrupt 3 is low priority.
 1 = External interrupt 3 is high priority.

PX2 **External Interrupt 2 Priority.** This bit controls the priority of external interrupt 2.

bit 0 0 = External interrupt 2 is low priority.
 1 = External interrupt 2 is high priority.

Seconds Timer Interrupt (SECINT)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-----|---------|---------|---------|---------|---------|---------|---------|-------------|
| SFR F9h | WRT | SECINT6 | SECINT5 | SECINT4 | SECINT3 | SECINT2 | SECINT1 | SECINT0 | 7Fh |

This system clock is divided by the value of the 16-bit register MSECH:MSECL. Then, that 1ms timer tick is divided by the register HMSEC which provides the 100ms signal used by this seconds timer. Therefore, this seconds timer can generate an interrupt which occurs from 100ms to 12.8 seconds. Reading this register will clear the Seconds Interrupt. This Interrupt can be monitored in the AIE register.

WRT **Write Control.** Determines whether to write the value immediately or wait until the current count is finished.

bit 7 Read = 0.
 0 = Delay Write Operation. The SEC value is loaded when the current count expires.
 1 = Write Immediately. The counter is loaded once the CPU completes the write operation.

SECINT6–0 **Seconds Count.** Normal operation would use 100ms as the clock interval.

bits 6–0 Seconds Interrupt = (1 + SEC) • (HMSEC + 1) • (MSEC + 1) • t_{CLK}.

Milliseconds Interrupt (MSINT)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|-----|--------|--------|--------|--------|--------|--------|--------|-------------|
| SFR FAh | WRT | MSINT6 | MSINT5 | MSINT4 | MSINT3 | MSINT2 | MSINT1 | MSINT0 | 7Fh |

The clock used for this timer is the 1ms clock which results from dividing the system clock by the values in registers MSECH:MSECL. Reading this register is necessary for clearing the interrupt; however, AI in EICON (SFR D8h) must also be cleared.

WRT **Write Control.** Determines whether to write the value immediately or wait until the current count is finished.
 bit 7 Read = 0.
 0 = Delay Write Operation. The MSINT value is loaded when the current count expires.
 1 = Write Immediately. The MSINT counter is loaded once the CPU completes the write operation.

MSINT6–0 **Milliseconds Count.** Normal operation would use 1ms as the clock interval.
 bits 6–0 MS Interrupt Interval = $(1 + MSINT) \cdot (MSEC + 1) \cdot t_{CLK}$

One Microsecond Register (USEC)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|---|---|-------|-------|-------|-------|-------|-------|-------------|
| SFR FBh | 0 | 0 | FREQ5 | FREQ4 | FREQ3 | FREQ2 | FREQ1 | FREQ0 | 03h |

FREQ5–0 **Clock Frequency – 1.** This value + 1 divides the system clock to create a 1µs Clock.
 bits 5–0 USEC = $CLK / (FREQ + 1)$. This clock is used to set Flash write time. See FTCON (SFR EFh).

One Millisecond Low Register (MSECL)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| SFR FCh | MSECL7 | MSECL6 | MSECL5 | MSECL4 | MSECL3 | MSECL2 | MSECL1 | MSECL0 | 9Fh |

MSECL7–0 **One Millisecond Low.** This value in combination with the next register is used to create a 1ms clock.
 bits 7–0 $1ms = (MSECH \cdot 256 + MSECL + 1) \cdot t_{CLK}$. This clock is used to set Flash erase time. See FTCON (SFR EFh).

One Millisecond High Register (MSECH)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| SFR FDh | MSECH7 | MSECH6 | MSECH5 | MSECH4 | MSECH3 | MSECH2 | MSECH1 | MSECH0 | 0Fh |

MSECH7–0 **One Millisecond High.** This value in combination with the previous register is used to create a 1ms clock.
 bits 7–0 $1ms = (MSECH \cdot 256 + MSECL + 1) \cdot t_{CLK}$.

One Hundred Millisecond Register (HMSEC)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|-------------|
| SFR FEh | HMSEC7 | HMSEC6 | HMSEC5 | HMSEC4 | HMSEC3 | HMSEC2 | HMSEC1 | HMSEC0 | 63h |

WRT **Write Control.** Determines whether to write the value immediately or wait until the current count is finished.
 Read = 0.

HMSEC7–0 **One Hundred Millisecond.** This clock divides the 1ms clock to create a 100ms clock.
 bits 7–0 $100ms = (MSECH \cdot 256 + MSECL + 1) \cdot (HMSEC + 1) \cdot t_{CLK}$.

Watchdog Timer Register (WDTCON)

| | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | Reset Value |
|---------|------|------|------|--------|--------|--------|--------|--------|-------------|
| SFR FFh | EWDT | DWDT | RWDT | WDCNT4 | WDCNT3 | WDCNT2 | WDCNT1 | WDCNT0 | 00h |

EWDT Enable Watchdog (R/W).

bit 7 Write 1/Write 0 sequence sets the Watchdog Enable Counting bit.

DWDT Disable Watchdog (R/W).

bit 6 Write 1/Write 0 sequence clears the Watchdog Enable Counting bit.

RWDT Reset Watchdog (R/W).

bit 5 Write 1/Write 0 sequence restarts the Watchdog Counter.

WDCNT4–0 Watchdog Count (R/W).

 bits 4–0 Watchdog expires in $(WDCNT + 1) \cdot \text{HMSEC}$ to $(WDCNT + 2) \cdot \text{HMSEC}$, if the sequence is not asserted. There is an uncertainty of 1 count.

NOTE: If HCR0.3 (EWDR) is set and the watchdog timer expires, a system reset is generated. If HCR0.3 (EWDR) is cleared and the watchdog timer expires, an interrupt is generated (see Table 7).

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| MSC1201Y2RHHR | ACTIVE | QFN | RHH | 36 | 2500 | TBD | CU SNPB | Level-1-235C-UNLIM |
| MSC1201Y2RHHT | ACTIVE | QFN | RHH | 36 | 250 | TBD | CU SNPB | Level-1-235C-UNLIM |
| MSC1201Y3RHHR | ACTIVE | QFN | RHH | 36 | 2500 | TBD | CU SNPB | Level-1-235C-UNLIM |
| MSC1201Y3RHHT | ACTIVE | QFN | RHH | 36 | 250 | TBD | CU SNPB | Level-1-235C-UNLIM |
| MSC1202Y2RHHR | ACTIVE | QFN | RHH | 36 | 2500 | TBD | CU SNPB | Level-1-235C-UNLIM |
| MSC1202Y2RHHT | ACTIVE | QFN | RHH | 36 | 250 | TBD | CU SNPB | Level-1-235C-UNLIM |
| MSC1202Y3RHHR | ACTIVE | QFN | RHH | 36 | 2500 | TBD | CU SNPB | Level-1-235C-UNLIM |
| MSC1202Y3RHHT | ACTIVE | QFN | RHH | 36 | 250 | TBD | CU SNPB | Level-1-235C-UNLIM |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

RHH (S-PQFP-N36)

PLASTIC QUAD FLATPACK

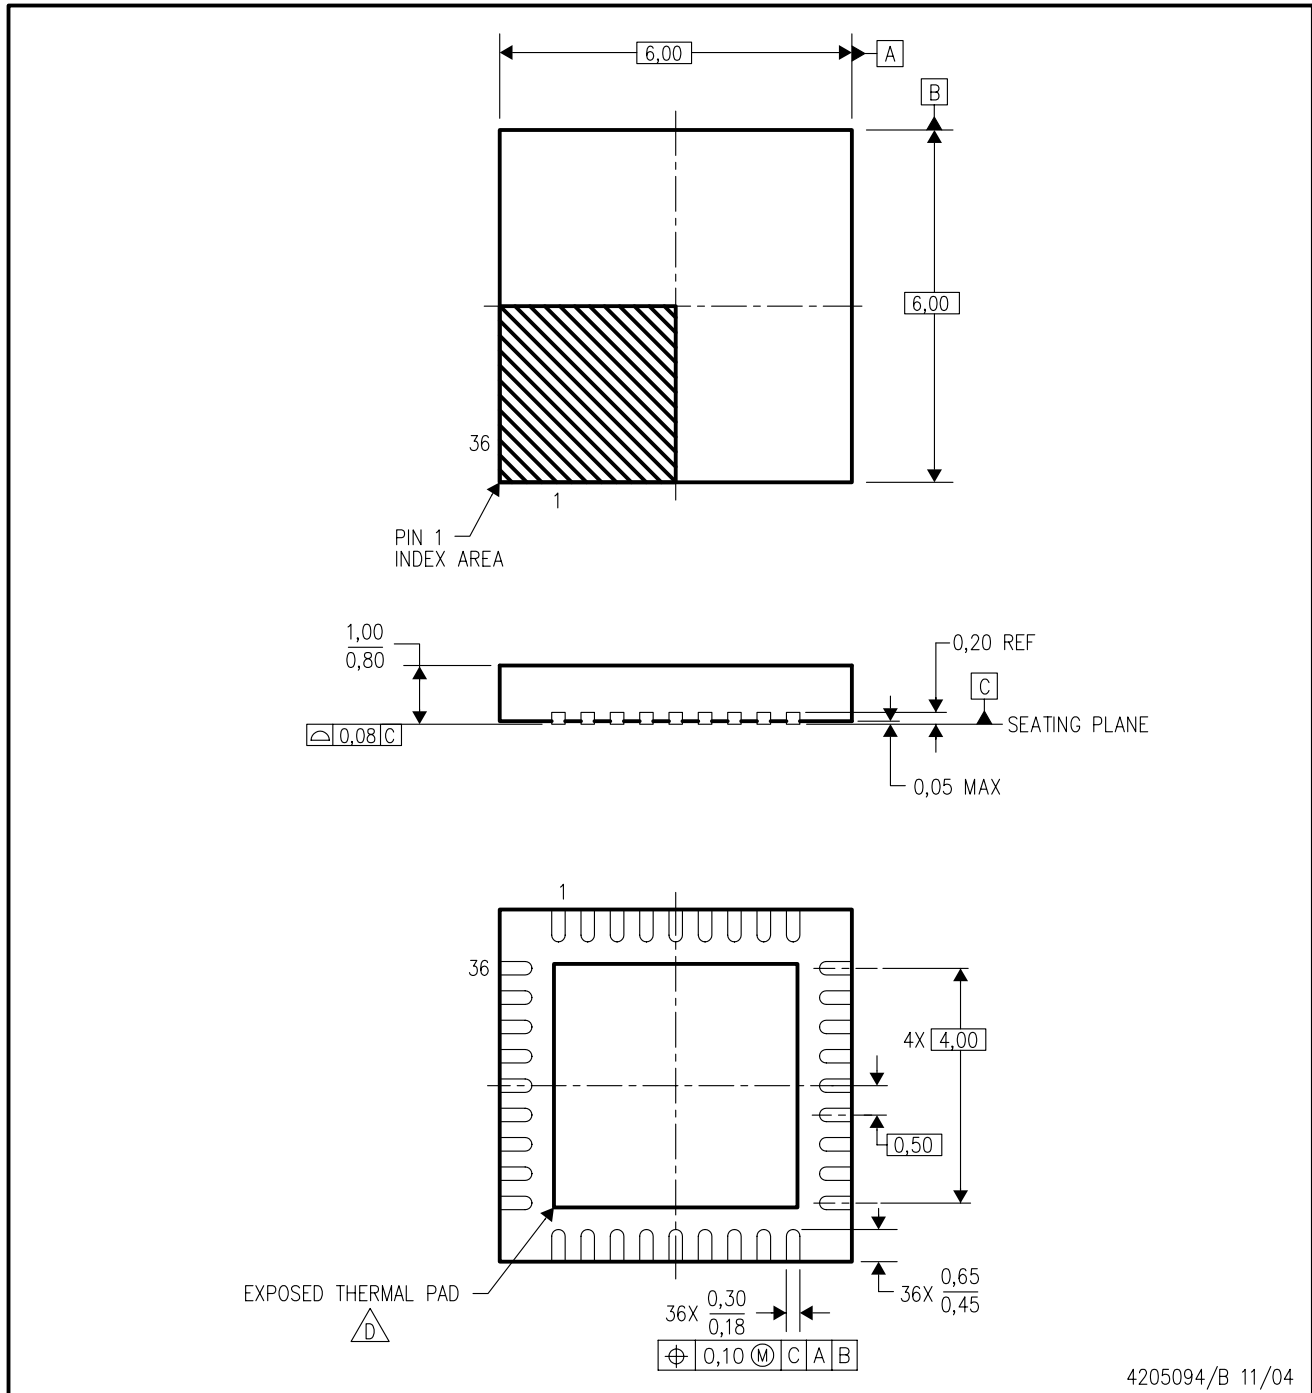

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. QFN (Quad Flatpack No-Lead) Package configuration.
 - D. The package thermal pad must be soldered to the board for thermal and mechanical performance. See the Product Data Sheet for details regarding the exposed thermal pad dimensions.
 - E. Falls within JEDEC MO-220.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| Products | | Applications | |
|------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers | amplifier.ti.com | Audio | www.ti.com/audio |
| Data Converters | dataconverter.ti.com | Automotive | www.ti.com/automotive |
| DSP | dsp.ti.com | Broadband | www.ti.com/broadband |
| Interface | interface.ti.com | Digital Control | www.ti.com/digitalcontrol |
| Logic | logic.ti.com | Military | www.ti.com/military |
| Power Mgmt | power.ti.com | Optical Networking | www.ti.com/opticalnetwork |
| Microcontrollers | microcontroller.ti.com | Security | www.ti.com/security |
| | | Telephony | www.ti.com/telephony |
| | | Video & Imaging | www.ti.com/video |
| | | Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331