



ADVANCED  
LINEAR  
DEVICES, INC.

ALD2302A/ALD2302

## DUAL PRECISION CMOS VOLTAGE COMPARATOR WITH PUSH-PULL DRIVER

### GENERAL DESCRIPTION

The ALD2302A/ALD2302 are monolithic precision high performance dual voltage comparators built with advanced silicon gate CMOS technology. The primary features are: very high typical input impedance of  $10^{12}\Omega$ ; low input bias current of  $10\text{pA}$ ; fast response time of  $180\text{ns}$ ; very low power dissipation of  $175\mu\text{A}$  per comparator; and single ( $+5\text{V}$ ) or dual ( $\pm 5\text{V}$ ) power supply operation.

The input voltage range includes ground, which makes these comparators ideal for single supply low level signal detection with high source impedance. The outputs can source and sink current allowing for application flexibility. They can be used in either wired-OR connection without pull-up resistor or push-pull configuration. The ALD2302A/ALD2302 can also be used in wired-OR connection with other open drain circuits such as the ALD2301/ALD2303 voltage comparators.

The ALD2302A/ALD2302 voltage comparators are ideal for a great variety of applications, especially in low level signal detection circuits which require low standby power and high output current. For quad packages, use the ALD4302A/ALD4302 quad voltage comparator.

### APPLICATIONS

- PCMCIA instruments
- MOSFET driver
- High source impedance voltage comparison circuits
- Multiple limit window comparator
- Power supply voltage monitor
- Photodetector sensor circuit
- High speed LED driver
- Oscillators
- Battery operated instruments
- Remote signal detection
- Multiple relay drivers

### BENEFITS

- On-chip input and output buffers
- Precision voltage comparison capability
- Eliminate need for second power supply
- Eliminate pull-up resistor

### ORDERING INFORMATION ("L" suffix for lead free version)


| Operating Temperature Range *            |                                 |                            |
|--|---------------------------------|----------------------------|
| 0°C to +70°C                             | 0°C to +70°C                    | -55°C to +125°C            |
| 8-Pin<br>Small Outline<br>Package (SOIC) | 8-Pin<br>Plastic Dip<br>Package | 8-Pin<br>CERDIP<br>Package |
| ALD2302ASAL                              | ALD2302APAL                     | ALD2302ADA                 |
| ALD2302SAL                               | ALD2302PAL                      | ALD2302DA                  |

\* Contact factory for leaded (non-RoHS) or high temperature versions.


### FEATURES

- Guaranteed to drive  $200\Omega$  loads
- Fanout of 30LS TTL loads
- Low supply current of  $175\mu\text{A}$  each comparator
- Pinout of LM193 type industry standard comparators
- Extremely low input bias currents -- typically  $10\text{pA}$
- Virtually eliminates source impedance effects
- Low operating supply voltage of  $4\text{V}$  to  $10\text{V}$
- Single ( $+5\text{V}$ ) and dual supply ( $\pm 5\text{V}$ ) operation
- High speed for both large and small signals --  $180\text{ns}$  for TTL inputs and  $400\text{ns}$  for  $20\text{mV}$  overdrive
- CMOS, NMOS and TTL compatible
- Push-pull outputs-current sourcing/ sinking
- High output sinking current -- typically  $60\text{mA}$
- Low supply current spikes
- High gain --  $100\text{V/mV}$

### PIN CONFIGURATION

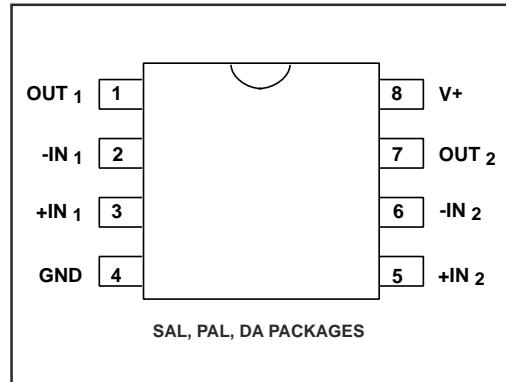

### BLOCK DIAGRAM

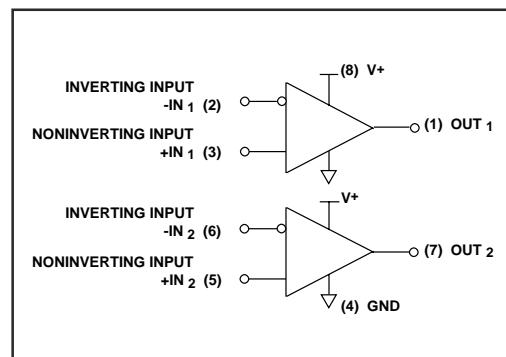

## ABSOLUTE MAXIMUM RATINGS

|                                  |                   |                   |
|----------------------------------|-------------------|-------------------|
| Supply voltage, V+               |                   | 10.6V             |
| Differential input voltage range |                   | -0.3V to V+ +0.3V |
| Power dissipation                |                   | 600 mW            |
| Operating temperature range      | SAL, PAL packages | 0°C to +70°C      |
|                                  | DA package        | -55°C to +125°C   |
| Storage temperature range        |                   | -65°C to +150°C   |
| Lead temperature, 10 seconds     |                   | +260°C            |

## OPERATING ELECTRICAL CHARACTERISTICS







$T_A = 25^\circ\text{C}$   $V+ = +5\text{V}$  unless otherwise specified

| Parameter                                    | Symbol         | 2302A        |      |               | 2302         |      |               | Unit          | Test Conditions  |
|--|----------------|--------------|------|---------------|--------------|------|---------------|---------------|--|
|  |                | Min          | Typ  | Max           | Min          | Typ  | Max           |               |  |
| Supply Voltage                               | $V_S$<br>$V_+$ | $\pm 2$<br>4 |      | $\pm 5$<br>10 | $\pm 2$<br>4 |      | $\pm 5$<br>10 | V<br>V        | Dual Supply<br>Single Supply   |
| Supply Current                               | $I_S$          |              | 350  | 500           |              | 350  | 500           | $\mu\text{A}$ | $R_{LOAD} = \infty$  |
| Voltage Gain                                 | $A_{VD}$       | 10           | 100  |               | 10           | 100  |               | V/mV          | $R_{LOAD} \geq 15\text{K}\Omega$   |
| Input Offset Voltage                         | $V_{OS}$       |              | 0.5  | 1.0<br>2.0    |              | 1.5  | 4.0<br>5.0    | mV            | $R_{LOAD} = 1.5\text{K}\Omega$<br>$0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ |
| Input Offset Current <sup>1</sup>            | $I_{OS}$       |              | 10   | 200<br>800    |              | 10   | 200<br>800    | pA            |  |
| Input Bias Current <sup>1</sup>              | $I_B$          |              | 10   | 200<br>1000   |              | 10   | 200<br>1000   | pA            | $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$                                   |
| Common Mode Input Voltage Range <sup>2</sup> | $V_{ICR}$      | -0.3         |      | $V^+ - 1.5$   | -0.3         |      | $V^+ - 1.5$   | V             | $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$                                   |
| Low Level Output Voltage                     | $V_{OL}$       |              | 0.18 | 0.4           |              | 0.18 | 0.4           | V             | $I_{SINK} = 12\text{mA}$<br>$V_{INPUT} = 1\text{V}$<br>Differential                |
| Low Level Output Current                     | $I_{OL}$       | 24           | 60   |               | 24           | 60   |               | mA            | $V_{OL} = 1.0\text{V}$   |
| High Level Output Voltage                    | $V_{OH}$       | 3.5          | 4.5  |               | 3.5          | 4.5  |               | V             | $I_{OH} = -2\text{mA}$   |
| Response Time <sup>2</sup>                   | $t_{RP}$       |              | 400  |               |              | 400  |               | ns            | $C_L = 15\text{pF}$<br>100mV Input Step/20mV Overdrive                             |
|  |                |              | 180  |               |              | 180  |               | ns            | $C_L = 15\text{pF}$<br>TTL- Level Input Step                                       |







Notes: <sup>1</sup> Consists of junction leakage currents

<sup>2</sup> Sample tested parameters

## TYPICAL PERFORMANCE CHARACTERISTICS

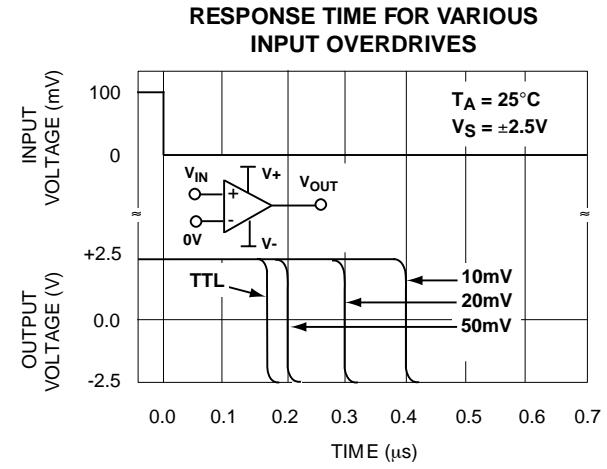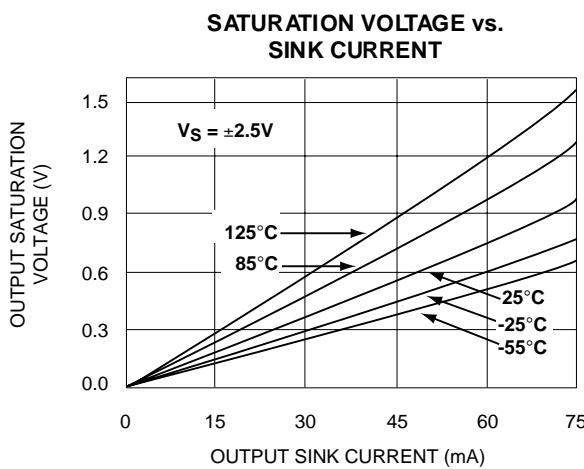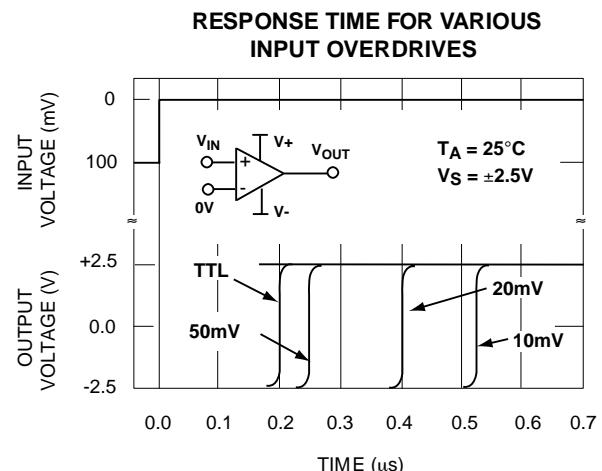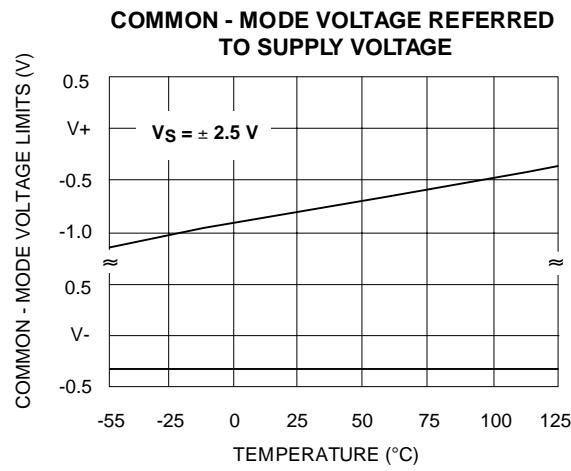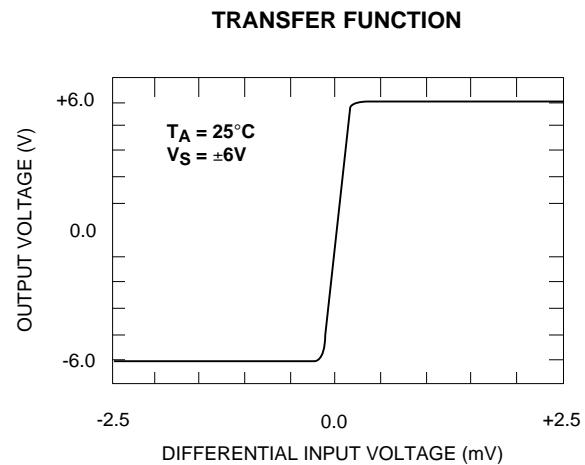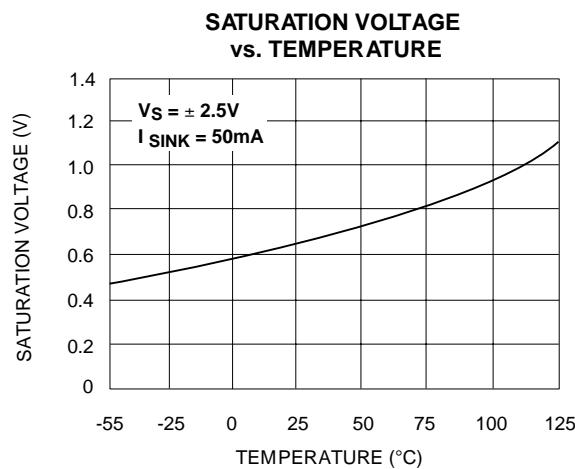


## TYPICAL PERFORMANCE CHARACTERISTICS (cont'd)

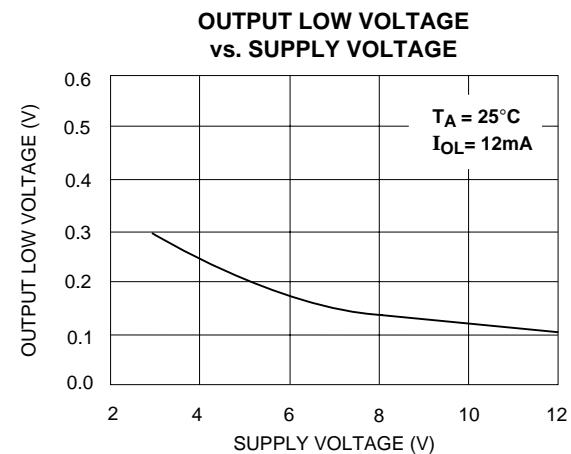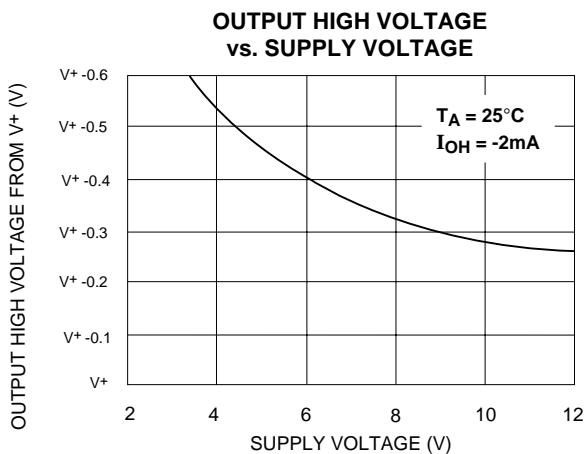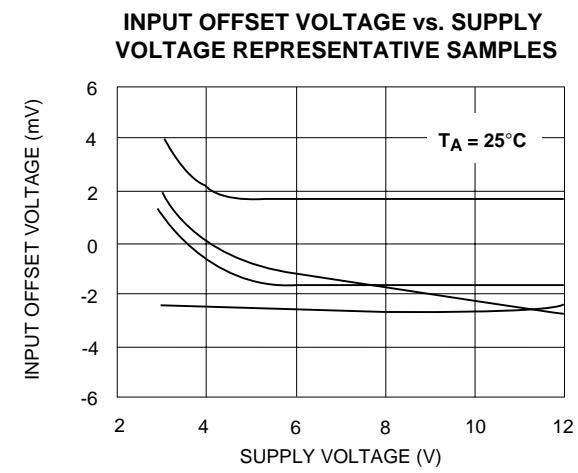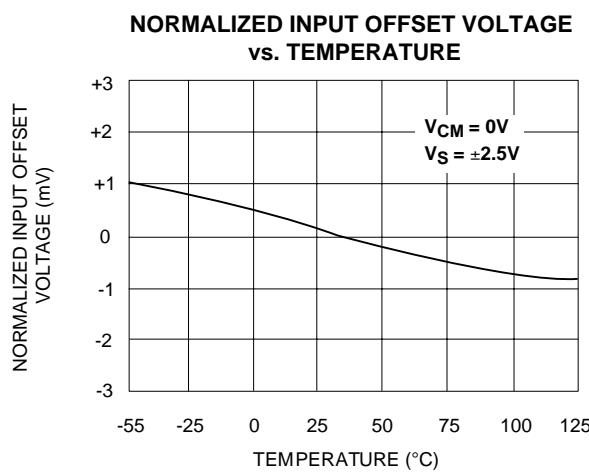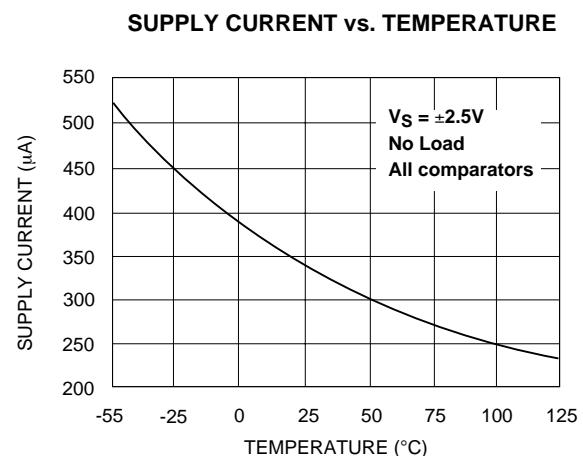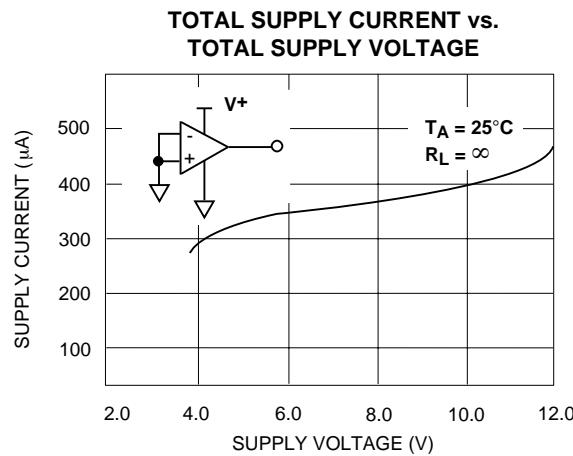


## TYPICAL APPLICATIONS


**ZERO CROSSING DETECTOR**

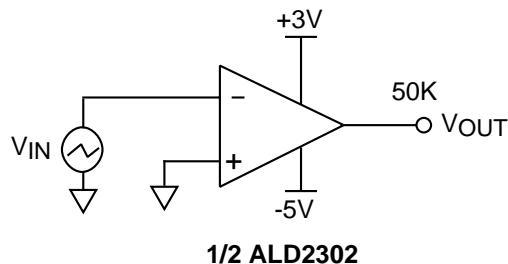

**DOUBLE DUAL LIMIT WINDOW COMPARATOR**

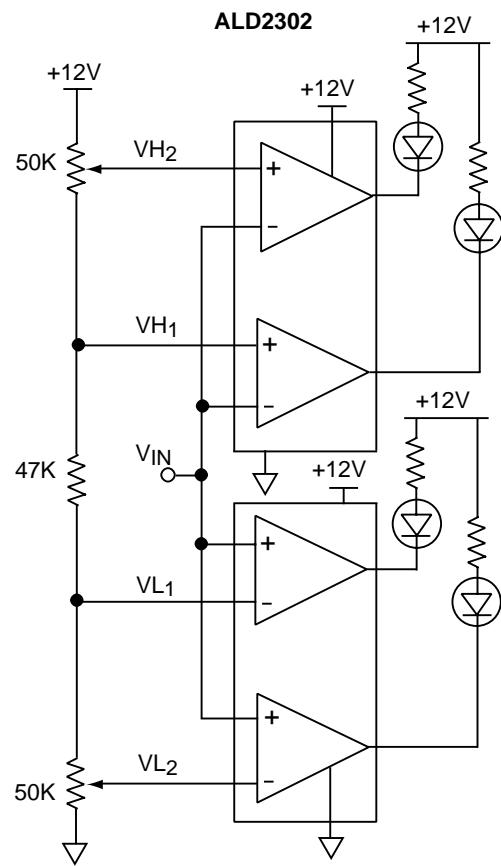


**MULTIPLE RELAY DRIVE**

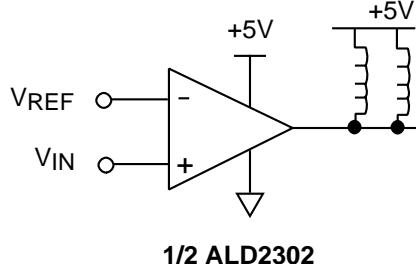

**1/2 ALD2302**

**VOLTAGE LEVEL TRANSLATOR**

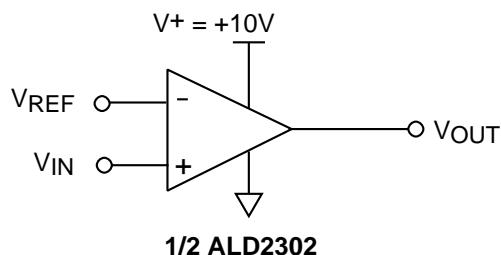

**1/2 ALD2302**

$$V_{REF} = 1.4V \text{ for TTL input}$$


$$V_{REF} = \frac{V^+}{2} \text{ for CMOS input}$$

Output  $V_{OUT}$  swings from rail-to-rail

$VL_1$  and  $VH_1$  first limit window send warning.  
 $VL_2$  and  $VH_2$  second limit window execute system cutoff.


## TYPICAL APPLICATIONS (cont'd)

### PUSH-PULL COMPLEMENTARY POWER MOSFET DRIVER

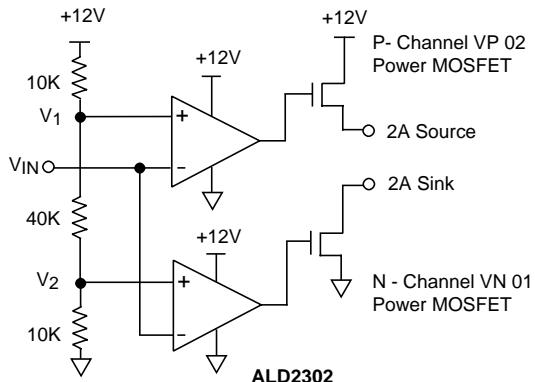

This circuit eliminates crossover current in the complementary power transistors. The outputs can be used to source and sink different loads or tied together to provide push-pull drive of the same load.

### TIME DELAY GENERATOR


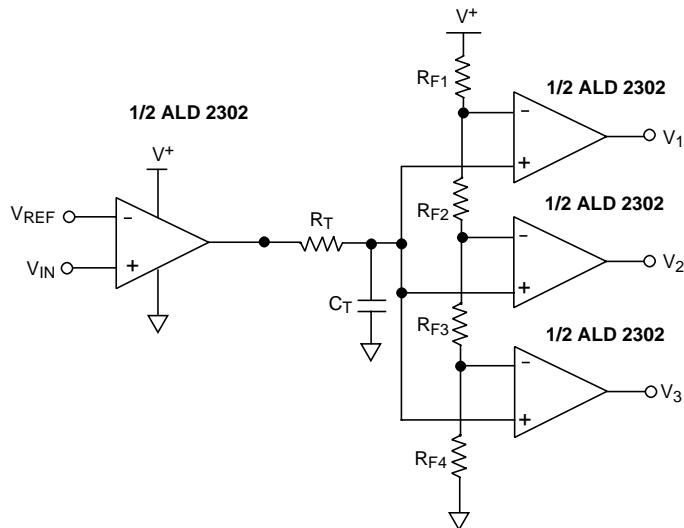


#### Design & Operating Notes:


- As each output sources up to 10mA in the output high state, the output stage of a wired - OR low output circuit must be able to sink this current and still provide desired output voltage levels. For TTL output levels, this consideration limits the number to a maximum of three ALD2302 outputs wired-OR together.
- In order to minimize stray oscillation, all unused inputs must be tied to ground.
- The input bias and offset currents are essentially input protection diode reverse bias leakage currents, and are typically less than 1pA at room temperature. The currents are a function of ambient temperature, and would have to be considered in applications where very high source impedance or high accuracy are involved.
- The high output sinking current of 60mA for each output offers flexibility in many applications, as a separate buffer or driver would not be necessary to drive the intended load. However, as the circuit normally operates close to ambient temperature due to its very low power consumption, thermal effects caused by large output current transients must be considered in certain applications.

## SOIC-8 PACKAGE DRAWING

**8 Pin Plastic SOIC Package**

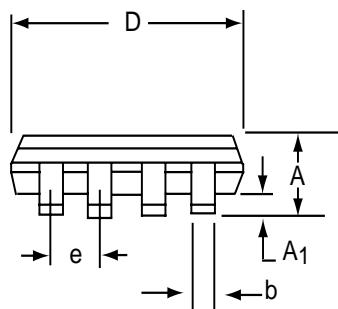
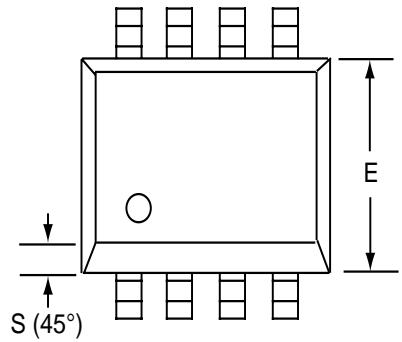


| Dim                  | Millimeters |       | Inches    |       |
|----------------------|-------------|-------|-----------|-------|
|                      | Min         | Max   | Min       | Max   |
| <b>A</b>             | 1.35        | 1.75  | 0.053     | 0.069 |
| <b>A<sub>1</sub></b> | 0.10        | 0.25  | 0.004     | 0.010 |
| <b>b</b>             | 0.35        | 0.45  | 0.014     | 0.018 |
| <b>C</b>             | 0.18        | 0.25  | 0.007     | 0.010 |
| <b>D-8</b>           | 4.69        | 5.00  | 0.185     | 0.196 |
| <b>E</b>             | 3.50        | 4.05  | 0.140     | 0.160 |
| <b>e</b>             | 1.27 BSC    |       | 0.050 BSC |       |
| <b>H</b>             | 5.70        | 6.30  | 0.224     | 0.248 |
| <b>L</b>             | 0.60        | 0.937 | 0.024     | 0.037 |
| <b>Ø</b>             | 0°          | 8°    | 0°        | 8°    |
| <b>S</b>             | 0.25        | 0.50  | 0.010     | 0.020 |

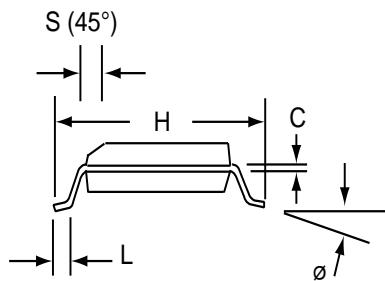


## PDIP-8 PACKAGE DRAWING

**8 Pin Plastic DIP Package**

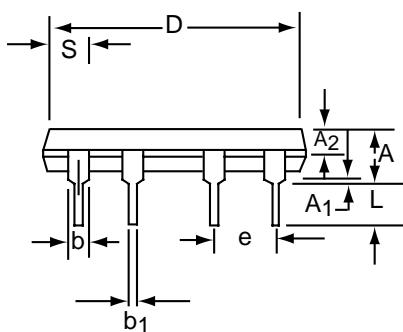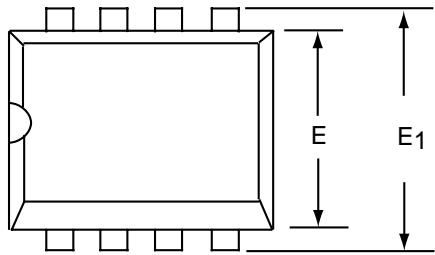


| Dim                  | Millimeters |       | Inches |       |
|----------------------|-------------|-------|--------|-------|
|                      | Min         | Max   | Min    | Max   |
| <b>A</b>             | 3.81        | 5.08  | 0.105  | 0.200 |
| <b>A<sub>1</sub></b> | 0.38        | 1.27  | 0.015  | 0.050 |
| <b>A<sub>2</sub></b> | 1.27        | 2.03  | 0.050  | 0.080 |
| <b>b</b>             | 0.89        | 1.65  | 0.035  | 0.065 |
| <b>b<sub>1</sub></b> | 0.38        | 0.51  | 0.015  | 0.020 |
| <b>c</b>             | 0.20        | 0.30  | 0.008  | 0.012 |
| <b>D-8</b>           | 9.40        | 11.68 | 0.370  | 0.460 |
| <b>E</b>             | 5.59        | 7.11  | 0.220  | 0.280 |
| <b>E<sub>1</sub></b> | 7.62        | 8.26  | 0.300  | 0.325 |
| <b>e</b>             | 2.29        | 2.79  | 0.090  | 0.110 |
| <b>e<sub>1</sub></b> | 7.37        | 7.87  | 0.290  | 0.310 |
| <b>L</b>             | 2.79        | 3.81  | 0.110  | 0.150 |
| <b>S-8</b>           | 1.02        | 2.03  | 0.040  | 0.080 |
| <b>Ø</b>             | 0°          | 15°   | 0°     | 15°   |

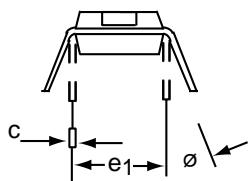

# CERDIP-8 PACKAGE DRAWING

8 Pin CERDIP Package

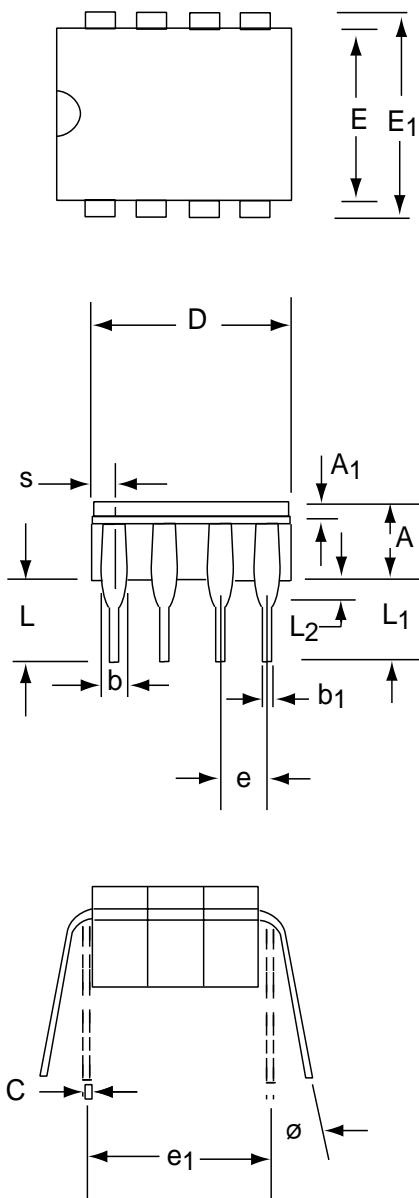

| Dim                  | Millimeters |       | Inches    |       |
|----------------------|-------------|-------|-----------|-------|
|                      | Min         | Max   | Min       | Max   |
| <b>A</b>             | 3.55        | 5.08  | 0.140     | 0.200 |
| <b>A<sub>1</sub></b> | 1.27        | 2.16  | 0.050     | 0.085 |
| <b>b</b>             | 0.97        | 1.65  | 0.038     | 0.065 |
| <b>b<sub>1</sub></b> | 0.36        | 0.58  | 0.014     | 0.023 |
| <b>C</b>             | 0.20        | 0.38  | 0.008     | 0.015 |
| <b>D-8</b>           | --          | 10.29 | --        | 0.405 |
| <b>E</b>             | 5.59        | 7.87  | 0.220     | 0.310 |
| <b>E<sub>1</sub></b> | 7.73        | 8.26  | 0.290     | 0.325 |
| <b>e</b>             | 2.54 BSC    |       | 0.100 BSC |       |
| <b>e<sub>1</sub></b> | 7.62 BSC    |       | 0.300 BSC |       |
| <b>L</b>             | 3.81        | 5.08  | 0.150     | 0.200 |
| <b>L<sub>1</sub></b> | 3.18        | --    | 0.125     | --    |
| <b>L<sub>2</sub></b> | 0.38        | 1.78  | 0.015     | 0.070 |
| <b>S</b>             | --          | 2.49  | --        | 0.098 |
| <b>Ø</b>             | 0°          | 15°   | 0°        | 15°   |



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331