
# **Trimmer Potentiometers**



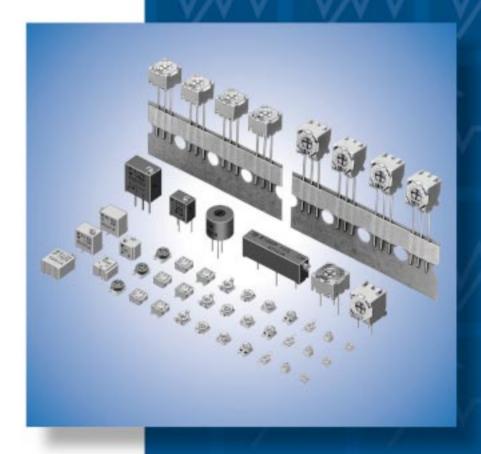

Murata Manufacturing Co., Ltd.

# **CONTENTS**

Part Numbering ————————————————————————————————————	2
Selection Guide of Trimmer Potentiometers	4
1 SMD Open Type 2mm Size PVZ2 Series —	5
PVZ2 Series Notice	7
2 SMD Open Type 3mm Size PVZ3/PVS3/PVA3 Series —	9
● PVZ3/PVS3/PVA3 Series Notice	16
3 SMD Sealed Type 2mm Size PVF2 Series —	19
PVF2 Series Notice	21
4 SMD Sealed Type 3mm Size PVG3 Series —	23
PVG3 Series Notice	26
5 SMD Sealed Type 4mm Size PVM4 Series	28
● PVM4 Series Notice	31
6 SMD Sealed Type Multi-turns PVG5/PV01 Series	33
● PVG5/PV01 Series Notice	39
7 Lead Sealed Type Single-turn PVC6/PV32/PV34 Series ————————————————————————————————————	41
● PVC6/PV32/PV34 Series Notice —	52
8 Lead Sealed Type Multi-turns PV12/PV37/PV23/PV22/PV36 Series ————	54
● PV12/PV37/PV23/PV22/PV36 Series Notice	71
9 Angle Sensing Potentiometer SMD Dust-proof Type 12mm Size PVS1 Series ———	73
PVS1 Series Notice	75
SMD Open Type and SMD Sealed Type PVM4A_C01 Series Specifications and Test Methods	77
SMD Sealed Type/Lead Sealed Type Specifications and Test Methods	79
Angle Sensing Potentiometer Specifications and Test Methods	82
Packaging ———————————————————————————————————	83
Recommended Adjustment Tools/Qualified Standards	88

<sup>•</sup> The RoHS compliance means that we judge from EU Directive 2002/95/EC the products do not contain lead, cadmium, mercury, hexavalent

chromium, PBB and PBDE, except exemptions stated in EU Directive 2002/95/EC annex and impurities existing in natural world.

• This statement does not insure the complaince of any of the listed parts with any laws or legal imperatives developed by any EU members individually with regards to the RoHS Directive.

## Part Numbering

## **Trimmer Potentiometers**

(Part Number) PV Z3 A 103 A01 R00

#### Product ID

Product ID	
PV	Trimmer Potentiometers

#### 2Series

## 3Adjustment Direction /Lead Type

Code	Series	Code	Adjustment Direction/ Lead Type
Z2	SMD Open 2mm Size	Α	Тор
	2 ONB Open Zimii Gize		Rear
		Α	Тор
Z3	SMD Open 3mm Size	K	Rear
		R	Rear
S3	SMD Open 3mm Size Stopper Low-profile	A	Тор
А3	SMD Open 3mm Size	Α	Тор
F2	SMD Sealed type 2mm Size	Α	Тор
		Α	Top, J-hook
G3	SMD Sealed 3mm Size	G	Top, Gull-wing
		K	Rear
M4	SMD Sealed 4mm Size	Α	Тор
C.F.	SMD Sealed 5mm Square	Α	Тор
G5	11-turns	Н	Side
		Р	Side
01	SMD Sealed 6mm Square	w	Тор
	12-turns	Х	Side
		Α	Top, Triangle
		D	Top, Triangle
		Е	Side, Triangle
C6	Lead Sealed 6mm Square Single-turn	G	Side, Triangle
		Н	Side, Triangle
		М	Top, Inline
		Q	Side, Inline
		Н	Top, Triangle
		Р	Top, Triangle
	Lead Sealed 6mm Round	R	Top, Inline
32	Single-turn	N	Side, Triangle
		Т	Side, Triangle
		S	Side, Triangle
		F	Top, Triangle
		Р	Top, Triangle
34	Lead Sealed 9mm Square	Н	Side, Triangle
	Single-turn	Х	Side, Triangle
		w	Side, Inline
		Н	Top, Triangle
12	Lead Sealed 7mm Round	Р	Top, Triangle
	4-turns	T	Side, Triangle
12			
12		S	Side, Friangle
12	Load Sociad	S L	Side, Triangle Side
22	Lead Sealed 31mm Rectangular	S L S	Side, Triangle Side Side

23	Lead Sealed 19mm		Side, Triangle
23	Rectangular 15-turns	Υ	Side, Triangle
		W	Top, Inline
		Υ	Top, Triangle
36	Lead Sealed 10mm Square 25-turns	Р	Side, Triangle
		Х	Side, Inline
		Z	Side, Triangle
		W	Top, Triangle
	Lead Sealed 6mm Square 12-turns	Y	Top, Inline
37		Р	Side, Triangle
		Х	Side, Triangle
			Side, Inline

#### **4**Total Resistance

Expressed by three figures. The unit is ohm. The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

Ex.)	Code	Total Resistance
	100	10ohm
	102	1000ohm
	104	100000ohm (=100kohm)

#### 6 Individual Specification

Code	Series	Individual Specification Code		
A01	PVZ2/PVZ3/PVS3/ PVA3/PV32/PV12	Standard Type		
C01	PVG3/PVM4/PVG5/PV01/ PVC6/PV34/PV22/PV23/ PV36/PV37	Standard Type		
A04	PVZ2	Ultra-thin Type		
C01	PVZ3	High-heat Resistance Type (for Top Adjustment		
E01	PVZ3	High-heat Resistance Type (for Rear Adjustment)		
D01	01 PVM4 High-liability Type			
C31	PV36/PV37	Radial Taping		
C04	PVC6	Radial Taping		
A11	PVF2	Standard Type (Resistance Change Characteristics : Linear)		
A41	PVF2	Standard Type (Resistance Change Characteristics : Log curve)		
A81	PVF2	Standard Type (Resistance Change Characteristics : Log curve)		
A51	PVF2	Standard Type (Resistance Change Characteristics : Log-log curve)		
A91	PVF2	Standard Type (Resistance Change Characteristics : Log-log curve)		

#### **6**Packaging

Code	Packaging
A00	Ammo Pack
B00	Bulk
M00*	Magazine
R00	Reel

<sup>\*</sup> M12 for PV36P Type and M15 for PV36W/Y/X/Z Type.

#### **Angle Sensing Potentiometers**

(Part Number)

PV S1 A 103 A01 R00

#### ●Product ID

Product ID	
PV	Trimmer Potentiometers
	(Rotary Position Sensor)

#### 2Series

Code	Series
<b>S</b> 1	Dust-proof Type 12mm Size

#### **3**Terminal Shape

Code	Terminal Shape
Α	SMD Type
L	Lead Type

#### **4**Total Resistance

Expressed by three figures. The unit is ohm. The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

Ex.)	Code	Total Resistance
	103	10000 ohm (=10k ohm)

#### **5**Individual Specification Code

Code	Individual Specification Code
A01	SMD Type Standard
A03	Lead Type Standard

#### 6 Packaging

Code	Packaging		
B00	Bulk		
R00	Reel		
T00	Tray		

\* PVS1 Series will be changed to new part number since Oct. 1, 2004. Details is as follows.

(Part Number)

sv	01	Α	103	ΑE	A01	R00
O	2	a	4	A	6	•

#### Product ID

Product ID	
sv	Rotary Position Sensor

## 2Series

Code	Series
01	Carbon Rotary Position Sensor

#### **3**Terminal Shape

	Code	Terminal Shape		
	Α	SMD Type		
L		Lead Type		

#### **4**Total Resistance

Expressed by three figures. The unit is ohm. The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

Ex.)	Code	Total Resistance
	103	10000 ohm (=10k ohm)

#### 5 Rotor Hole Shape/Rotor Hole Size

Code	Rotor Hole Shape/Rotor Hole Size			
AD	D Hole/3.5mm Dia.			
AE D Hole/4.0mm Dia.				
CE	T Hole/4.0mm Dia.			


#### 6Individual Specification Code

Code	Individual Specification Code		
A01	SMD Type Standard		
A03	Lead Type Standard		

#### Packaging

Code	Packaging	
B00	Bulk	
R00 Reel		
T00	Tray	

## **Selection Guide of Trimmer Potentiometers**

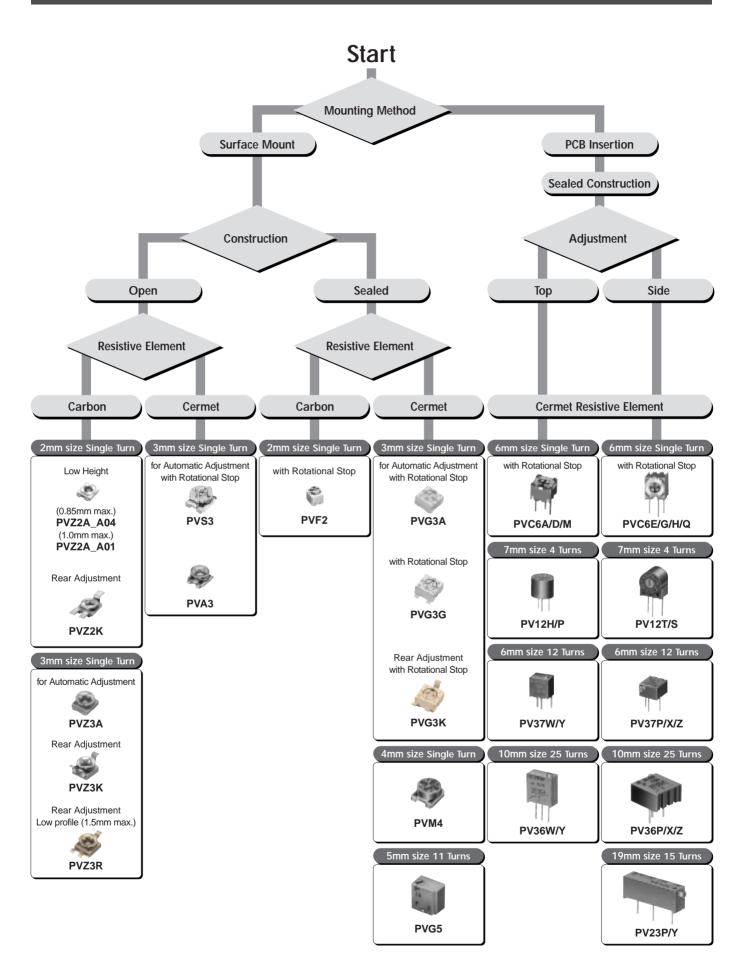

## **Trimmer Potentiometers**

# muRata

## SMD Open Type 2mm Size PVZ2 Series

#### ■ Features

- Ultra-small and thin external dimensions of 2.1(W)x2.7(L)x0.85 max. (T)mm. (PVZ2A\_A04 Series)
- 2. Au plated termination achieves a high density P.C.B. mounting.
- Cross-shaped driver slot allows for in-process automatic adjustment and it provides superior adjustability.
- 4. Two-piece parts construction achieves low cost and excellent quality.
- 5. Special resin substrate allows high peak temperature for reflow soldering.


## ■ Applications

Pick-up module
 Cellular-phone
 Pager
 DVC

7. Digital camera 8. Portable audio, etc.



PVZ2A




\*1 Driver Plate Rotation Area: Please do not place any components more than 0.7mm in height within this area

\*2 PVZ2A\_A01 : 0.9±0.1 PVZ2A A04 : 0.8±0.05

in mm Tolerance : ±0.2



PVZ2K



\*1. Driver Plate Rotation Area : Please do not place any components more than 0.7mm in height within this area.

(Tolerance : ±0.2)

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVZ2□501A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	500ohm ±30%	±500ppm/°C
PVZ2□102A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	1k ohm ±30%	±500ppm/°C
PVZ2□202A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	2k ohm ±30%	±500ppm/°C
PVZ2□302A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	3k ohm ±30%	±500ppm/°C
PVZ2□502A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	5k ohm ±30%	±500ppm/°C
PVZ2□103A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	10k ohm ±30%	±500ppm/°C
PVZ2□203A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	20k ohm ±30%	±500ppm/°C
PVZ2□303A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	30k ohm ±30%	±500ppm/°C
PVZ2□503A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	50k ohm ±30%	±500ppm/°C
PVZ2□104A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	100k ohm ±30%	±500ppm/°C
PVZ2□204A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	200k ohm ±30%	±500ppm/°C
PVZ2□304A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	300k ohm ±30%	±500ppm/°C
PVZ2□504A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	500k ohm ±30%	±500ppm/°C
PVZ2□105A01	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	1M ohm ±30%	±500ppm/°C
PVZ2□501A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	500ohm ±30%	±500ppm/°C
PVZ2□102A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	1k ohm ±30%	±500ppm/°C
PVZ2□202A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	2k ohm ±30%	±500ppm/°C
PVZ2□302A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	3k ohm ±30%	±500ppm/°C
PVZ2□502A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	5k ohm ±30%	±500ppm/°C
PVZ2□103A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	10k ohm ±30%	±500ppm/°C
PVZ2□203A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	20k ohm ±30%	±500ppm/°C
PVZ2□303A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	30k ohm ±30%	±500ppm/°C
PVZ2□503A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	50k ohm ±30%	±500ppm/°C
PVZ2□104A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	100k ohm ±30%	±500ppm/°C
PVZ2□204A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	200k ohm ±30%	±500ppm/°C

Continued from the preceding page.


Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVZ2□304A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	300k ohm ±30%	±500ppm/°C
PVZ2□504A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	500k ohm ±30%	±500ppm/°C
PVZ2□105A04	0.1W(50°C)	Reflow/Soldering Iron	1(240°±10°)	1M ohm ±30%	±500ppm/°C

The blank column is filled with the code of adjustment direction A (top) or K (rear).

## **■** Construction




## ■ Standard Land Pattern




(in mm) Tolerance : ±0.1)

## **■** Construction



## ■ Standard Land Pattern



(n mm) Tolerance : ±0.1)

#### ■ Characteristics

■ Characteristics		
Humidity Exposure	Res. Change : +10, -2%	
High Temperature	Res. Change : R≦50kohm···+2, -10%	
Exposure	50kohm <r···+2, -15%<="" td=""></r···+2,>	
Humidity Load Life	Res. Change : ±10%	
Load Life	Res. Change : R≦50kohm···+2, -10%	
Load Lile	50kohm <r···+2, -15%<="" td=""></r···+2,>	
Temperature Cycle	Res. Change : ±5%	
Temperature Coefficient	±500ppm/°C	
of Resistance		
Rotational Life	Res. Change : ±10% (10 cycles)	

## **PVZ2 Series Notice**

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40 deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- If you use the trimmer potentiometer in an environment other than listed below, please consult with a Murata factory representative prior to using.

The trimmer potentiometer should not be used under

#### ■ Notice (Rating)

- 1. When using with partial load (rheostat), minimize the power depending on the resistance value.
- 2. The maximum input voltage to a trimmer potentiometer should not exceed (P.R)^1/2 or the maximum operating voltage, whichever is smaller.
- The maximum input current to a trimmer potentiometer should not exceed (P/R)^1/2 or the allowable wiper current, whichever is smaller.
- 4. If the trimmer potentiometer is used in DC and high humidity conditions, please connect wiper (#2) for plus and resistive element (#1 or #3) for minus.

the following environmental conditions:

- Corrosive gaseous atmosphere
   (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid

(Ex. Oil, Medical liquid, Organic solvent, etc.)

- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above

#### ■ Notice (Soldering and Mounting)

- 1. Soldering
- (1) Reflow soldering and Soldering Iron are available. Cannot be soldered using the flow soldering method. If you use the flow soldering method, the trimmer potentiometer may not function.
- (2) Use our standard land dimension. Excessive land area causes displacement due to the effect of the surface tension of the solder. Insufficient land area leads to insufficient soldering strength of the chip.
- (3) Standard soldering condition
  - (a) Reflow soldering:

Refer to the standard temperature profile.

- (b) Soldering iron:
  - >Temperature of tip 360 deg. C max.
  - >Soldering time 3 sec. max.
    >Diameter 1mm max.
    >Wattage of iron 30W max.

Before using other soldering conditions than those listed above, please consult with Murata factory representative prior to using. If the soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the trimmer potentiometer may deviate from the specified characteristics.

(4) Apply the appropriate amount of solder paste.

The thickness of solder paste should be printed from 100 micro m to 150 micro m and the dimension of land pattern used should be Murata's standard land pattern at reflow soldering. Insufficient amounts of solder can lead to insufficient soldering strength on PCB. Excessive amounts of solder may cause bridging between the terminals.

- (5) The soldering iron should not come in contact with the case of the trimmer potentiometer. If such contact does occur, the trimmer potentiometer may be damaged.
- 2. Mounting
- (1) Do not apply excessive force (preferably 4.9N (Ref.; 500gf) max.), when the trimmer potentiometer is mounted to the PCB.
- (2) Do not warp and/or bend PC board to prevent trimmer potentiometer from breakage.
- (3) In chip placers, the recommended size of the cylindrical pick-up nozzle should be outer dimension 1.5-1.8mm dia. and inner dimension 1.3mm dia.
- 3. Cleaning
  - (1) In case there is flux on the resistive element, clean sufficiently with cleaning solvents and completely remove all residual flux.
  - (2) Isopropyl-alcohol and Ethyl-alcohol are

Continued on the following page.

## **PVZ2 Series Notice**




Continued from the preceding page.

applicable solvents for cleaning. If you use any other types of solvents, please evaluate

performance by your product.

#### ■ Reflow Soldering Standard Profile





## ■ Notice (Handling)

- 1. Use suitable screwdrivers that fit comfortably in driver slot. We recommend the screwdriver below.
  - \* Recommended screwdriver for manual adjustment PVZ2A A01=Murata P/N: KMDR090 PVZ2A\_A04=Murata P/N: KMDR150
- 2. Don't apply more than 4.9N (Ref.; 500gf) of twist and stress after mounting onto PCB to prevent contact intermittence. If excessive force is applied, the trimmer potentiometer may not function.

## ■ Notice (Other)

- 1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- 2. Murata cannot guarantee trimmer potentiometer integrity when used under conditions other than those specified in this document.

- 3. Please use within the effective rotational angle. The potentiometer does not have a mechanical stop for over rotation. In cases out of effective rotational angle, the trimmer potentiometer may not function.
- 4. When using a lock paint to fix slot position, please consult with a Murata factory representative prior to using to prevent corrosion and contact intermittence.



## **Trimmer Potentiometers**



## SMD Open Type 3mm Size PVZ3/PVS3/PVA3 Series

## **PVZ3 Series**

#### ■ Features

- Excellent solderability characteristics are achieved via special plating techniques on each termination.
- 2. Specially designed substrate prevents wicking of flux onto the top of the part body.
- 3. Funnel shaped adjustment slot allows for in-process automatic adjustment.
- 4. High-heat resistance type is available (PVZ3A\_C01/PVZ3K\_E01/PVZ3R\_E01).
- Enlarged bottom termination enhance soldering strength while reducing the necessary land area required promoting high-density PCB mounting.
- 6. Flat surface is provided for smooth pick and place (PVZ3K only).
- The standard position of driver plate is adjusted at the center normally, but another position is also available.
- 8. This product meets Pb-free.

#### ■ Applications

Optical pick up

2. Cordless telephones

3. CD players

5. Motor

6. CD-ROMs

4. FDD


7. Car stereos

8. TFT-LCD TV sets

9. Headphone stereos




PV73A






PVZ3K





PVZ3R



Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVZ3A201□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	200ohm ±30%	±500ppm/°C
PVZ3A301□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	300ohm ±30%	±500ppm/°C
PVZ3A501□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	500ohm ±30%	±500ppm/°C
PVZ3A102□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	1k ohm ±30%	±500ppm/°C
PVZ3A202□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	2k ohm ±30%	±500ppm/°C
PVZ3A302□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	3k ohm ±30%	±500ppm/°C
PVZ3A502□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	5k ohm ±30%	±500ppm/°C
PVZ3A103□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	10k ohm ±30%	±500ppm/°C
PVZ3A203□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	20k ohm ±30%	±500ppm/°C
PVZ3A303□	0.1W(50°C)	Reflow/Soldering Iron	1(230°+10°)	30k ohm +30%	+500ppm/°C


Continued from the preceding page.

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVZ3A503□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	50k ohm ±30%	±500ppm/°C
PVZ3A104□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	100k ohm ±30%	±500ppm/°C
PVZ3A204□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	200k ohm ±30%	±500ppm/°C
PVZ3A304□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	300k ohm ±30%	±500ppm/°C
PVZ3A504□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	500k ohm ±30%	±500ppm/°C
PVZ3A105□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	1M ohm ±30%	±500ppm/°C
PVZ3A205□	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	2M ohm ±30%	±500ppm/°C
PVZ3K201E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	200ohm ±30%	±500ppm/°C
PVZ3K301E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	300ohm ±30%	±500ppm/°C
PVZ3K501E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	500ohm ±30%	±500ppm/°C
PVZ3K102E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	1k ohm ±30%	±500ppm/°C
PVZ3K202E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	2k ohm ±30%	±500ppm/°C
PVZ3K302E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	3k ohm ±30%	±500ppm/°C
PVZ3K502E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	5k ohm ±30%	±500ppm/°C
PVZ3K103E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	10k ohm ±30%	±500ppm/°C
PVZ3K203E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	20k ohm ±30%	±500ppm/°C
PVZ3K303E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	30k ohm ±30%	±500ppm/°C
PVZ3K503E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	50k ohm ±30%	±500ppm/°C
PVZ3K104E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	100k ohm ±30%	±500ppm/°C
PVZ3K204E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	200k ohm ±30%	±500ppm/°C
PVZ3K304E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	300k ohm ±30%	±500ppm/°C
PVZ3K504E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	500k ohm ±30%	±500ppm/°C
PVZ3K105E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	1M ohm ±30%	±500ppm/°C
PVZ3K205E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	2M ohm ±30%	±500ppm/°C
PVZ3R201E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	200ohm ±30%	±500ppm/°C
PVZ3R301E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	300ohm ±30%	±500ppm/°C
PVZ3R501E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	500ohm ±30%	±500ppm/°C
PVZ3R102E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	1k ohm ±30%	±500ppm/°C
PVZ3R202E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	2k ohm ±30%	±500ppm/°C
PVZ3R302E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	3k ohm ±30%	±500ppm/°C
PVZ3R502E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	5k ohm ±30%	±500ppm/°C
PVZ3R103E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	10k ohm ±30%	±500ppm/°C
PVZ3R203E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	20k ohm ±30%	±500ppm/°C
PVZ3R303E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	30k ohm ±30%	±500ppm/°C
PVZ3R503E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	50k ohm ±30%	±500ppm/°C
PVZ3R104E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	100k ohm ±30%	±500ppm/°C
PVZ3R204E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	200k ohm ±30%	±500ppm/°C
PVZ3R304E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	300k ohm ±30%	±500ppm/°C
PVZ3R504E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	500k ohm ±30%	±500ppm/°C
PVZ3R105E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	1M ohm ±30%	±500ppm/°C
PVZ3R205E01	0.1W(50°C)	Reflow/Soldering Iron	1(230°±10°)	2M ohm ±30%	±500ppm/°C


The blank column is filled with the code of individual specification A01 (standard type) and C01 (high-heat resistance type).

## **■** Construction

#### PVZ3A




## ■ Standard Land Pattern




(n mm) Tolerance : ±0.1)

## **■** Construction




## ■ Standard Land Pattern




in mm

## **■** Construction



## ■ Standard Land Pattern



(n mm) Tolerance : ±0.1)

#### ■ Characteristics

- Characteristics		
Humidity Exposure	Res. Change : +10, -2%	
High Temperature	Res. Change : R≦100kohm···+2, -10%	
Exposure	100kohm <r···+2, -15%<="" td=""></r···+2,>	
Humidity Load Life	Res. Change : ±10%	
Load Life	Res. Change : R≦100kohm···+2, -10%	
Load Life	100kohm <r···+2, -15%<="" td=""></r···+2,>	
Temperature Cycle	Res. Change : ±5%	
Temperature Coefficient	1500mm/°C	
of Resistance	±500ppm/°C	
Rotational Life	Res. Change : ±10% (10 cycles)	

## **PVS3 Series**

#### ■ Features

- 1. Funnel shaped slot allows for in-process automatic adjustment and it provides superior adjustability.
- 2. Easy insertion and operation of adjustment screwdriver
- 3. Low profile of 1.5mm height with stopper
- 4. Plated termination achieves high resistance to solder leaching.
- 5. Screwdrivers for adjustment are available on the market.

## ■ Applications

1. Camcorders


2. Video disk players


3. TFT-LCD TV sets

4. Headphone stereos

5. Cordless telephones


6. Micro-motors






Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVS3A101A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	100ohm ±25%	±250ppm/°C
PVS3A201A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	200ohm ±25%	±250ppm/°C
PVS3A301A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	300ohm ±25%	±250ppm/°C
PVS3A501A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	500ohm ±25%	±250ppm/°C
PVS3A102A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	1k ohm ±25%	±250ppm/°C
PVS3A202A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	2k ohm ±25%	±250ppm/°C
PVS3A302A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	3k ohm ±25%	±250ppm/°C
PVS3A502A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	5k ohm ±25%	±250ppm/°C
PVS3A103A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	10k ohm ±25%	±250ppm/°C
PVS3A203A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	20k ohm ±25%	±250ppm/°C
PVS3A303A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	30k ohm ±25%	±250ppm/°C
PVS3A503A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	50k ohm ±25%	±250ppm/°C
PVS3A104A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	100k ohm ±25%	±250ppm/°C
PVS3A204A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	200k ohm ±25%	±250ppm/°C
PVS3A304A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	300k ohm ±25%	±250ppm/°C
PVS3A504A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	500k ohm ±25%	±250ppm/°C
PVS3A105A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	1M ohm ±25%	±250ppm/°C
PVS3A205A01	0.1W(70°C)	Reflow/Soldering Iron	1(270°±10°)	2M ohm ±25%	±250ppm/°C

## **■** Construction



## ■ Standard Land Pattern



Continued on the following page.







 $\begin{tabular}{|c|c|c|c|}\hline \end{tabular}$  Continued from the preceding page.

## ■ Characteristics

= Ondraotoristics		
Humidity Exposure	Res. Change : ±3%	
High Temperature	Dog Change : ±20/	
Exposure	Res. Change : ±3%	
Humidity Load Life	Res. Change : ±3%	
Load Life	Res. Change : ±3%	
Temperature Cycle	Res. Change : ±3%	
Temperature Coefficient	1.250nnm/°C	
of Resistance	±250ppm/°C	
Rotational Life	Res. Change : ±10% (10 cycles)	

## **PVA3 Series**

#### ■ Features

- 1. Funnel shaped slot allows for in-process automatic adjustment and it provides superior adjustability.
- 2. Easy insertion and operation of adjustment screwdriver
- 3. Plated termination achieves high resistance to solder leaching.
- 4. Screwdrivers for adjustment are available on the market.
- 5. Recommended for both reflow and flow soldering method. (Need cleaning for flow soldering method)

## ■ Applications


1. Camcorders

2. Video disk players

3. TFT-LCD TV sets 5. Cordless telephones 4. Headphone stereos


6. Micro-motors

7. Optical cameras




Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVA3A101A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	100ohm ±25%	±250ppm/°C
PVA3A201A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	200ohm ±25%	±250ppm/°C
PVA3A301A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	300ohm ±25%	±250ppm/°C
PVA3A501A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	500ohm ±25%	±250ppm/°C
PVA3A102A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	1k ohm ±25%	±250ppm/°C
PVA3A202A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	2k ohm ±25%	±250ppm/°C
PVA3A302A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	3k ohm ±25%	±250ppm/°C
PVA3A502A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	5k ohm ±25%	±250ppm/°C
PVA3A103A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	10k ohm ±25%	±250ppm/°C
PVA3A203A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	20k ohm ±25%	±250ppm/°C
PVA3A303A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	30k ohm ±25%	±250ppm/°C
PVA3A503A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	50k ohm ±25%	±250ppm/°C
PVA3A104A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	100k ohm ±25%	±250ppm/°C
PVA3A204A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	200k ohm ±25%	±250ppm/°C
PVA3A304A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	300k ohm ±25%	±250ppm/°C
PVA3A504A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	500k ohm ±25%	±250ppm/°C
PVA3A105A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	1M ohm ±25%	±250ppm/°C
PVA3A205A01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(270°±10°)	2M ohm ±25%	±250ppm/°C

#### ■ Construction



#### ■ Standard Land Pattern



(in mm) Tolerance : ±0.1)

Continued on the following page.







 $\begin{tabular}{|c|c|c|c|}\hline \end{tabular}$  Continued from the preceding page.

## ■ Characteristics

Humidity Exposure	Res. Change : ±3%	
High Temperature	Pos Change: ±30/	
Exposure	Res. Change : ±3%	
Humidity Load Life	Res. Change : ±3%	
Load Life	Res. Change : ±3%	
Temperature Cycle	Res. Change : ±3%	
Temperature Coefficient	10500000000	
of Resistance	±250ppm/°C	
Rotational Life	Res. Change : ±10% (10 cycles)	

## PVZ3/PVS3/PVA3 Series Notice

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40 deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- 6. If you use the trimmer potentiometer in an environment other than listed below, please consult with a Murata factory representative prior

The trimmer potentiometer should not be used under

#### ■ Notice (Rating)

- 1. When using with partial load (rheostat), minimize the power depending on the resistance value.
- 2. The maximum input voltage to a trimmer potentiometer should not exceed (P.R)^1/2 or the maximum operating voltage, whichever is smaller.
- 3. The maximum input current to a trimmer potentiometer should not exceed (P/R)^1/2 or the allowable wiper current, whichever is smaller.
- 4. If the trimmer potentiometer is used in DC and high humidity conditions, please connect wiper (#2) for plus and resistive element (#1 or #3) for minus. (PVZ3 Series only)

the following environmental conditions:

- (1) Corrosive gaseous atmosphere (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid

(Ex. Oil, Medical liquid, Organic solvent, etc.)

- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above

#### ■ Notice (Soldering and Mounting)

- 1. Soldering
- (1) Standard soldering condition
  - (a) Reflow soldering: Refer to the standard temperature profile.
  - (b) Soldering iron:
  - \*PVZ3A\_A01 series
    - >Temperature of tip 260 deg. C max.
  - >Soldering time 3 sec. max. >Diameter 2mm max. >Wattage of iron 30W max.
  - \*PVZ3A\_C01, PVZ3K\_E01, PVZ3R\_E01 series \*PVS3, PVA3 series
    - >Temperature of tip 360 deg. C max.
    - >Soldering time 3 sec. max. >Diameter 2mm max. >Wattage of iron 30W max.

Before using other soldering conditions than those listed above, please consult with Murata factory representative prior to using. If the soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the trimmer potentiometer may deviate from the specified characteristics.

(2) Flow soldering is available for PVA3 series. For PVZ3 and PVS3, do not use flow soldering method (dipping).

- If you use the flow soldering method, the trimmer potentiometer may not function.
- (3) The soldering iron should not come in contact with the case of the trimmer potentiometer. If such contact does occur, the trimmer potentiometer may be damaged.
- (4) Apply the appropriate amount of solder paste. The thickness of solder paste should be printed from 150 micro m to 200 micro m (PVZ3 series should be printed from 100 micro m to 150 micro m) and the dimension of land pattern used should be Murata's standard land pattern at reflow soldering. Insufficient amounts of solder can lead to insufficient soldering strength on PCB. Excessive amounts of solder may cause bridging between the terminals.

#### 2. Mounting

- (1) Use our standard land dimension. Excessive land area causes displacement due to the effect of the surface tension of the solder. Insufficient land area leads to insufficient soldering strength of the chip.
- (2) Do not apply excessive force (preferably 4.9N (Ref.; 500gf) max.), when the trimmer potentiometer is mounted to the PCB.
- (3) Do not warp and/or bend PC board to prevent

Continued on the following page.





## PVZ3/PVS3/PVA3 Series Notice

Continued from the preceding page.


trimmer potentiometer from breakage.

- (4) In chip placers, the recommended size of the cylindrical pick-up nozzle should be outer dimension 2.5-2.8mm dia, and inner dimension 2mm dia.
- 3. Cleaning
  - (1) In case there is flux on the resistive element,

#### **■** Flow Soldering Standard Profile

**PVA3 Series Only** 

For flow soldering




- clean sufficiently with cleaning solvents and completely remove all residual flux.
- (2) Isopropyl-alcohol and Ethyl-alcohol are applicable solvents for cleaning. If you use any other types of solvents, please evaluate performance by your product.


## ■ Reflow Soldering Standard Profile

PVA3/PVS3/PVZ3\_A01 Series

For reflow soldering



#### PVZ3\_C01/E01 Series



#### ■ Notice (Handling)

- 1. Use suitable screwdrivers that fit comfortably in driver slot. We recommend the screwdrivers below.
  - \* Recommended screwdriver for manual adjustment <PVZ3/PVA3 series>

VESSEL MFG.: NO.9000+1.7x30 (Murata P/N: KMDR080) <PVZ3/PVA3/PVS3 series> TORAY MFG.: SA-2225 (Murata P/N: KMDR070)

\* Recommended screwdriver for automatic adjustment

TORAY MFG.: JB-2225 (Murata P/N: KMBT070)

2. Don't apply more than 4.9N (Ref.; 500gf) of twist

- and stress after mounting onto PCB to prevent contact intermittence. If excessive force is applied, the trimmer potentiometer may not function.
- 3. For PVZ3 and PVA3 series, please use within the effective rotational angle. The potentiometer does not have a mechanical stop for over rotation. In cases out of effective rotational angle, the trimmer potentiometer may not function.
- 4. When using a lock paint to fix slot position, please consult with a Murata factory representative prior to using to prevent corrosion and contact intermittence.



## PVZ3/PVS3/PVA3 Series Notice

## ■ Notice (Other)

- Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- 2. Murata cannot guarantee trimmer potentiometer integrity when used under conditions other than those specified in this document.



## **Trimmer Potentiometers**




## SMD Sealed Type 2mm Size PVF2 Series

#### ■ Features

- 1. Ultra-compact size of "2x2x2.3mm"
- 2. A sealed structure prevents liquids (water, cleaning liquid, sweat, etc.) from entering.
- 3. As for the resistance change characteristics, both a log curve type and linear type are available.
- 4. A rotation service life of 100 cycles is quaranteed.
- 5. Can be automatically mounted using a chip placer, as well as mounted using reflow soldering.

#### ■ Applications

- 1. Hearing aids
- 2. Ultra-compact sensors or the like
- 3. Applications requiring ultra-compactness, and a sealed structure




Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVF2A501A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	500ohm ±30%	±500ppm/°C
PVF2A102A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	1k ohm ±30%	±500ppm/°C
PVF2A202A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	2k ohm ±30%	±500ppm/°C
PVF2A502A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	5k ohm ±30%	±500ppm/°C
PVF2A103A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	10k ohm ±30%	±500ppm/°C
PVF2A203A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	20k ohm ±30%	±500ppm/°C
PVF2A503A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	50k ohm ±30%	±500ppm/°C
PVF2A104A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	100k ohm ±30%	±500ppm/°C
PVF2A204A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	200k ohm ±30%	±500ppm/°C
PVF2A504A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	500k ohm ±30%	±500ppm/°C
PVF2A105A11	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	1M ohm ±30%	±500ppm/°C
PVF2A102A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	1k ohm ±30%	±500ppm/°C
PVF2A202A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	2k ohm ±30%	±500ppm/°C
PVF2A502A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	5k ohm ±30%	±500ppm/°C
PVF2A103A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	10k ohm ±30%	±500ppm/°C
PVF2A203A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	20k ohm ±30%	±500ppm/°C
PVF2A503A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	50k ohm ±30%	±500ppm/°C
PVF2A104A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	100k ohm ±30%	±500ppm/°C
PVF2A204A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	200k ohm ±30%	±500ppm/°C
PVF2A504A41	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	500k ohm ±30%	±500ppm/°C
PVF2A102A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	1k ohm ±30%	±500ppm/°C
PVF2A202A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	2k ohm ±30%	±500ppm/°C
PVF2A502A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	5k ohm ±30%	±500ppm/°C
PVF2A103A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	10k ohm ±30%	±500ppm/°C
PVF2A203A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	20k ohm ±30%	±500ppm/°C
PVF2A503A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	50k ohm ±30%	±500ppm/°C
PVF2A104A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	100k ohm ±30%	±500ppm/°C
PVF2A204A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	200k ohm ±30%	±500ppm/°C
PVF2A504A51	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	500k ohm ±30%	±500ppm/°C
PVF2A102A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	1k ohm ±30%	±500ppm/°C
PVF2A202A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	2k ohm ±30%	±500ppm/°C
PVF2A502A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	5k ohm ±30%	±500ppm/°C
PVF2A103A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	10k ohm ±30%	±500ppm/°C
PVF2A203A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	20k ohm ±30%	±500ppm/°C

Continued from the preceding page.


Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVF2A503A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	50k ohm ±30%	±500ppm/°C
PVF2A104A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	100k ohm ±30%	±500ppm/°C
PVF2A204A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	200k ohm ±30%	±500ppm/°C
PVF2A504A81	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	500k ohm ±30%	±500ppm/°C
PVF2A102A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	1k ohm ±30%	±500ppm/°C
PVF2A202A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	2k ohm ±30%	±500ppm/°C
PVF2A502A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	5k ohm ±30%	±500ppm/°C
PVF2A103A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	10k ohm ±30%	±500ppm/°C
PVF2A203A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	20k ohm ±30%	±500ppm/°C
PVF2A503A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	50k ohm ±30%	±500ppm/°C
PVF2A104A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	100k ohm ±30%	±500ppm/°C
PVF2A204A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	200k ohm ±30%	±500ppm/°C
PVF2A504A91	0.001W(50°C)	Reflow/Soldering Iron	1(210°±10°)	500k ohm ±30%	±500ppm/°C

The last three digits express the individual specification codes for Resistant Curve. Please refer to Resistance Curve on the following page for characteristics.

## **■** Construction



## ■ Standard Land Pattern




(n mm) Tolerance : ±0.10

## ■ Characteristics


Temperature Cycle	ΔTR ±5%
Humidity	ΔTR ±15, -2%
Vibration	ΔV.S.S. ±5%
Shock (100G)	ΔV.S.S. ±5%
Temperature Load Life	ΔTR +2, -10%
Low Temperature Exposure	ΔTR ±3%
Rotational Life (100 cycles)	ΔTR ±10%

 $\Delta TR \colon Total \; Resistance \; Change \\ \Delta V.S.S. \; \colon Voltage \; Setting \; Stability$ 

## **■** Resistance Curve



## Linear-log. log. curve (Measured from terminal 2 to 3)



## **PVF2 Series Notice**

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40 deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- If you use the trimmer potentiometer in an environment other than listed below, please consult with a Murata factory representative prior to using.

The trimmer potentiometer should not be used under

#### ■ Notice (Rating)

- 1. When using with partial load (rheostat), minimize the power depending on the resistance value.
- 2. The maximum input voltage to a trimmer potentiometer should not exceed (P.R)^1/2 or the maximum operating voltage, whichever is smaller.
- The maximum input current to a trimmer potentiometer should not exceed (P/R)^1/2 or the allowable wiper current, whichever is smaller.
- 4. If the trimmer potentiometer is used in DC and high humidity conditions, please connect wiper (#2) for plus and resistive element (#1 or #3) for minus.

the following environmental conditions:

- Corrosive gaseous atmosphere
   (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid

(Ex. Oil, Medical liquid, Organic solvent, etc.)

- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above

#### ■ Notice (Soldering and Mounting)

- 1. Soldering
- (1) Standard solder iron condition
  - (a) Reflow soldering:

Refer to the standard temperature profile.

- (b) Sodering iron:
  - >Temperature of tip 260 deg. C max.
- >Soldering time 3 sec. max.
  >Diameter 1mm dia. max.
  >Wattage of iron 30W max.

Before using other soldering conditions than those listed above, please consult with a Murata factory representative prior to using. If the soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the trimmer potentiometer may deviate from the specified characteristics.

- (2) Use our standard land dimension. Excessive land area causes displacement due to the effect of the surface tension of the solder. Insufficient land area leads to insufficient soldering strength of the chip.
- (3) The soldering iron should not come in contact with the case of the trimmer potentiometer. If such contact does occur, the trimmer potentiometer may be damaged.
- (4) Cannot be soldered using the flow soldering method. If you use the flow soldering method,

the trimmer potentiometer may not function.

#### 2. Mounting

- (1) Use our standard land dimension. Excessive land area causes displacement due to the effect of the surface tension of the solder. Insufficient land area leads to insufficient soldering strength of the chip.
- (2) Do not apply excessive force (preferably 4.9N (Ref.; 500gf) max.), when the trimmer potentiometer is mounted to the PCB.
- (3) Do not warp and/or bend PC board to prevent trimmer potentiometer from breakage.
- 3. Cleaning
- (1) Isopropyl-alcohol and Ethyl-alcohol are applicable solvents for cleaning. If you use any other types of solvents, please consult with a Murata factory representative prior to using.
- (2) The total cleaning time by cold dipping, vapor and ultrasonic washing (conditions as below) method should be less than 3 minutes.
- (3) For ultra-sonic cleaning, the available condition is as follows.
  - >Power: 600W (67 liter) max.
  - >Frequency: 28kHz
  - >Temperature: Ambient temperature

Due to the ultra-sonic cleaning equipment's peculiar self-resonance point and that the

## **PVF2 Series Notice**




Continued from the preceding page.

cleaning compatibility usually depends on the jig construction and/or the cleaning condition such as the depth of immersion, please check the cleaning equipment to determine the suitable

#### ■ Reflow Soldering Standard Profile





## ■ Notice (Handling)

- 1. Use suitable screwdrivers that fit comfortably in driver slot.
- 2. Don't apply more than 4.9N (Ref.; 500gf) of twist and stress after mounting onto PCB to prevent contact intermittence. If excessive force is applied, the trimmer potentiometer may not function.
- 3. The rotational torque at the position of the adjustment range should not exceed the stop strength.
- 4. When using a lock paint to fix slot position, please use adhesive resin without chlorine or sulfur (Three-bond "1401 series").

#### ■ Notice (Other)

- 1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- 2. Murata cannot guarantee trimmer potentiometer integrity when used under conditions other than those specified in this document.

conditions.

If the trimmer potentiometer is cleaned by other conditions, the trimmer potentiometer may be damaged.



## **Trimmer Potentiometers**



## SMD Sealed Type 3mm Size PVG3 Series

#### ■ Features

- 1. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 2. Driver plate with cross-slot is suitable for automatic adjustment.
- 3. Rotor with large diameter and deep groove improves driver insertion.
- 4. J-hook, Gull wing terminal shape. Rear and through hole terminal shape.
- 5. 3mm and 4mm land pattern can be used without change. (Gull wing is suitable for 4mm size land pattern.)
- 6. Heat resistance performance enables high temperature peak re-flow soldering.
- 7. To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.

#### ■ Applications


1. Small sensors 2. Optical Transceiver Module

3. Copier 4. Printer

5. Compact Power Supply 6. Wireless Radio module




PVG3A






PVG3G





PVG3K



Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVG3□100C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	10ohm ±20%	±150ppm/°C
PVG3□200C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10)	20ohm ±20%	±150ppm/°C
PVG3□500C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	50ohm ±20%	±150ppm/°C
PVG3□101C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	100ohm ±20%	±150ppm/°C
PVG3□201C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	200ohm ±20%	±150ppm/°C
PVG3□501C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	500ohm ±20%	±150ppm/°C
PVG3□102C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	1k ohm ±20%	±150ppm/°C
PVG3□202C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	2k ohm ±20%	±150ppm/°C
PVG3□502C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	5k ohm ±20%	±150ppm/°C
PVG3□103C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	10k ohm ±20%	±150ppm/°C
PVG3□203C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	20k ohm ±20%	±150ppm/°C
PVG3□503C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	50k ohm ±20%	±150ppm/°C


Continued from the preceding page.


Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVG3□104C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	100k ohm ±20%	±150ppm/°C
PVG3□204C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	200k ohm ±20%	±150ppm/°C
PVG3□504C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	500k ohm ±20%	±150ppm/°C
PVG3□105C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	1M ohm ±20%	±150ppm/°C
PVG3□205C01	0.25W(70°C)	Reflow/Soldering Iron	1(210°±10°)	2M ohm ±20%	±150ppm/°C

The blank column is filled with the code of adjustment direction and lead type A (top, J-hook), G (top, gull-wing), or K (rear).


Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PVG3□100A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	10 ohm±20%	±250	
PVG3□200A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	20 ohm±20%	±250	
PVG3□500A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	50 ohm±20%	±250	
PVG3□101A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	100 ohm±20%	±250	
PVG3□201A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	200 ohm±20%	±100	
PVG3□501A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	500 ohm±20%	±100	
PVG3□102A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	1k ohm±20%	±100	
PVG3□202A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	2k ohm±20%	±100	Non Standard
PVG3□502A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	5k ohm±20%	±100	Product
PVG3□103A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	10k ohm±20%	±100	(Cd included)
PVG3□203A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	20k ohm±20%	±100	
PVG3□503A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	50k ohm±20%	±100	
PVG3□104A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	100k ohm±20%	±100	
PVG3□204A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	200k ohm±20%	±100	
PVG3□504A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	500k ohm±20%	±100	
PVG3□105A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	1M ohm±20%	±100	
PVG3□205A01	0.25(70°C)	Reflow/Soldering Iron	1(210°±10°)	2M ohm±20%	±100	


## ■ Construction





## ■ Standard Land Pattern






Continued on the following page.








## ■ Standard Land Pattern

## PVG3K



(n mm) Tolerance : ±0.1)

## ■ Characteristics

- Characteristics	
Tomporatura Cuala	$\Delta TR$ ±2%
Temperature Cycle	ΔV.S.S ±1%
	ΔTR ±2%
Humidity	ΔV.S.S ±1%
	IR 10Mohm min.
Vibration (20C)	$\Delta TR$ ±1%
Vibration (20G)	ΔV.S.S ±1%
Shock (100G)	$\Delta TR$ ±1%
SHOCK (100G)	ΔV.S.S ±1%
Temperature Load Life	$\Delta TR$ ±3% or 30hm max., whichever is greater
remperature Load Life	ΔV.S.S ±1%
Low Tomporature Evposure	$\Delta TR$ ±2%
Low Temperature Exposure	ΔV.S.S ±2%
High Temperature Exposure	$\Delta$ TR ±3%
riigii reiiiperature Exposure	ΔV.S.S ±2%
Rotational Life (50cycles)	$\Delta TR$ R $\leq$ 100ohm $\cdots$ ±3% or 2ohm max., whichever is greater
Rotational Life (30Cycles)	R>100kohm ··· +0/-10%

 $\begin{array}{lll} \Delta TR & : Total \ Resistance \ Change \\ \Delta V.S.S & : Voltage \ Setting \ Stability \\ IR & : Insulation \ Resistance \\ R & : Standard \ Total \ Resistance \\ \end{array}$ 

## **PVG3 Series Notice**

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40 deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- 6. If you use the trimmer potentiometer in an environment other than listed below, please consult with a Murata factory representative prior

The trimmer potentiometer should not be used under

#### ■ Notice (Rating)

- 1. When using with partial load (rheostat), minimize the power depending on the resistance value.
- 2. The maximum input voltage to a trimmer potentiometer should not exceed (P.R)^1/2 or the maximum operating voltage, whichever is smaller.
- 3. The maximum input current to a trimmer potentiometer should not exceed (P/R)^1/2 or the allowable wiper current, whichever is smaller.

the following environmental conditions:

- (1) Corrosive gaseous atmosphere (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid

(Ex. Oil, Medical liquid, Organic solvent, etc.)

- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above

#### ■ Notice (Soldering and Mounting)

- 1. Soldering
- (1) Standard soldering condition
  - (a) Reflow soldering:
    - Refer to the standard temperature profile.
  - (b) Soldering iron


Temperature of tip: 400 deg. C max. Soldering time : 3 sec. max. Diameter of tip : 2mm dia. max. : 30W max. Wattage of iron

Before using other soldering conditions more than those listed above, please consult with a Murata factory representative prior to using. If the soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the trimmer potentiometer may deviate from the specified characteristics.

- (2) Cannot be soldered using the flow soldering method. If you use the flow soldering method, the trimmer potentiometer may not function.
- (3) The soldering iron should not come in contact with the case of the trimmer potentiometer. If such contact does occur, the trimmer potentiometer may be damaged.
- (4) Apply the appropriate amount of solder paste. If the amount of solder paste applied to the land is insufficient, the required adhesive strength cannot be obtained. If an excessive amount of solder paste is applied, solder bridging or flux overflow to the resistive element surface can occur.

#### 2. Mounting

- (1) Use our standard land dimension. Excessive land area causes displacement due to the effect of the surface tension of the solder. Insufficient land area leads to insufficient soldering strength of the chip.
- (2) Do not apply excessive force (preferably 4.9N (Ref.; 500gf) max.), when the trimmer potentiometer is mounted to the PCB.
- (3) Do not warp and/or bend PC board to prevent trimmer potentiometer from breakage.
- (4) In chip placers, the size of the cylindrical pick-up nozzle should be outer dimension 2.5-3.0mm dia, and inner dimension 2.0-2.5mm dia..
- 3. Cleaning
- (1) Isopropyl-alcohol and Ethyl-alcohol are applicable solvents for cleaning. If you use any other types of solvents, please consult with a Murata factory representative prior to using.
- (2) Less than 3 minutes of total cleaning time by dipping, vapor and ultra-sonic method.
- (3) In case of ultra-sonic cleaning method, cleaning conditions should be as follows.
  - (a) Power: 600W (67lit.) max.
  - (b) Frequency: 28kHz
  - (c) Temperature: Ambient temperature Due to ultra-sonic cleaning equipment's peculiar self-resonance point and that cleaning compatibility usually depends on the jig






## **PVG3 Series Notice**



Continued from the preceding page.

construction and/or the cleaning condition such as the depth of immersion, please check the cleaning equipment to determine the suitable

## ■ Reflow Soldering Standard Profile



conditions. If the condition is not suitable, the trimmer potentiometer may deviate from specified characteristics.

## ■ Notice (Handling)

- 1. Use suitable screwdrivers that fit comfortably in driver slot.
  - \* Recommended screwdriver for manual adjustment TORAY INDUSTRIES, INC.: SA-2225 (Murata P/N: KMDR070)
  - \* Recommended screwdriver bit for automatic adjustment

TORAY INDUSTRIES, INC.: JB-2225 (Mutata P/N: KMBT070)

We can supply the screwdrivers above. If you place order, please specify the Murata P/N.

#### ■ Notice (Other)

- 1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- 2. Murata cannot guarantee trimmer potentiometer integrity when used under conditions other than those specified in this document.

- 2. Don't apply more than 9.8N (Ref.; 1kgf) of twist and stress after mounting onto PCB to prevent contact intermittence.
- 3. When adjusting with an adjustment tool, the applied force to the adjustment screw should not exceed 4.9N (Ref.; 500gf). If excessive force is applied, the trimmer potentiometer may not function due to damage.
- 4. When using a lock paint to fix slot position, please use adhesive resin without chlorine or sulfur (Three-bond "1401 series").



## **Trimmer Potentiometers**



## SMD Sealed Type 4mm Size PVM4 Series

#### ■ Features

- 1. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 2. Available for flow and reflow soldering method while maintaining unique sealed construction.
- 3. Simple construction by 3-piece parts achieves high reliability.
- 4. Large diameter slot of rotor improves driver insertion.
- 5. Available for cleaning after soldering
- 6. High grade version is available (PVM4AxxxD01).
- 7. To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.

## ■ Applications

1. Security

2. OA, FA equipments


3. Measuring equipments

4. Professional cameras

5. Encorders

6. Sensors





Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVM4A101C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	100ohm ±25%	±250ppm/°C
PVM4A201C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	200ohm ±25%	±250ppm/°C
PVM4A301C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	300ohm ±25%	±250ppm/°C
PVM4A501C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	500ohm ±25%	±250ppm/°C
PVM4A102C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	1k ohm ±25%	±250ppm/°C
PVM4A202C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	2k ohm ±25%	±250ppm/°C
PVM4A302C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	3k ohm ±25%	±250ppm/°C
PVM4A502C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	5k ohm ±25%	±250ppm/°C
PVM4A103C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	10k ohm ±25%	±250ppm/°C
PVM4A203C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	20k ohm ±25%	±250ppm/°C
PVM4A303C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	30k ohm ±25%	±250ppm/°C
PVM4A503C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	50k ohm ±25%	±250ppm/°C
PVM4A104C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	100k ohm ±25%	±250ppm/°C
PVM4A204C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	200k ohm ±25%	±250ppm/°C
PVM4A304C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	300k ohm ±25%	±250ppm/°C
PVM4A504C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	500k ohm ±25%	±250ppm/°C
PVM4A105C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	1M ohm ±25%	±250ppm/°C
PVM4A205C01	0.1W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	2M ohm ±25%	±250ppm/°C
PVM4A101D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	100ohm ±20%	±100ppm/°C
PVM4A201D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	200ohm ±20%	±100ppm/°C
PVM4A301D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	300ohm ±20%	±100ppm/°C
PVM4A501D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	500ohm ±20%	±100ppm/°C
PVM4A102D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	1k ohm ±20%	±200ppm/°C
PVM4A202D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	2k ohm ±20%	±200ppm/°C
PVM4A302D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	3k ohm ±20%	±200ppm/°C
PVM4A502D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	5k ohm ±20%	±200ppm/°C
PVM4A103D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	10k ohm ±20%	±150ppm/°C
PVM4A203D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	20k ohm ±20%	±150ppm/°C
PVM4A303D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	30k ohm ±20%	±150ppm/°C
PVM4A503D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	50k ohm ±20%	±150ppm/°C

Continued from the preceding page.

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVM4A104D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	100k ohm ±20%	±150ppm/°C
PVM4A204D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	200k ohm ±20%	±150ppm/°C
PVM4A304D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	300k ohm ±20%	±150ppm/°C
PVM4A504D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	500k ohm ±20%	±150ppm/°C
PVM4A105D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	1M ohm ±20%	±150ppm/°C
PVM4A205D01	0.25W(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	2M ohm ±20%	±150ppm/°C

The last three digits express the individual specification codes. C01 for standard type and D01 for high-liability type.

Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PVM4A101A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	100 ohm±25%	±250	Non Standard
PVM4A201A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	200 ohm±25%	±250	Non Standard
PVM4A301A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	300 ohm±25%	±250	Product
PVM4A501A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	500 ohm±25%	±250	(Cd Free)
PVM4A102A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	1k ohm±25%	±250	
PVM4A202A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	2k ohm±25%	±250	
PVM4A302A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	3k ohm±25%	±250	
PVM4A502A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	5k ohm±25%	±250	
PVM4A103A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	10k ohm±25%	±250	
PVM4A203A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	20k ohm±25%	±250	Non Standard
PVM4A303A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	30k ohm±25%	±250	Product
PVM4A503A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	50k ohm±25%	±250	(Cd included)
PVM4A104A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	100k ohm±25%	±250	(Ca iriciadea)
PVM4A204A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	200k ohm±25%	±250	
PVM4A304A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	300k ohm±25%	±250	
PVM4A504A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	500k ohm±25%	±250	
PVM4A105A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	1M ohm±25%	±250	
PVM4A205A01	0.1(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	2M ohm±25%	±250	
PVM4A101B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	100 ohm±20%	±150	Non Ctondord
PVM4A201B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	200 ohm±20%	±100	Non Standard
PVM4A301B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	300 ohm±20%	±100	Product
PVM4A501B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	500 ohm±20%	±100	(Cd Free)
PVM4A102B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	1k ohm±20%	±100	
PVM4A202B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	2k ohm±20%	±100	
PVM4A302B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	3k ohm±20%	±100	
PVM4A502B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	5k ohm±20%	±100	
PVM4A103B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	10k ohm±20%	±100	
PVM4A203B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	20k ohm±20%	±100	Non Standard
PVM4A303B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	30k ohm±20%	±100	Product
PVM4A503B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	50k ohm±20%	±100	(Cd included)
PVM4A104B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	100k ohm±20%	±150	(Cu included)
PVM4A204B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	200k ohm±20%	±150	
PVM4A304B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	300k ohm±20%	±150	
PVM4A504B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	500k ohm±20%	±150	
PVM4A105B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	1M ohm±20%	±150	
PVM4A205B01	0.25(70°C)	Flow/Reflow/Soldering Iron	1(240°±10°)	2M ohm±20%	±150	


Continued on the following page.






Continued from the preceding page.

## **■** Construction



## ■ Standard Land Pattern



(in mm) Tolerance : ±0.1)

## ■ Characteristics

Item	PVM4A□□□C01	PVM4A□□□D01
Humidity Exposure	Res. Change : ±3%	Res. Change : ±2%
High Temperature Exposure	Res. Change : ±3%	Res. Change : ±2%
Humidity Load Life	Res. Change : ±3%	Res. Change : ±3%
Temperature Load Life	Res. Change : ±3%	Res. Change : ±3%
Temperature Cycle	Res. Change : ±3%	Res. Change : ±2%
Rotational Life	Res. Change: ±10% (20 cycles)	Res. Change : ±5% (100 cycles)



## **PVM4 Series Notice**

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40 deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- If you use the trimmer potentiometer in an environment other than listed below, please consult with a Murata factory representative prior to using.

The trimmer potentiometer should not be used under

#### ■ Notice (Rating)

- 1. When using with partial load (rheostat), minimize the power depending on the resistance value.
- The maximum input voltage to a trimmer potentiometer should not exceed (P.R)^1/2 or the maximum operating voltage, whichever is smaller.
- The maximum input current to a trimmer potentiometer should not exceed (P/R)^1/2 or the allowable wiper current, whichever is smaller.

the following environmental conditions:

- Corrosive gaseous atmosphere
   (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid
  - (Ex. Oil, Medical liquid, Organic solvent, etc.)
- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above

## ■ Notice (Soldering and Mounting)

- 1. Soldering
- (1) Can be soldered by reflow soldering method, flow soldering method, and soldering iron. (In case of flow soldering, it is necessary to clean after soldering.)
- (2) Use our standard land dimension. Excessive land area causes displacement due to the effect of the surface tension of the solder. Insufficient land area leads to insufficient soldering strength of the chip.
- (3) Standard soldering condition
  - (a) Reflow and flow soldering:

Refer to the standard temperature profile.

- (b) Soldering iron:
  - >Temperature of tip 400 deg.C max.
  - >Soldering time 5 sec. max.
  - >Diameter 2mm dia. max.
  - >Wattage of iron 40W max.

Before using other soldering conditions than those listed above, please consult with a Murata factory representative prior to using. If the soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the trimmer potentiometer may deviate from the specified characteristics.

(4) Apply the appropriate amount of solder paste. The thickness of solder paste should be printed from 100 micro m to 150 micro m and the dimension of land pattern used should be Murata's standard land pattern at reflow soldering.

- Insufficient amounts of solder can lead to insufficient soldering strength on PCB. Excessive amounts of solder may cause bridging between the terminals.
- (5) The soldering iron should not come in contact with the case of the trimmer potentiometer. If such contact does occur, the trimmer potentiometer may be damaged.
- 2. Mounting
- (1) Do not apply excessive force (preferably 9.8N (Ref.; 1kgf) max.), when the trimmer potentiometer is mounted to the PCB.
- (2) Do not warp and/or bend PC board to prevent trimmer potentiometer from breakage.
- (3) In chip placers, the recommended size of the cylindrical pick-up nozzle should be outer dimension 4.0mm dia. and inner dimension 2.0mm dia.
- 3. Cleaning
- Isopropyl alcohol and Ethyl alcohol are available materials for cleaning.
   For other materials, please consult with a Murata factory representative prior to using.
- (2) The following are the recommended cleaning conditions for the potentiometer. If this part is cleanied under any other conditions than these listed below, the sealing construction may be damaged.

(Condition)

Type1: Cold dipping/Max. 5 min.

## **PVM4 Series Notice**



Continued from the preceding page.

Type2: Hot dipping/Max. 2 min.

Type3: Ultra-sonic washing/Max. 1 min.

(20W/litre or below)

Type4: Hot dipping/Max. 1 min.+

Ultra-sonic washing/Max.1 min.

(20W/litre or below)


Type5: Hot dipping/Max. 1 min.+

Ultra-sonic washing/Max. 30 sec.+

(20W/litre or below)/(Preferably max. 30 sec.)

Vapor/Max.30 sec.

#### **■** Flow Soldering Standard Profile



## ■ Notice (Handling)

1. Use suitable screwdrivers that fit comfortably in driver slot. We recommend the screwdriver below.

\* Recommended screwdriver for manual adjustment VESSEL MFG.: NO. 9000-2.6x30

(Murata P/N: KMDR120)

We can supply the screwdrivers above.

If you place order, please specify the Murata P/N.

2. Don't apply more than 4.9N (Ref.; 500gf) of twist and stress after mounting onto PCB to prevent contact intermittence. If excessive force is


## ■ Notice (Other)

- 1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- 2. Murata cannot guarantee trimmer potentiometer integrity when used under conditions other than those specified in this document.

Due to ultra-sonic cleaning equipment's peculiar self-resonance point and that cleaning compatibility usually depends on the jig construction and/or the cleaning condition such as the depth of immersion, please check the cleaning equipment to determine the suitable conditions.

If the condition is not suitable, the trimmer potentiometer may deviate from specified characteristics.

#### ■ Reflow Soldering Standard Profile



- applied, the trimmer potentiometer may not function
- 3. Please use within the effective rotational angle. The potentiometer does not have a mechanical stop for over rotation. In cases out of effective rotational angle, the trimmer potentiometer may not function.
- 4. When using a lock paint to fix slot position, please use adhesive resin without chlorine or sulfur (Three-bond "1401 series").



## **Trimmer Potentiometers**



## SMD Sealed Type Multi-turns PVG5/PV01 Series

## **PVG5 Series**

#### ■ Features


- 1. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 2. Available with reflow soldering method
- 3. Available for ultrasonic cleaning after soldering
- 4. Clutch mechanism prevents excessive wiper rotation.
- 5. Both Top and side adjustment directions
- 6. Ultra smaller volume (1/5-1/2) than leaded multi-turn potentiometer.
- To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.

#### ■ Applications

- 1. Measuring instruments 2. OA equipment
- 3. Madical equipment 4. Power supply
- 5. Sensors
- 6. Base station for cellular phone










PVG5H




Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVG5□100C01	0.25W(70°C)	Reflow/Soldering Iron	11	10ohm ±10%	±150ppm/°C
PVG5□200C01	0.25W(70°C)	Reflow/Soldering Iron	11	20ohm ±10%	±150ppm/°C
PVG5□500C01	0.25W(70°C)	Reflow/Soldering Iron	11	50ohm ±10%	±150ppm/°C
PVG5□101C01	0.25W(70°C)	Reflow/Soldering Iron	11	100ohm ±10%	±150ppm/°C
PVG5□201C01	0.25W(70°C)	Reflow/Soldering Iron	11	200ohm ±10%	±150ppm/°C
PVG5□501C01	0.25W(70°C)	Reflow/Soldering Iron	11	500ohm ±10%	±150ppm/°C
PVG5□102C01	0.25W(70°C)	Reflow/Soldering Iron	11	1k ohm ±10%	±150ppm/°C
PVG5□202C01	0.25W(70°C)	Reflow/Soldering Iron	11	2k ohm ±10%	±150ppm/°C
PVG5□502C01	0.25W(70°C)	Reflow/Soldering Iron	11	5k ohm ±10%	±150ppm/°C
PVG5□103C01	0.25W(70°C)	Reflow/Soldering Iron	11	10k ohm ±10%	±150ppm/°C
PVG5□203C01	0.25W(70°C)	Reflow/Soldering Iron	11	20k ohm ±10%	±150ppm/°C
PVG5□503C01	0.25W(70°C)	Reflow/Soldering Iron	11	50k ohm ±10%	±150ppm/°C
PVG5□104C01	0.25W(70°C)	Reflow/Soldering Iron	11	100k ohm ±10%	±150ppm/°C
PVG5□204C01	0.25W(70°C)	Reflow/Soldering Iron	11	200k ohm ±10%	±150ppm/°C
PVG5□504C01	0.25W(70°C)	Reflow/Soldering Iron	11	500k ohm ±10%	±150ppm/°C
PVG5□105C01	0.25W(70°C)	Reflow/Soldering Iron	11	1M ohm ±10%	±150ppm/°C
PVG5□205C01	0.25W(70°C)	Reflow/Soldering Iron	11	2M ohm ±10%	±150ppm/°C


The blank column is filled with the code of adjustment direction A (top) or H (side).

Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PVG5□100A01	0.25(70°C)	Reflow/Soldering Iron	11	10 ohm±10%	±200	
PVG5□200A01	0.25(70°C)	Reflow/Soldering Iron	11	20 ohm±10%	±200	
PVG5□500A01	0.25(70°C)	Reflow/Soldering Iron	11	50 ohm±10%	±200	
PVG5□101A01	0.25(70°C)	Reflow/Soldering Iron	11	100 ohm±10%	±200	
PVG5□201A01	0.25(70°C)	Reflow/Soldering Iron	11	200 ohm±10%	±100	
PVG5□501A01	0.25(70°C)	Reflow/Soldering Iron	11	500 ohm±10%	±100	
PVG5□102A01	0.25(70°C)	Reflow/Soldering Iron	11	1k ohm±10%	±100	
PVG5□202A01	0.25(70°C)	Reflow/Soldering Iron	11	2k ohm±10%	±100	Non Standard
PVG5□502A01	0.25(70°C)	Reflow/Soldering Iron	11	5k ohm±10%	±100	Product
PVG5□103A01	0.25(70°C)	Reflow/Soldering Iron	11	10k ohm±10%	±100	(Cd included)
PVG5□203A01	0.25(70°C)	Reflow/Soldering Iron	11	20k ohm±10%	±100	
PVG5□503A01	0.25(70°C)	Reflow/Soldering Iron	11	50k ohm±10%	±100	
PVG5□104A01	0.25(70°C)	Reflow/Soldering Iron	11	100k ohm±10%	±100	
PVG5□204A01	0.25(70°C)	Reflow/Soldering Iron	11	200k ohm±10%	±100	
PVG5□504A01	0.25(70°C)	Reflow/Soldering Iron	11	500k ohm±10%	±100	
PVG5□105A01	0.25(70°C)	Reflow/Soldering Iron	11	1M ohm±10%	±100	
PVG5□205A01	0.25(70°C)	Reflow/Soldering Iron	11	2M ohm±10%	±100	


## **■** Construction



## ■ Standard Land Pattern



(n mm) Tolerance : ±0.1)



Continued on the following page.







Continued from the preceding page.

#### ■ Characteristics

- Characteristics		
Temperature Cycle	ΔTR	±2%
remperature cycle	ΔV.S.S.	±1%
Humidity	ΔTR	±2%
Trumuity	IR	10Mohm min.
Vibration	ΔTR	±1%
VIDIATION	ΔV.S.S.	±1%
Shock	ΔTR	±1%
SHOCK	ΔV.S.S.	±1%
	ΔTR	±3% or 3ohm max.,
Temperature Load Life		whichever is greater
	ΔV.S.S.	±1%
Low Tomporatura Evpacura	ΔTR	±1%
Low Temperature Exposure	ΔV.S.S.	±1%
High Tomporature Exposure	ΔTR	±2%
High Temperature Exposure	ΔV.S.S.	±1%
Rotational Life (100 cycles)	ΔTR	±3% or 3ohm max.,
Rotational Life (100 Cycles)		whichever is greater

 $\Delta \mathsf{TR}$ : Total Resistance Change  $\Delta V.S.S.$ : Voltage Setting Stability IR : Insulation Resistance

(n mm) Tolerance : ±0.3)


# **PV01 Series**


#### ■ Features


- 1. Small size (6.35x6.35x4.3mm)
- 2. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 3. Available with reflow soldering method
- 4. Available for ultrasonic cleaning after soldering
- 5. Clutch mechanism prevents excessive wiper rotation.
- 6. To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.

## ■ Applications

- 1. Measuring instruments 2. FAX
- 3. PPCs
- 4. Printers
- 5. Sensors

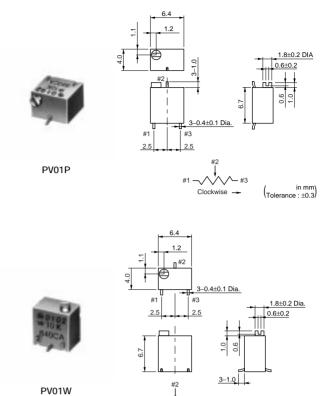





Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV01□100C01	0.25W(85°C)	Reflow/Soldering Iron	12	10ohm ±10%	±150ppm/°C
PV01□200C01	0.25W(85°C)	Reflow/Soldering Iron	12	20ohm ±10%	±150ppm/°C
PV01□500C01	0.25W(85°C)	Reflow/Soldering Iron	12	50ohm ±10%	±150ppm/°C
PV01□101C01	0.25W(85°C)	Reflow/Soldering Iron	12	100ohm ±10%	±150ppm/°C
PV01□201C01	0.25W(85°C)	Reflow/Soldering Iron	12	200ohm ±10%	±150ppm/°C
PV01□501C01	0.25W(85°C)	Reflow/Soldering Iron	12	500ohm ±10%	±150ppm/°C
PV01□102C01	0.25W(85°C)	Reflow/Soldering Iron	12	1k ohm ±10%	±150ppm/°C
PV01□202C01	0.25W(85°C)	Reflow/Soldering Iron	12	2k ohm ±10%	±150ppm/°C
PV01□502C01	0.25W(85°C)	Reflow/Soldering Iron	12	5k ohm ±10%	±150ppm/°C
PV01□103C01	0.25W(85°C)	Reflow/Soldering Iron	12	10k ohm ±10%	±150ppm/°C
PV01□203C01	0.25W(85°C)	Reflow/Soldering Iron	12	20k ohm ±10%	±150ppm/°C
PV01□253C01	0.25W(85°C)	Reflow/Soldering Iron	12	25k ohm ±10%	±150ppm/°C
PV01□503C01	0.25W(85°C)	Reflow/Soldering Iron	12	50k ohm ±10%	±150ppm/°C
PV01□104C01	0.25W(85°C)	Reflow/Soldering Iron	12	100k ohm ±10%	±150ppm/°C
PV01□204C01	0.25W(85°C)	Reflow/Soldering Iron	12	200k ohm ±10%	±150ppm/°C
PV01□254C01	0.25W(85°C)	Reflow/Soldering Iron	12	250k ohm ±10%	±150ppm/°C


Continued from the preceding page.

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV01□504C01	0.25W(85°C)	Reflow/Soldering Iron	12	500k ohm ±10%	±150ppm/°C
PV01□105C01	0.25W(85°C)	Reflow/Soldering Iron	12	1M ohm ±10%	±150ppm/°C


The blank column is filled with the code of adjustment direction P (side), W (top) or X (side). Magazine packaging is standard for PV01 series.


Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PV01□100A01	0.25(85°C)	Refrow/Soldering Iron	12	10 ohm±10%	±100	
PV01□200A01	0.25(85°C)	Refrow/Soldering Iron	12	20 ohm±10%	±100	
PV01□500A01	0.25(85°C)	Refrow/Soldering Iron	12	50 ohm±10%	±100	
PV01□101A01	0.25(85°C)	Refrow/Soldering Iron	12	100 ohm±10%	±100	
PV01□201A01	0.25(85°C)	Refrow/Soldering Iron	12	200 ohm±10%	±100	
PV01□501A01	0.25(85°C)	Refrow/Soldering Iron	12	500 ohm±10%	±100	
PV01□102A01	0.25(85°C)	Refrow/Soldering Iron	12	1k ohm±10%	±100	
PV01□202A01	0.25(85°C)	Refrow/Soldering Iron	12	2k ohm±10%	±100	
PV01□502A01	0.25(85°C)	Refrow/Soldering Iron	12	5k ohm±10%	±100	Non Standard
PV01□103A01	0.25(85°C)	Refrow/Soldering Iron	12	10k ohm±10%	±100	Product
PV01□203A01	0.25(85°C)	Refrow/Soldering Iron	12	20k ohm±10%	±100	(Cd included)
PV01□253A01	0.25(85°C)	Refrow/Soldering Iron	12	25k ohm±10%	±100	
PV01□503A01	0.25(85°C)	Refrow/Soldering Iron	12	50k ohm±10%	±100	
PV01□104A01	0.25(85°C)	Refrow/Soldering Iron	12	100k ohm±10%	±100	
PV01□204A01	0.25(85°C)	Refrow/Soldering Iron	12	200k ohm±10%	±100	
PV01□254A01	0.25(85°C)	Refrow/Soldering Iron	12	250k ohm±10%	±100	
PV01□504A01	0.25(85°C)	Refrow/Soldering Iron	12	500k ohm±10%	±100	
PV01□105A01	0.25(85°C)	Refrow/Soldering Iron	12	1M ohm±10%	±100	

# ■ Construction



## ■ Standard Land Pattern





Continued on the following page.





Continued from the preceding page.

## ■ Characteristics

- Ondiadelensies		
Tomporatura Cuala	ΔTR	±1%
Temperature Cycle	ΔV.S.S.	±1%
Llumiditu	ΔTR	±2%
Humidity	IR	100Mohm min.
Vibration (20G)	$\Delta TR$	±1%
VIDIATION (20G)	ΔV.S.S.	±1%
Shock (100G)	ΔTR	±1%
Snock (100G)	ΔV.S.S.	±1%
Tomporatura Load Life	ΔTR	±2%
Temperature Load Life	ΔV.S.S.	±1%
Law Tamparatura Evpagura	ΔTR	±1%
Low Temperature Exposure	ΔV.S.S.	±1%
High Tomporature Europeure	ΔTR	±2%
High Temperature Exposure	ΔV.S.S.	±1%
Detetional Life (200 avales)	ΔTR	R≦100ohm ··· ±3%
Rotational Life (200 cycles)		R>100ohm ··· ±2%

: Total Resistance Change  $\Delta TR$  $\Delta \text{V.S.S.}$  : Voltage Setting Stability : Insulation Resistance R : Standard Total Resistance

# **PVG5/PV01 Series Notice**

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40 deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- If you use the trimmer potentiometer in an environment other than listed below, please consult with a Murata factory representative prior to using.

The trimmer potentiometer should not be used under

#### ■ Notice (Rating)

- 1. When using with partial load (rheostat), minimize the power depending on the resistance value.
- The maximum input voltage to a trimmer potentiometer should not exceed (P.R)^1/2 or the maximum operating voltage, whichever is smaller.
- 3. The maximum input current to a trimmer potentiometer should not exceed (P/R)^1/2 or the allowable wiper current, whichever is smaller.

the following environmental conditions:

- Corrosive gaseous atmosphere
   (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid

(Ex. Oil, Medical liquid, Organic solvent, etc.)

- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above

#### ■ Notice (Soldering and Mounting)

- 1. Soldering
- (1) Standard soldering condition
  - (a) Reflow and flow soldering:

    Refer to the standard temperature profile.
  - (b) Soldering iron:
    - >Temperature of tip 260 deg.C max.
    - >Soldering time 3 sec. max.
      >Diameter 2mm dia. max.
      >Wattage of iron 30W max.

Before using other soldering conditions than those listed above, please consult with a Murata factory representative prior to using. If the soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the trimmer capacitor may deviate from the specified characteristics.

- (2) Cannot be soldered using the flow soldering method. If you use the flow soldering method, the trimmer potentiometer may not function.
- (3) The soldering iron should not come in contact with the case of the trimmer potentiometer. If such contact does occur, the trimmer potentiometer may be damaged.
- (4) Insufficient amounts of solder can lead to insufficient soldering strength on PCB. Excessive amounts of solder may cause bridging between the terminals.
- 2. Mounting
- (1) Use our standard land dimension. Excessive land area causes displacement due to the effect of the

- surface tension of the solder. Insufficient land area leads to insufficient soldering strength of the chip.
- (2) Do not apply excessive force (preferably 9.8N (Ref.; 1kgf) max.), when the trimmer potentiometer is mounted to the PCB.
- (3) Do not warp and/or bend PC board to prevent trimmer potentiometer from breakage.
- (4) In chip placers, the recommended size of the cylindrical pick-up nozzle should be outer dimension 4.0mm dia. and inner dimension 2.0mm dia.
- 3. Cleaning
- (1) Isopropyl-alcohol and Ethyl-alcohol are applicable solvents for cleaning. If you use any other types of solvents, please consult with a Murata factory representative prior to using.
- (2) The total cleaning time by cold dipping, vapor and ultrasonic washing (conditions as below) method should be less than 3 minutes.
- (3) For ultra-sonic cleaning, the available condition is as follows.
  - >Power: 600W (67 liter) max.
  - >Frequency: 28kHz
  - >Temperature: Ambient temperature

    Due to the ultra-sonic cleaning equipment's

peculiar self-resonance point and that the cleaning compatibility usually depends on the jig construction and/or the cleaning condition such as the depth of immersion, please check the

# **PVG5/PV01 Series Notice**




Continued from the preceding page.

cleaning equipment to determine the suitable conditions.

If the trimmer potentiometer is cleaned by other

### ■ Reflow Soldering Standard Profile





conditions, the trimmer potentiometer may be damaged.

## ■ Notice (Handling)

- 1. Use suitable screwdrivers that fit comfortably in driver slot. We recommend the screwdrivers below.
  - \* Recommended screwdrivers for manual adjustment <PVG5 series>

VESSEL MFG.: NO.9000-1.3x30 (Murata P/N: KMDR130)

<PV01 series>

**ENGINEER INC.: DA-40** (Murata P/N: KMDR180)

We can supply the screwdrivers above.

If you place order, please specify Murata P/N.

### ■ Notice (Other)

- 1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- 2. Murata cannot guarantee trimmer potentiometer integrity when used under conditions other than those specified in this document.

- 2. Don't apply more than 9.8N (Ref.; 1kgf) of twist and stress after mounting onto PCB to prevent contact intermittence. If excessive force is applied, the trimmer potentiometer may not
- 3. When adjusting with a screwdriver, do not apply excessive force (preferable 4.9N (Ref; 500gf) max.)
- 4. When using a lock paint to fix slot position, please use adhesive resin without chlorine or sulfur (Three-bond "1401 series").



# **Trimmer Potentiometers**



# Lead Sealed Type Single-turn PVC6/PV32/PV34 Series

## **PVC6 Series**

#### ■ Features


- 1. Enlarged and colored rotor provides superior adjustability.
- 2. Cone-shaped rotor improves driver insertion during automatic adjustment.
- 3. Available for "Zero" plus adjustment tool (taper head) use
- 4. Easy to see 11-scales adjustment positions.
- 5. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 6. Available for ultrasonic cleaning after soldering
- 7. During cutting process by the inserter machine, the round shaped lead wire prevents clinch problems and realizes longer life of cutter than flat shaped lead wire.
- 8. Flammability: UL94V-0
- 9. To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.

#### ■ Applications

- 1. DY
- 3. Power supply
- 5. CATV
- 7. Printers
- 2. CRT display
  - 4. Professional cameras
- 6. FAX
- 8. OA Equipment
- 9. Sensors





PVC6A






PVC6D














PVC6M






PVC6H












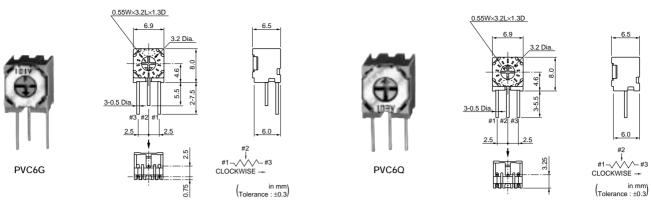

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVC6□100C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	10ohm ±10%	±100ppm/°C
PVC6□200C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	20ohm ±10%	±100ppm/°C
PVC6□250C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	25ohm ±10%	±100ppm/°C
PVC6□500C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	50ohm ±10%	±100ppm/°C
PVC6□101C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	100ohm ±10%	±100ppm/°C
PVC6□201C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	200ohm ±10%	±100ppm/°C
PVC6□251C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	250ohm ±10%	±100ppm/°C
PVC6□501C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	500ohm ±10%	±100ppm/°C
PVC6□102C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	1k ohm ±10%	±100ppm/°C
PVC6□202C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	2k ohm ±10%	±100ppm/°C
PVC6□252C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	2.5k ohm ±10%	±100ppm/°C
PVC6□502C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	5k ohm ±10%	±100ppm/°C
PVC6□103C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	10k ohm ±10%	±100ppm/°C
PVC6□203C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	20k ohm ±10%	±100ppm/°C
PVC6□253C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	25k ohm ±10%	±100ppm/°C
PVC6□503C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	50k ohm ±10%	±100ppm/°C
PVC6□104C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	100k ohm ±10%	±100ppm/°C
PVC6□204C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	200k ohm ±10%	±100ppm/°C
PVC6□254C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	250k ohm ±10%	±100ppm/°C
PVC6□504C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	500k ohm ±10%	±100ppm/°C
PVC6□105C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	1M ohm ±10%	±100ppm/°C
PVC6□205C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	2M ohm ±10%	±100ppm/°C
PVC6□505C01	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	5M ohm ±10%	±100ppm/°C
PVC6□100C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	10ohm ±10%	±100ppm/°C
PVC6□200C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	20ohm ±10%	±100ppm/°C
PVC6□250C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	25ohm ±10%	±100ppm/°C
PVC6□500C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	50ohm ±10%	±100ppm/°C
PVC6□101C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	100ohm ±10%	±100ppm/°C
PVC6□201C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	200ohm ±10%	±100ppm/°C
PVC6□251C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	250ohm ±10%	±100ppm/°C
PVC6□501C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	500ohm ±10%	±100ppm/°C
PVC6□102C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	1k ohm ±10%	±100ppm/°C
PVC6□202C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	2k ohm ±10%	±100ppm/°C
PVC6□252C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	2.5k ohm ±10%	±100ppm/°C
PVC6□502C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	5k ohm ±10%	±100ppm/°C
PVC6□103C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	10k ohm ±10%	±100ppm/°C
PVC6□203C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	20k ohm ±10%	±100ppm/°C
PVC6□253C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	25k ohm ±10%	±100ppm/°C
PVC6□503C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	50k ohm ±10%	±100ppm/°C
PVC6□104C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	100k ohm ±10%	±100ppm/°C
PVC6□204C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	200k ohm ±10%	±100ppm/°C
PVC6□254C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	250k ohm ±10%	±100ppm/°C
PVC6□504C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	500k ohm ±10%	±100ppm/°C
PVC6□105C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	1M ohm ±10%	±100ppm/°C

muRata

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PVC6□205C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	2M ohm ±10%	±100ppm/°C
PVC6□505C04	0.5W(70°C)	Flow/Soldering Iron	1(240°±5°)	5M ohm ±10%	±100ppm/°C

Operating Temperature Range: -55 to 125 °C

The blank column is filled with the code of adjustment direction and lead type (A, D, E, G, H, M and Q).

The order quantity should be an integral multiple of the "Minimum Quantity"


The last three digits express the individual specification codes. C01 for standard type and C04 for radial taping type (PVC6M/PVC6Q series only).

Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PVC6□100A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	10 ohm±10%	±100	
PVC6□200A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	20 ohm±10%	±100	
PVC6□250A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	25 ohm±10%	±100	Non Standard
PVC6□500A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	50 ohm±10%	±100	Product
PVC6□101A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	100 ohm±10%	±100	(Cd Free)
PVC6□201A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	200 ohm±10%	±100	(Curree)
PVC6□251A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	250 ohm±10%	±100	
PVC6□501A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	500 ohm±10%	±100	
PVC6□102A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	1k ohm±10%	±100	
PVC6□202A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	2k ohm±10%	±100	
PVC6□252A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	2.5k ohm±10%	±100	
PVC6□502A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	5k ohm±10%	±100	
PVC6□103A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	10k ohm±10%	±100	
PVC6□203A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	20k ohm±10%	±100	
PVC6□253A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	25k ohm±10%	±100	Non Standard
PVC6□503A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	50k ohm±10%	±100	Product
PVC6□104A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	100k ohm±10%	±100	(Cd included)
PVC6□204A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	200k ohm±10%	±100	
PVC6□254A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	250k ohm±10%	±100	
PVC6□504A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	500k ohm±10%	±100	
PVC6□105A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	1M ohm±10%	±100	
PVC6□205A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	2M ohm±10%	±100	
PVC6□505A01	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	5M ohm±10%	±100	
PVC6□100A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	10 ohm±10%	±100	
PVC6□200A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	20 ohm±10%	±100	
PVC6□250A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	25 ohm±10%	±100	Non Standard
PVC6□500A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	50 ohm±10%	±100	Product
PVC6□101A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	100 ohm±10%	±100	(Cd Free)
PVC6□201A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	200 ohm±10%	±100	(Cu Fiee)
PVC6□251A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	250 ohm±10%	±100	
PVC6□501A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	500 ohm±10%	±100	
PVC6□102A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	1k ohm±10%	±100	
PVC6□202A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	2k ohm±10%	±100	
PVC6□252A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	2.5k ohm±10%	±100	
PVC6□502A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	5k ohm±10%	±100	
PVC6□103A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	10k ohm±10%	±100	
PVC6□203A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	20k ohm±10%	±100	
PVC6□253A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	25k ohm±10%	±100	Non Standard
PVC6□503A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	50k ohm±10%	±100	Product
PVC6□104A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	100k ohm±10%	±100	(Cd included)
PVC6□204A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	200k ohm±10%	±100	
PVC6□254A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	250k ohm±10%	±100	
PVC6□504A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	500k ohm±10%	±100	
PVC6□105A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	1M ohm±10%	±100	
PVC6□205A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	2M ohm±10%	±100	
PVC6□505A04	0.5(70°C)	Flow/Soldering Iron	1(240°±5°)	5M ohm±10%	±100	




Continued from the preceding page.

# **■** Construction




# ■ Mounting Holes

#### PVC6A/PVC6E




( Tolerance:±0.1 ) in mm

#### PVC6D/PVC6H




Tolerance:±0.1 ) in mm

## PVC6M/PVC6Q



## PVC6G



Tolerance ±0.1

Continued on the following page.



Continued from the preceding page.

# ■ Characteristics

Tammaratura Cuala	ΔTR	±2%
Temperature Cycle	ΔV.S.S.	±1%
	ΔTR	±2%
Humidity	ΔV.S.S.	±1%
	IR	100Mohm min.
Vibration (20G)	ΔTR	±1%
VIDIATION (20G)	ΔV.S.S.	±1%
Charle (100C)	ΔTR	±1%
Shock (100G)	ΔV.S.S.	±1%
Townsesture Load Life	ΔTR	±2%
Temperature Load Life	ΔV.S.S.	±2%
Low Tomporature Evpagues	ΔTR	±2%
Low Temperature Exposure	ΔV.S.S.	±1%
Ulah Tamanahan Faranan	ΔTR	±2%
High Temperature Exposure	ΔV.S.S.	±1%
Rotational Life (200 cycles)	ΔTR	±4%

ΔTR : Total Resistance Change  $\Delta \text{V.S.S.}\,$  : Voltage Setting Stability : Insulation Resistance

# **PV32 Series**

#### ■ Features

- 1. 6 standard terminal styles
- 2. Round shaped body enables smaller area mount than same 6mm square potentiometer.
- 3. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 4. Available for ultrasonic cleaning after soldering
- 5. Flammability: UL94V-0

#### ■ Applications


1. HDTVs 2. Professional cameras

3. CATV 4. FAX 5. Printers 6. Sensors

7. Power supply












PV32R


















(n mm) Tolerance : ±0.3)



PV32N








(n mm) Tolerance : ±0.3)



PV32S






KWISE -	
1	in mm
T-1	



PV32T





(n mm) Tolerance : ±0.3)

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV32□100A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	10ohm ±20%	±100ppm/°C
PV32□200A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	20ohm ±20%	±100ppm/°C
PV32□250A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	25ohm ±20%	±100ppm/°C




Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV32□500A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	50ohm ±20%	±100ppm/°C
PV32□101A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	100ohm ±20%	±100ppm/°C
PV32□201A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	200ohm ±20%	±100ppm/°C
PV32□251A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	250ohm ±20%	±100ppm/°C
PV32□501A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	500ohm ±20%	±100ppm/°C
PV32□102A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	1k ohm ±20%	±100ppm/°C
PV32□202A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	2k ohm ±20%	±100ppm/°C
PV32□252A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	2.5k ohm ±20%	±100ppm/°C
PV32□502A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	5k ohm ±20%	±100ppm/°C
PV32□103A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	10k ohm ±20%	±100ppm/°C
PV32□203A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	20k ohm ±20%	±100ppm/°C
PV32□253A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	25k ohm ±20%	±100ppm/°C
PV32□503A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	50k ohm ±20%	±100ppm/°C
PV32□104A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	100k ohm ±20%	±100ppm/°C
PV32□204A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	200k ohm ±20%	±100ppm/°C
PV32□254A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	250k ohm ±20%	±100ppm/°C
PV32□504A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	500k ohm ±20%	±100ppm/°C
PV32□105A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	1M ohm ±20%	±100ppm/°C
PV32□205A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	2M ohm ±20%	±100ppm/°C
PV32□505A01	0.5W(70°C)	Flow/Soldering Iron	1(230°±5°)	5M ohm ±20%	±100ppm/°C

Operating Temperature Range: -55 to 125 °C

The blank column is filled with the code of adjustment direction and lead type (H, P, R, N, S and T).


The order quantity should be an integral multiple of the "Minimum Quantity".


# **■** Construction



# ■ Mounting Holes

PV32H PV32R






Tolerance:±0.1 Tolerance:±0.1

Continued on the following page.




# ■ Mounting Holes

#### PV32P/PV32S




(Tolerance:±0.1 ) in mm

## PV32N



(Tolerance ±0.1) in mm

PV32T



(Tolerance:±0.1 ) in mm

# ■ Characteristics

Temperature Cycle	$\Delta TR$	±2%
remperature Cycle	ΔV.S.S.	±1%
11!	ΔTR	±2%
Humidity	IR	100Mohm min.
Vibratian (200)	ΔTR	±1%
Vibration (20G)	ΔV.S.S.	±1%
Cl I (400C)	ΔTR	±1%
Shock (100G)	ΔV.S.S.	±1%
T	ΔTR	±2%
Temperature Load Life	ΔV.S.S.	±2%
Law Tanananah ma Funanana	ΔTR	±2%
Low Temperature Exposure	ΔV.S.S.	±1%
High Topporature Europeure	ΔTR	±2%
High Temperature Exposure	ΔV.S.S.	±1%
Rotational Life (200 cycles)	ΔTR	±4%

 $\begin{array}{ll} \Delta TR & : Total \ Resistance \ Change \\ \Delta V.S.S. & : Voltage \ Setting \ Stability \\ IR & : Insulation \ Resistance \end{array}$ 

# **PV34 Series**

#### ■ Features


- 1. 5 standard terminal styles
- 2. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 3. Available for ultrasonic cleaning after soldering
- 4. Flammability: UL94V-0
- 5. To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.

# ■ Applications

- 1. HDTVs
- 2. Professional cameras
- 3. CATV
- 4. Printers
- 5. Sensors
- 6. Switching power supplies




PV34F






PV34H






PV34P











PV34X



Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV34□100C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	10ohm ±10%	±150ppm/°C
PV34□200C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	20ohm ±10%	±150ppm/°C
PV34□500C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	50ohm ±10%	±150ppm/°C





Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV34□101C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	100ohm ±10%	±150ppm/°C
PV34□201C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	200ohm ±10%	±100ppm/°C
PV34□501C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	500ohm ±10%	±100ppm/°C
PV34□102C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	1k ohm ±10%	±100ppm/°C
PV34□202C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	2k ohm ±10%	±100ppm/°C
PV34□502C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	5k ohm ±10%	±100ppm/°C
PV34□103C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	10k ohm ±10%	±100ppm/°C
PV34□203C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	20k ohm ±10%	±100ppm/°C
PV34□253C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	25k ohm ±10%	±100ppm/°C
PV34□503C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	50k ohm ±10%	±100ppm/°C
PV34□104C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	100k ohm ±10%	±100ppm/°C
PV34□204C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	200k ohm ±10%	±100ppm/°C
PV34□254C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	250k ohm ±10%	±100ppm/°C
PV34□504C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	500k ohm ±10%	±100ppm/°C
PV34□105C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	1M ohm ±10%	±100ppm/°C
PV34□205C01	0.5W(70°C)	Flow/Soldering Iron	1(280°±15°)	2M ohm ±10%	±100ppm/°C


Operating Temperature Range: -55 to 125  $^{\circ}\text{C}$ 

The blank column is filled with the code of adjustment direction and lead type (F, H, P, X and W).

The order quantity should be an integral multiple of the "Minimum Quantity".


Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PV34□100A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	10 ohm±10%	±100	
PV34□200A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	20 ohm±10%	±100	
PV34□500A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	50 ohm±10%	±100	
PV34□101A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	100 ohm±10%	±100	
PV34□201A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	200 ohm±10%	±100	
PV34□501A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	500 ohm±10%	±100	
PV34□102A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	1k ohm±10%	±100	
PV34□202A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	2k ohm±10%	±100	
PV34□502A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	5k ohm±10%	±100	Non Standard
PV34□103A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	10k ohm±10%	±100	Product
PV34□203A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	20k ohm±10%	±100	(Cd included)
PV34□253A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	25k ohm±10%	±100	
PV34□503A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	50k ohm±10%	±100	
PV34□104A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	100k ohm±10%	±100	
PV34□204A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	200k ohm±10%	±100	
PV34□254A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	250k ohm±10%	±100	
PV34□504A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	500k ohm±10%	±100	
PV34□105A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	1M ohm±10%	±100	
PV34□205A01	0.5(70°C)	Flow/Soldering Iron	1(280°±15°)	2M ohm±10%	±100	

## **■** Construction




# ■ Mounting Holes

PV34F




(Tolerance:±0.1 ) in mm

#### PV34H/PV34P




Tolerance:±0.1

PV34W



( Tolerance:±0.1 ) in mm

# PV34X



(Tolerance ±0.1) in mm

# ■ Characteristics

Tomporatura Cuala	ΔTR	±2%
Temperature Cycle	ΔV.S.S.	±1%
Llumaiditu	ΔTR	±2%
Humidity	IR	100Mohm min.
Vibration (20C)	ΔTR	±1%
Vibration (20G)	ΔV.S.S.	±1%
Charl (100C)	ΔTR	±1%
Shock (100G)	ΔV.S.S.	±1%
Tomporatura Load Life	ΔTR	±2%
Temperature Load Life	ΔV.S.S.	±2%
Low Temperature Exposure	ΔTR	±1%
Low remperature Exposure	ΔV.S.S.	±1%
High Tomporature Evpocure	ΔTR	±2%
High Temperature Exposure	ΔV.S.S.	±1%
Dotational Life (200 avales)	ΔTR	R≦100kohm ±3%
Rotational Life (200 cycles)		R>100kohm ±5%

 $\begin{array}{lll} \Delta TR & : Total \ Resistance \ Change \\ \Delta V.S.S. : Voltage \ Setting \ Stability \\ IR & : Insulation \ Resistance \\ R & : Standard \ Total \ Resistance \\ \end{array}$ 

## PVC6/PV32/PV34 Series Notice

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40 deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- If you use the trimmer potentiometer in an environment other than listed below, please consult with a Murata factory representative prior to using.

The trimmer potentiometer should not be used under

#### ■ Notice (Rating)

- 1. When using with partial load (rheostat), minimize the power depending on the resistance value.
- 2. The maximum input voltage to a trimmer potentiometer should not exceed (P.R)^1/2 or the maximum operating voltage, whichever is smaller.
- 3. The maximum input current to a trimmer potentiometer should not exceed (P/R)^1/2 or the allowable wiper current, whichever is smaller.

the following environmental conditions:

- Corrosive gaseous atmosphere
   (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid

(Ex. Oil, Medical liquid, Organic solvent, etc.)

- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above

#### ■ Notice (Soldering and Mounting)

- 1. Soldering
- (1) Standard soldering condition
  - (a) Flow soldering:

>Pre-heating temp. 80-100 deg. C >Soldering temp. 260 deg. C max.

>Soldering time 3 sec. max.

- (b) Soldering iron:
  - >Temperature of tip 300 deg. C max.

>Soldering time 3 sec. max.

>Wattage of iron 40W max.

Before using other soldering conditions than those listed above, please consult with Murata factory representative prior to using. If the soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the trimmer potentiometer may deviate from the specified characteristics.

- (2) To minimize mechanical stress when adjusting, the trimmer potentiometer should be mounted onto PCB without gap.
- (3) The soldering iron should not come in contact with the case of the trimmer potentiometer. If such contact does occur, the trimmer potentiometer may be damaged.
- 2. Mounting
- (1) Use PCB hole to meet the pin of the trimmer potentiometer. If the trimmer potentiometer installs into insufficient PCB hole, the

- trimmer potentimeter may be damaged by mechanical stress.
- (2) Do not apply excessive force (preferably 9.8N (Ref.; 1kgf) max.), when the trimmer potentiometer is mounted to the PCB.
- 3. Cleaning
- (1) Isopropyl-alcohol and Ethyl-alcohol are applicable solvents for cleaning. If you use any other types of solvents, please consult with a Murata factory representative prior to using.
- (2) The total cleaning time by cold dipping, vapor and ultrasonic washing (conditions as below) method should be less than 3 minutes.
- (3) For ultra-sonic cleaning, the available condition is as follows.
  - >Power: 600W (67 liter) max.
  - >Frequency: 28kHz
  - >Temperature: Ambient temperature

    Due to the ultra-sonic cleaning equipment's

peculiar self-resonance point and that the cleaning compatibility usually depends on the jig construction and/or the cleaning condition such as the depth of immersion, please check the cleaning equipment to determine the suitable conditions.

If the trimmer potentiometer is cleaned by other conditions, the trimmer potentiometer may be damaged.



# PVC6/PV32/PV34 Series Notice

#### ■ Notice (Handling)

- 1. Use suitable screwdrivers that fit comfortably in driver slot. We recommend the screwdrivers below.
  - \* Recommended screwdriver for manual adjustment <PVC6 series>

VESSEL MFG.: NO.9000+0x30 (Murata P/N: KMDR150)

TORAY INDUSTRIES, INC.: SA-2225

(Murata P/N: KMDR070)

<PV32/34 series>

ENGINEER INC. : DA-40 (Murata P/N : KMDR180)

\* Recommended screwdriver bit for automatic adjustment

<PVC6 series>

VESSEL MFG.: NO.CA-10 (Murata P/N: KMBT090)

TORAY INDUSTRIES, INC.: JB-2225

(Murata P/N: KMBT070)

We can supply the screwdrivers avobe.

- Notice (Other)
- Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- Murata cannot guarantee trimmer potentiometer integrity when used under conditions other than those specified in this document.

- If you place an order, please specify the Murata P/N.
- Don't apply more than 9.8N (Ref.; 1kgf) of twist and stress after mounting onto PCB to prevent contact intermittence. If excessive force is applied, the trimmer potentiometer may not function.
- When adjusting with an adjustment tool, the applied force to the adjustment screw should not exceed
   N (Ref.; 500gf). If excessive force is applied, the trimmer potentiometer may not function due to damage.
- The rotational torque at the position of the adjustment range should not exceed the stop strength.
- 5. When using a lock paint to fix slot position, please use adhesive resin without chlorine or sulfur (Three-bond "1401 series").



# **Trimmer Potentiometers**



# Lead Sealed Type Multi-turns PV12/PV37/PV23/PV22/PV36 Series

# **PV12 Series**

#### ■ Features

- 1. The unique inner gear system recognizes the position of the center of the shaft of the potentiometer.
- 2. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 3. Available for ultrasonic cleaning after soldering
- 4. Clutch mechanism prevents excessive wiper rotation.

## ■ Applications


2. Professional cameras 1. HDTVs

3. CATV 4. FAX 5. Printers 6. Sensors

7. Switching power supplies




PV12H









PV12P







PV12T



Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV12□100A01	0.5W(70°C)	Flow/Soldering Iron	4	10ohm ±10%	±100ppm/°C
PV12□200A01	0.5W(70°C)	Flow/Soldering Iron	4	20ohm ±10%	±100ppm/°C
PV12□500A01	0.5W(70°C)	Flow/Soldering Iron	4	50ohm ±10%	±100ppm/°C
PV12□101A01	0.5W(70°C)	Flow/Soldering Iron	4	100ohm ±10%	±100ppm/°C
PV12□201A01	0.5W(70°C)	Flow/Soldering Iron	4	200ohm ±10%	±100ppm/°C
PV12□501A01	0.5W(70°C)	Flow/Soldering Iron	4	500ohm ±10%	±100ppm/°C
PV12□102A01	0.5W(70°C)	Flow/Soldering Iron	4	1k ohm ±10%	±100ppm/°C
PV12□202A01	0.5W(70°C)	Flow/Soldering Iron	4	2k ohm ±10%	±100ppm/°C
PV12□502A01	0.5W(70°C)	Flow/Soldering Iron	4	5k ohm ±10%	±100ppm/°C
PV12□103A01	0.5W(70°C)	Flow/Soldering Iron	4	10k ohm ±10%	±100ppm/°C

Continued from the preceding page.


Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV12□203A01	0.5W(70°C)	Flow/Soldering Iron	4	20k ohm ±10%	±100ppm/°C
PV12□503A01	0.5W(70°C)	Flow/Soldering Iron	4	50k ohm ±10%	±100ppm/°C
PV12□104A01	0.5W(70°C)	Flow/Soldering Iron	4	100k ohm ±10%	±100ppm/°C
PV12□204A01	0.5W(70°C)	Flow/Soldering Iron	4	200k ohm ±10%	±100ppm/°C
PV12□504A01	0.5W(70°C)	Flow/Soldering Iron	4	500k ohm ±10%	±100ppm/°C
PV12□105A01	0.5W(70°C)	Flow/Soldering Iron	4	1M ohm ±10%	±100ppm/°C
PV12□205A01	0.5W(70°C)	Flow/Soldering Iron	4	2M ohm ±10%	±100ppm/°C

Operating Temperature Range: -55 to 125  $^{\circ}\text{C}$ 

The blank column is filled with the code of adjustment direction and lead type (H, P, T and S).


The order quantity should be an integral multiple of the "Minimum Quantity".

## **■** Construction




# ■ Mounting Holes

PV12H




(Tolerance:±0.1 ) in mm

PV12P/PV12S



(Tolerance:±0.1 ) in mm

PV12T



Tolerance:±0.1 \
in mm

# ■ Characteristics

Tomporatura Cuala	ΔTR	±2%
Temperature Cycle	ΔV.S.S.	±1%
Llumiditu	ΔTR	±2%
Humidity	IR	100Mohm min.
Vibration (20C)	ΔTR	±1%
Vibration (20G)	ΔV.S.S.	±1%
Ch I. (100C)	ΔTR	±1%
Shock (100G)	ΔV.S.S.	±1%
Tomporatura Load Life	ΔTR	±3%
Temperature Load Life	ΔV.S.S.	±2%
Law Tamparatura Evpagura	ΔTR	±3%
Low Temperature Exposure	ΔV.S.S.	±1.5%
High Tomporature Europeure	ΔTR	±3%
High Temperature Exposure	ΔV.S.S.	±1.5%
Rotational Life (200 cycles)	ΔTR	±3%

 $\begin{array}{ll} \Delta TR & : Total \ Resistance \ Change \\ \Delta V.S.S. & : Voltage \ Setting \ Stability \\ IR & : Insulation \ Resistance \end{array}$ 


# **PV37 Series**


#### ■ Features


- 1. Smaller volume (about one-third) than 25-turns potentiometer
- 2. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 3. Available for ultrasonic cleaning after soldering
- 4. Clutch mechanism prevents excessive wiper rotation.
- 5. 5 standard terminal styles
- 6. Both Top and side adjustment directions
- 7. To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.


# ■ Applications


- 1. Measuring instruments 2. OA equipment
- 3. Medical equipment 4. Power supply
- 5. Base station for cellular phone














Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV37□100C01	0.25W(85°C)	Flow/Soldering Iron	12	10ohm ±10%	±150ppm/°C
PV37□200C01	0.25W(85°C)	Flow/Soldering Iron	12	20ohm ±10%	±150ppm/°C
PV37□500C01	0.25W(85°C)	Flow/Soldering Iron	12	50ohm ±10%	±150ppm/°C

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV37□101C01	0.25W(85°C)	Flow/Soldering Iron	12	100ohm ±10%	±150ppm/°C
PV37□201C01	0.25W(85°C)	Flow/Soldering Iron	12	200ohm ±10%	±150ppm/°C
PV37□501C01	0.25W(85°C)	Flow/Soldering Iron	12	500ohm ±10%	±150ppm/°C
PV37□102C01	0.25W(85°C)	Flow/Soldering Iron	12	1k ohm ±10%	±150ppm/°C
PV37□202C01	0.25W(85°C)	Flow/Soldering Iron	12	2k ohm ±10%	±150ppm/°C
PV37□502C01	0.25W(85°C)	Flow/Soldering Iron	12	5k ohm ±10%	±150ppm/°C
PV37□103C01	0.25W(85°C)	Flow/Soldering Iron	12	10k ohm ±10%	±150ppm/°C
PV37□203C01	0.25W(85°C)	Flow/Soldering Iron	12	20k ohm ±10%	±150ppm/°C
PV37□253C01	0.25W(85°C)	Flow/Soldering Iron	12	25k ohm ±10%	±150ppm/°C
PV37□503C01	0.25W(85°C)	Flow/Soldering Iron	12	50k ohm ±10%	±150ppm/°C
PV37□104C01	0.25W(85°C)	Flow/Soldering Iron	12	100k ohm ±10%	±150ppm/°C
PV37□204C01	0.25W(85°C)	Flow/Soldering Iron	12	200k ohm ±10%	±150ppm/°C
PV37□254C01	0.25W(85°C)	Flow/Soldering Iron	12	250k ohm ±10%	±150ppm/°C
PV37□504C01	0.25W(85°C)	Flow/Soldering Iron	12	500k ohm ±10%	±150ppm/°C
PV37□105C01	0.25W(85°C)	Flow/Soldering Iron	12	1M ohm ±10%	±150ppm/°C
PV37□205C01	0.25W(85°C)	Flow/Soldering Iron	12	2M ohm ±10%	±150ppm/°C
PV37□100C31	0.25W(85°C)	Flow/Soldering Iron	12	10ohm ±10%	±150ppm/°C
PV37□200C31	0.25W(85°C)	Flow/Soldering Iron	12	20ohm ±10%	±150ppm/°C
PV37□500C31	0.25W(85°C)	Flow/Soldering Iron	12	50ohm ±10%	±150ppm/°C
PV37□101C31	0.25W(85°C)	Flow/Soldering Iron	12	100ohm ±10%	±150ppm/°C
PV37□201C31	0.25W(85°C)	Flow/Soldering Iron	12	200ohm ±10%	±150ppm/°C
PV37□501C31	0.25W(85°C)	Flow/Soldering Iron	12	500ohm ±10%	±150ppm/°C
PV37□102C31	0.25W(85°C)	Flow/Soldering Iron	12	1k ohm ±10%	±150ppm/°C
PV37□202C31	0.25W(85°C)	Flow/Soldering Iron	12	2k ohm ±10%	±150ppm/°C
PV37□502C31	0.25W(85°C)	Flow/Soldering Iron	12	5k ohm ±10%	±150ppm/°C
PV37□103C31	0.25W(85°C)	Flow/Soldering Iron	12	10k ohm ±10%	±150ppm/°C
PV37□203C31	0.25W(85°C)	Flow/Soldering Iron	12	20k ohm ±10%	±150ppm/°C
PV37□253C31	0.25W(85°C)	Flow/Soldering Iron	12	25k ohm ±10%	±150ppm/°C
PV37□503C31	0.25W(85°C)	Flow/Soldering Iron	12	50k ohm ±10%	±150ppm/°C
PV37□104C31	0.25W(85°C)	Flow/Soldering Iron	12	100k ohm ±10%	±150ppm/°C
PV37□204C31	0.25W(85°C)	Flow/Soldering Iron	12	200k ohm ±10%	±150ppm/°C
PV37□254C31	0.25W(85°C)	Flow/Soldering Iron	12	250k ohm ±10%	±150ppm/°C
PV37□504C31	0.25W(85°C)	Flow/Soldering Iron	12	500k ohm ±10%	±150ppm/°C
PV37□105C31	0.25W(85°C)	Flow/Soldering Iron	12	1M ohm ±10%	±150ppm/°C
PV37□205C31	0.25W(85°C)	Flow/Soldering Iron	12	2M ohm ±10%	±150ppm/°C

Operating Temperature Range: -55 to 125  $^{\circ}\text{C}$ 


The blank column is filled with the code of adjustment direction and lead type (P, X, Y, W and Z).

The order quantity should be an integral multiple of the "Minimum Quantity".

The last three digits express the individual specification codes. C01 for standard type and C31 for radial taping type (PV37Y/PV37Z series only).


Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PV37□100A01	0.25(85°C)	Flow/Soldering Iron	12	10 ohm±10%	±100	
PV37□200A01	0.25(85°C)	Flow/Soldering Iron	12	20 ohm±10%	±100	
PV37□500A01	0.25(85°C)	Flow/Soldering Iron	12	50 ohm±10%	±100	
PV37□101A01	0.25(85°C)	Flow/Soldering Iron	12	100 ohm±10%	±100	
PV37□201A01	0.25(85°C)	Flow/Soldering Iron	12	200 ohm±10%	±100	
PV37□501A01	0.25(85°C)	Flow/Soldering Iron	12	500 ohm±10%	±100	
PV37□102A01	0.25(85°C)	Flow/Soldering Iron	12	1k ohm±10%	±100	
PV37□202A01	0.25(85°C)	Flow/Soldering Iron	12	2k ohm±10%	±100	
PV37□502A01	0.25(85°C)	Flow/Soldering Iron	12	5k ohm±10%	±100	
PV37□103A01	0.25(85°C)	Flow/Soldering Iron	12	10k ohm±10%	±100	
PV37□203A01	0.25(85°C)	Flow/Soldering Iron	12	20k ohm±10%	±100	
PV37□253A01	0.25(85°C)	Flow/Soldering Iron	12	25k ohm±10%	±100	
PV37□503A01	0.25(85°C)	Flow/Soldering Iron	12	50k ohm±10%	±100	
PV37□104A01	0.25(85°C)	Flow/Soldering Iron	12	100k ohm±10%	±100	
PV37□204A01	0.25(85°C)	Flow/Soldering Iron	12	200k ohm±10%	±100	
PV37□254A01	0.25(85°C)	Flow/Soldering Iron	12	250k ohm±10%	±100	
PV37□504A01	0.25(85°C)	Flow/Soldering Iron	12	500k ohm±10%	±100	
PV37□105A01	0.25(85°C)	Flow/Soldering Iron	12	1M ohm±10%	±100	Non Standard
PV37□205A01	0.25(85°C)	Flow/Soldering Iron	12	2M ohm±10%	±100	Product
PV37□100A31	0.25(85°C)	Flow/Soldering Iron	12	10 ohm±10%	±100	(Cd included)
PV37□200A31	0.25(85°C)	Flow/Soldering Iron	12	20 ohm±10%	±100	(Ca iriciadea)
PV37□500A31	0.25(85°C)	Flow/Soldering Iron	12	50 ohm±10%	±100	
PV37□101A31	0.25(85°C)	Flow/Soldering Iron	12	100 ohm±10%	±100	
PV37□201A31	0.25(85°C)	Flow/Soldering Iron	12	200 ohm±10%	±100	
PV37□501A31	0.25(85°C)	Flow/Soldering Iron	12	500 ohm±10%	±100	
PV37□102A31	0.25(85°C)	Flow/Soldering Iron	12	1k ohm±10%	±100	
PV37□202A31	0.25(85°C)	Flow/Soldering Iron	12	2k ohm±10%	±100	
PV37□502A31	0.25(85°C)	Flow/Soldering Iron	12	5k ohm±10%	±100	
PV37□103A31	0.25(85°C)	Flow/Soldering Iron	12	10k ohm±10%	±100	
PV37□203A31	0.25(85°C)	Flow/Soldering Iron	12	20k ohm±10%	±100	
PV37□253A31	0.25(85°C)	Flow/Soldering Iron	12	25k ohm±10%	±100	
PV37□503A31	0.25(85°C)	Flow/Soldering Iron	12	50k ohm±10%	±100	
PV37□104A31	0.25(85°C)	Flow/Soldering Iron	12	100k ohm±10%	±100	
PV37□204A31	0.25(85°C)	Flow/Soldering Iron	12	200k ohm±10%	±100	
PV37□254A31	0.25(85°C)	Flow/Soldering Iron	12	250k ohm±10%	±100	
PV37□504A31	0.25(85°C)	Flow/Soldering Iron	12	500k ohm±10%	±100	
PV37□105A31	0.25(85°C)	Flow/Soldering Iron	12	1M ohm±10%	±100	
PV37□205A31	0.25(85°C)	Flow/Soldering Iron	12	2M ohm±10%	±100	

## **■** Construction




# ■ Mounting Holes

PV37P




(Tolerance:±0.1

#### PV37W/PV37X



(Tolerance ±0.1) in mm

#### PV37Y/PV37Z



(Tolerance:±0.1 ) in mm

# ■ Characteristics

	ΔTR	±1%
Temperature Cycle	ΔV.S.S.	±1%
	ΔTR	±2%
Humidity	IR	100Mohm min.
	ΔTR	±1%
Vibration (20G)	ΔV.S.S.	±1%
Cl I (100C)	ΔTR	±1%
Shock (100G)	ΔV.S.S.	±1%
T	ΔTR	±2%
Temperature Load Life	ΔV.S.S.	±1%
Low Tomporature Evpacure	ΔTR	±1%
Low Temperature Exposure	ΔV.S.S.	±1%
High Topporature Functure	ΔTR	±2%
High Temperature Exposure	ΔV.S.S.	±1%
Dotational Life (200 avales)	ΔTR	R≦100ohm ±3%
Rotational Life (200 cycles)		R>100ohm ±2%

 $\begin{array}{lll} \Delta TR & : Total \ Resistance \ Change \\ \Delta V.S.S. : Voltage \ Setting \ Stability \\ IR & : Insulation \ Resistance \\ R & : Standard \ Total \ Resistance \\ \end{array}$ 


# **PV23 Series**


#### ■ Features

- 1. Small size (4.6x6.4x19.1mm) and high power rating (0.75W at 70deg.C)
- 2. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 3. Available for ultrasonic cleaning after soldering
- 4. Clutch mechanism prevents excessive wiper rotation.
- To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.

## ■ Applications

- 1. Measuring instruments 2. FAX
- 3. Copier
- 4. Printers
- 5. Sensors





2M ohm ±10%

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV23□100C01	0.75W(70°C)	Flow/Soldering Iron	15	10ohm ±10%	±150ppm/°C
PV23□200C01	0.75W(70°C)	Flow/Soldering Iron	15	20ohm ±10%	±150ppm/°C
PV23□500C01	0.75W(70°C)	Flow/Soldering Iron	15	50ohm ±10%	±150ppm/°C
PV23□101C01	0.75W(70°C)	Flow/Soldering Iron	15	100ohm ±10%	±150ppm/°C
PV23□201C01	0.75W(70°C)	Flow/Soldering Iron	15	200ohm ±10%	±100ppm/°C
PV23□501C01	0.75W(70°C)	Flow/Soldering Iron	15	500ohm ±10%	±100ppm/°C
PV23□102C01	0.75W(70°C)	Flow/Soldering Iron	15	1k ohm ±10%	±100ppm/°C
PV23□202C01	0.75W(70°C)	Flow/Soldering Iron	15	2k ohm ±10%	±100ppm/°C
PV23□502C01	0.75W(70°C)	Flow/Soldering Iron	15	5k ohm ±10%	±100ppm/°C
PV23□103C01	0.75W(70°C)	Flow/Soldering Iron	15	10k ohm ±10%	±100ppm/°C
PV23□203C01	0.75W(70°C)	Flow/Soldering Iron	15	20k ohm ±10%	±100ppm/°C
PV23□503C01	0.75W(70°C)	Flow/Soldering Iron	15	50k ohm ±10%	±100ppm/°C
PV23□104C01	0.75W(70°C)	Flow/Soldering Iron	15	100k ohm ±10%	±100ppm/°C
PV23□204C01	0.75W(70°C)	Flow/Soldering Iron	15	200k ohm ±10%	±100ppm/°C
PV23□504C01	0.75W(70°C)	Flow/Soldering Iron	15	500k ohm ±10%	±100ppm/°C
PV23□105C01	0.75W(70°C)	Flow/Soldering Iron	15	1M ohm ±10%	±100ppm/°C

15

Operating Temperature Range: -55 to 125  $^{\circ}\text{C}$ 

PV23 205C01

The blank column is filled with the code of adjustment direction and lead type (P and Y).

Flow/Soldering Iron

The order quantity should be an integral multiple of the "Minimum Quantity".


0.75W(70°C)



±100ppm/°C


Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PV23□100A01	0.75(70°C)	Flow/Soldering Iron	15	10 ohm±10%	±100	
PV23□200A01	0.75(70°C)	Flow/Soldering Iron	15	20 ohm±10%	±100	
PV23□500A01	0.75(70°C)	Flow/Soldering Iron	15	50 ohm±10%	±100	
PV23□101A01	0.75(70°C)	Flow/Soldering Iron	15	100 ohm±10%	±100	
PV23□201A01	0.75(70°C)	Flow/Soldering Iron	15	200 ohm±10%	±100	
PV23□501A01	0.75(70°C)	Flow/Soldering Iron	15	500 ohm±10%	±100	
PV23□102A01	0.75(70°C)	Flow/Soldering Iron	15	1k ohm±10%	±100	
PV23□202A01	0.75(70°C)	Flow/Soldering Iron	15	2k ohm±10%	±100	Non Standard
PV23□502A01	0.75(70°C)	Flow/Soldering Iron	15	5k ohm±10%	±100	Product
PV23□103A01	0.75(70°C)	Flow/Soldering Iron	15	10k ohm±10%	±100	(Cd included)
PV23□203A01	0.75(70°C)	Flow/Soldering Iron	15	20k ohm±10%	±100	
PV23□503A01	0.75(70°C)	Flow/Soldering Iron	15	50k ohm±10%	±100	
PV23□104A01	0.75(70°C)	Flow/Soldering Iron	15	100k ohm±10%	±100	
PV23□204A01	0.75(70°C)	Flow/Soldering Iron	15	200k ohm±10%	±100	
PV23□504A01	0.75(70°C)	Flow/Soldering Iron	15	500k ohm±10%	±100	
PV23□105A01	0.75(70°C)	Flow/Soldering Iron	15	1M ohm±10%	±100	
PV23□205A01	0.75(70°C)	Flow/Soldering Iron	15	2M ohm±10%	±100	

# **■** Construction




# ■ Mounting Holes

PV23P PV23Y



(Tolerance:±0.1) (Tolerance:±0.1) in mm



# ■ Characteristics

Tanananahana Ossala	ΔTR	±2%
Temperature Cycle	ΔV.S.S.	±1%
Liveridity	ΔTR	±2%
Humidity	IR	100Mohm min.
Vibration (200)	ΔTR	±1%
Vibration (20G)	ΔV.S.S.	±1%
Ch I. (FOC)	ΔTR	±1%
Shock (50G)	ΔV.S.S.	±1%
Tomporatura Load Life	$\Delta TR$	±3%
Temperature Load Life	ΔV.S.S.	±1%
Law Tamparatura Evpagura	$\Delta TR$	±1%
Low Temperature Exposure	ΔV.S.S.	±1%
High Tomporature Evpocure	$\Delta TR$	±2%
High Temperature Exposure	ΔV.S.S.	±1%
Rotational Life (200 cycles)	ΔTR	±3%

 $\begin{array}{ll} \Delta TR & : Total \ Resistance \ Change \\ \Delta V.S.S. & : Voltage \ Setting \ Stability \\ IR & : Insulation \ Resistance \end{array}$ 


# **PV22 Series**


#### ■ Features


- 1. High power rating (1W at 70 deg.C)
- 2. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 3. Available for ultrasonic cleaning after soldering
- 4. Clutch mechanism prevents excessive wiper rotation.
- 5. To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.

# ■ Applications

- 2. FAX 1. Measuring instruments
- 3. Copier
- 4. Printers
- 5. Sensors

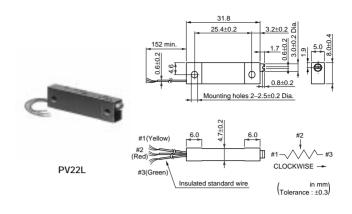






Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV22□100C01	1.0W(70°C)	Flow/Soldering Iron	22	10ohm ±10%	±100ppm/°C
PV22□200C01	1.0W(70°C)	Flow/Soldering Iron	22	20ohm ±10%	±100ppm/°C
PV22□500C01	1.0W(70°C)	Flow/Soldering Iron	22	50ohm ±10%	±100ppm/°C
PV22□101C01	1.0W(70°C)	Flow/Soldering Iron	22	100ohm ±10%	±100ppm/°C
PV22□201C01	1.0W(70°C)	Flow/Soldering Iron	22	200ohm ±10%	±100ppm/°C
PV22□501C01	1.0W(70°C)	Flow/Soldering Iron	22	500ohm ±10%	±100ppm/°C
PV22□102C01	1.0W(70°C)	Flow/Soldering Iron	22	1k ohm ±10%	±100ppm/°C
PV22□202C01	1.0W(70°C)	Flow/Soldering Iron	22	2k ohm ±10%	±100ppm/°C
PV22□502C01	1.0W(70°C)	Flow/Soldering Iron	22	5k ohm ±10%	±100ppm/°C
PV22□103C01	1.0W(70°C)	Flow/Soldering Iron	22	10k ohm ±10%	±100ppm/°C
PV22□203C01	1.0W(70°C)	Flow/Soldering Iron	22	20k ohm ±10%	±100ppm/°C
PV22□503C01	1.0W(70°C)	Flow/Soldering Iron	22	50k ohm ±10%	±100ppm/°C
PV22□104C01	1.0W(70°C)	Flow/Soldering Iron	22	100k ohm ±10%	±100ppm/°C
PV22□204C01	1.0W(70°C)	Flow/Soldering Iron	22	200k ohm ±10%	±100ppm/°C
PV22□504C01	1.0W(70°C)	Flow/Soldering Iron	22	500k ohm ±10%	±100ppm/°C
PV22□105C01	1.0W(70°C)	Flow/Soldering Iron	22	1M ohm ±10%	±100ppm/°C

muRata



Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV22□205C01	1.0W(70°C)	Flow/Soldering Iron	22	2M ohm ±10%	±100ppm/°C


Operating Temperature Range: -55 to 150  $^{\circ}\text{C}$ 

The blank column is filled with the code of adjustment direction and lead type (L, S and Y).

The order quantity should be an integral multiple of the "Minimum Quantity".


Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PV22□100A01	1.0(70°C)	Flow/Soldering Iron	22	10 ohm±10%	±100	
PV22□200A01	1.0(70°C)	Flow/Soldering Iron	22	20 ohm±10%	±100	
PV22□500A01	1.0(70°C)	Flow/Soldering Iron	22	50 ohm±10%	±100	
PV22□101A01	1.0(70°C)	Flow/Soldering Iron	22	100 ohm±10%	±100	
PV22□201A01	1.0(70°C)	Flow/Soldering Iron	22	200 ohm±10%	±100	
PV22□501A01	1.0(70°C)	Flow/Soldering Iron	22	500 ohm±10%	±100	
PV22□102A01	1.0(70°C)	Flow/Soldering Iron	22	1k ohm±10%	±100	
PV22□202A01	1.0(70°C)	Flow/Soldering Iron	22	2k ohm±10%	±100	Non Standard
PV22□502A01	1.0(70°C)	Flow/Soldering Iron	22	5k ohm±10%	±100	Product
PV22□103A01	1.0(70°C)	Flow/Soldering Iron	22	10k ohm±10%	±100	(Cd included)
PV22□203A01	1.0(70°C)	Flow/Soldering Iron	22	20k ohm±10%	±100	
PV22□503A01	1.0(70°C)	Flow/Soldering Iron	22	50k ohm±10%	±100	
PV22□104A01	1.0(70°C)	Flow/Soldering Iron	22	100k ohm±10%	±100	
PV22□204A01	1.0(70°C)	Flow/Soldering Iron	22	200k ohm±10%	±100	
PV22□504A01	1.0(70°C)	Flow/Soldering Iron	22	500k ohm±10%	±100	
PV22□105A01	1.0(70°C)	Flow/Soldering Iron	22	1M ohm±10%	±100	
PV22□205A01	1.0(70°C)	Flow/Soldering Iron	22	2M ohm±10%	±100	


# ■ Construction



## ■ Mounting Holes

PV22S PV22Y





Tolerance:±0.1 Tolerance:±0.1 in mm

Continued on the following page.



Continued from the preceding page.

# ■ Characteristics

Tomporatura Cuala	ΔTR	±2%
Temperature Cycle	ΔV.S.S.	±1%
11	ΔTR	±2%
Humidity	IR	100Mohm min.
Vibration (20C)	ΔTR	±1%
Vibration (20G)	ΔV.S.S.	±1%
Ch I. (FOC)	ΔTR	±1%
Shock (50G)	ΔV.S.S.	±1%
Tomporatura Load Life	ΔTR	±3%
Temperature Load Life	ΔV.S.S.	±1%
Law Tamparatura Evpagura	ΔTR	±1%
Low Temperature Exposure	ΔV.S.S.	±1%
High Tomporature Europeure	ΔTR	±2%
High Temperature Exposure	ΔV.S.S.	±1%
Rotational Life (200 cycles)	ΔTR	±2%

 $\Delta TR$ : Total Resistance Change ΔV.S.S. : Voltage Setting Stability : Insulation Resistance

66


# **PV36 Series**


#### ■ Features


- 1. High resolution 25-turns enables precision adjustment easily.
- 2. Sealed construction protects the interior from dust and liquid, which achieves stable performance.
- 3. Available for ultrasonic cleaning after soldering
- 4. Clutch mechanism prevents excessive wiper rotation.
- 5. 5 standard terminal styles
- 6. Both Top and side adjustment directions.
- To be complied with RoHS directive by new Cd free cermet resistive material. Pb free terminals with Sn plating.


# ■ Applications

- 1. Measuring instruments 2. OA equipment
- 3. Medical equipment 4. Power supply
- 5. Base station for cellular phone

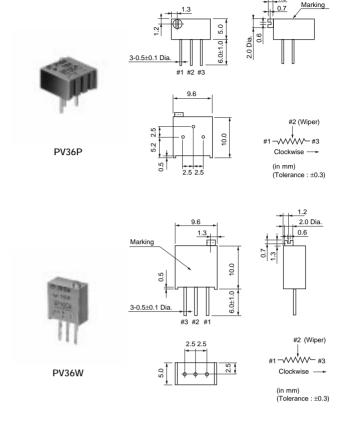







Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV36□100C01	0.5W(70°C)	Flow/Soldering Iron	25	10ohm ±10%	±150ppm/°C
PV36□200C01	0.5W(70°C)	Flow/Soldering Iron	25	20ohm ±10%	±150ppm/°C
PV36□500C01	0.5W(70°C)	Flow/Soldering Iron	25	50ohm ±10%	±150ppm/°C

A	Continued	from	the	preceding	pag

Part Number	Power Rating	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR
PV36□101C01	0.5W(70°C)	Flow/Soldering Iron	25	100ohm ±10%	±150ppm/°C
PV36□201C01	0.5W(70°C)	Flow/Soldering Iron	25	200ohm ±10%	±100ppm/°C
PV36□501C01	0.5W(70°C)	Flow/Soldering Iron	25	500ohm ±10%	±100ppm/°C
PV36□102C01	0.5W(70°C)	Flow/Soldering Iron	25	1k ohm ±10%	±100ppm/°C
PV36□202C01	0.5W(70°C)	Flow/Soldering Iron	25	2k ohm ±10%	±100ppm/°C
PV36□502C01	0.5W(70°C)	Flow/Soldering Iron	25	5k ohm ±10%	±100ppm/°C
PV36□103C01	0.5W(70°C)	Flow/Soldering Iron	25	10k ohm ±10%	±100ppm/°C
PV36□203C01	0.5W(70°C)	Flow/Soldering Iron	25	20k ohm ±10%	±100ppm/°C
PV36□253C01	0.5W(70°C)	Flow/Soldering Iron	25	25k ohm ±10%	±100ppm/°C
PV36□503C01	0.5W(70°C)	Flow/Soldering Iron	25	50k ohm ±10%	±100ppm/°C
PV36□104C01	0.5W(70°C)	Flow/Soldering Iron	25	100k ohm ±10%	±100ppm/°C
PV36□204C01	0.5W(70°C)	Flow/Soldering Iron	25	200k ohm ±10%	±100ppm/°C
PV36□254C01	0.5W(70°C)	Flow/Soldering Iron	25	250k ohm ±10%	±100ppm/°C
PV36□504C01	0.5W(70°C)	Flow/Soldering Iron	25	500k ohm ±10%	±100ppm/°C
PV36□105C01	0.5W(70°C)	Flow/Soldering Iron	25	1M ohm ±10%	±100ppm/°C
PV36□205C01	0.5W(70°C)	Flow/Soldering Iron	25	2M ohm ±10%	±100ppm/°C
PV36□100C31	0.5W(70°C)	Flow/Soldering Iron	25	10ohm ±10%	±150ppm/°C
PV36□200C31	0.5W(70°C)	Flow/Soldering Iron	25	20ohm ±10%	±150ppm/°C
PV36□500C31	0.5W(70°C)	Flow/Soldering Iron	25	50ohm ±10%	±150ppm/°C
PV36□101C31	0.5W(70°C)	Flow/Soldering Iron	25	100ohm ±10%	±150ppm/°C
PV36□201C31	0.5W(70°C)	Flow/Soldering Iron	25	200ohm ±10%	±100ppm/°C
PV36□501C31	0.5W(70°C)	Flow/Soldering Iron	25	500ohm ±10%	±100ppm/°C
PV36□102C31	0.5W(70°C)	Flow/Soldering Iron	25	1k ohm ±10%	±100ppm/°C
PV36□202C31	0.5W(70°C)	Flow/Soldering Iron	25	2k ohm ±10%	±100ppm/°C
PV36□502C31	0.5W(70°C)	Flow/Soldering Iron	25	5k ohm ±10%	±100ppm/°C
PV36□103C31	0.5W(70°C)	Flow/Soldering Iron	25	10k ohm ±10%	±100ppm/°C
PV36□203C31	0.5W(70°C)	Flow/Soldering Iron	25	20k ohm ±10%	±100ppm/°C
PV36□253C31	0.5W(70°C)	Flow/Soldering Iron	25	25k ohm ±10%	±100ppm/°C
PV36□503C31	0.5W(70°C)	Flow/Soldering Iron	25	50k ohm ±10%	±100ppm/°C
PV36□104C31	0.5W(70°C)	Flow/Soldering Iron	25	100k ohm ±10%	±100ppm/°C
PV36□204C31	0.5W(70°C)	Flow/Soldering Iron	25	200k ohm ±10%	±100ppm/°C
PV36□254C31	0.5W(70°C)	Flow/Soldering Iron	25	250k ohm ±10%	±100ppm/°C
PV36□504C31	0.5W(70°C)	Flow/Soldering Iron	25	500k ohm ±10%	±100ppm/°C
PV36□105C31	0.5W(70°C)	Flow/Soldering Iron	25	1M ohm ±10%	±100ppm/°C
PV36□205C31	0.5W(70°C)	Flow/Soldering Iron	25	2M ohm ±10%	±100ppm/°C

Operating Temperature Range: -55 to 125 °C


The blank column is filled with the code of adjustment direction and lead type (P, X, Y, W and Z).

The order quantity should be an integral multiple of the "Minimum Quantity".

The last three digits express the individual specification codes. C01 for standard type and C31 for radial taping type (PV36W/PV36X series only).


Part Number	Power Rating (W)	Soldering Method	Number of Turns (Effective Rotation Angle)	Total Resistance Value	TCR (ppm/°C)	Remarks
PV36□100A01	0.5(70°C)	Flow/Soldering Iron	25	10 ohm±10%	±100	
PV36□200A01	0.5(70°C)	Flow/Soldering Iron	25	20 ohm±10%	±100	
PV36□500A01	0.5(70°C)	Flow/Soldering Iron	25	50 ohm±10%	±100	
PV36□101A01	0.5(70°C)	Flow/Soldering Iron	25	100 ohm±10%	±100	
PV36□201A01	0.5(70°C)	Flow/Soldering Iron	25	200 ohm±10%	±100	
PV36□501A01	0.5(70°C)	Flow/Soldering Iron	25	500 ohm±10%	±100	
PV36□102A01	0.5(70°C)	Flow/Soldering Iron	25	1k ohm±10%	±100	
PV36□202A01	0.5(70°C)	Flow/Soldering Iron	25	2k ohm±10%	±100	
PV36□502A01	0.5(70°C)	Flow/Soldering Iron	25	5k ohm±10%	±100	
PV36□103A01	0.5(70°C)	Flow/Soldering Iron	25	10k ohm±10%	±100	
PV36□203A01	0.5(70°C)	Flow/Soldering Iron	25	20k ohm±10%	±100	
PV36□253A01	0.5(70°C)	Flow/Soldering Iron	25	25k ohm±10%	±100	
PV36□503A01	0.5(70°C)	Flow/Soldering Iron	25	50k ohm±10%	±100	
PV36□104A01	0.5(70°C)	Flow/Soldering Iron	25	100k ohm±10%	±100	
PV36□204A01	0.5(70°C)	Flow/Soldering Iron	25	200k ohm±10%	±100	
PV36□254A01	0.5(70°C)	Flow/Soldering Iron	25	250k ohm±10%	±100	
PV36□504A01	0.5(70°C)	Flow/Soldering Iron	25	500k ohm±10%	±100	
PV36□105A01	0.5(70°C)	Flow/Soldering Iron	25	1M ohm±10%	±100	Non Standard
PV36□205A01	0.5(70°C)	Flow/Soldering Iron	25	2M ohm±10%	±100	Product
PV36□100A31	0.5(70°C)	Flow/Soldering Iron	25	10 ohm±10%	±100	(Cd included)
PV36□200A31	0.5(70°C)	Flow/Soldering Iron	25	20 ohm±10%	±100	(Ca iriciadea)
PV36□500A31	0.5(70°C)	Flow/Soldering Iron	25	50 ohm±10%	±100	
PV36□101A31	0.5(70°C)	Flow/Soldering Iron	25	100 ohm±10%	±100	
PV36□201A31	0.5(70°C)	Flow/Soldering Iron	25	200 ohm±10%	±100	
PV36□501A31	0.5(70°C)	Flow/Soldering Iron	25	500 ohm±10%	±100	
PV36□102A31	0.5(70°C)	Flow/Soldering Iron	25	1k ohm±10%	±100	
PV36□202A31	0.5(70°C)	Flow/Soldering Iron	25	2k ohm±10%	±100	
PV36□502A31	0.5(70°C)	Flow/Soldering Iron	25	5k ohm±10%	±100	
PV36□103A31	0.5(70°C)	Flow/Soldering Iron	25	10k ohm±10%	±100	
PV36□203A31	0.5(70°C)	Flow/Soldering Iron	25	20k ohm±10%	±100	
PV36□253A31	0.5(70°C)	Flow/Soldering Iron	25	25k ohm±10%	±100	
PV36□503A31	0.5(70°C)	Flow/Soldering Iron	25	50k ohm±10%	±100	
PV36□104A31	0.5(70°C)	Flow/Soldering Iron	25	100k ohm±10%	±100	
PV36□204A31	0.5(70°C)	Flow/Soldering Iron	25	200k ohm±10%	±100	
PV36□254A31	0.5(70°C)	Flow/Soldering Iron	25	250k ohm±10%	±100	
PV36□504A31	0.5(70°C)	Flow/Soldering Iron	25	500k ohm±10%	±100	
PV36□105A31	0.5(70°C)	Flow/Soldering Iron	25	1M ohm±10%	±100	
PV36□205A31	0.5(70°C)	Flow/Soldering Iron	25	2M ohm±10%	±100	

# **■** Construction




# ■ Mounting Holes

PV36P




PV36W/X



(Tolerance:±0.1

( Tolerance:±0.1 ) in mm

#### PV36Y/Z



(Tolerance ±0.1) in mm

# ■ Characteristics

Tomporatura Cuala	ΔTR ±2%
Temperature Cycle	ΔV.S.S. ±1%
I I considitor	ΔTR ±2%
Humidity	IR 100Mohm min.
Vibration (20C)	ΔTR ±1%
Vibration (20G)	ΔV.S.S. ±1%
Charl (100C)	ΔTR ±1%
Shock (100G)	ΔV.S.S. ±1%
Tomporatura Load Life	ΔTR ±3%
Temperature Load Life	ΔV.S.S. ±1%
Low Temperature Exposure	ΔTR ±2%
Low remperature Exposure	ΔV.S.S. ±1%
High Tomporature Expecure	ΔTR ±3%
High Temperature Exposure	ΔV.S.S. ±1%
Detational Life (200 evalue)	ΔTR R≦1kohm, R≧500kohm ··· ±5%
Rotational Life (200 cycles)	1kohm <r<500kohm td="" ±3%<="" ···=""></r<500kohm>

 $\begin{array}{lll} \Delta TR & : Total \ Resistance \ Change \\ \Delta V.S.S. : Voltage \ Setting \ Stability \\ IR & : Insulation \ Resistance \\ R & : Standard \ Total \ Resistance \\ \end{array}$ 

# PV12/PV37/PV23/PV22/PV36 Series Notice

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40 deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- If you use the trimmer potentiometer in an environment other than listed below, please consult with a Murata factory representative prior to using.

The trimmer potentiometer should not be used under

#### ■ Notice (Rating)

- 1. When using with partial load (rheostat), minimize the power depending on the resistance value.
- 2. The maximum input voltage to a trimmer potentiometer should not exceed (P.R)^1/2 or the maximum operating voltage, whichever is smaller.
- 3. The maximum input current to a trimmer potentiometer should not exceed (P/R)^1/2 or the allowable wiper current, whichever is smaller.

the following environmental conditions:

- Corrosive gaseous atmosphere
   (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid

(Ex. Oil, Medical liquid, Organic solvent, etc.)

- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above

#### ■ Notice (Soldering and Mounting)

- 1. Soldering
- (1) Standard soldering condition
  - (a) Flow soldering:

>Pre-heating temp. 80-100 deg. C >Soldering temp. 260 deg. C max.

>Soldering time 3 sec. max.

- (b) Soldering iron:
  - >Temperature of tip 300 deg. C max.

>Soldering time 3 sec. max.

>Wattage of iron 40W max.

Before using other soldering conditions than those listed above, please consult with Murata factory representative prior to using. If the soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the trimmer potentiometer may deviate from the specified characteristics.

- (2) To minimize mechanical stress when adjusting, the trimmer potentiometer should be mounted onto PCB without gap.
- (3) The soldering iron should not come in contact with the case of the trimmer potentiometer. If such contact does occur, the trimmer potentiometer may be damaged.
- 2. Mounting
- (1) Use PCB hole to meet the pin of the trimmer potentiometer. If the trimmer potentiometer installs into insufficient PCB hole, the

- trimmer potentimeter may be damaged by mechanical stress.
- (2) Do not apply excessive force (preferably 9.8N (Ref.; 1kgf) max.), when the trimmer potentiometer is mounted to the PCB.
- 3. Cleaning
  - (1) Isopropyl-alcohol and Ethyl-alcohol are applicable solvents for cleaning. If you use any other types of solvents, please consult with a Murata factory representative prior to using.
  - (2) The total cleaning time by cold dipping, vapor and ultrasonic washing (conditions as below) method should be less than 3 minutes.
  - (3) For ultra-sonic cleaning, the available condition is as follows.
    - >Power: 600W (67 liter) max.
    - >Frequency: 28kHz
    - >Temperature: Ambient temperature

Due to the ultra-sonic cleaning equipment's peculiar self-resonance point and that the cleaning compatibility usually depends on the jig construction and/or the cleaning condition such as the depth of immersion, please check the cleaning equipment to determine the suitable conditions.

If the trimmer potentiometer is cleaned by other conditions, the trimmer potentiometer may be damaged.

## PV12/PV37/PV23/PV22/PV36 Series Notice

#### ■ Notice (Handling)

- 1. Use suitable screwdrivers that fit comfortably in driver slot. We recommend the screwdrivers below.
  - \* Recommended screwdriver for manual adjustment ENGINEER INC.: DA-40

(Murata P/N: KMDR180)

We can supply the screwdrivers above.

If you place order, please specify the Murata P/N.

2. Don't apply more than 9.8N (Ref.; 1kgf) of twist and stress after mounting onto PCB to prevent contact intermittence. If excessive force is

- Notice (Other)
- Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
- 2. Murata cannot guarantee trimmer potentiometer integrity when used under conditions other than those specified in this document.

- applied, the trimmer potentiometer may not function.
- When adjusting with an adjustment tool, the applied force to the adjustment screw should not exceed
   N (Ref.; 500gf). If excessive force is applied, the trimmer potentiometer may not function due to damage.
- 4. When using a lock paint to fix slot position, please use adhesive resin without chlorine or sulfur (Three-bond "1401 series").

# **Trimmer Potentiometers**




## Angle Sensing Potentiometer SMD Dust-proof Type 12mm Size PVS1 Series


#### ■ Features

- 1. Dust-proof construction protects the interior from dust, which maintains stable characteristics.
- 2. Compliant to high peak temperature lead free soldering.
- 3. Excellent resistance materials and high reliability wiper achieves 1M cycles.
- 4. D formation thru-hole rotor enables selection of any kind of gear shape.
- 5. Leaded terminal type is available.
- 6. Ultra-thin size (2.1mm height)
- 7. Au plated terminals without Lead.

## ■ Applications

- 1. Animal robot
- 2. Switch for automotive
- 3. Motor drive unit
- 4. Radio control equipment
- 5. Electric motor-driven bicycle







Part Number	Total Resistance Value (k ohm)	Linearity (%)	Effective Rotational Angle	TCR	Rotational Life
PVS1A103A01 (SV01A103AEA01)	10 ±30%	±2	333.3° (Ref.)	±500ppm/°C	1M cycles
PVS1L103A03 (SV01L103AEA11)	10 ±30%	±2	333.3° (Ref.)	±500ppm/°C	1M cycles

PVS1 series will be changed to new part number "SV01" since Oct. 1, 2004.

#### ■ Construction








## ■ Standard Land Pattern

# PVS1A (in mm) (in mm) (Tolerance: ±0.1)

## ■ Standard Mounting Holes

PVS1L



(in mm) (Tolerance : ±0.1)

## ■ Characteristics

Temperature Cycle	ΔTR	±20%
(Thermal Shock)	Linearity	±3%
Llumidity	ΔTR	±20%
Humidity	Linearity	±3%
Vibration	ΔTR	±10%
vibration	Linearity	±3%
Shook (20C)	ΔTR	±10%
Shock (20G)	Linearity	±3%
Llumidity Load Life	ΔTR	±20%
Humidity Load Life	Linearity	±3%
High Temperature	ΔTR	+5/-30%
Exposure	Linearity	±3%
Low Temperature	ΔTR	±20%
Exposure	Linearity	±3%
Rotational Life	ΔTR	±20%
(1M cycles)	Linearity	±3%

ΔTR: Total Resistance Change

## **PVS1 Series Notice**

#### ■ Notice (Operating and Storage Conditions)

- 1. Store in temperatures of -10 to +40deg. C and relative humidity of 30-85%RH.
- 2. Do not store in or near corrosive gases.
- 3. Use within six months after delivery.
- 4. Open the package just before using.
- 5. Do not store under direct sunlight.
- Do not use the rotary position sensor under the following environmental conditions. If you use the rotary position sensor in an environment other these listed below, please consult with Murata factory representative prior to using.

#### ■ Notice (Soldering and Mounting)-PVS1A Type

- 1. Soldering
- (1) PVS1A series can be soldered by reflow soldering method and soldering iron. Do not use flow soldering method (dipping).
- (2) The dimension of land pattern used should be Murata's standard land pattern at reflow soldering. Excessive land area may cause displacement due to the effect of the surface tension of the solder. Insufficient land area may cause insufficient soldering strength on PCB.
- (3) Standard soldering condition
  - (a) Reflow soldering : Refer to the standard temperature profile.
  - (b) Soldering iron:
    - >Temperature of tip 360 deg. C max.
    - >Soldering time 3 sec. max./1 terminal
    - >Diameter 3mm max. >Wattage of iron 30W max.
  - Before using other soldering conditions than those listed above, please consult with Murata factory representative prior to using. If the
- Notice (Soldering and Mounting)-PVS1L Type
- 1. Soldering
- (1) PVS1L series can be soldered by flow soldering method and soldering iron. Do not use reflow soldering method.
- (2) Standard soldering condition
  - (a) Flow soldering

>Pre-haeting temp.: 80-100 deg. C >Soldering temp. : 260 deg. C max.

>Soldering time : 3 sec. max.

(b) Soldering iron

>Temperature of tip: 360 deg. C max. >Soldering time : 3 sec. max./1 terminal

>Diameter : 3mm max. >Wattage of iron : 30W max.

Before using other soldering conditions than those listed above, please consult with Murata factory representative prior to using. If the


- Corrosive gasses atmosphere
   (Ex. Chlorine gas, Hydrogen sulfide gas, Ammonia gas, Sulfuric acid gas, Nitric oxide gas, etc.)
- (2) In liquid (Ex. Water, Oil, Medical liquid, Organic solvent, etc.)
- (3) Dusty / dirty atmosphere
- (4) Direct sunlight
- (5) Static voltage nor electric/magnetic fields
- (6) Direct sea breeze
- (7) Other variations of the above
  - soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the rotary position sensor may deviate from the specified characteristics.
- (4) The amount of solder is critical. Insufficient amounts of solder can lead to insufficient soldering strength on PCB. Excessive amounts of solder may cause bridging between the terminals.
- (5) The soldering iron should not come in contact with the cover of the rotary position sensor. If such contact does occur, the rotary position sensor may be damaged.
- 2. Mounting
- (1) Do not apply excessive force (preferable 9.8N (Ref.; 1kgf) max.), when the rotary position sensor is mounted to the PCB.
- (2) Do not warp and/or bend PCB to prevent the rotary position sensor from breakage.
- 3. Cleaning
  Cannot be cleaned because of open construction.
  - soldering conditions are not suitable, e.g., excessive time and/or excessive temperature, the rotary position sensor may deviate from the specified characteristics.
- (3) The amount of solder is critical.
- (4) The soldering iron should not come in contact with the cover of the rotary position sensor. If such contact does occur, the rotary position sensor may be damaged.
- 2. Mounting
- (1) Use PCB hole to meet the pin of the rotary position sensor. If the rotary position sensor is installed into insufficient PCB hole, the rotary position sensor may be damaged by mechanical stress.
- (2) Do not apply excessive force (preferably 9.8N (Ref.; 1kgf) max.), when the rotary position


## **PVS1 Series Notice**

Continued from the preceding page. sensor is mounted to the PCB.

3. Cleaning

■ Reflow Soldering Standard Profile





## ■ Notice (Handling)

Uncontrolled mechanical force except usual rotation on the hollow rotor of product, may cause big change of electrical characteristic, big increase of rotational torque or mechanical damage of product.

Therefore, please pay your attention on the following points for your design.

- The fixing method of product must be soldering by the terminals of product. And please don't fix by screw cramping of supporting board which might cause mechanical deformation of product.
- 2. Your connecting shaft must be sustained by your bearing and any uncontrolled force should not apply on the hollow rotor of product.

## ■ Notice (Other)

- Please make sure the connecting impedance is not to be less than 10M ohm. The rotary position sensor is designed to connect the output terminal and A/D port of the microprocessor directly. Therefore, connecting impedance presupposes certain M ohm and the contact resistance is set high.
- To minimize the processing error and noise influence which occur in rare cases, when data is installed through the product, please note the following items and program your software.
  - (1) Data install should be done plural times and

- applied the mean value.
- (2) Data considered as error should be invalid.
- (3) If suspicious data is found, the data should be re-installed.
- Before using rotary position sensor, please test after assembly in your particular mass production system.
- MURATA cannot guarantee rotary position sensor integrity when used under conditions other than those specified in this document.

a

## SMD Open Type and SMD Sealed Type PVM4A\_C01 Series Specifications and Test Methods

The tests and measurements should be conducted under the condition of 15 to 35°C of temperature, 25 to 75% of relative humidity and 86 to 106 kpa of atmospheric pressure unless otherwise specified. If questionable results occur that have been measured in accordance with the above mentioned conditions, the tests and measurements should be conducted under the condition of 25±2°C of temperature and, 45 to 55% of relative humidity and 86 to 106 kpa of atmospheric pressure.

No.	Item	Test Methods
1	Total Resistance	Measure total resistance between the resistance element and terminals (terminals #1 and #3) with the contact arm positioned against a stop. The positioning of the contact arm and terminal should be the same for subsequent total resistance measurements on the same device.  Use the test voltage specified in Table-1 for total resistance measurements. This voltage should be used whenever a subsequent total resistance measurement is made.  Total Resistance, Maximum Test Nominal (ohm) Voltage (V)  10≤R≤100 1.0  100 <r≤1k 3.0<="" td=""></r≤1k>
		1k <r≤10k< th="">     10.0       10k<r≤100k< td="">     30.0       100k<r< td="">     100.0       Table 1: Total resistance test voltage</r<></r≤100k<></r≤10k<>
2	Residual Resistance	Position the contact arm at the extreme counterclockwise limit of mechanical travel and measure the resistance between the contact arm and the corresponding end terminal. Then, position the contact arm at the extreme clockwise limit of mechanical travel and measure the resistance between the contact arm and the corresponding end terminal. During this test, take suitable precautions to ensure that the rated current of the resistance element is not exceeded.
3	Contact Resistance	Contact resistance variation should be measured with the measuring circuit shown below, or its equivalent. The operating wiper should be rotated in both directions through 90% of the actual effective-electrical travel for a total of 6 cycles.  The rate of rotation of the operating wiper should be such that the wiper completes 1 count in determining whether or not a contact resistance variation is observed at least twice in the same location. The test current should follow the value given in Table-2 unless otherwise limited by the power rating.  Standard Total Resistance R (ohm)  100≤R<10k 10mA max. 10k≤R<100k 10mA max. 10k≤R<100μA max. Table 2: Test current for CRV  Rx: Trimmer Potentiometer Oscilloscope bandwidth:100Hz to 50kHz  Figure 1: CRV measuring circuit
4	Humidity Exposure	The wiper contact point should be preset at about 50% position of effective rotational angle. After that, the potentiometer should be placed in a chamber at 40±2°C and 90 - 95% without loading for 500±12 hours.  The resistance value should be measured after keeping the potentiometer in a room for 5±1/6 hours.
5	High Temperature Exposure	The wiper contact point should be preset at about 50% position of effective rotational angle. After that, the potentiometer should be placed in a chamber at 70±2°C without loading for 500±12 hours. The resistance value should be measured after keeping the potentiometer in a room for 1.5±1/6 hours.
6	Humidity Load Life	The wiper contact point should be preset at about 50% position of effective rotational angle. After that, the potentiometer should be placed in a chamber at 40±2°C and 90 - 95% with loading the 1/2 rated voltage between #1 and #2 terminals, intermittently 1.5 hours ON and 0.5 hours OFF for 1000±12hours.  The resistance value should be measured after keeping the potentiometer in a room for 5±1/6 hours.
7	Load Life	The wiper contact point should be preset at about 50% position of effective rotational angle. After that, the potentiometer should be placed in a chamber at 70±2°C (50±2°C for PVZ) with loading the 1/2 rated voltage between #1 and #2 terminals, intermittently 1.5 hours ON and 0.5 hours OFF for 1000±12 hours. The resistance value should be measured after keeping the potentiometer in a room for 1.5±1/6 hours.
8	Temperature Cycle	The wiper contact point should be preset at about 50% position of effective rotational angle. After that, the potentiometer should be subjected to Table 3, Table 4 temperature for 5 cycles. The resistance value should be measured after keeping the potentiometer in a room for 1.5±10 minutes.    Sequence   1   2   3   4     Temp. (°C)   -25±3   +25±2   +85±3   +25±2     Time (min.)   30±3   10max.   30±3   10max.   30±3   10max.     Table 3: PVZ   Table 4: PVA3/PVS3/PVM4A CO1



# SMD Open Type and SMD Sealed Type PVM4A\_C01 Series Specifications and Test Methods

Continued from the preceding page

Vo.	Item	Test Methods					
9	Temperature Coefficient of Resistance	The trimmer potentiometer should be subjected to each of the following temperatures (see Table 5 to 45 minutes. The resistance value should be measured in the chamber.	4 +125±3				
10	Rotational Life	The wiper should be rotated over 90% of the effective rotational angle without loading at a speed o minute, for 10 cycles continuously. The resistance value should be measured after keeping the poroom for 10±5 minutes.					



# SMD Sealed Type/Lead Sealed Type Specifications and Test Methods

The following describes trimmer potentiometer testing conducted by Murata Manufacturing Co., Ltd. in accordance with MIL-R-22097 (Military specification for variable resistors, non-wirewound) and MIL-STD-202 (Test methods for electronic and electrical component parts).

No.	Item			Test I	Methods		
		against a stop. The position	ng of the c device. Us	ontact arm and ter se the test voltage	minal sho specified	ould be the in Table	1 and #3) with the contact arm positioned he same for subsequent total resistance of the total resistance measurements.
		Total Resistance, Ma	aximum Te	st			
1	Total Resistance		Voltage (V)				
•	Total Resistance	10≦R≦100 100 <r≦1k< td=""><td>1.0</td><td></td><td></td><td></td><td></td></r≦1k<>	1.0				
		1k <r≦10k< td=""><td>3.0 10.0</td><td></td><td></td><td></td><td></td></r≦10k<>	3.0 10.0				
		10k <r≦100k< td=""><td>30.0</td><td></td><td></td><td></td><td></td></r≦100k<>	30.0				
		100k <r< td=""><td>100.0</td><td></td><td></td><td></td><td></td></r<>	100.0				
		Table 1: Total resistance	test voltag	je			
2	Residual Resistance	between the contact arm an wise limit of mechanical trav	d the corre el and mea	sponding end term sure the resistand	ninal. The ce betwee	n, position the cor	cal travel and measure the resistance on the contact arm at the extreme clock- ntact arm and the corresponding end ter- urrent of the resistance element is not
		adjustment rotor (screw) sho angle (number of turns) for a contact resistance variation where the contact arm move adjustment rotor (screw) sho	ould be rota a total of 6 is observed es from the ould be suc test currer	ated in both direction of the last cycles. Only the last at least twice in the termination, on or that that the adjustm	ons throu st 3 cycle he same off, the re ent rotor	gh 90% or should location, esistance (screw) or should be should b	It shown in Figure 1, or its equivalent. The of the actual effective-electrical rotational dount in determining whether or not a exclusive of the roll-on or roll-off points element. The rate of rotation of the completes 1 cycle for 5 seconds minimum in Table 2 unless otherwise limited by
	Contact Resistance	R (ohm)	Test	Current			#1 Rx #3 Oscilloscope
3	Variation	R≦100	20	)mA		J <sub>2</sub>	#2
		100 <r<500< td=""><td></td><td>0mA</td><td></td><td>rrent Source t shown in Ta</td><td></td></r<500<>		0mA		rrent Source t shown in Ta	
		500≦R<1k		mA		Ŷ	Amplifier
		1k≦R<2k 2k≦R<50k		mA mA		Rx : Trir	mmer Potentiometer
		50k≦R<200k		0μΑ			scope bandwidth :100Hz to 50kHz
		200k≦R<1M		<u>0μ/τ</u> 0μΑ		Fig	ure 1: CRV measuring circuit
		1M≦R<2M	50	<u>·</u> DμA			
		2M≦R	30	DμA			
		Table 2: Test curre	ent for CRV	,			
4	Temperature Coefficient of Resistance	The trimmer potentiometer sutes. Temperature coefficient $TCR = \frac{R_2 - R_1}{R_1 (T_2 - T_1)} \times 10^6$ $T_1 : Reference tem T_2 : Test temperature R_1 : Resistance at R_2 : Resistance at R_2 : Resistance at R_3 : Resistance at R_4 : Resistance at R_5 : R_5 : Resistance at R_5 : Resistance at R_5 : Resistance at R_5 : R_5$	nt of resista (ppm/°C) aperature in ure in degre reference t	nce should be app degrees celsius des celsius demperature ohm			nperatures (see Table 3) for 30-45 minng formula.
		Sequence 1*	2	3	4*	5	6
		Temperature (°C) +25	-15	Min. operating	+25	+65	Max. operating
		Note*: Reference temperatu	re	Temperature			Temperature
		There is the second temperate		3: Test temperatu	res		
		adequate DC test potential s	should be a	pplied between te	rminal #1	and tern	rical rotational angle (number of turns). An minal #3. The voltage between terminal #1 uld be measured and applied to the
5	Voltage Setting Stability	Voltage setting stability= $\left(\frac{e}{E}\right)$	- <u>e</u> )×10	0 (%)			
		e : Before test (The voltage between ter e': After test	minal #1 a	nd terminal #2)		#1 0	→
		(The voltage between ter				<b> ←</b>	e



# SMD Sealed Type/Lead Sealed Type Specifications and Test Methods

Continued from the preceding page.

No.	Item	Test Methods
		The trimmer potentiometer should be subjected to Table 4 temperature for 5 cycles. The trimmer potentiometer should be removed from the chamber, and maintained at a temperature of 25±5°C for 1~2 hours.
6	Temperature Cycle	Sequence         1         2         3         4           Temp.         PV□ series         -55±3         +125±3           Temp.         PV□ series         -55±3         +25±3
	. ,	PV22 series   PV22 series   PV22 series   PV52 series
		Table 4: One cycle of temperature cycle.
7	Humidity	1) PVC6, PV12, PV32, PV34 PVM4A D101 series The trimmer potentiometer should be placed in a chamber at a temperature of 40±2°C and a humidity of 90-95% without loading for 250±8 hours (500±12 hours for PVM4A D101 series). The trimmer potentiometer should be removed from the chamber, and maintained at a temperature of 25±5°C for 5±1/6 hours.  2) PVF2 series The trimmer potentiometer should be placed in a chamber at 60±2°C and 90-95% without loading for 1000±12 hours. The trimmer potentiometer should be removed from the chamber, and maintained at a temperature of 25±5°C for 5±1/6 hours  2) PVF3, PV65, PV01, PV22, PV23, PV36, PV37 series The trimmer potentiometer should be subjected Figure-3 the programmed humidity environment for 10 cycle. The trimmer potentiometer should be removed from the chamber, and maintained at a temperature of 25±5°C for 1.5±1/2 hours.  MIL-STD-202 METHOD 106  MIL-STD-202 METHOD 106
		1) PV series The trimmer potentiometer should be vibrated throughout the frequency range at the 20G level. A complete frequency range, 10Hz to 2000Hz and back, should be made within 15 minutes for a total of 4 sweeps in each of the three
8	Vibration	axis direction for a total of 12 sweeps.  2) PVF2 series  The trimmer potentiometer should be subjected to vibration at 0.3 inch amplitude. The frequency should be varied uniformly between the approximate limits of 10Hz and 55Hz. This motion should be applied for period of 2 hours in each of 3 mutually perpendicular directions (total of 6 hours).
9	Shock	1) PV series The trimmer potentiometer should be shocked at the 100G (50G for PV22 and PV23 series) level and should be subjected to 4 shocks in each of the three axis directions for a total of 12 shocks.  2) PVM4A D101 series The trimmer potentiometer should be shocked at the 100G level and should be subjected to 3 shocks in each of the six axis directions for a total of 18 shocks.
10	Temperature Road Life	Full rated continuous working voltage not exceeding the maximum rated voltage should be applied intermittently between terminal #1 and terminal #3 of the trimmer potentiometer, 1.5 hours on and 0.5 hours off, for a total of 1000±12 hours, at a temperature of 70±2°C (85±2°C for PV01 and PV37 series, 50±2°C for PVF2 series). The trimmer potentiometer should be removed from the chamber, and maintained at a temperature of 25±5°C for 1 to 2 hours.
11	High Temperature Exposure (Except for PVF2)	The trimmer potentiometer should be placed in a chamber at a temperature of 125±3°C (150±3°C for PV22 series) 250±8 hours without loading. The trimmer potentiometer should be removed from the chamber, and maintained at a temperature of 25±5°C for 1 to 2 hours.
12	Low Temperature Exposure (Except for PVF2 and PVM4A DD1)	The trimmer potentiometer should be placed in a chamber at a temperature of -55±3°C for 1 hours without loading. Full rated continuous working voltage not exceeding the maximum rated voltage should be applied for 45 minutes. The trimmer potentiometer should be removed from the chamber, and maintained at a temperature of 25±5°C for approximately 24 hours.

# SMD Sealed Type/Lead Sealed Type Specifications and Test Methods

Continued from the preceding page.

No.	Item	Test Methods				
13	Low Temperature Operation (Only for PVF2 and PVM4A DD01)	The trimmer potentiometer should be placed in a chamber at a temperature of -25±3°C (-55±3°C for PVM4A DO1 series) 48±4 hours without loading. The trimmer potentiometer should be removed from the chamber, and mainained at a temperature of 25±5°C for 1-2 hours				
14	Rotational Life	1)PV series Full rated continuous working voltage not exceeding the maximum rated voltage should be applied with the circuit shown in the figure. The adjustment rotor (screw) should be continuously cycled through not less than 90% of effective-electrical rotational angle (number of turns), at the rate of 1 cycle for 5 seconds minimum to 2.5 minutes maximum for total of 200 cycles.  End Terminal Resistor 1 End Terminal End Terminal Resistor 2 End Terminal Figure 4  2) PVG3, PVG5 series The adjustment rotor (screw) should be continuously cycled though not less than 90% of effective-electrical rotational angle (number of turns), at the rate of 1 cycle for 5 seconds minimum to 2.5 minutes maximum for a total of 50 (100 for PVG5) cycles, without loading.  3) PVF2, PVM4A DD01 series				
		The wiper should be rotated over 90% of the effective rotational angle without loading at a speed of 10 cycles per minute, for 100 cycles continuously.				



# **Angle Sensing Potentiometer Specifications and Test Methods**


No.	Item	Test Methods
1	Linearity	Independent linearity should vary no more than ±2% within ±160° to 50% voltage ratio.  Taper : linear, 100%/333.3° Measured with the circuit as below (Figure 1).  Guarantee limit for linearity  Output voltage ratio (%)  V (1-2) V (1-3) X100  Output (#2)  Figure-1
2	Temperature Coefficient of Resistance	The rotary position sensor should be subjected to each of the following temperatures (see Table 1) for 30-45 minutes. Temperature coefficient of resistance should be applied to the following formula.
3	Temperature Cycle (Thermal Shock)	The rotary position sensor should be subjected to Table 2 temperature for 5 cycles.  Then, the rotary position sensor should be kept in the dry box for 24 +8/-0 hrs.  Sequence 1 2 3 4  Temperature (°C) -40±3 +25±2 +85±3 +25±2  Time (min.) 30 5 max. 30 5 max.  Table 2: One cycle of temperature cycle
4	Humidity	The rotary position sensor should be stored in a chamber at temperature of +60±2°C and relative Humidity of 90-95% for 250±8 hrs. After removing from the chamber, the rotary position sensor should be kept in the dry box for 24 +8/-0 hours.
5	Vibration	The rotary position sensor should be tested under the condition of the amplitude of 1.5mm, the frequency range from 10 to 55Hz (should be traversed in approximately one minute) and 2 hours in each of 3 mutually perpendicular directions (total 6 hours). Then, the rotary position sensor should be kept in the dry box for 1-2 hrs.
6	Shock	The rotary position sensor should be tested under the condition of the peak acceleration 20G max. in half-sine wave and 5 shocks in each of 3 mutually perpendicular directions (total 15 shocks). Then, the rotary position sensor should be kept in the dry box for 1-2 hrs.
7	Humidity Load Life	Full rated continuous working voltage not exceeding 5Vdc should be applied intermittently between terminal #1 and terminal #3 of the rotary position sensor, 1.5 hours on and 0.5 hours off, for 96±4 hours in total in a chamber at a temperature of +40±2°C and relative humidity of 90-95%. After removing from the chamber, the rotary position sensor should be kept in the dry box for 24 +8/-0 hours.
8	High Temp. Exposure	The rotary position sensor should be stored in a chamber at the temperature of +85±3°C without loading for 250±8 hours. After removing from the chamber, the rotary position sensor should be kept in the dry box for 24 +8/-0 hours.
9	Low Temp. Exposure	The rotary position sensor should be stored in a chamber at the temperature of -40±3°C without loading for 168±4 hours. After removing from the chamber, the rotary position sensor should be kept in the dry box for 24 +8/-0 hours.
10	Rotational Life	The adjustment rotor should be continuously rotated within ±160° of effective electrical rotational angle, at the rate of one cycle for 6 seconds for 1 Million cycles under the condition of +25±2°C of temperature without loading.



■ Minimum Quantity

Part Number			Minimum Quantity (p	ocs.)			
Part Number	ø180mm reel	ø330mm reel	Ammo Pack	Magazine	Bulk	Tray	
PVZ2A	3000	12000	000 —		1000		
PVZ2K	3000	_	_	_	1000	_	
PVZ3A	2000	8000	_	_	1000	_	
PVZ3K/R	1500	_	_	_	1000	_	
PVS3	2500	8000	_	_	500	_	
PVA3	2000	8000	_	_	500	_	
PVG3A/G	1000	_	_	_	500	_	
PVG3K	500	_	_	_	_	_	
PVM4	500	3000	_	_	500	_	
PVF2A	500	_	_	_	100	_	
PVG5A	250	_	_	_	50	_	
PVG5H	500	_	_	_	50	_	
PV01W	_	_	_	50	_	_	
PV01P	_	_	_	50	_	_	
PV01X	_	_	_	50	_	_	
PVC6A/D/G/H/E	_	_	_	50	50	_	
PVC6M/Q	_	_	1000	50	50	_	
PV34	_	_	_	_	100	_	
PV32	_	_	_	_	100	_	
PV23/12	_	_	_	_	50	_	
PV22	_	_	_	_	30	_	
PV36W	_	_	1000	50	50	_	
PV36Y	_	_	_	50	50	_	
PV36X	_	_	1000	40	50	_	
PV36Z/P	_	_	_	40	50	_	
PV37Y/Z	_	_	1000	_	50	_	
PV37W/X/P	_	_	_	_	50	_	
PVS1A	_	1000	_	_	50	_	
PVS1L	_	_	_	_	_	1000	

## ■ Dimensions of Reel

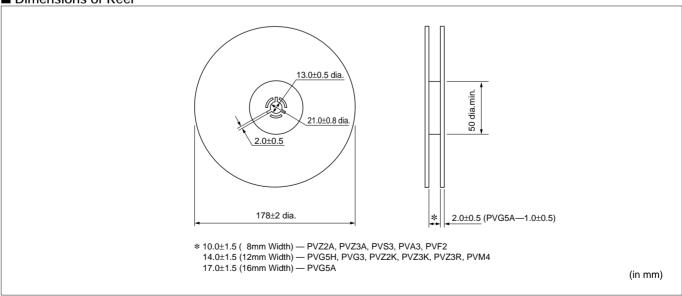






 $\begin{tabular}{|c|c|c|c|}\hline \end{tabular}$  Continued from the preceding page.


## ■ Dimensions of Reel

PVS1



## ■ Dimensions of Plastic Tape

## **PVZ2 / PVZ3 / PVA3 / PVS3 / PVF2**



Tape feeding direction

Part Number	А	В	С	D	I	J
PVZ2A	2.4±0.1	3.1±0.1	8.0±0.2	3.5±0.1	1.1±0.1	0.2±0.1
PVZ2K	2.4±0.1	5.7±0.1	12.0±0.1	5.5±0.1	1.1±0.1	0.3±0.1
PVZ3A/PVA3		3.8±0.2	8.0±0.2	3.5±0.1	1.95±0.1	0.2±0.1
PVZ3K	3.3+0.2	5.8±0.2	40.010.0	5.5±0.1	2.3±0.1	0.210.4
PVZ3R	3.3±0.2	6.5±0.2	12.0±0.2	5.5±0.1	2.1±0.1	0.3±0.1
PVS3		4.1±0.2	8.0±0.2	3.5±0.1	1.6±0.1	0.2±0.1
PVF2	2.3±0.2	2.3±0.2	8.010.2	3.5±0.1	2.3±0.1	0.3±0.1

<sup>•</sup> The side containing terminals #1 and #3 faces the plastic tape pilot holes.

(in mm)








Continued from the preceding page.

**■** Dimensions of Plastic Tape

### PVG3A / PVG3G / PVM4 / PVG5H




Tape feeding direction

Part Number	Α	В	I	J	
PVG3A	4.010.4	4.0±0.1	0.410.4	0.3±0.1	
PVG3G	4.0±0.1	4.9±0.1	2.1±0.1		
PVM4	4.5±0.2	5.5±0.2	2.15±0.1	0.3±0.1	
PVG5H	5.4±0.2	5.8±0.2	4.0±0.1	0.4±0.1	

<sup>•</sup> The side containing terminals #1 and #3 faces the plastic tape pilot holes (except PVG3).

(in mm)

(in mm)

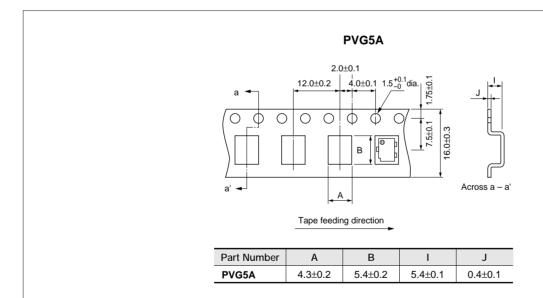





Continued from the preceding page.


## **■** Dimensions of Plastic Tape


PVG3K







## ■ Dimensions of Radial Taping



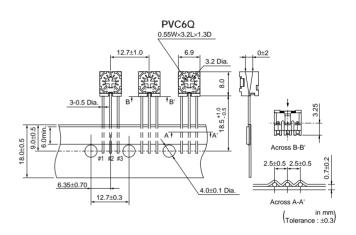






Continued on the following page.  $\begin{tabular}{|c|c|c|c|}\hline \end{tabular}$ 







Continued from the preceding page.

## ■ Dimensions of Radial Taping





## ■ Dimensions of Ammo Pack



■ Dimensions of Magazine Packaging PV01 PVC6 370 +0 9.0±0.5 413 +0 9.8±0.5 15.3±0.5 18.8±0.5 PV36W/Y/X/Z PV36P 508 <sup>+0</sup><sub>-1.0</sub> 11.5±0.5 508 <sup>+0</sup><sub>-1.0</sub> 21.1±0.5 18.0±0.5 (in mm)

## Recommended Adjustment Tools/Qualified Standards

■ Recommended Adjustment Tools

Trimmer Potentiometer Series	Manufacturers	Model Number	MURATA Model Number	Blade
PVZ2	MURATA MFG.	KMDR090	KMDR090	- Minus (round edge)
PVZ2A_A04	VESSEL MFG.	No.9000+0×30	KMDR150	+ Cross
DV72	VESSEL MFG.	No.9000+1.7×30	KMDR080	+ Cross
PVZ3	TORAY INDUSTRIES, INC.	SA-2225	KMDR070	- Minus (round edge)
DVAO	VESSEL MFG.	No.9000+1.7×30	KMDR080	+ Cross
PVA3	TORAY INDUSTRIES, INC.	SA-2225	KMDR070	- Minus (round edge)
PVS3	TORAY INDUSTRIES, INC.	SA-2225	KMDR070	- Minus (round edge)
PVG3	TORAY INDUSTRIES, INC.	SA-2225	KMDR070	- Minus (round edge)
PVM4	VESSEL MFG.	No.9000-2.6X30	KMDR120	- Minus
DVOE	VESSEL MFG.	No.9000-1.3X30	KMDR130	- Minus
PVG5	ENGINEER INC.	DA-54		- Minus
BVOC	VESSEL MFG.	No.9000+0×30	KMDR150	+ Cross
PVC6	TORAY INDUSTRIES, INC.	SA-2225	KMDR070	- Minus (round edge)
	VESSEL MFG.	No.9000-1.8X30	KMDR110	- Minus
others	ENGINEED ING	DA-40	KMDR180	- Minus (both ends)
	ENGINEER INC.	DA-55		- Minus

**■** For Automatic Adjustment

<u></u>	*******				
Trimmer Potentiometer Series	Manufacturers	Model Number	MURATA Model Number	Blade	
PVZ3 PVA3 PVS3 PVG3	TORAY INDUSTRIES, INC.	JB-2225	KMBT070	– Minus (round edge)	
PVC6	VESSEL MFG.	No.CA-10	KMBT090	+ Cross	
FVC0	TORAY INDUSTRIES, INC.	JB-2225	KMBT070	- Minus (round edge)	

#### ■ Qualified Standards

The products listed here have been produced by the QS9000 and ISO9001 certified factory.

The producte herea here have b	con produced by the dece	oo aha 1000001 conmou lactory.	
MURATA FACTORY	Qualified Date	Standard	Qualified Number
Sabae Murata Mfg.Co.,Ltd. August 14, 1997		UNDERWRITERS LABORATORIES INC.	A5704
Wuxi Murata Electronis Co.,Ltd.	May 12, 1999	UNDERWRITERS LABORATORIES INC.	A7924

<sup>\*</sup> No ODCs (Ozone Depleting Chemicals) are used on all Murata's trimmer potentiometers.



#### ⚠ Note:

1. Export Control

For customers outside Japan>

Murata products should not be used or sold for use in the development, production, stockpiling or utilization of any conventional weapons or mass-destructive weapons (nuclear weapons, chemical or biological weapons, or missiles), or any other weapons.

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

- 2. Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage to a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.
  - Aircraft equipment
     Undersea equipment
- ② Aerospace equipment④ Power plant equipment
- Medical equipment
- 6 Transportation equipment (vehicles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data-processing equipment
- (1) Application of similar complexity and/or reliability requirements to the applications listed in the above
- 3. Product specifications in this catalog are as of April 2004. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.
- 4. Please read rating and ACAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.
- 5. This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.
- 6. Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.
- 7. No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.



http://www.murata.com/



Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию.

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России, а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научноисследовательскими институтами России.

С нами вы становитесь еще успешнее!

#### Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,

Промышленная ул, дом № 19, литера Н,

помещение 100-Н Офис 331