

1.6GHz ON/OFF Function LNA

■ GENERAL DESCRIPTION

The XC2407A816UR-G is an ultra-low-noise amplifier (LNA) with low operating voltage, low noise figure (NF), low power consumption using CMOS process, The XC2407 is designed for GPS band frequency (1.6GHz).

The IC's internal circuit can be placed in stand-by mode via the CE function, In the stand-by mode, consumption current is greatly reduced and there is no need to add external ON/OFF control function like LDO.

External R_{BIAS} can adjust power supply to any voltage of 1.71V~3.63V as self bias function. Standard power supply voltages are 3.45V, 3.00V, 2.85V and 1.80V.


■ APPLICATIONS

- GPS band RF signal amplified

■ FEATURES

- Noise Figure : NF=0.96dB (TYP.) (@1.575GHz)
- Low Power Consumption : 7.02mW (TYP.) ($V_{DD}=1.80V$, $R_{BIAS}=430\Omega$)
- High Gain : S21=15dB (TYP.) (@1.575GHz)
- CE Function : CE "H" 1.1V~ V_{DD} ($1.71V \leq V_{DD} \leq 3.15V$)
CE "L" 0V~0.4V
- Operation Voltage Range : 1.71V~3.63V
- Output : CMOS Output
50Ω Driver Built-in
- Operating Temperature Range : -40°C~+85°C
- Package : USP-8A01
- Environmentally Friendly : EU RoHS Compliant, Pb Free

■ TYPICAL APPLICATION CIRCUIT

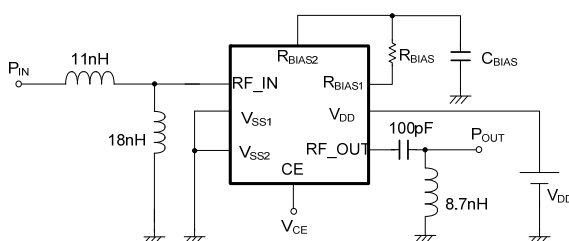

TOP VIEW


V_{DD} [V] (TYP.)	R_{BIAS} [Ω]
3.45	620
3.00	470
2.85	430
1.80	150

* R_{BIAS} should be used in $\pm 1\%$ tolerance and $\pm 200\text{ppm/}$ temperature stability.

■ TYPICAL PERFORMANCE CHARACTERISTICS


Power Gain / Noise Figure vs. Frequency

XC2407A816

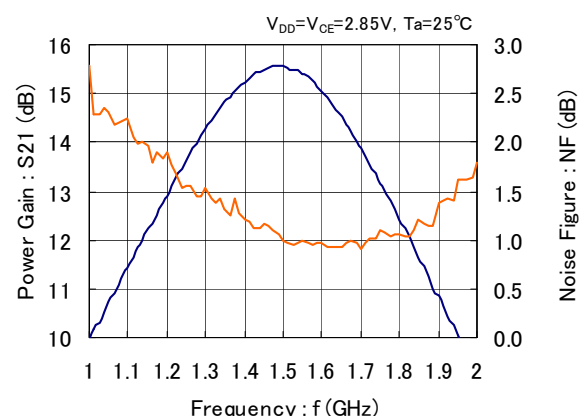

XC2407A816UR-G

■ BLOCK DIAGRAM

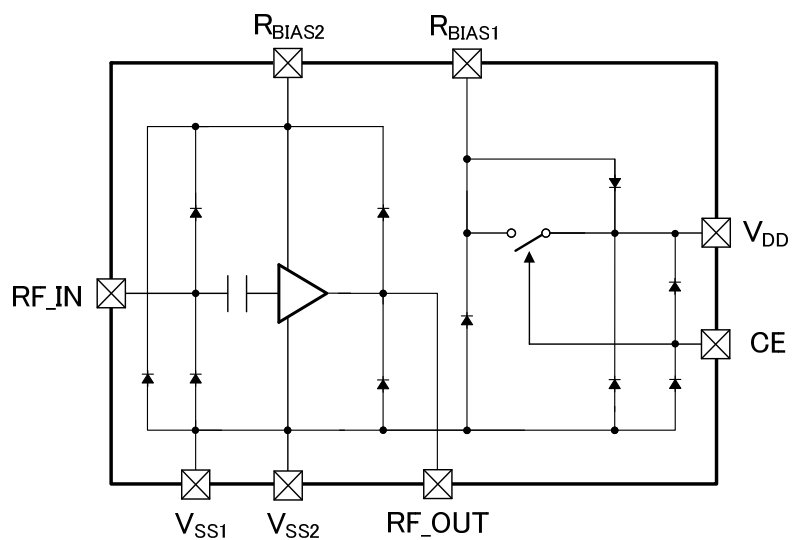

* Diodes inside the circuit are an ESD protection diode.


■ PRODUCT CLASSIFICATION

● Ordering Information

PRODUCT NAME	PACKAGE	ORDER UNIT
XC2407A816UR-G ^(*)	USP-8A01	3,000 / Reel

^(*) The “-G” suffix denotes Halogen and Antimony free as well as being fully RoHS compliant.

PIN CONFIGURATION

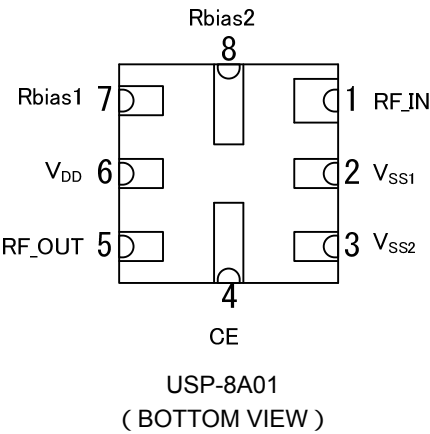

PIN ASSIGNMENT

PIN NUMBER	PIN NAME	FUNCTION
1	RF_IN	RF Signal Input
2	V _{SS1}	Ground
3	V _{SS2}	Ground
4	CE	ON/OFF Control Pin
5	RF_OUT	RF Signal Output
6	V _{DD}	Power Supply
7	R _{BIAS1}	R _{BIAS} Connect Pin
8	R _{BIAS2}	R _{BIAS} Connect Pin

FUNCTION CHART

PIN NAME	SIGNAL	STATUS
CE	CE High	Active
	CE Low	Stand-by
	CE OPEN	Undefined State

XC2407A816UR-G

■ ABSOLUTE MAXIMUM RATINGS

Ta=25

PARAMETER	SYMBOL	RATINGS	UNITS
Power Supply Voltage	V _{DD}	-0.3 ~ 4.0	V
CE Input Voltage	V _{CE}	-0.3 ~ V _{DD} +0.3 or 4.0 ^{(*)1}	V
Current Circuit	I _{DD}	42	mA
R _{BIAS1} Input Voltage	R _{BIAS1}	-0.3 ~ V _{DD} +0.3 or 4.0 ^{(*)1}	V
R _{BIAS2} Input Voltage	R _{BIAS2}	-0.3 ~ +1.6	V
RF Input Power	P _{IN}	10	dBm
RF_IN Input Voltage	V _{RF_IN}	-0.3 ~ R _{BIAS2} +0.3 or +1.6 ^{(*)2}	V
RF_OUT Input Voltage	V _{RF_OUT}	0 ~ R _{BIAS2} or +1.6 ^{(*)3}	V
Power Dissipation	P _d	120	mW
Operating Ambient Temperature	T _{opr}	-40 ~ +85	
Storage Temperature	T _{stg}	-55 ~ +125	

* All voltages are described based on the V_{SS1} and V_{SS2} pin.

V_{SS1} pin and V_{SS2} pin should be connected each other outside.

^{(*)1} The maximum value should be either V_{DD}+0.3V or +4.00V in the lowest.

^{(*)2} The maximum value should be either R_{BIAS2}+0.3V or +1.60V in the lowest.

^{(*)3} The maximum value should be either R_{BIAS2} or +1.60V in the lowest.

ELECTRICAL CHARACTERISTICS

● DC Characteristics

Ta=25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Power Supply Voltage	V_{DD}	$R_{BIAS}=620\Omega$ ^{(*)2}	3.278	3.450	3.630	V	①
		$R_{BIAS}=470\Omega$ ^{(*)2}	2.850	3.000	3.150	V	①
		$R_{BIAS}=430\Omega$ ^{(*)2}	2.708	2.850	2.992	V	①
		$R_{BIAS}=150\Omega$ ^{(*)2}	1.710	1.800	1.890	V	①
Current Circuit	I_{DD}	1.71V V_{DD} 3.63V ^{(*)1} $V_{CE}=V_{DD}$	-	3.9	7.5	mA	①
Stand-by Current	I_{STBY}	1.71V V_{DD} 3.63V ^{(*)1} $V_{CE}=0V$	-	-	0.1	μA	①
CE "H" Level Voltage	V_{CEH}	1.71V V_{DD} 3.15V	1.1	-	V_{DD}	V	①
		3.15V< V_{DD} 3.63V	1.3	-	V_{DD}	V	①
CE "L" Level Voltage	V_{CEL}	-	0	-	0.4	V	①

^{(*)1} For the relation of V_{DD} and R_{BIAS} , Please refer to the "Power Supply Voltage vs. R_{BIAS} Table" below.

^{(*)2} R_{BIAS} should be used in $\pm 1\%$ tolerance and $\pm 200\text{ppm/}$ temperature stability.

● AC Characteristics

 $V_{DD}=V_{CE}=2.85V$, $R_{BIAS}=430\Omega$, Ta=25

PARAMETER	SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNITS	CIRCUIT
Power Gain	S21	f=1.575GHz	13.5	15.0	-	dB	②
Input Return Loss	S11	f=1.575GHz	-	9.5	-	dB	②
Output Return Loss	S22	f=1.575GHz	-	9.5	-	dB	②
Isolation	S12	f=1.575GHz	-	-20	-	dB	②
Noise Figure ^{(*)1}	NF	f=1.575GHz	-	0.96	-	dB	③
Input Power IP3	I_{IP3}	f=1.575GHz, 1.576GHz	-	-5.1	-	dBm	④
Input Power IP2	I_{IP2}	f=0.8GHz, 2.375GHz	-	10.3	-	dBm	④
Input Power @ 1dB Gain Compression	P1dB	f=1.575GHz	-	-19	-	dBm	②

^{(*)1} NF is the value excluding the substrate loss.

Power Supply Voltage vs. R_{BIAS}


V_{DD} [V]	R_{BIAS} [Ω]
3.278~3.630	620
2.850~3.150	470
2.708~2.992	430
1.710~1.890	150

NOTE ON USE

1. For temporary, transitional voltage drop or voltage rising phenomenon, the IC is liable to malfunction should the ratings be exceeded.
2. Please eliminate static electricity from the operational table, people, and soldering iron.
3. Please use noiseless power supply for stable operation.
4. Please connect C_{BIAS} to R_{BIAS2} pin as close as possible.
5. V_{SS1} pin and V_{SS2} pin should be connected each other outside.
6. Please ensure to use an external component which does not depend on bias or temperature too much.
7. Torex places an importance on improving our products and their reliability.
We request that users incorporate fail-safe designs and post-aging protection treatment when using Torex products in their systems.


■ TEST CIRCUITS

- Circuit (DC Characteristics: Power Supply Pin Voltage, Circuit Current, Stand-by Current)

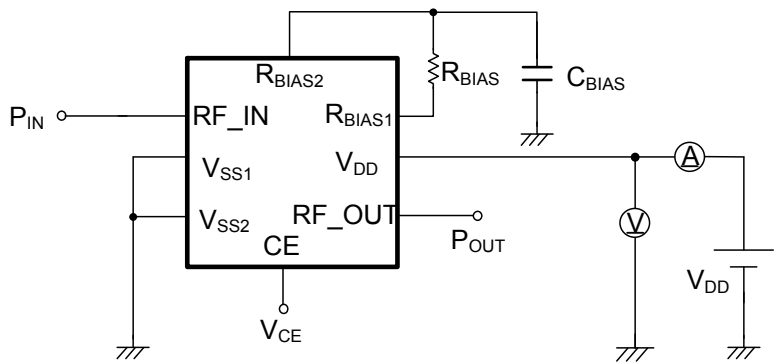


* P_{IN} / P_{OUT} is 50 Ω

- Circuit (Power Gain, Input Return Loss, Output Return Loss, Isolation, Input Power @ 1dB Gain Compression)

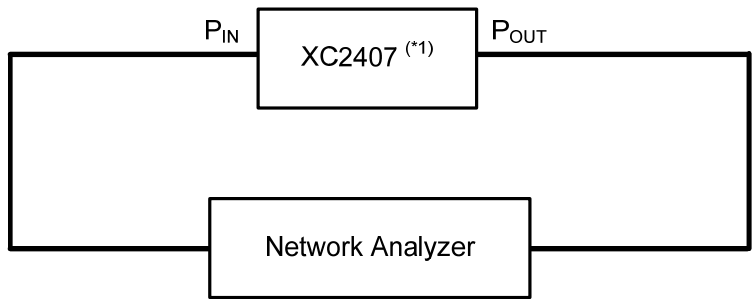

(*1) Refer to the circuit for the block detail.


- Circuit (Noise Figure)

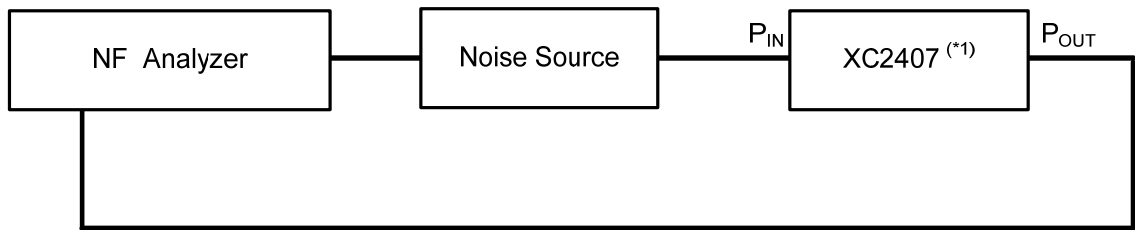

(*1) Refer to the circuit for the block detail.


■TEST CIRCUITS (Continued)

- Circuit (Input Power IP3, Input Power IP2)

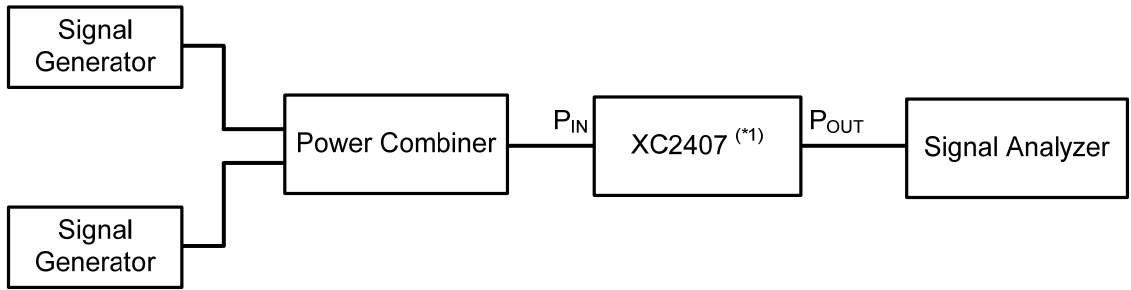

(*1) Refer to the circuit for the block detail.

- Circuit (XC2407 series, the circuit of the block)

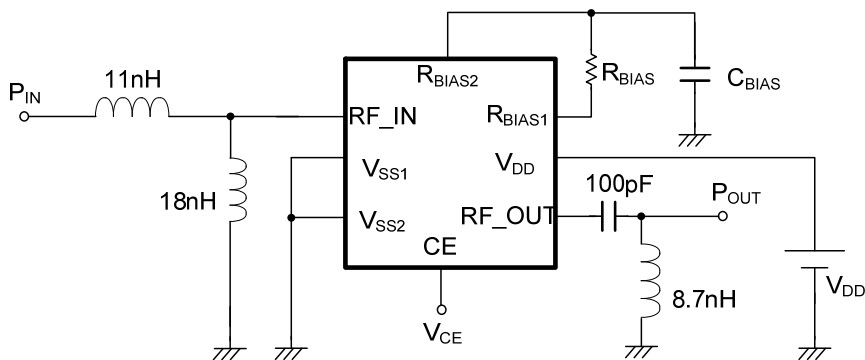


V _{DD} (V) (TYP.)	R _{BIAS} (Ω)
3.45	620
3.00	470
2.85	430
1.80	150

* R_{BIAS} should be used in ±1% tolerance and ±200ppm/°C temperature stability.

■TEST CIRCUITS (Continued)

Evaluation Board

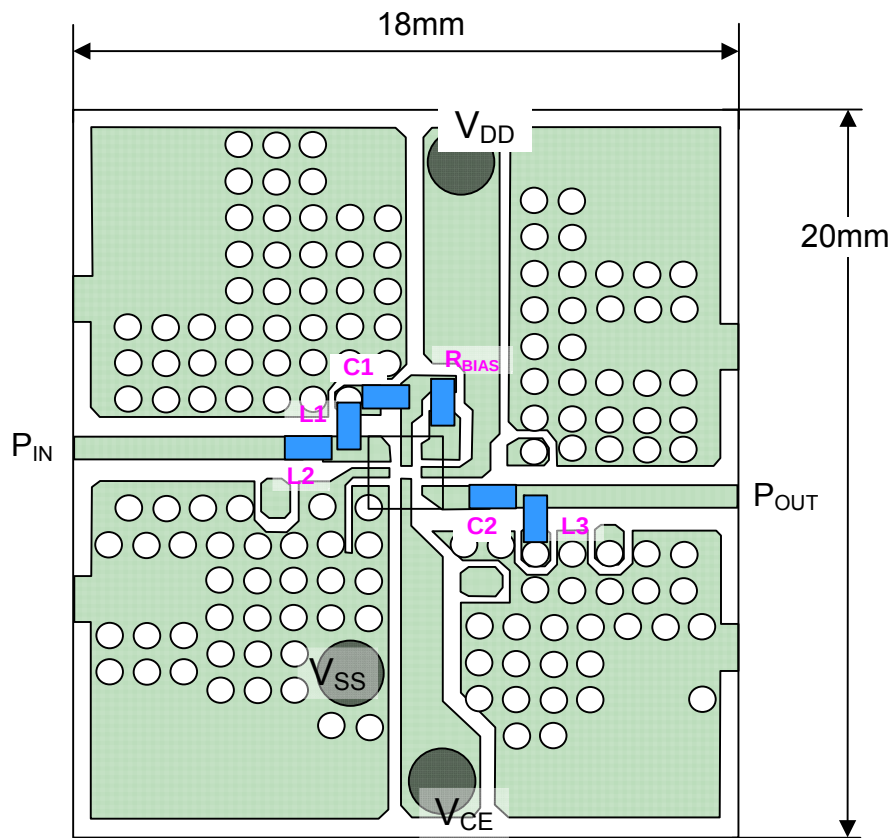

PCB (FR-4)
MICROSTRIPLINE WIDTH=0.6mm
t=0.18mm
PCB size=18mm × 20mm


* Please use an external component which does not depend on bias or temperature too much.

External Components


SYMBOL	SPEC	COMMENT
C1	10nF	-
C2	100pF	-
L1	18nH	MURATA (LQW15A18NG00D)
2	11nH	MURATA (LQW15A11NG00D)
L3	8.7nH	MURATA (LQW15A8N7G00D)
R _{BIAS}	-	Less than ±1% tolerance, Less than ±200ppm/°C temperature stability

TYPICAL PERFORMANCE CHARACTERISTICS


(1) Current Circuits vs. Supply Voltage

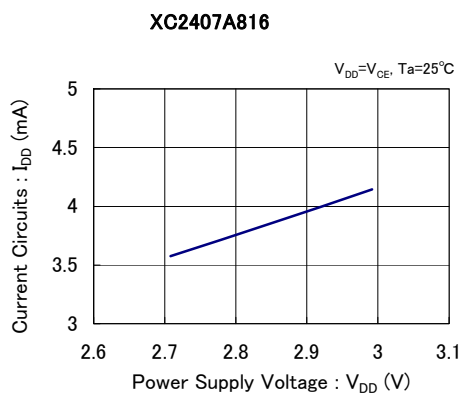


(2) CE "H" Level Voltage vs. Supply Voltage

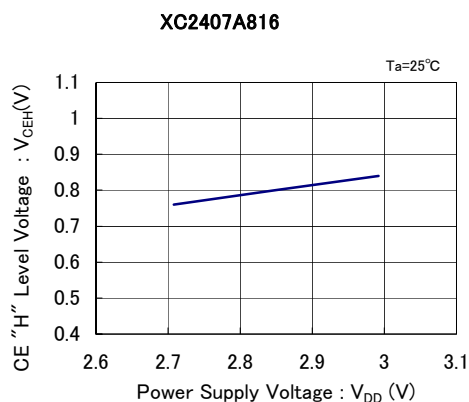


(3) CE "L" Level Voltage vs. Power Supply Voltage

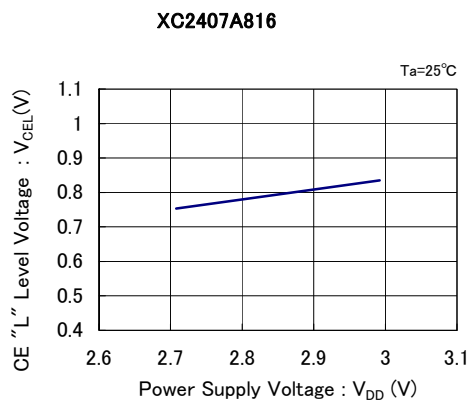


(4) Power Gain vs. Power Supply Voltage

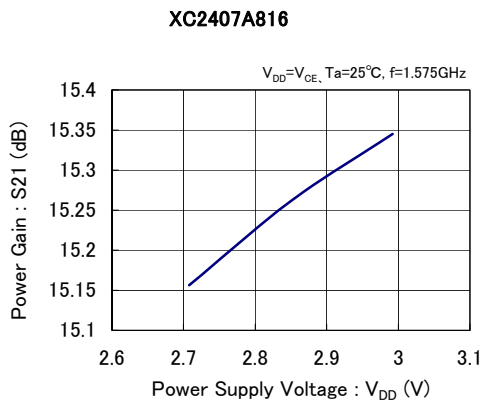

(5) Input Return Loss vs. Power Supply Voltage

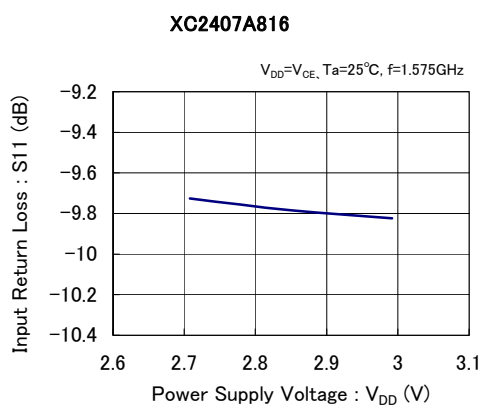


(6) Output Return Loss vs. Supply Voltage

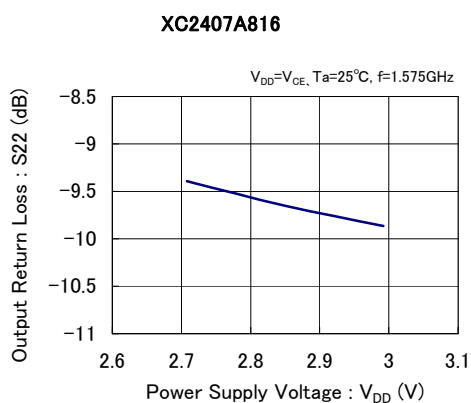


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(7) Isolation vs. Power Supply Voltage

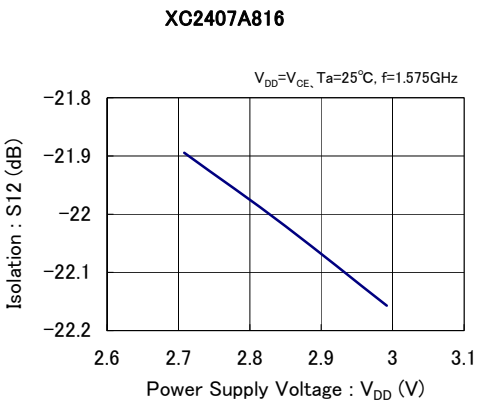


(8) Noise Figure vs. Power Supply Voltage

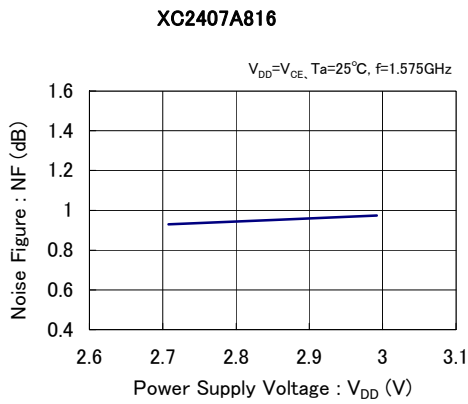


(9) Input Power IP3 vs. Power Supply Voltage

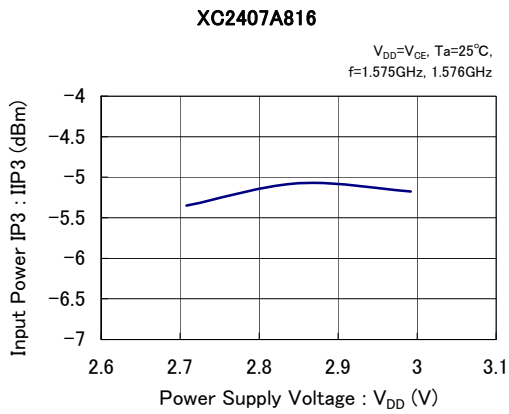


(10) Input Power IP2 vs. Power Supply Voltage

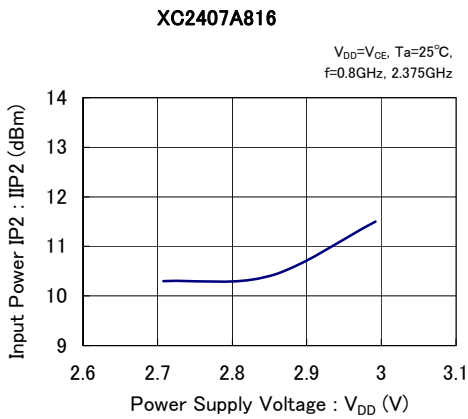

(11) Input Power @ 1dB Gain Compression vs. Power Supply Voltage

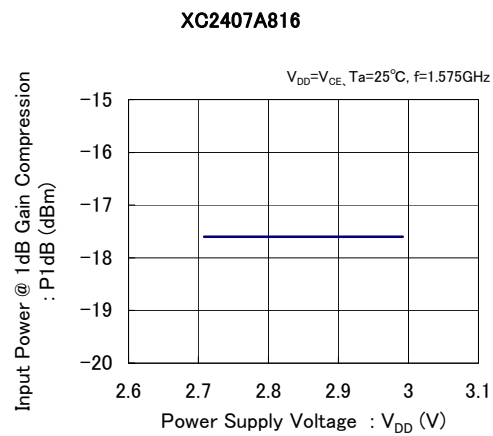


(12) Power Gain vs. Ambient Temperature

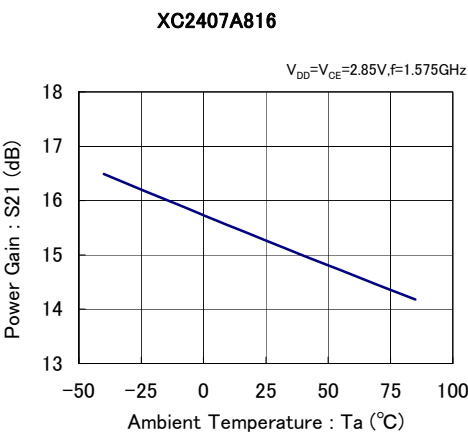


TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(13) Input Return Loss vs. Ambient Temperature

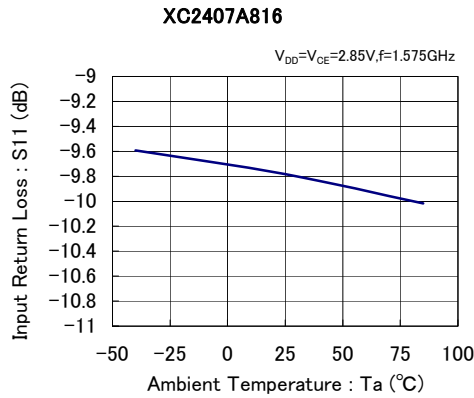


(14) Output Return Loss vs. Ambient Temperature

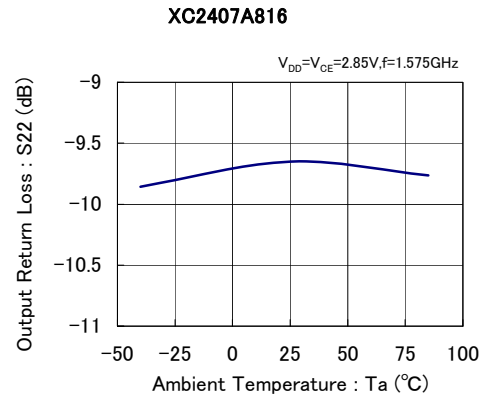


(15) Isolation vs. Ambient Temperature

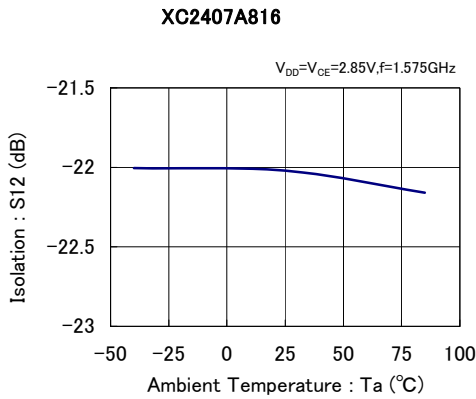


(16) Noise Figure vs. Ambient Temperature

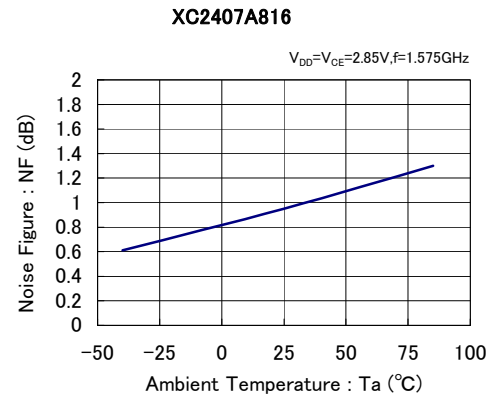

(17) Input Power IP3 vs. Ambient Temperature

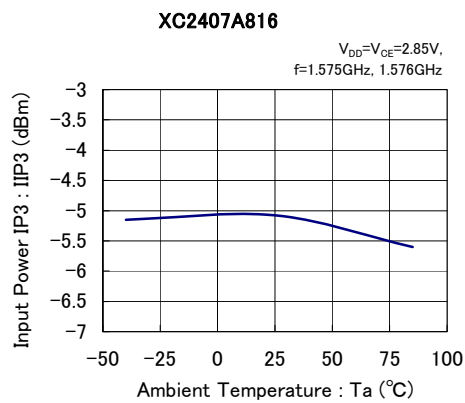


(18) Input Power IP2 vs. Ambient Temperature

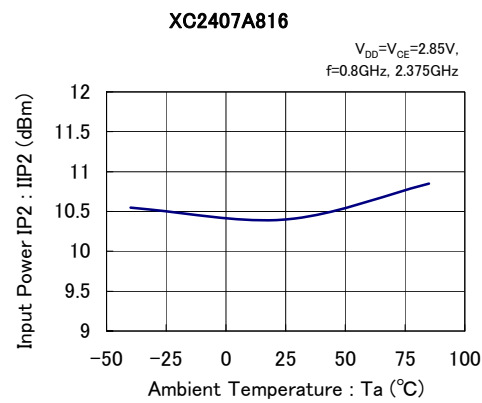


■ TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(19) Input Power @ 1dB Gain Compression vs. Ambient Temperature

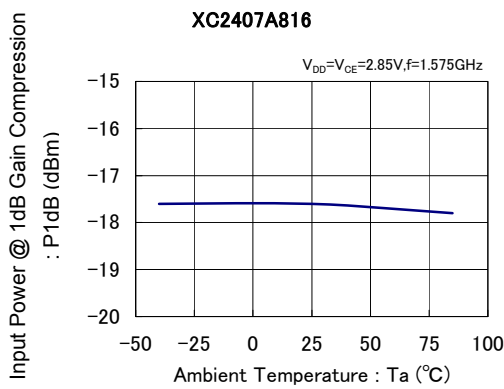


(20) Power Gain vs. Frequency

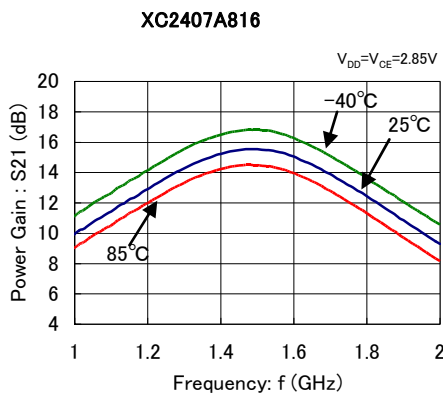


(21) Input Return Loss vs. Frequency

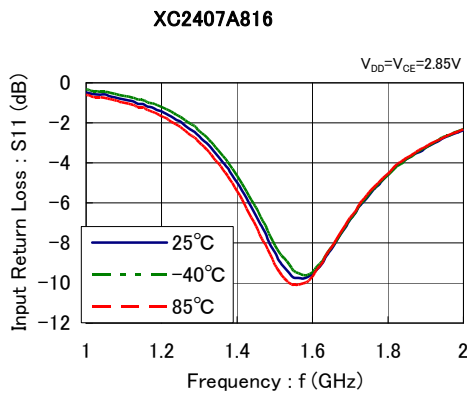


(22) Output Return Loss vs. Frequency

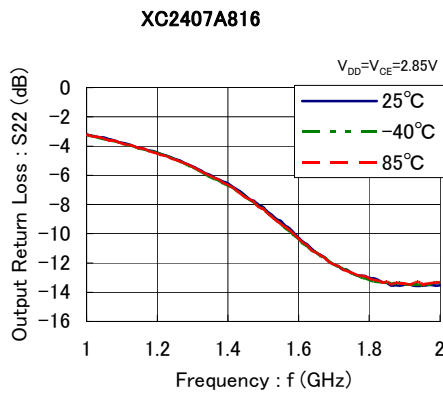

(23) Isolation vs. Frequency

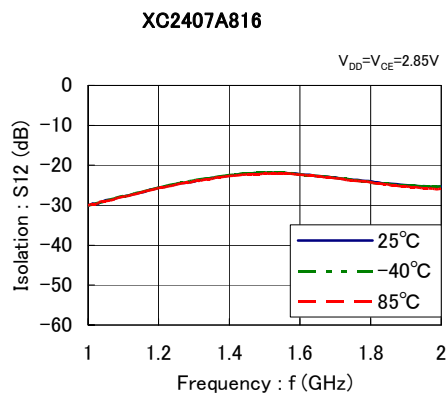


(24) Power Gain vs. Input Power

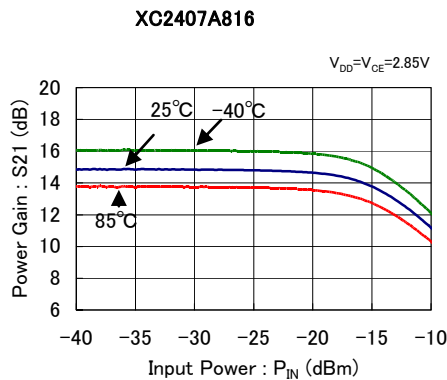


XC2407A816UR-G

TYPICAL PERFORMANCE CHARACTERISTICS (Continued)


(25) Output Power / IM3 vs. Input Power

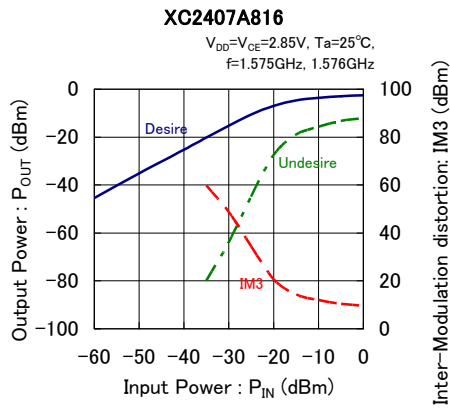

(26) Input Return Loss vs. Frequency (Smith Chart)

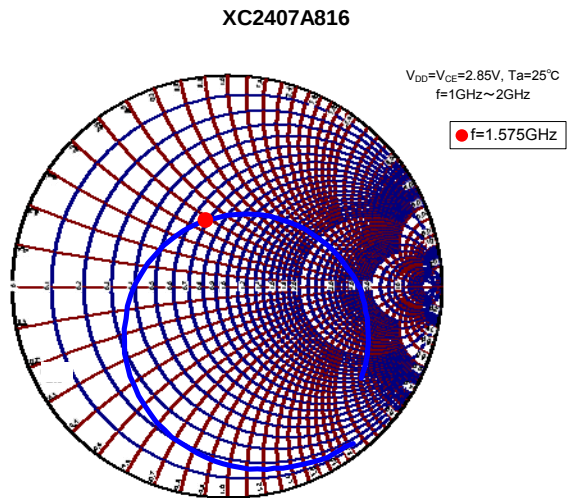


(27) Output Return Loss vs. Frequency (Smith Chart)

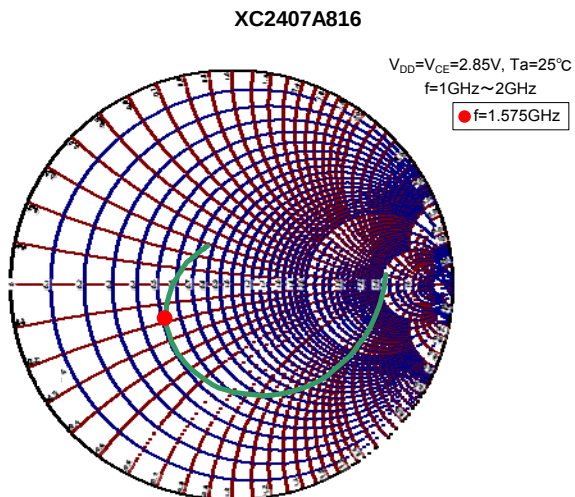

■ PACKAGING INFORMATION

- USP-8A01 (unit:mm)

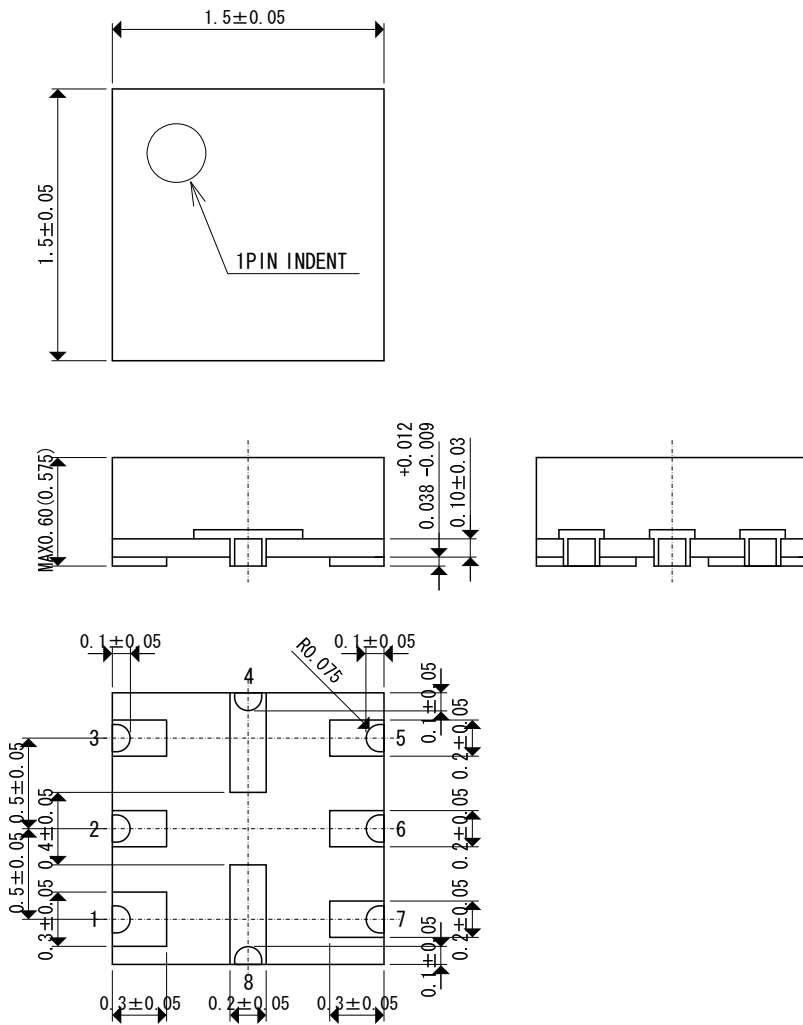


■ PACKAGING INFORMATION (Continued)

- [illegible]

-
- Technical drawing of a 3x3 grid of rectangular holes in a plate. The plate has a total width of 1.8 and a total height of 1.8. The holes are arranged in a 3x3 grid. The horizontal spacing between the centers of the holes is 0.4, and the vertical spacing is 0.5. The distance from the center of a hole to the nearest edge is 0.28. The hole width is 0.4 and the hole height is 0.35.

MARKING RULE

USP-8A01



① represents product series.

MARK	PRODUCT SERIES
7	XC2407*****-G

② represents product.

MARK	PRODUCT SERIES
A	XC2407A****-G

③ represents product.

MARK	PRODUCT SERIES
8	XC2407*8****-G

, represents production lot number.

01 to 09, 0A to 0Z, 11 to 9Z, A1 to A9, AA to AZ and B1 to ZZ in order.
(G, I, J, O, Q, W excepted)

*No character inversion used.

1. The products and product specifications contained herein are subject to change without notice to improve performance characteristics. Consult us, or our representatives before use, to confirm that the information in this datasheet is up to date.
2. We assume no responsibility for any infringement of patents, patent rights, or other rights arising from the use of any information and circuitry in this datasheet.
3. Please ensure suitable shipping controls (including fail-safe designs and aging protection) are in force for equipment employing products listed in this datasheet.
4. The products in this datasheet are not developed, designed, or approved for use with such equipment whose failure of malfunction can be reasonably expected to directly endanger the life of, or cause significant injury to, the user.
(e.g. Atomic energy; aerospace; transport; combustion and associated safety equipment thereof.)
5. Please use the products listed in this datasheet within the specified ranges.
Should you wish to use the products under conditions exceeding the specifications, please consult us or our representatives.
6. We assume no responsibility for damage or loss due to abnormal use.
7. All rights reserved. No part of this datasheet may be copied or reproduced without the prior permission of TOREX SEMICONDUCTOR LTD.

TOREX SEMICONDUCTOR LTD.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331