
SOT-23-5 PWM Step-up DC/DC CONVERTER

R1210N××2× SERIES

APPLICATION MANUAL

R1210N**2* SERIES

OUTLINE

The R1210NXX2C/XX2D Series are PWM step-up DC/DC Converter controllers, with high accuracy, low supply current by CMOS process.

Each of the R1210NXX2X Series consists of an oscillator, a PWM circuit, a reference voltage unit, an error amplifier, phase compensation circuit, resistors for voltage detection, a chip enable circuit, a controller against drastic load transient and an output voltage detector. A low ripple, high efficiency step-up DC/DC converter can be composed of this IC with only four external components, or an inductor, a diode, a transistor and a capacitor.

The R1210NXX2X Series can detect drastic change of output voltage with a circuit controller, the load transient response is improved.

Each of the R1210NXX2X Series has a driver pin, or 'EXT' pin for external transistor. By connecting a power transistor with low ON-resistance to EXT pin, a large current flows through an inductor, thus, large output current can be supplied.

The built-in chip enable circuit can make the standby mode with ultra low quiescent current.

Since the package for these ICs is small SOT-23-5, high density mounting of the ICs on board is possible.


FEATURES

- External Components Only an inductor, a diode, a capacitor, and a transistor
- Standby Current TYP. 0 μ A
- Low Temperature-Drift Coefficient of Output Voltage..... TYP. ± 100 ppm/ $^{\circ}$ C
- Output Voltage Stepwise Setting with a step of 0.1V in the range of 2.2V to 6.0V
- Two choices of Basic Oscillator Frequency 100kHz (XX2C), 180kHz (XX2D)
- Small Package SOT-23-5 (Mini-mold)
- Low Ripple, Low Noise
- Oscillator Start-up Voltage MAX. 0.8V

APPLICATIONS

- Power source for battery-powered equipment.
- Power source for portable communication appliances, cameras, VCRs
- Power source for appliances which require higher voltage than battery voltage.

BLOCK DIAGRAM

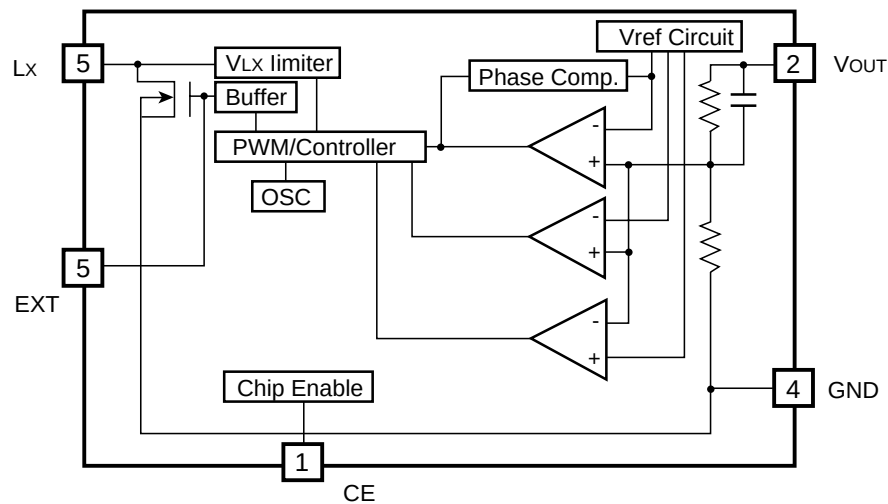

SELECTION GUIDE


In the R1210N Series, the output voltage, the oscillator frequency, the optional function, and the taping type for the ICs can be selected at the user’s request.

The selection can be made by designating the part number as shown below;

R1210NXXXX-XX
↑ ↑↑ ↑
a bc d

Code	Contents
a	Setting Output Voltage(V _{OUT}): Stepwise setting with a step of 0.1V in the range of 2.2V to 6.0V
b	Designation of Driver 2: External Tr. Driver
c	Designation of Oscillator Frequency C: 100kHz D: 180kHz
d	Designation of Taping Type; Ex.: TR, TL (refer to Taping Specification) “TR” is prescribed as a standard.

PIN CONFIGURATION

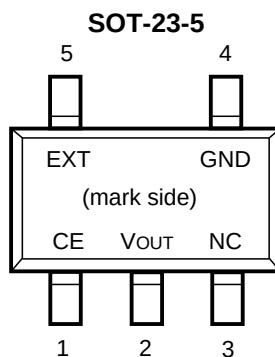

PIN DESCRIPTION

Pin No.	Symbol	Description
1	CE	Chip Enable Pin
2	V _{OUT}	Pin for Output Voltage
3	NC	No Connection
4	GND	Ground Pin
5	EXT	External Transistor Drive Pin

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V _{OUT}	V _{OUT} Pin Output Voltage	9	V
V _{EXT}	EXT Pin Output Voltage	-0.3~V _{OUT} +0.3	V
V _{CE}	CE Pin Input Voltage	9	V
I _{EXT}	EXT Pin Inductor Drive Output Current	±40	mA
PD	Power Dissipation	250	mW
T _{opt}	Operating Temperature Range	-40~+85	°C
T _{stg}	Storage Temperature Range	-55~+125	°C

ELECTRICAL CHARACTERISTICS

• R1210NXX2

(T_{opt} = 25°C)


Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
V _{OUT}	Output Voltage	V _{IN} = V _{SET} × 0.6, I _{OUT} = 1mA	×0.975		×1.025	V
V _{IN}	Maximum Input Voltage				8	V
ΔV _{OUT} /ΔT	Step-up Output Voltage Temperature Coefficient	-40°C ≤ T _{opt} ≤ 85°C		±100		ppm/°C
V _{START}	Start-up Voltage	V _{IN} = 0V → 2V			0.8	V
I _{DD2}	Supply Current 2	V _{OUT} = V _{CE} = V _{SET} + 0.5V		10	15	μA (xx2C)
				15	22	μA (xx2D)
I _{standby}	Supply Current 3(Standby)	V _{OUT} = 6.5V V _{CE} = 0V			0.5	μA
I _{DD1}	Supply Current1	V _{OUT} = V _{SET} × 0.96 EXT at no load 2.2V ≤ V _{set} ≤ 2.4V		18	35	μA (xx2C)
				23	45	μA (xx2D)
		V _{OUT} = V _{SET} × 0.96 EXT at no load 2.5V ≤ V _{set} ≤ 3.0V		20	40	μA (xx2C)
				25	50	μA (xx2D)
		V _{OUT} = V _{SET} × 0.96 EXT at no load 3.1V ≤ V _{set} ≤ 3.9V		25	50	μA (xx2C)
				30	60	μA (xx2D)
		V _{OUT} = V _{SET} × 0.96 EXT at no load 4V ≤ V _{set} ≤ 4.4V		30	60	μA (xx2C)
				35	70	μA (xx2D)
		V _{OUT} = V _{SET} × 0.96 EXT at no load 4.5V ≤ V _{set} ≤ 4.9V		35	70	μA (xx2C)
				40	80	μA (xx2D)

Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
I _{DD1}	Supply Current1	V _{OUT} =V _{SET} ×0.96 EXT at no load 5V ≤ V _{set} ≤ 5.4V		45	90	μA (xx2C)
				50	100	μA (xx2D)
		V _{OUT} =V _{SET} ×0.96 EXT at no load 5.5V ≤ V _{set} ≤ 6.0V		50	100	μA (xx2C)
				55	110	μA (xx2D)
I _{DD2}	Supply Current2	V _{OUT} =V _{CE} =V _{SET} +0.5V		10	15	μA (xx2C)
				15	22	μA (xx2D)
I _{EXTH}	EXT “H” Output Current	2.2V ≤ V _{SET} ≤ 2.5V, V _{EXT} =V _{OUT} -0.4V			-1.0	mA
		2.6V ≤ V _{SET} ≤ 3.0V, V _{EXT} =V _{OUT} -0.4V			-2.0	
		3.1V ≤ V _{SET} ≤ 3.5V, V _{EXT} =V _{OUT} -0.4V			-2.5	
		3.6V ≤ V _{SET} ≤ 4.0V, V _{EXT} =V _{OUT} -0.4V			-3.0	
		4.1V ≤ V _{SET} ≤ 4.5V, V _{EXT} =V _{OUT} -0.4V			-3.5	
		4.6V ≤ V _{SET} ≤ 5.0V, V _{EXT} =V _{OUT} -0.4V			-4.0	
		5.1V ≤ V _{SET} ≤ 5.5V, V _{EXT} =V _{OUT} -0.4V			-4.5	
		5.6V ≤ V _{SET} ≤ 6.0V, V _{EXT} =V _{OUT} -0.4V			-5.0	
fosc	Maximum Oscillator Fre- quency	V _{OUT} =V _{CE} =V _{SET} ×0.96	80	100	120	kHz (xx2C)
			144	180	216	kHz (xx2D)


Symbol	Item	Conditions	MIN.	TYP.	MAX.	Unit
$\Delta f_{osc}/\Delta T$	Oscillator Frequency Temperature Coefficient	$-40^{\circ}\text{C} \leq T_{opt} \leq 85^{\circ}\text{C}$		0.5		kHz/ $^{\circ}\text{C}$ (xx2C)
				0.6		kHz/ $^{\circ}\text{C}$ (xx2D)
Maxdty	Oscillator Maximum Duty Cycle	$V_{OUT} = V_{CE} = V_{SET} \times 0.96$, (V_{EXT} : “H” side)	70	85	97	%
I_{EXTL}	EXT “L” Output Current	$2.2\text{V} \leq V_{SET} \leq 2.5\text{V}, V_{EXT} = 0.4\text{V}$	1.0			mA
		$2.6\text{V} \leq V_{SET} \leq 3.0\text{V}, V_{EXT} = 0.4\text{V}$	2.0			
		$3.1\text{V} \leq V_{SET} \leq 3.5\text{V}, V_{EXT} = 0.4\text{V}$	2.5			
		$3.6\text{V} \leq V_{SET} \leq 4.0\text{V}, V_{EXT} = 0.4\text{V}$	3.0			
		$4.1\text{V} \leq V_{SET} \leq 4.5\text{V}, V_{EXT} = 0.4\text{V}$	3.5			
		$4.6\text{V} \leq V_{SET} \leq 5.0\text{V}, V_{EXT} = 0.4\text{V}$	4.0			
		$5.1\text{V} \leq V_{SET} \leq 5.5\text{V}, V_{EXT} = 0.4\text{V}$	4.5			
		$5.6\text{V} \leq V_{SET} \leq 6.0\text{V}, V_{EXT} = 0.4\text{V}$	5.0			
V_{CEH}	CE “H” Input Voltage	$V_{OUT} = V_{SET} \times 0.96$	0.9			V
V_{CEL}	CE “L” Input Voltage	$V_{OUT} = V_{SET} \times 0.96$			0.3	V
I_{CEH}	CE “H” Input Current	$V_{OUT} = V_{CE} = 6.5\text{V}$	-0.1	0	0.1	μA
I_{CEL}	CE “L” Input Current	$V_{OUT} = 6.5\text{V}, V_{CE} = 0\text{V}$	-0.1	0	0.1	μA

*Note: V_{SET} means setting Output Voltage.


TEST CIRCUITS

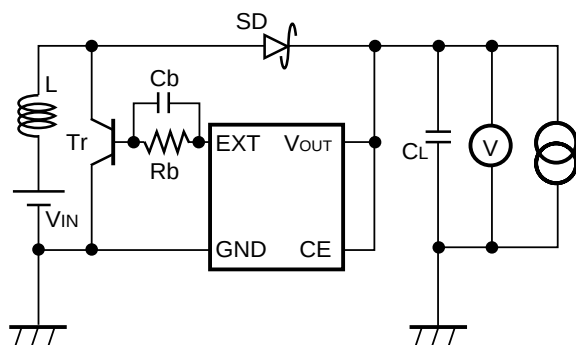


Test Circuit 1

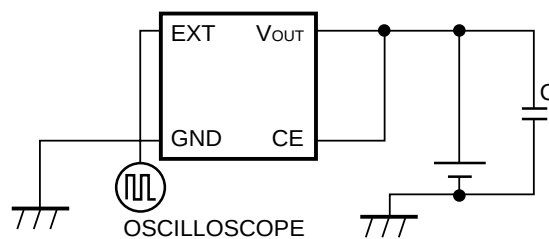


Test Circuit 2

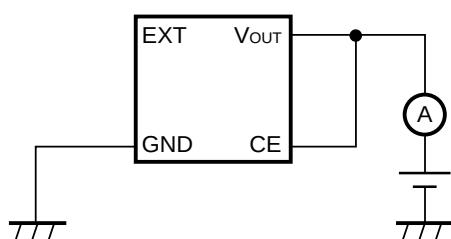


Test Circuit 3

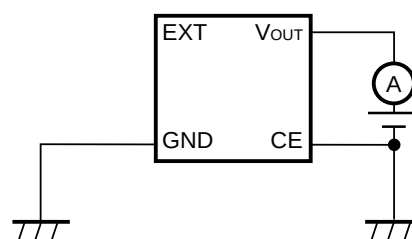

Test Circuit 4

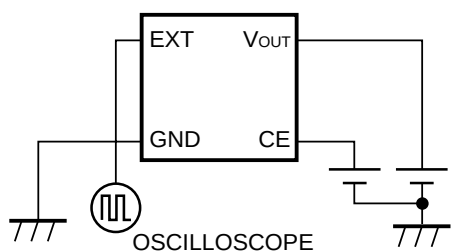

Test Circuit 5

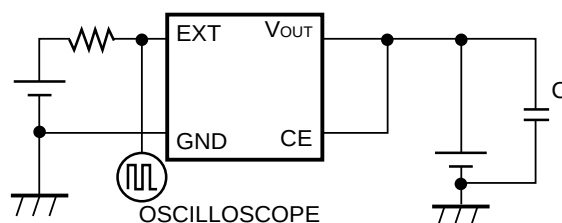

Test Circuit 6

Inductor (L) : 27 μ H (Sumida Electric Co., Ltd. CD104)

Diode (SD) : RB491D (Rohm, Schottky Type)

Capacitor (CL) : 47 μ F $\times$ 2 (Tantalum Type)





Transistor (Tr) : 2SD1628G

Base Resistor (Rb) : 300 Ω



Base Capacitor (Cb) : 0.01 μ F (Ceramic Type)



TYPICAL CHARACTERISTICS

1) Output Voltage vs. Output Current

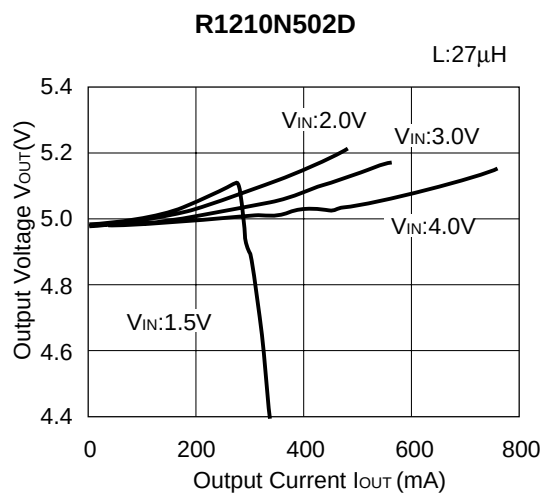
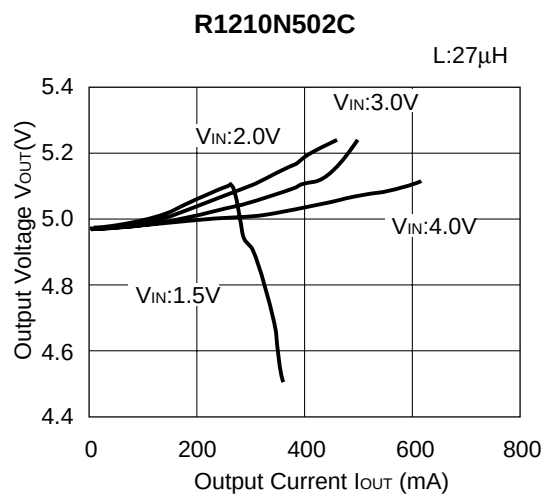
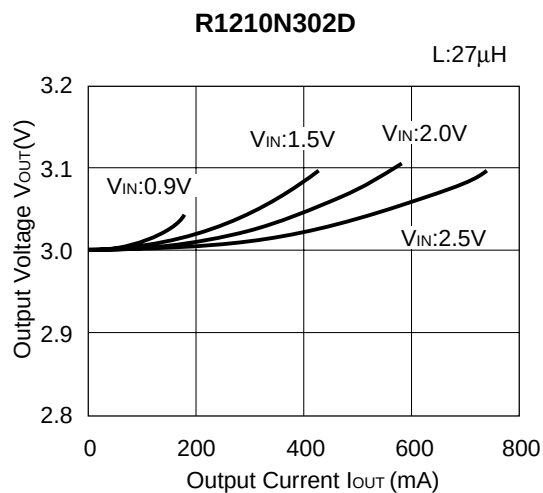
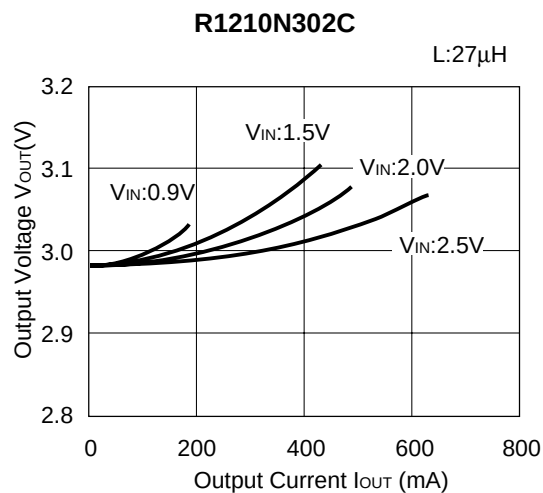


2) Efficiency vs. Output Current



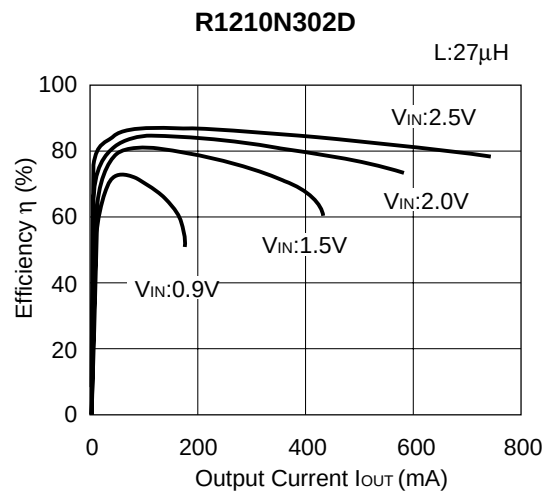
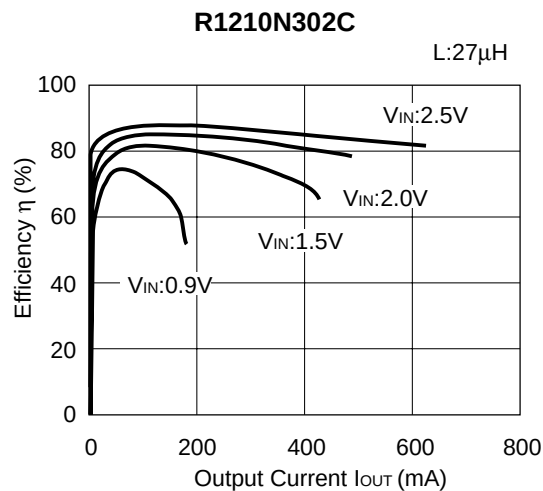


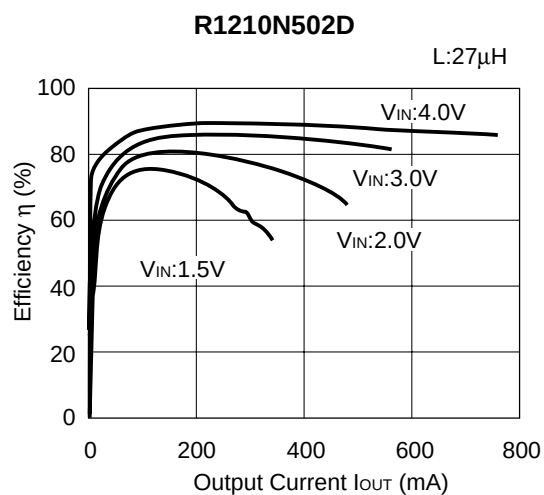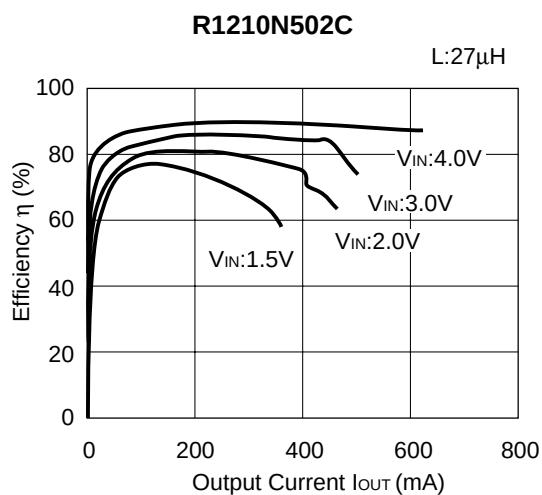



3) Ripple Voltage vs. Output Current

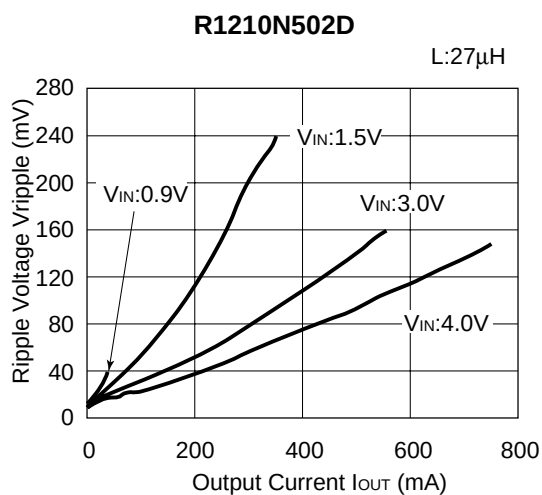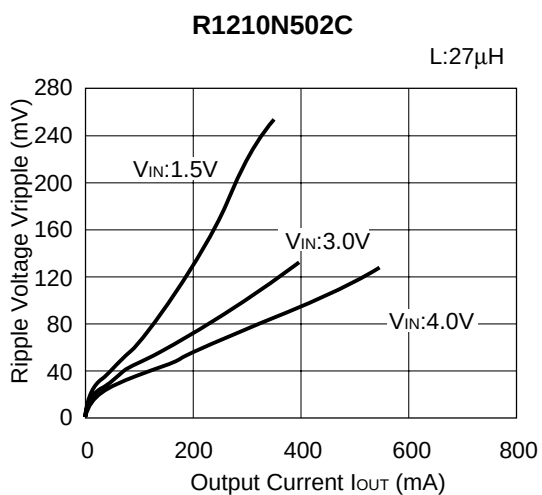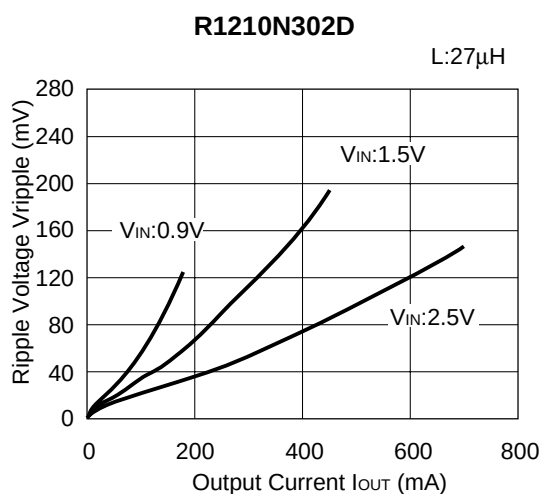
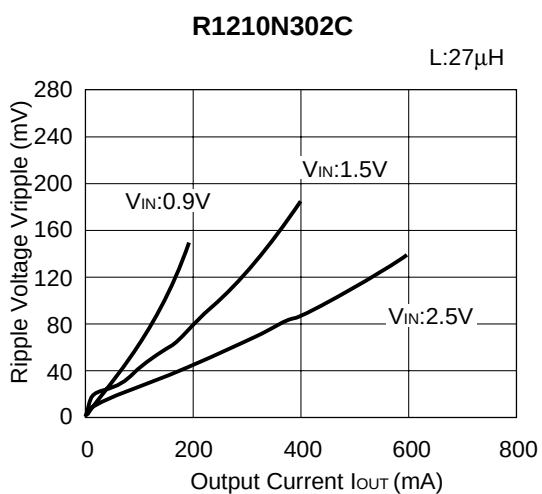


4) Start-up Voltage/ Hold-on Voltage vs. Output Current (T_{opt}=25°C)

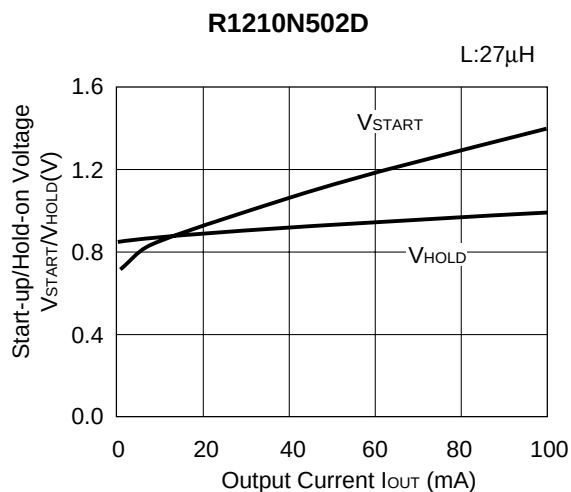
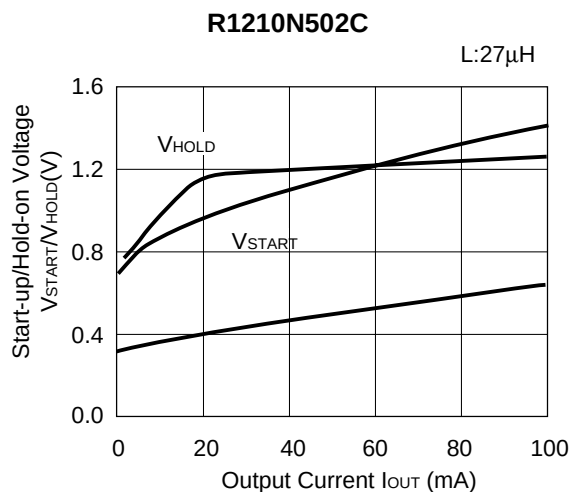
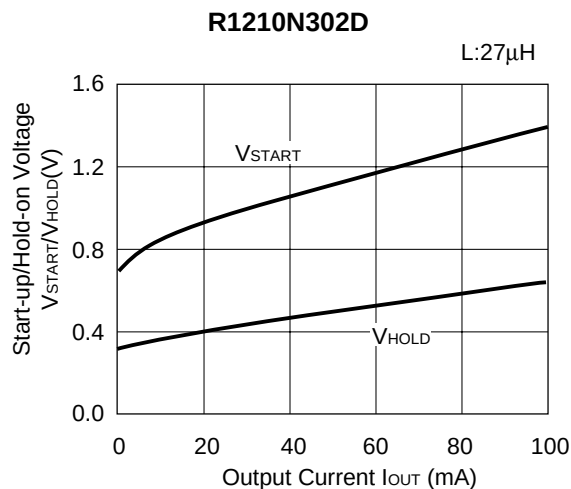
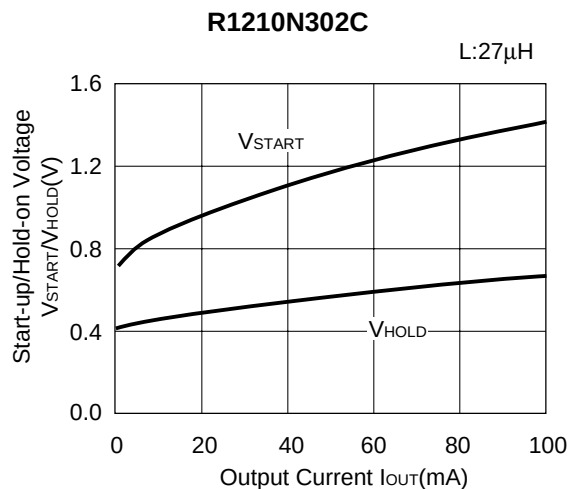


5) Output Voltage vs. Temperature



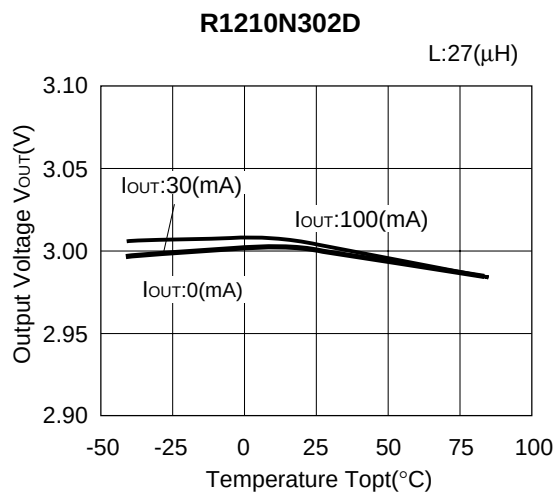
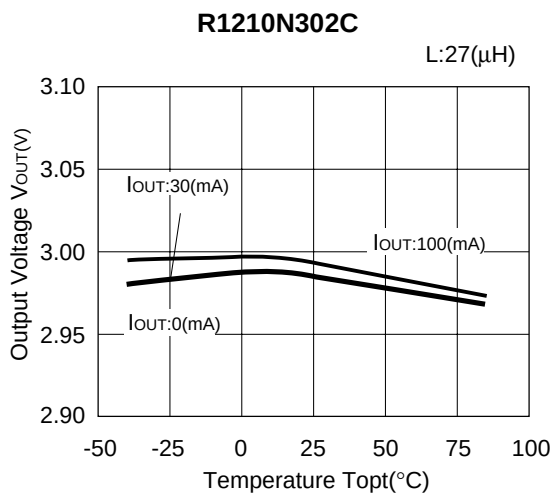


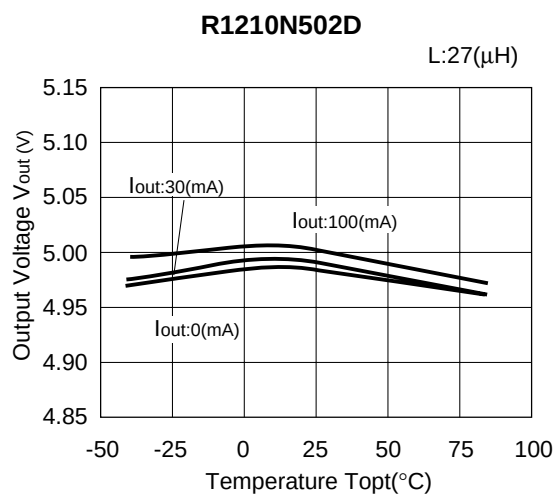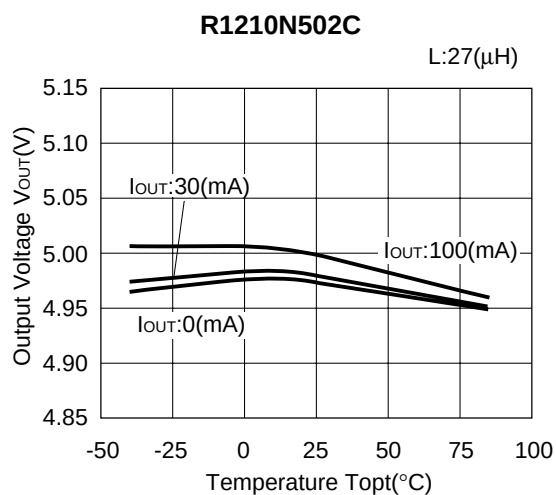



6) Supply Current 1 vs. Temperature

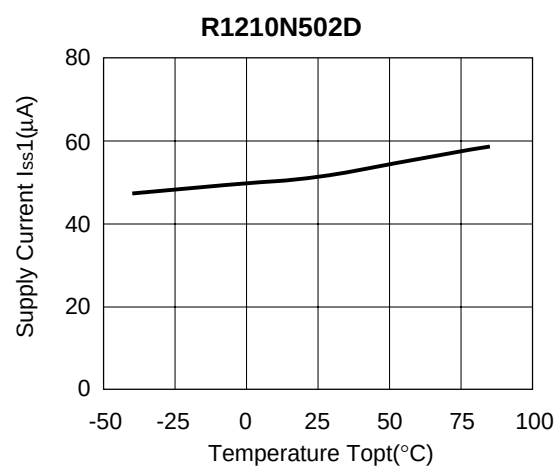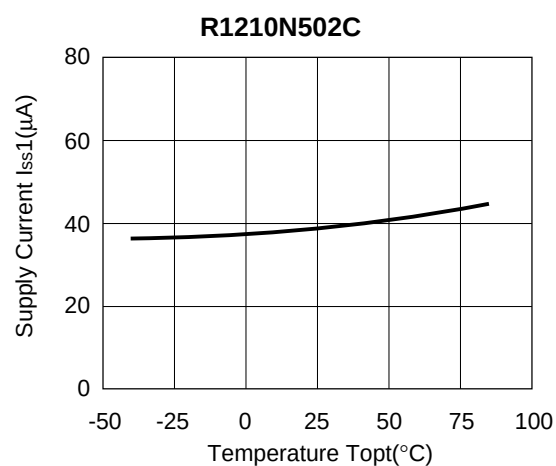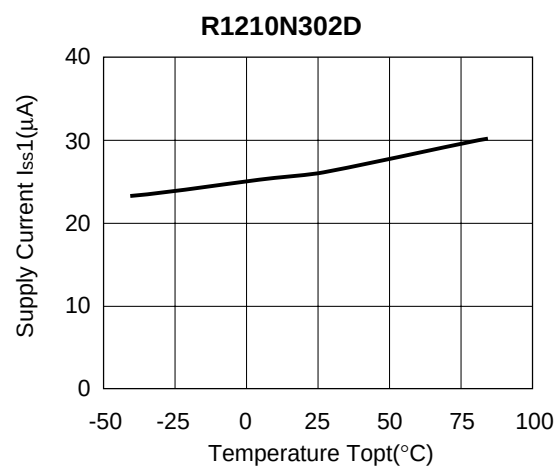
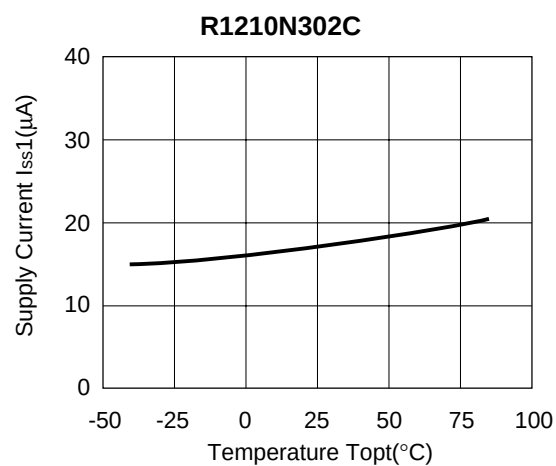


7) Supply Current 2 vs. Temperature

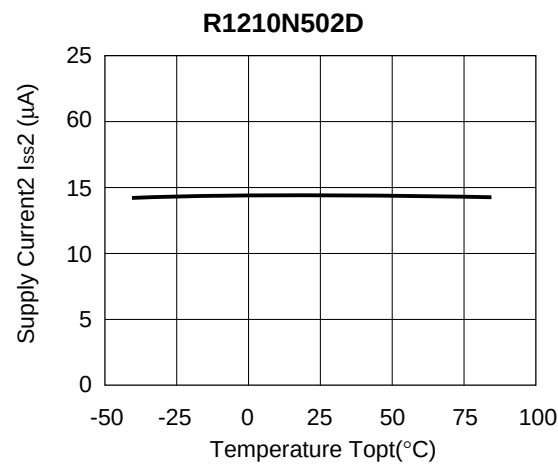
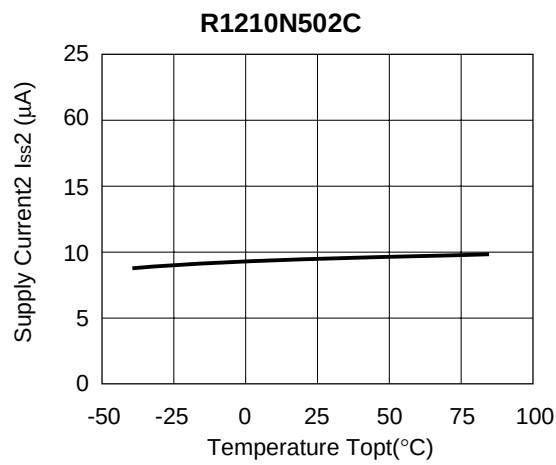
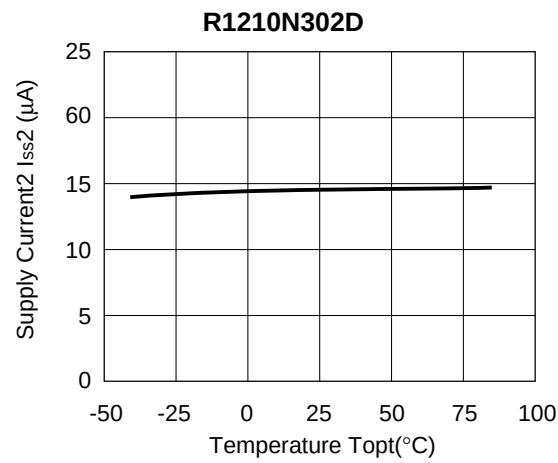
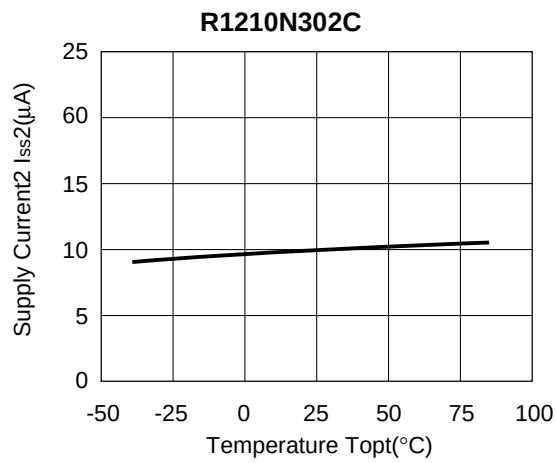


8) Supply Current 3 vs. Temperature



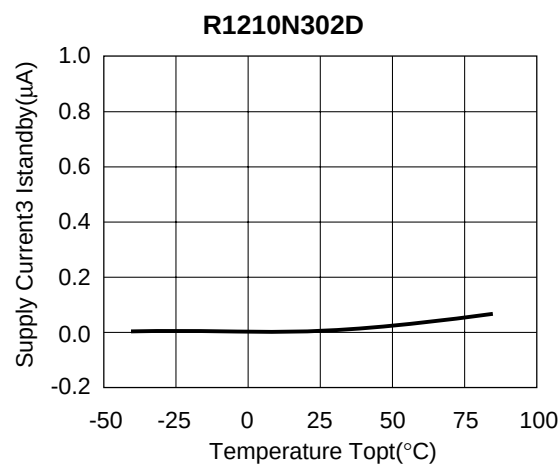
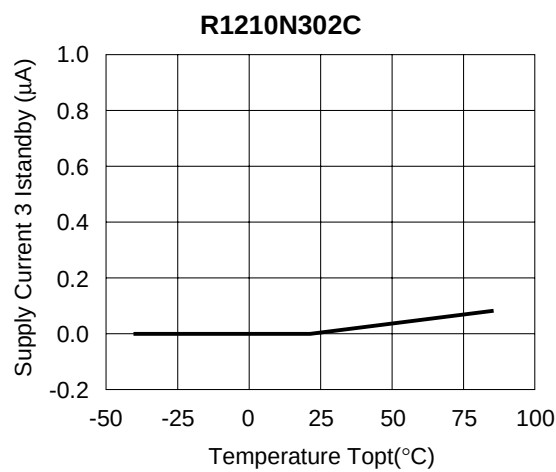


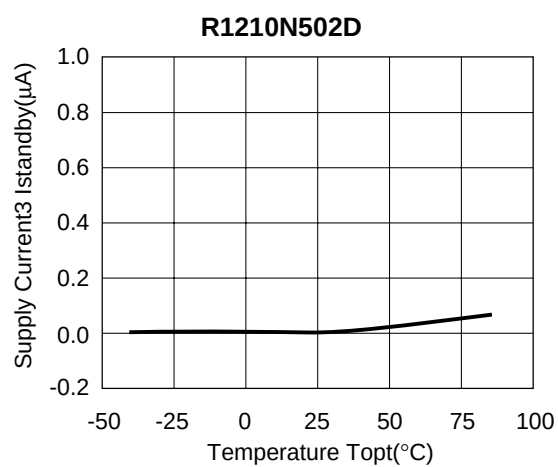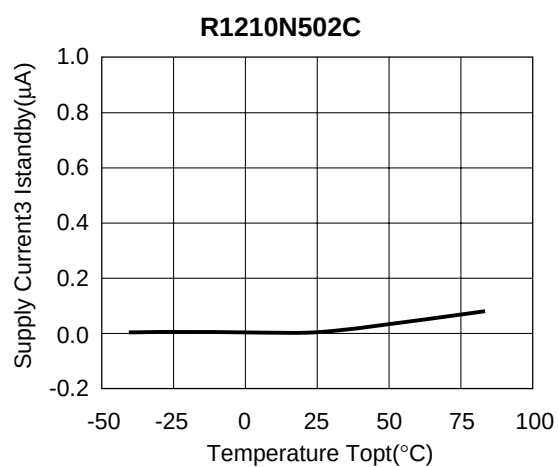



9) Oscillator Frequency vs. Temperature

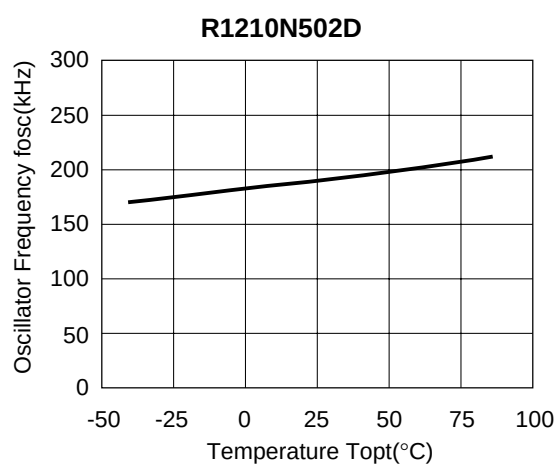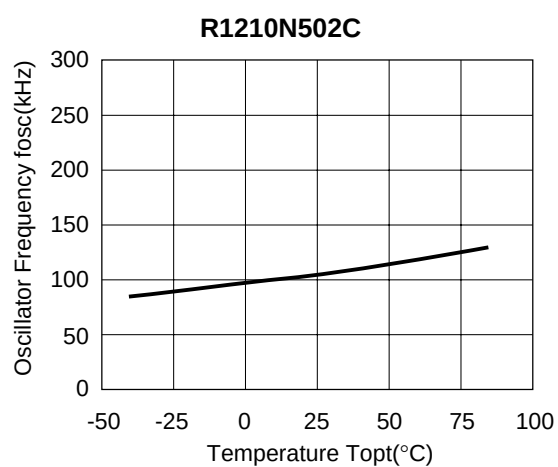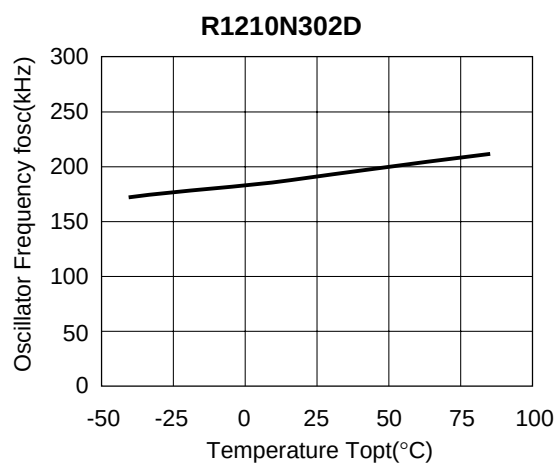
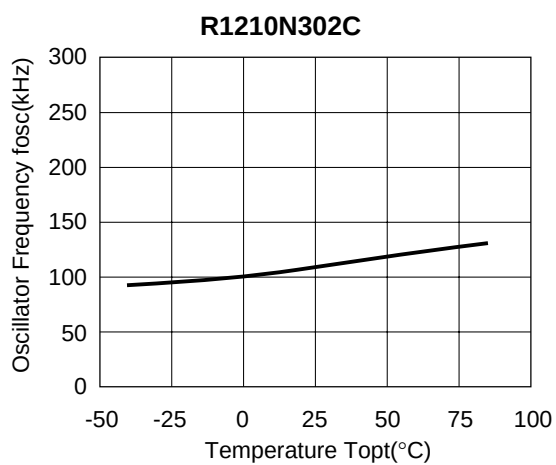


10) Maximum Duty Cycle vs. Temperature

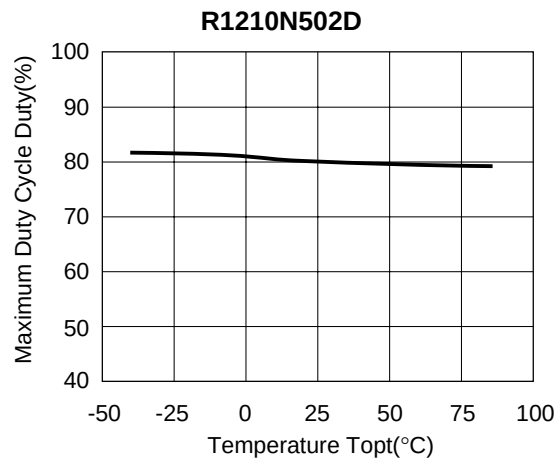
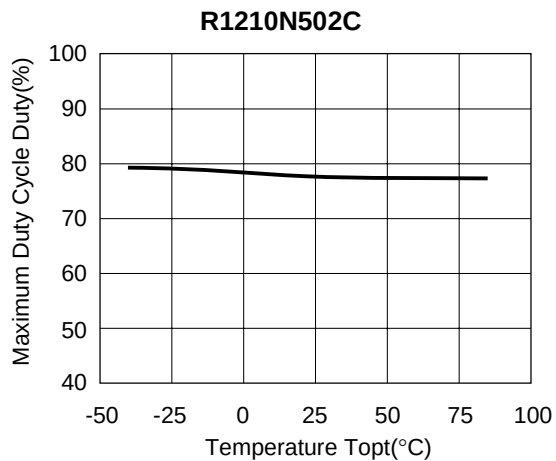
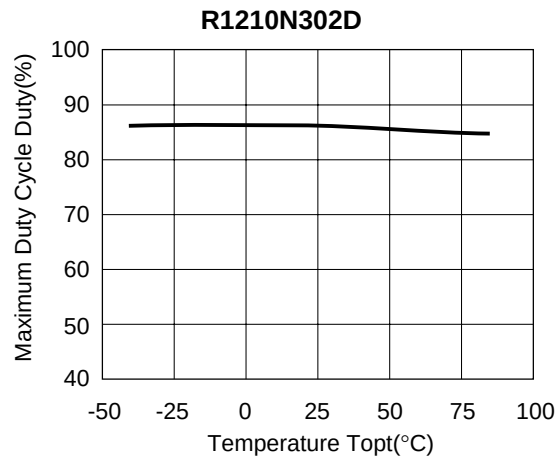
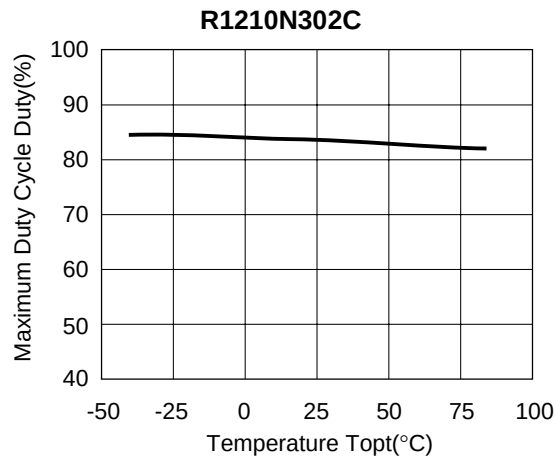


11) EXT "H" Output Current vs. Temperature

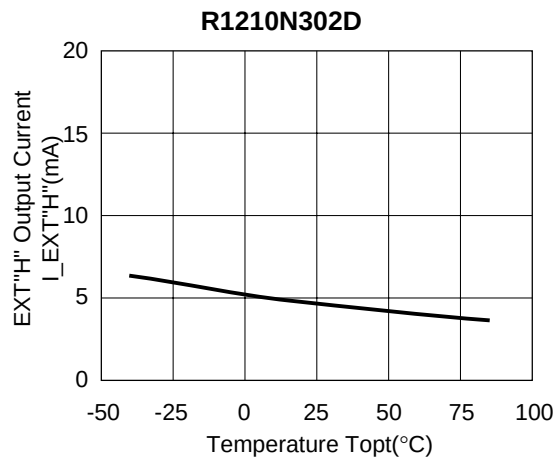
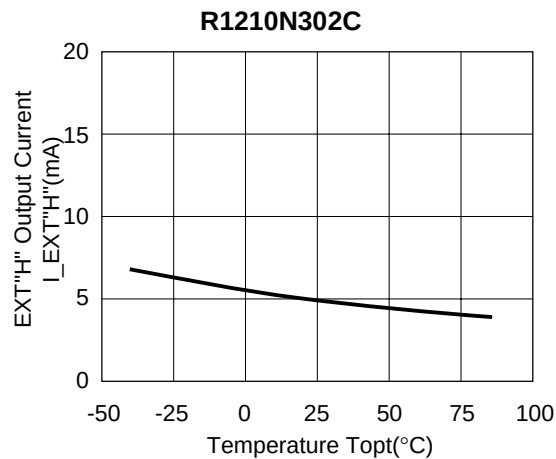


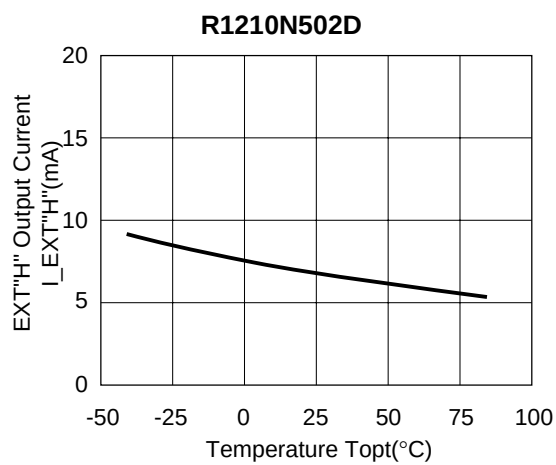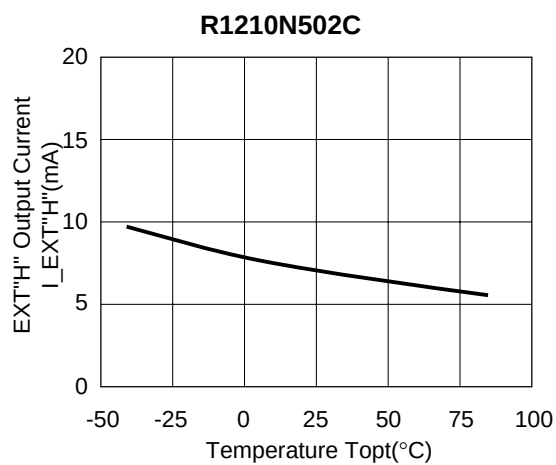



12) EXT "L" Output Current vs. Temperature

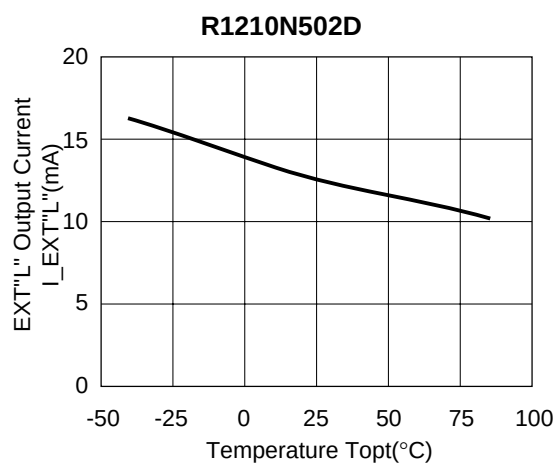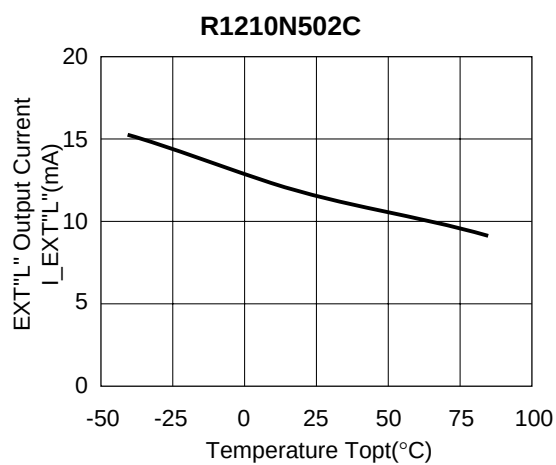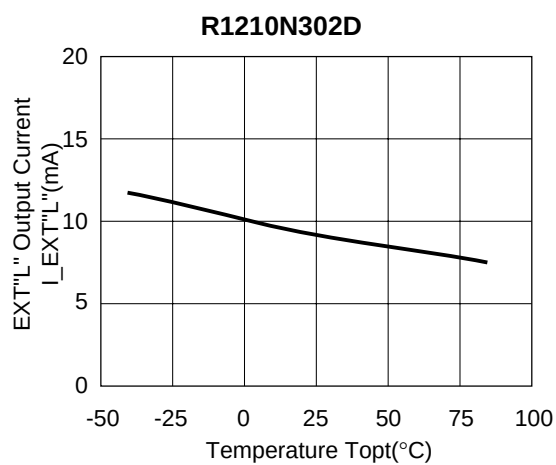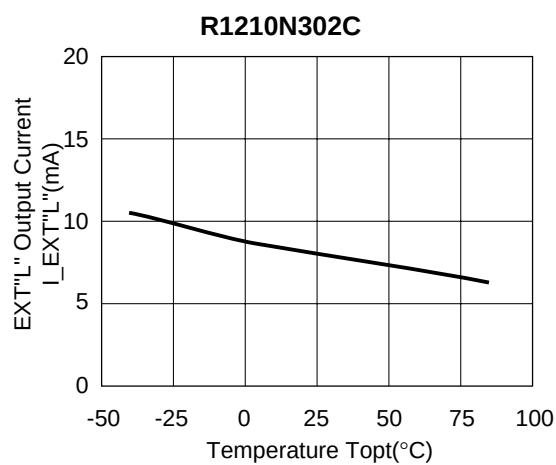

13) CE "H" Input Voltage vs. Temperature

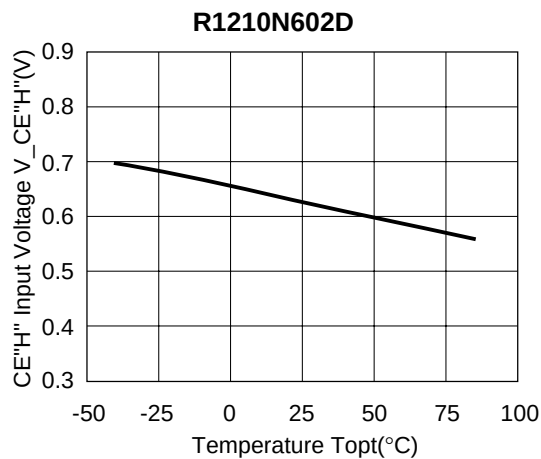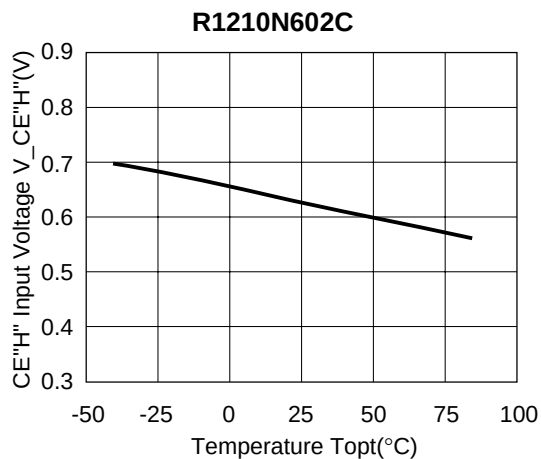


14) CE "L" Input Voltage vs. Temperature

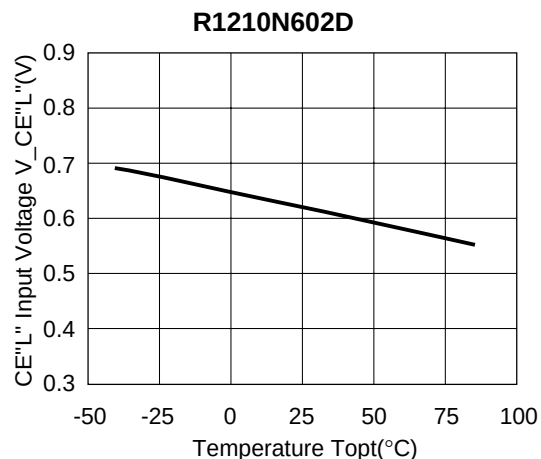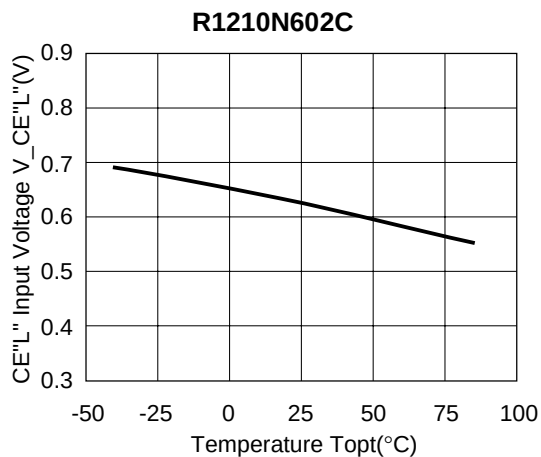


15) Output Waveform at Power-on (T_{opt}: 25°C)







((R1210N502C)) (V_{IN}: 0[V]→3.0[V])

I_{OUT}: 1[mA]

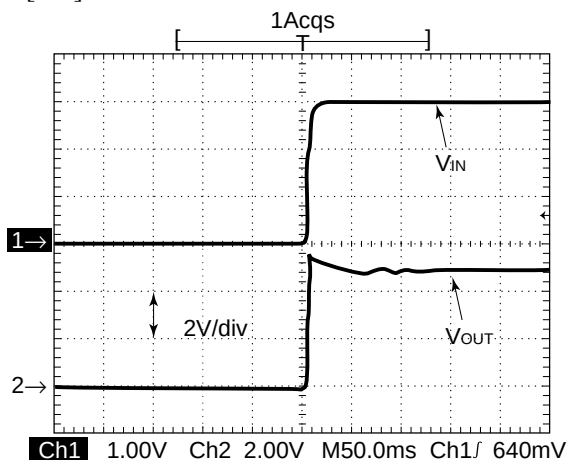



I_{OUT}: 100[mA]

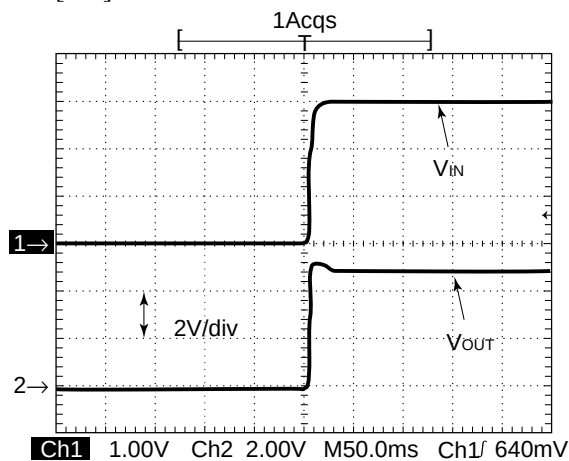

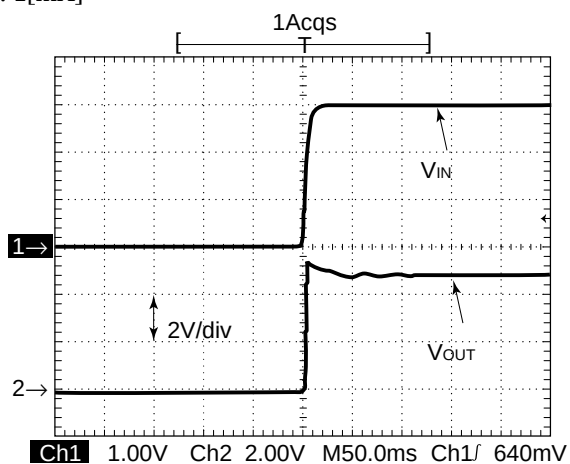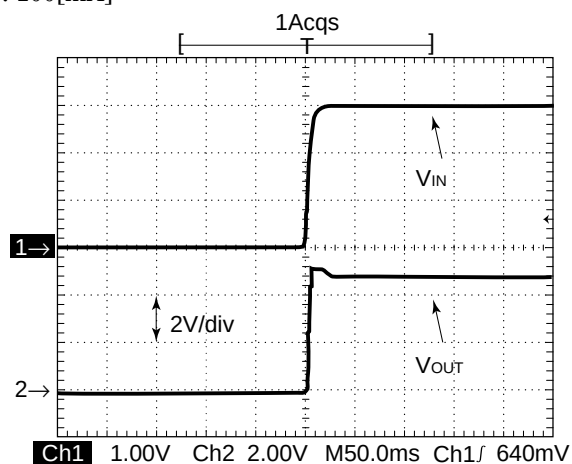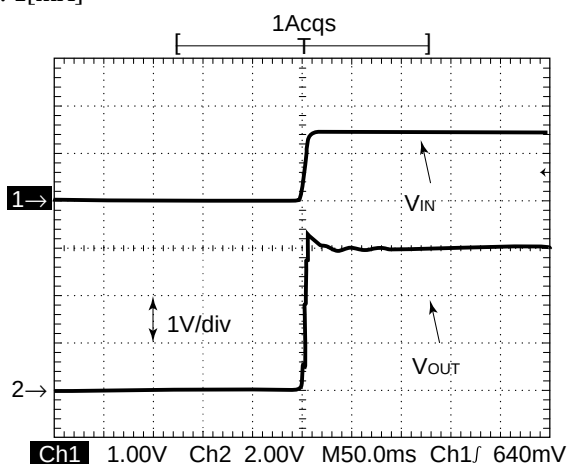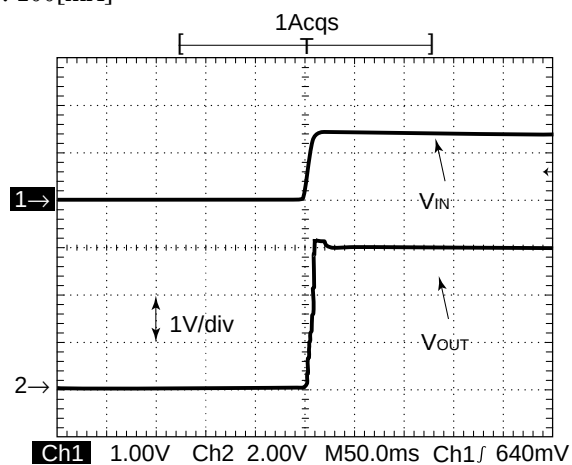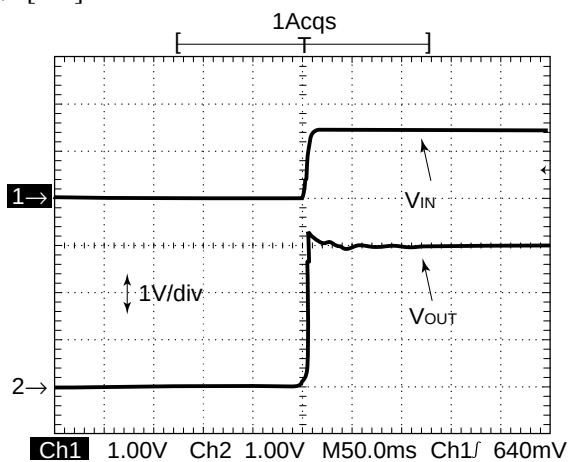
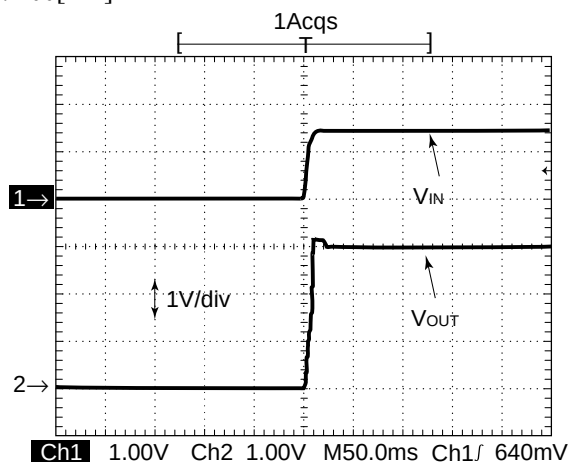
((R1210N502D)) (V_{IN} : 0[V]→3.0[V]) I_{OUT} : 1[mA] I_{OUT} : 100[mA]((R1210N302C)) (V_{IN} : 0[V]→1.5[V]) I_{OUT} : 1[mA] I_{OUT} : 100[mA]((R1210N302D)) (V_{IN} : 0[V]→1.5[V]) I_{OUT} : 1[mA] I_{OUT} : 100[mA]

16) Load Transient Response (Topt: 25°C)



((R1210N502C)) (V_{IN} : 3.0[V], I_{OUT} : 1[mA]→200[mA])

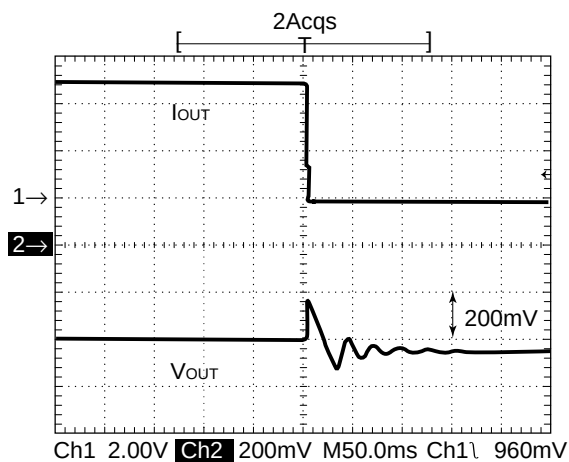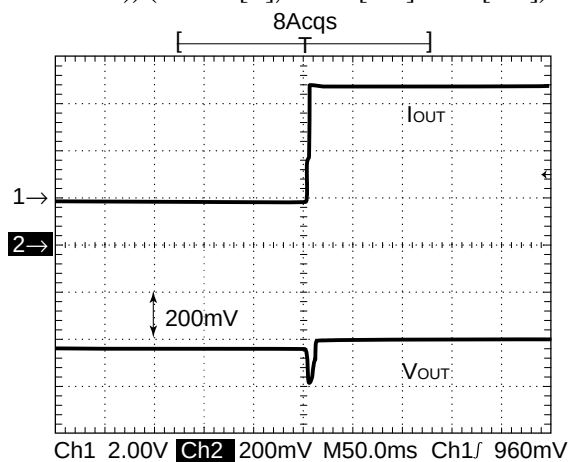



((R1210N502D)) (V_{IN} : 3.0[V], I_{OUT} : 1[mA]→200[mA])

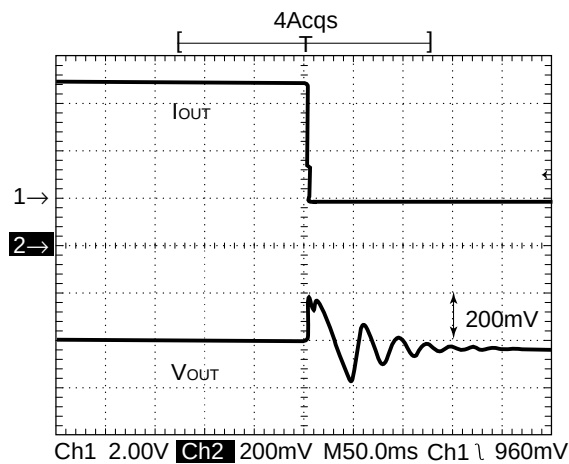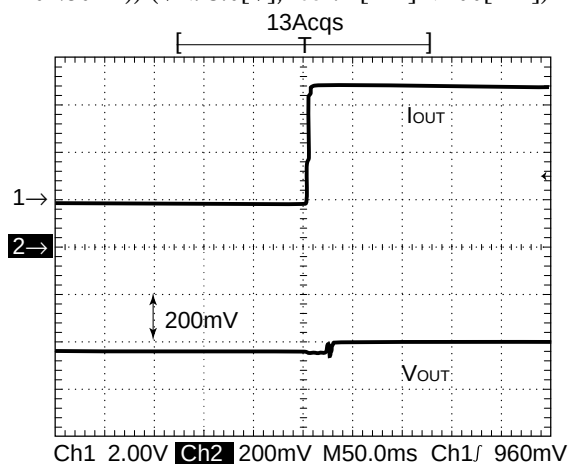

((R1210N302C)) (V_{IN} : 1.5[V], I_{OUT} : 1[mA]→100[mA])

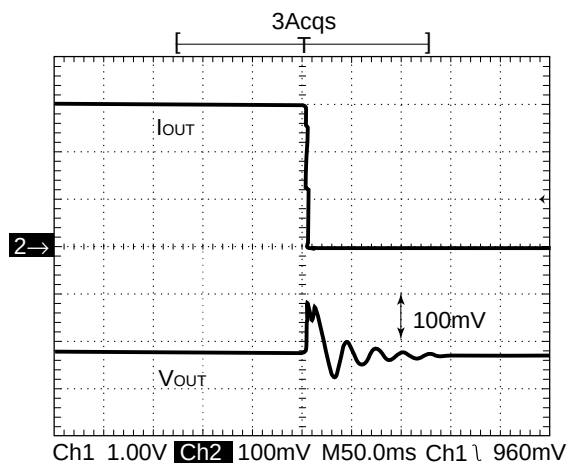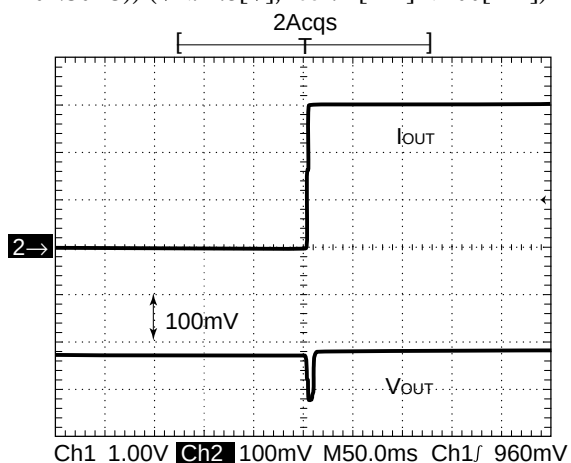

((R1210N302D)) (V_{IN} : 1.5[V], I_{OUT} : 1[mA]→100[mA])

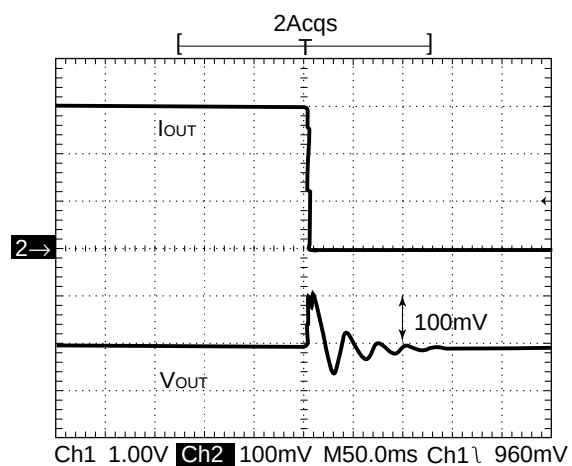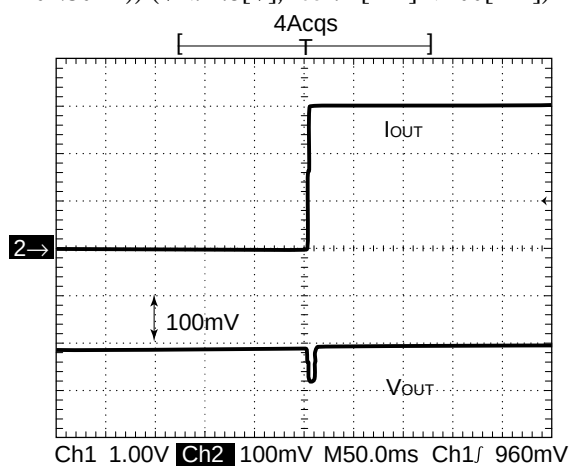



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331