



Rail-to-Rail Output, High Quality Audio, Dual Operational Amplifier

■ GENERAL DESCRIPTION

The MUSES8832 is a Rail-to-Rail output High quality audio operational amplifier, which is optimized for high-end audio and portable audio applications.

The MUSES8832 features 2.1nV/ $\sqrt{\text{Hz}}$ low noise, 10MHz wide gain bandwidth, 0.0009% low distortion, 600 Ω drive capability, -40°C to +125°C operating temperature range, and various reliabilities and conveniences are improved.

It is the best for audio preamplifiers, active filters, microphone amplifiers, and line amplifiers with excellent sound.

■ APPLICATIONS


- Home Audio
- PC Audio
- Portable Audio
- Car Audio

■ FEATURES

• Operating Voltage	+2.7V to +14V
	$\pm 1.35V$ to $\pm 7.0V$
• Low Noise	2.1nV/ $\sqrt{\text{Hz}}$ typ. at f=1kHz
	0.3 μV rms typ. (20Hz to 20kHz)
• Output Current	32mA typ. (Capability of driving 600 Ω loads)
• GBW	10MHz typ.
• Low Distortion	0.0009% typ. at V+=+5V, Vo=1.3Vrms
• Slew Rate	1V/ μs typ.
• Bipolar Technology	
• Package Outline	SOP8 JEDEC 150 mil, SSOP8-A3
• Operating Temperature Range	-40 to +125°C

■ PIN CONFIGURATION

PIN FUNCTION

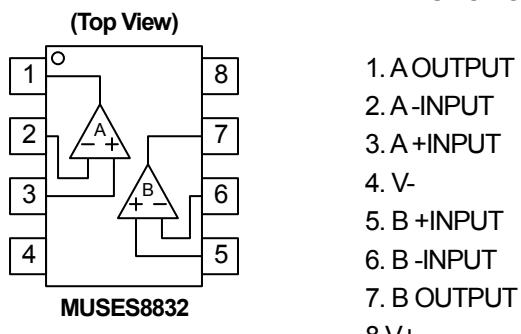

1. A OUTPUT
2. A -INPUT
3. A +INPUT
4. V-
5. B +INPUT
6. B -INPUT
7. B OUTPUT
8. V+

■ PACKAGE OUTLINE



MUSES8832E
(SOP8 JEDEC 150 mil)



MUSES8832VA3
(SSOP8-A3)



MUSES8832

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V ⁺ (V ⁺ /V)	+15 (± 7.5)	V
Input Voltage	V _{IN}	+15 (Note1)	V
Differential Input Voltage	V _{ID}	± 15	V
Power Dissipation	P _D	SOP8 JEDEC 150 mil: 900 SSOP8-A3: 650 (Note2)	mW
Operating Temperature Range	T _{opr}	-40 to +125	°C
Storage Temperature Range	T _{stg}	-65 to +150	°C

(Note1) For supply Voltages less than +15 V, the maximum input voltage is equal to the Supply Voltage.

(Note2) Mounted on the EIA/JEDEC standard board (114.3×76.2×1.6mm, two layer, FR-4).

■ RECOMMENDED OPERATING CONDITION (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage	V ⁺		+2.7	-	+14.0	V
	V ⁺ /V		± 1.35	-	± 7.0	V

■ ELECTRIC CHARACTERISTICS


V⁺=+5V, V=0V, Ta=25°C, R_L to V⁺/2, unless otherwise specified

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I _{CC}	No Signal, R _L = ∞	-	7.5	10	mA
Power Dissipation	P _D	No Signal	-	42.5	60	mW
Input Offset Voltage	V _{IO}	R _S =50Ω	-	0.1	0.5	mV
Input Bias Current	I _B		-	4	6.5	μA
Input Offset Current	I _{IO}		-	100	500	nA
Open-Loop Voltage Gain	A _V	R _L =10kΩ to V ⁺ /2, V _O =0.5 to 4.5V	90	115	-	dB
Common Mode Input Voltage Range	V _{ICM}	CMR≥90dB	0.5	-	3.7	V
Common Mode Rejection Ratio	CMR	R _S =50Ω	90	110	-	dB
Supply Voltage Rejection Ratio	SVR	R _S =50Ω	90	105	-	dB
Maximum Output Voltage 1	V _{OH1}	R _L =10kΩ to 0V	4.9	4.95	-	V
	V _{OL1}	R _L =10kΩ to 0V	-	0.05	0.1	V
Maximum Output Voltage 2	V _{OH2}	R _L =600Ω to V ⁺ /2	4.8	4.9	-	V
	V _{OL2}	R _L =600Ω to V ⁺ /2	-	0.1	0.2	V
Output Source Current	I _{SOURCE}	V _O =V ⁺ -0.5V	10	32	-	mA
Output Sink Current	I _{SINK}	V _O =0.5V	10	20	-	mA
Gain Bandwidth Product	GBW	f=10kHz	-	10	-	MHz
Slew Rate	SR	R _L =2kΩ	-	1	-	V/μs
Total Harmonic Distortion + Noise	THD+N	Gain=10, V _O =1.3Vrms, R _L =2kΩ, f=1kHz	-	0.0009	-	%
Channel Separation	CS	Gain=100, R _S =1kΩ, R _L =10kΩ, f=1kHz	-	140	-	dB
Input Noise Voltage1	e _n	f=1kHz	-	2.1	-	nV/√Hz
Input Noise Voltage2	V _n	f=20Hz to 20kHz	-	0.30	-	μVrms


■ NOTE

1. The closed gain should be 6dB or higher to prevent the oscillation. Unity gain follower application may cause the oscillation.
2. Minimize the load capacitor for the better performance. A large load capacitor CL reduces the frequency response and causes oscillation or ringing.
3. Be careful to the circuit of high impedance. Input bias current influences an input noise and output offset voltage.


■ APPLICATION CIRCUIT

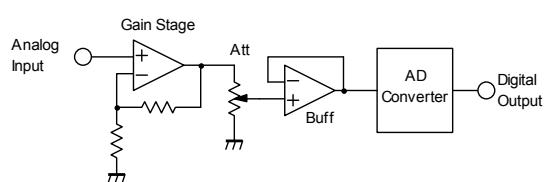

(Fig.1:ADC Input)

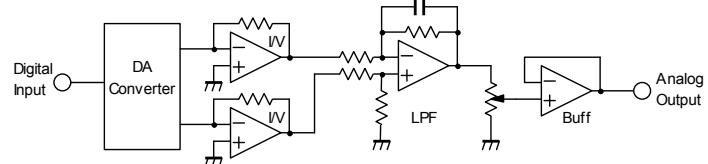







(Fig.2:DAC Output)

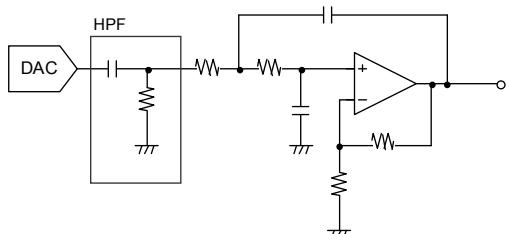







(Fig.3:DAC LPF Circuit)

MUSES8832

■ TYPICAL CHARACTERISTICS ($V^- = 0V$, $V_{CM} = V^+ / 2$, unless otherwise specified)

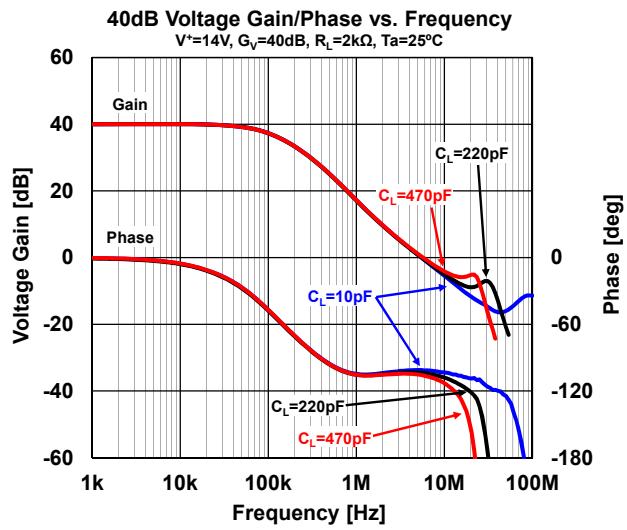
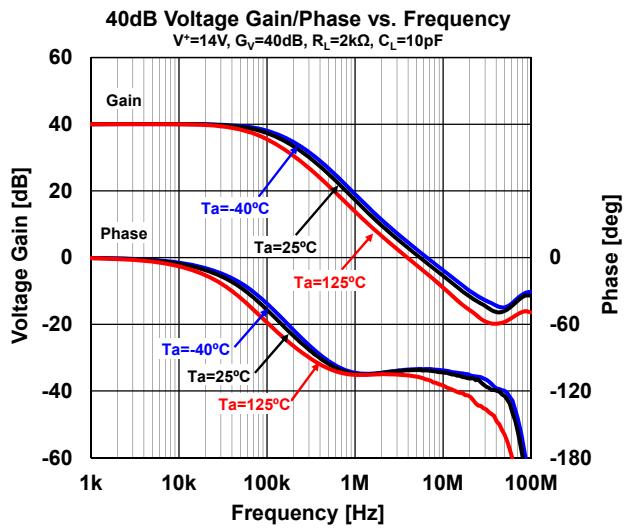
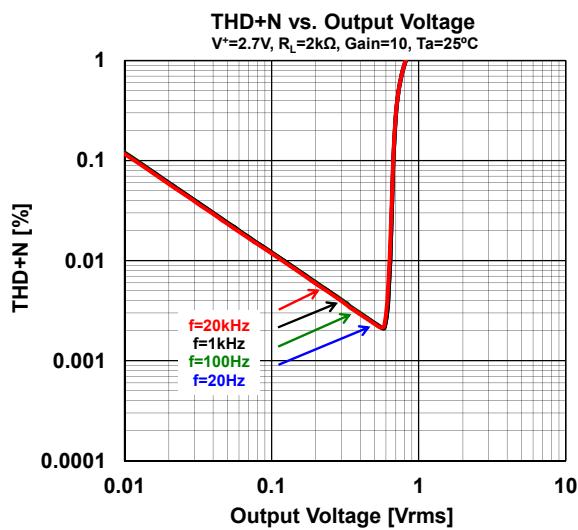
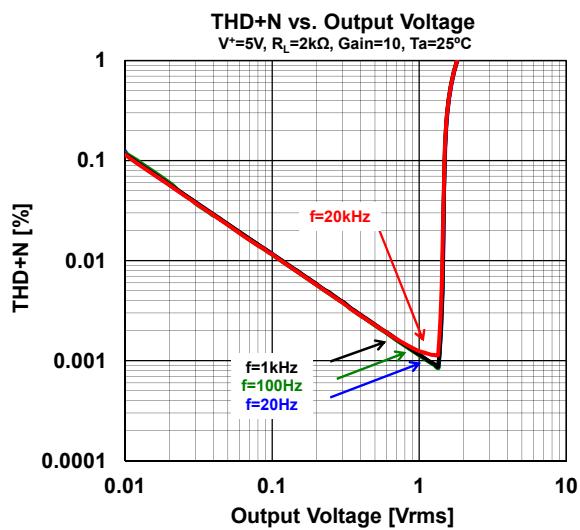
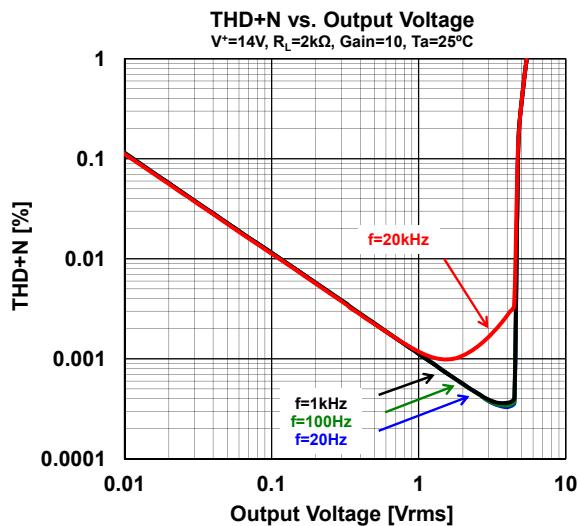
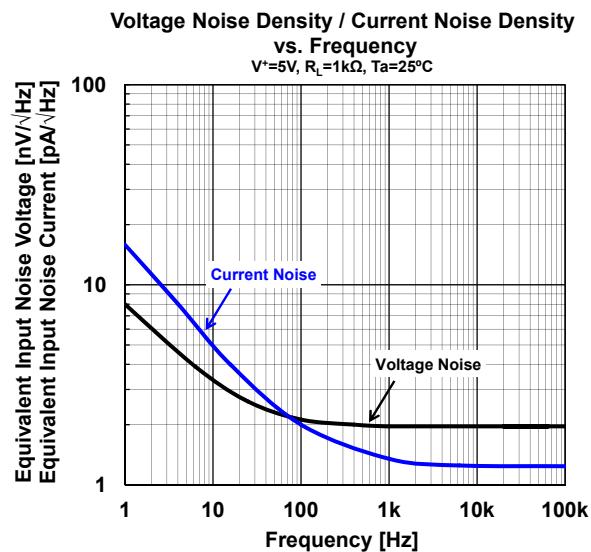


■ TYPICAL CHARACTERISTICS ($V^*=0V$, $V_{CM}=V^*/2$, unless otherwise specified)

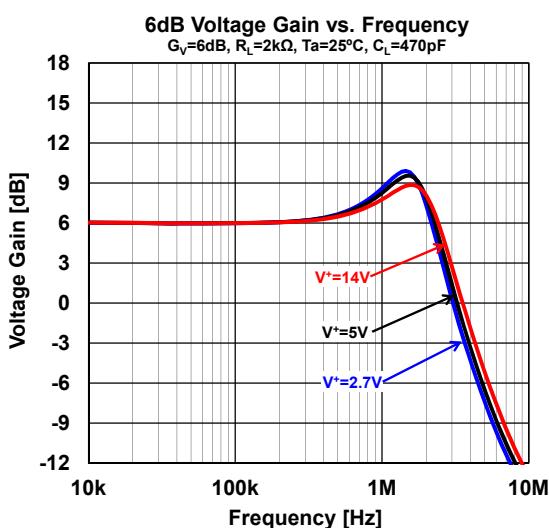
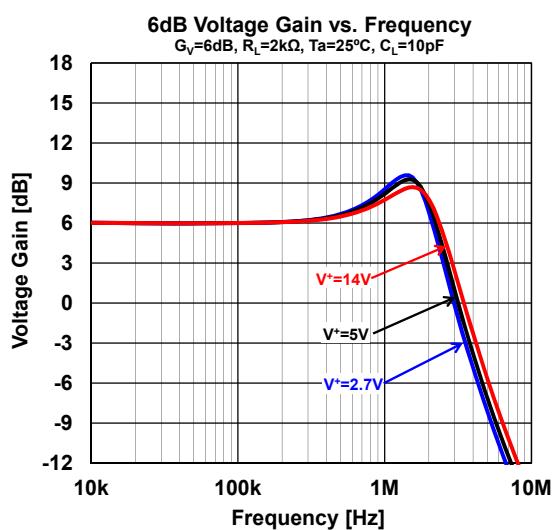
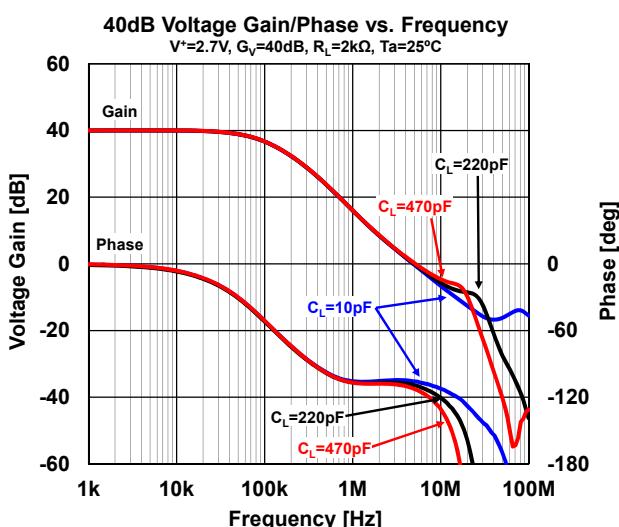
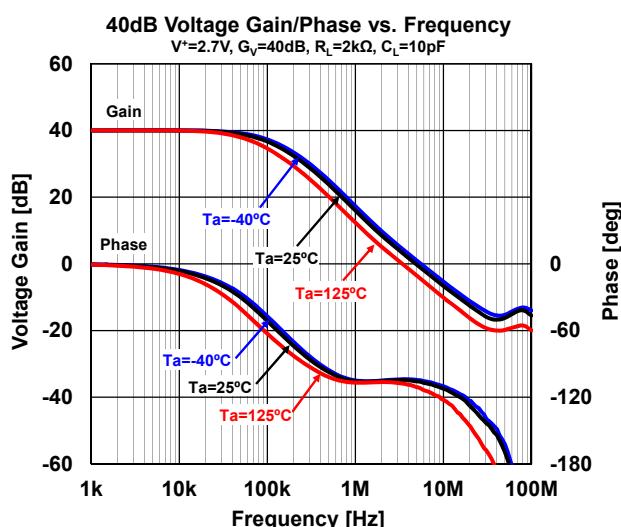
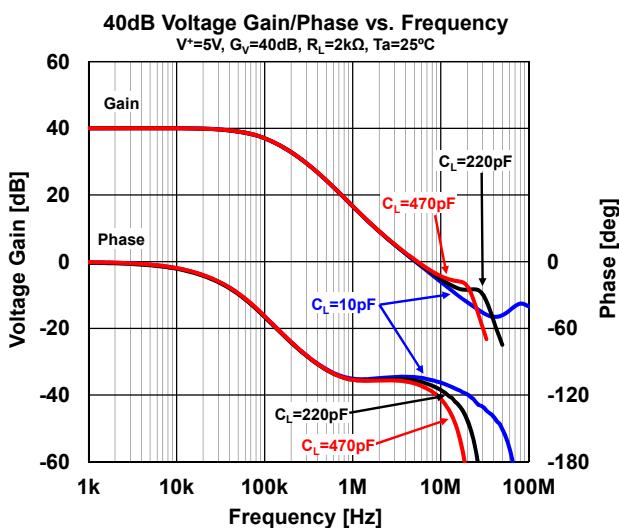
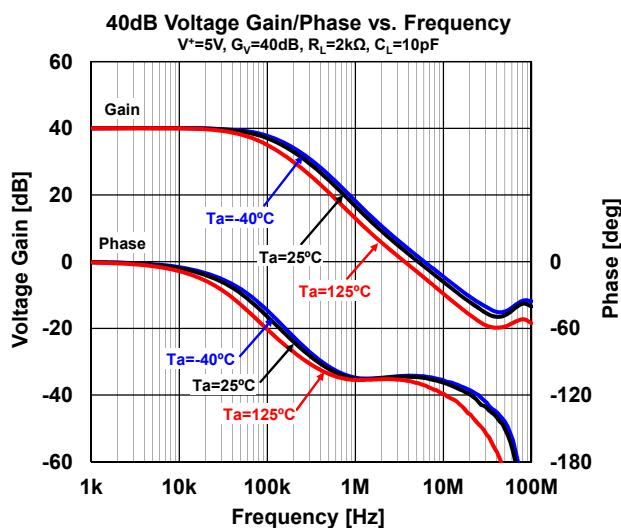


MUSES8832

■ TYPICAL CHARACTERISTICS ($V^- = 0V$, $V_{CM} = V^+ / 2$, unless otherwise specified)

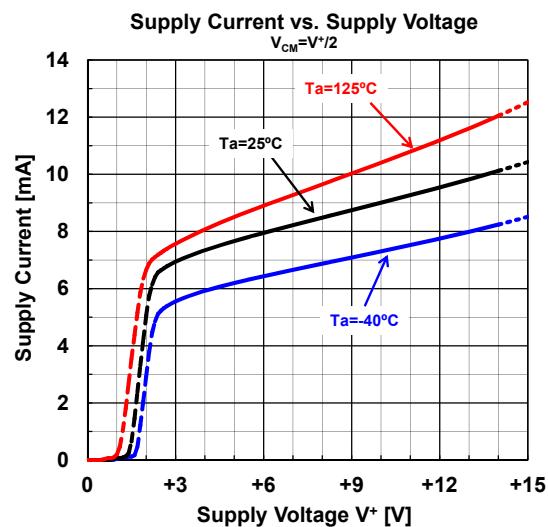
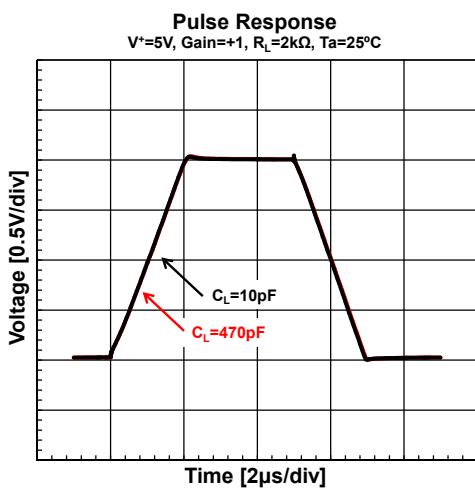
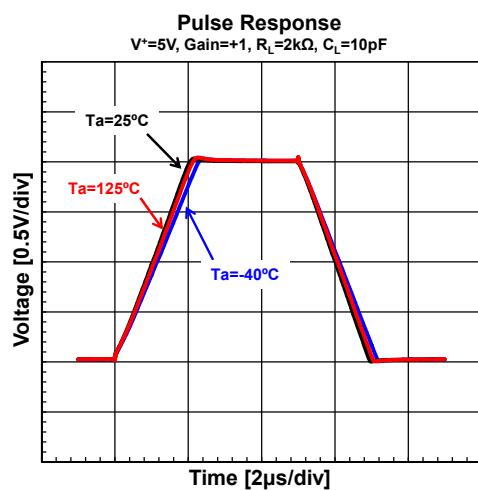
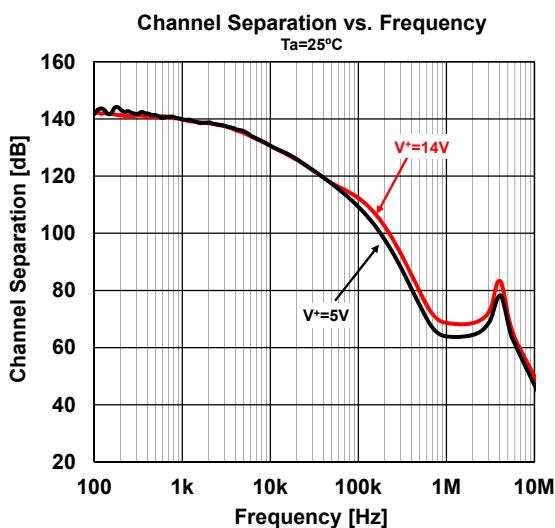
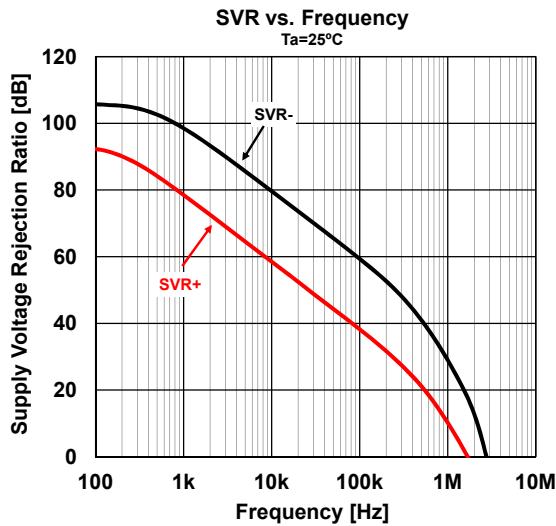
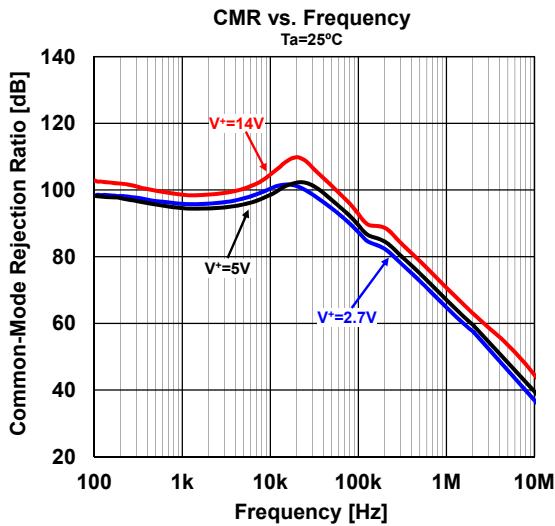


■ TYPICAL CHARACTERISTICS ($V^- = 0V$, $V_{CM} = V^+ / 2$, unless otherwise specified)

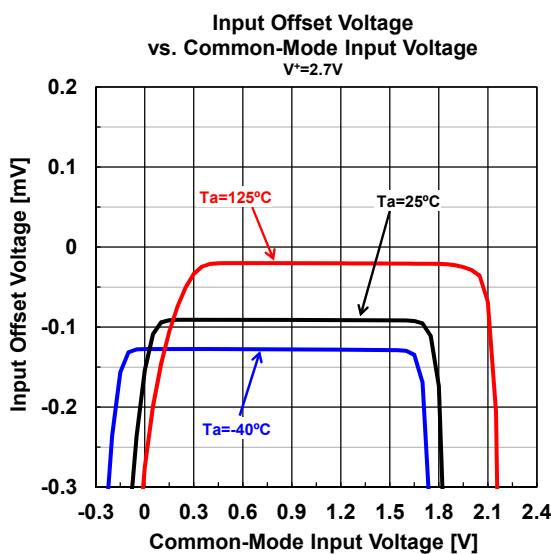
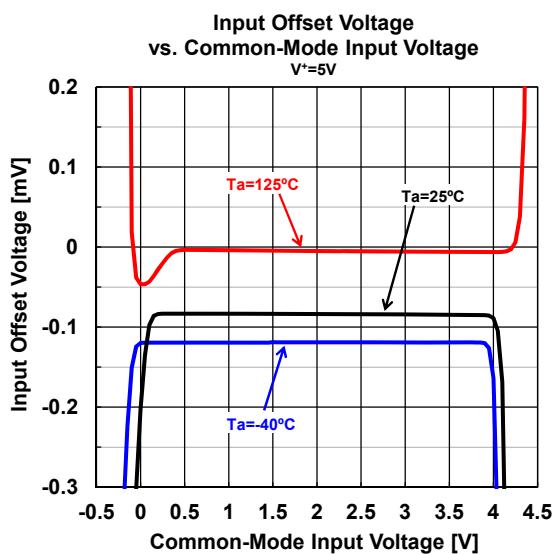
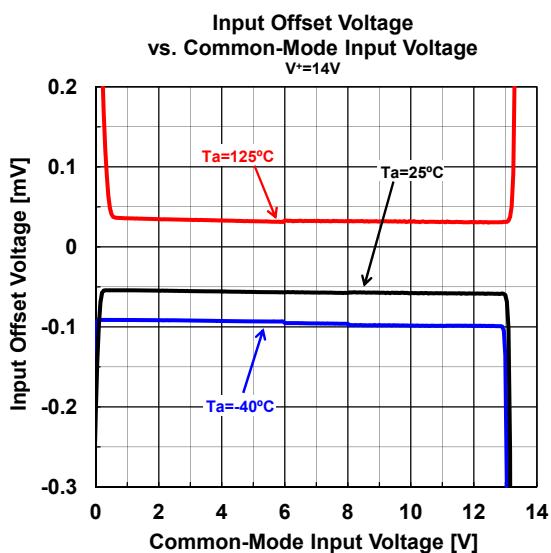
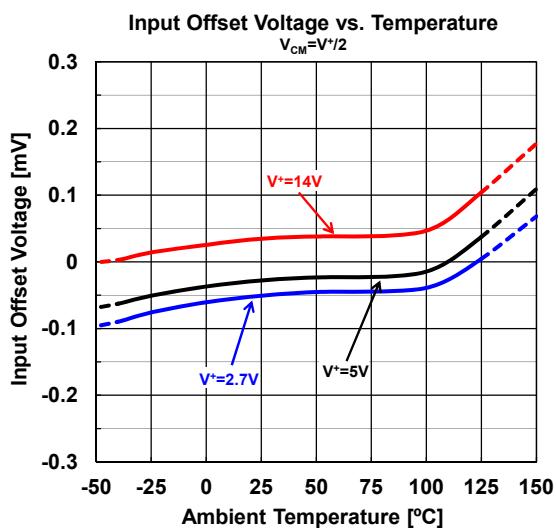
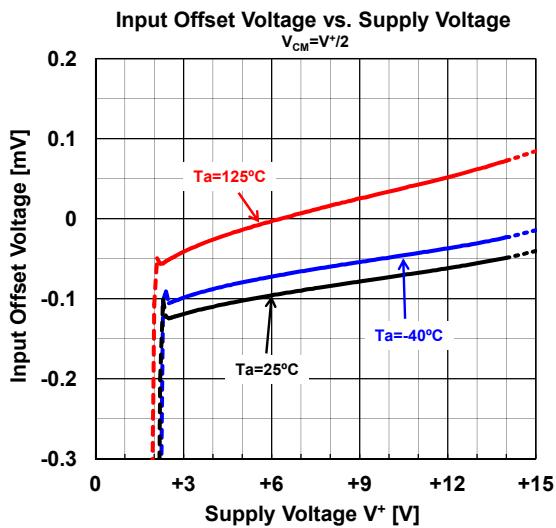
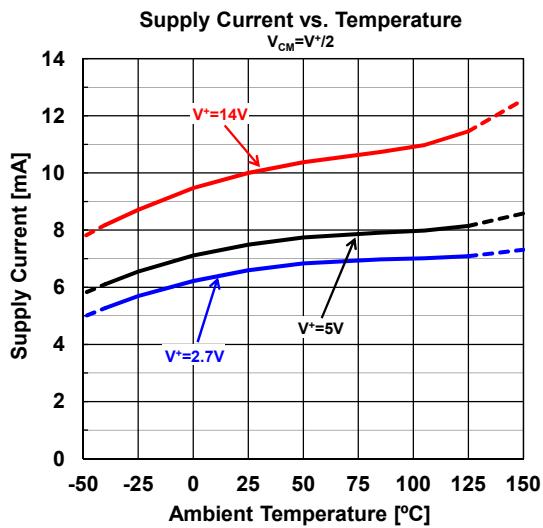


MUSES8832

■ TYPICAL CHARACTERISTICS ($V^- = 0V$, $V_{CM} = V^+ / 2$, unless otherwise specified)

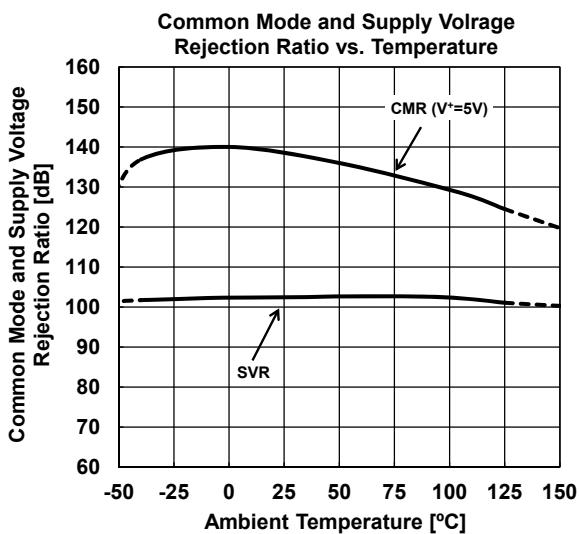
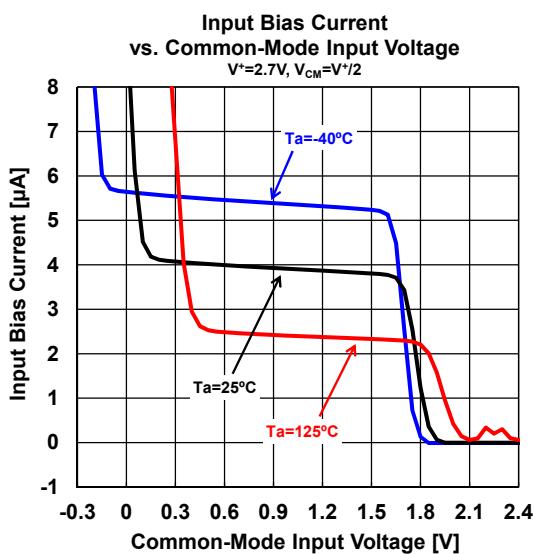
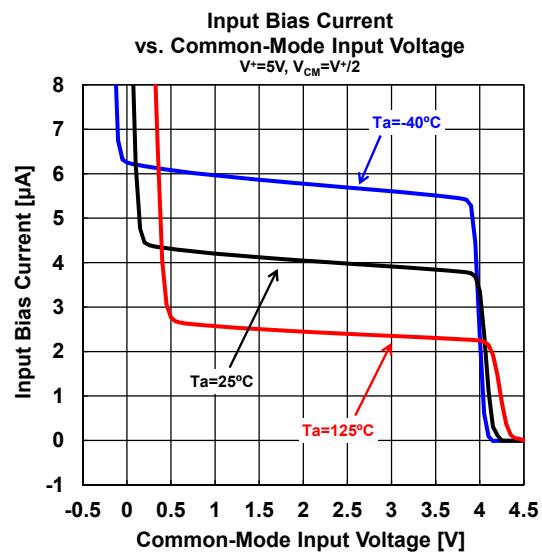
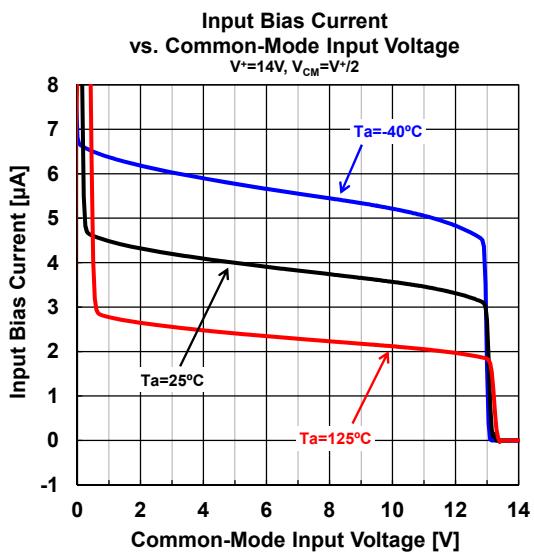
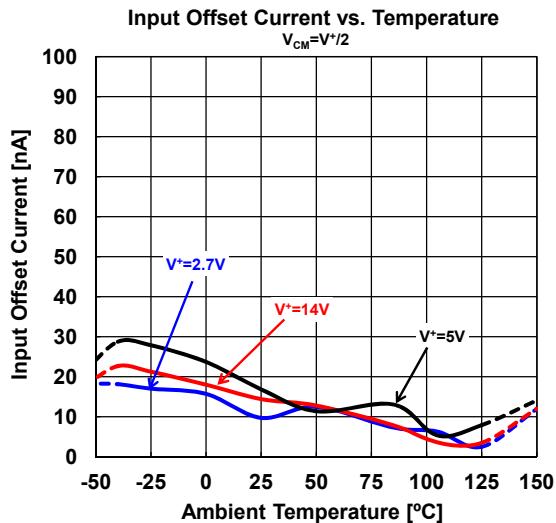
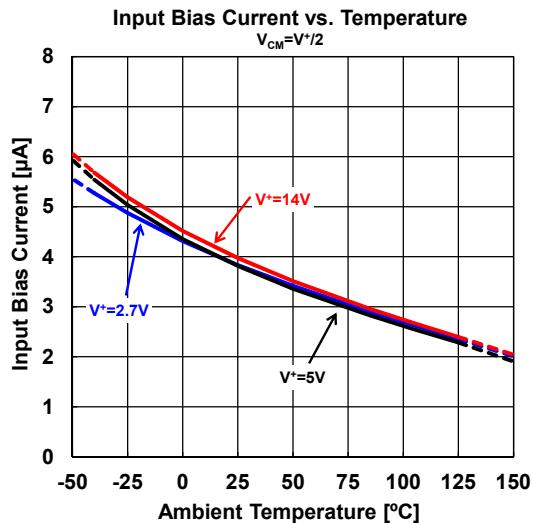


■ TYPICAL CHARACTERISTICS ($V^-=0V$, $V_{CM}=V^+/2$, unless otherwise specified)

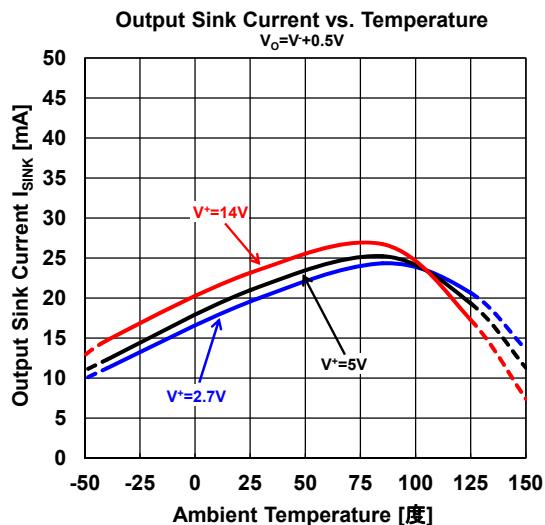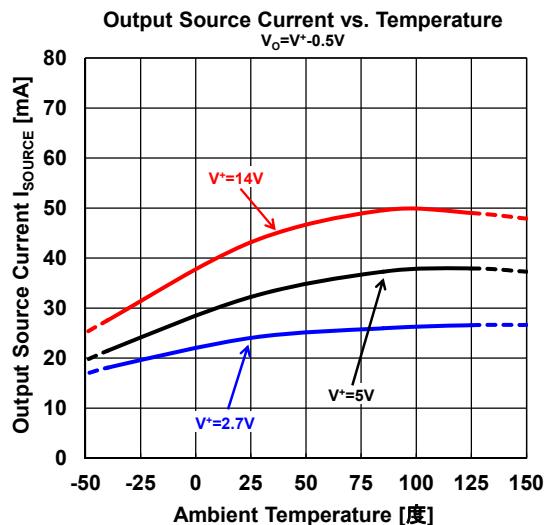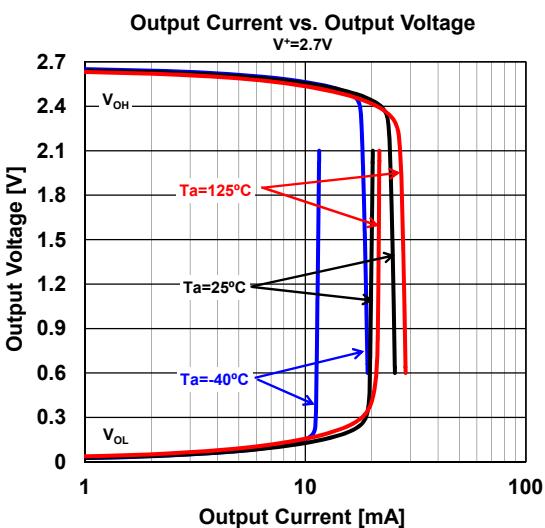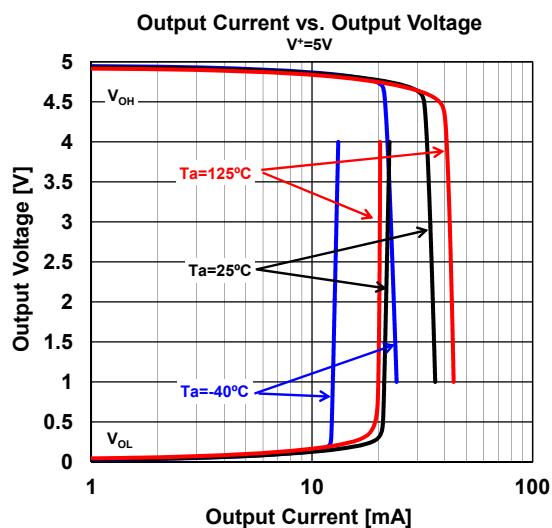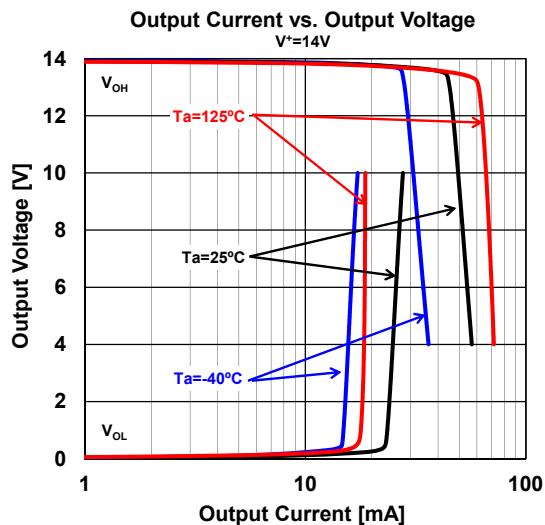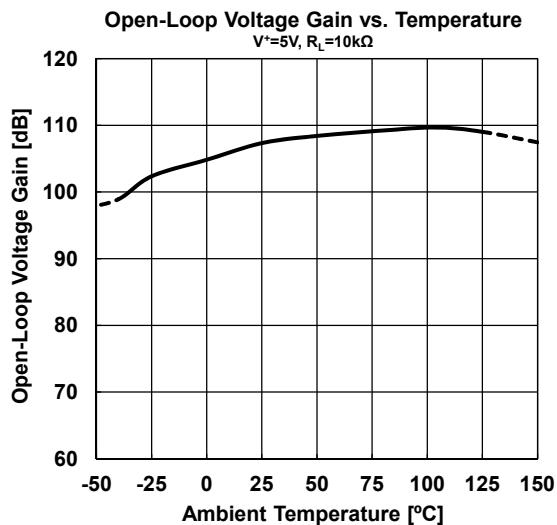

MUSES8832

■ TYPICAL CHARACTERISTICS ($V^- = 0V$, $V_{CM} = V^+ / 2$, unless otherwise specified)

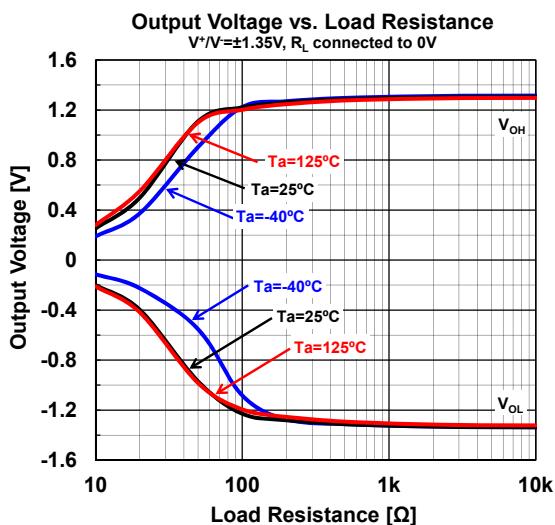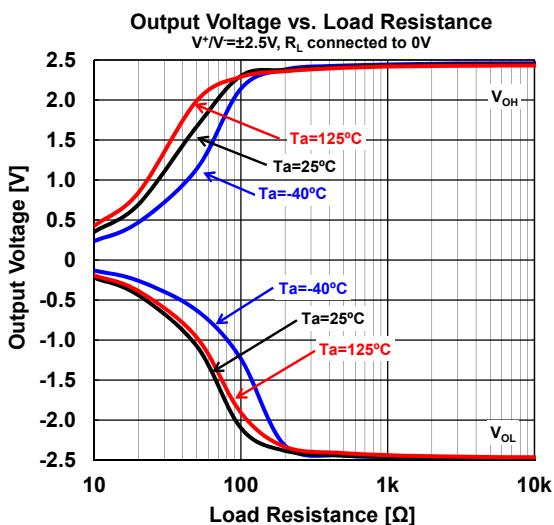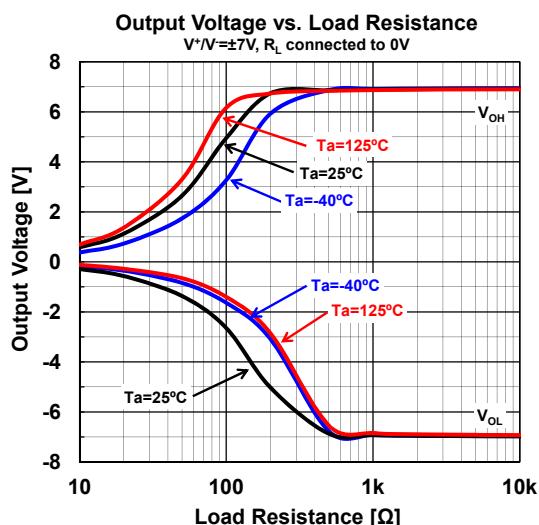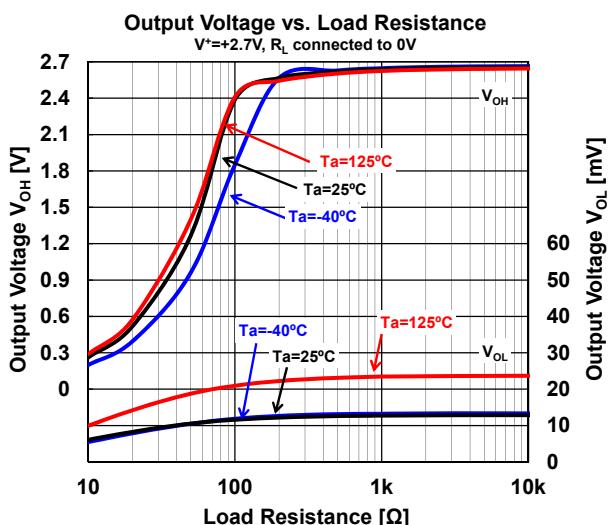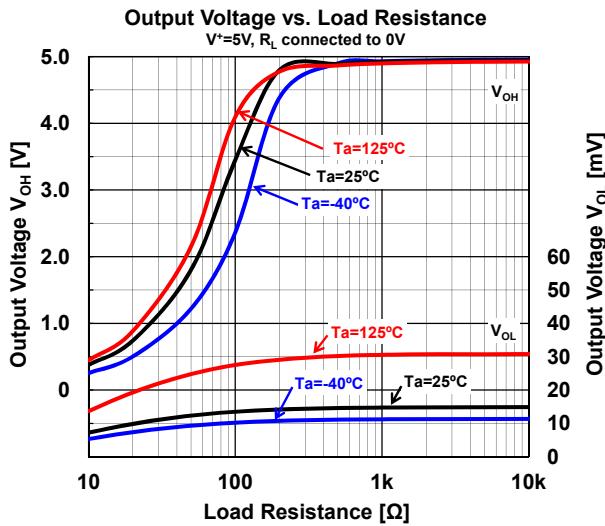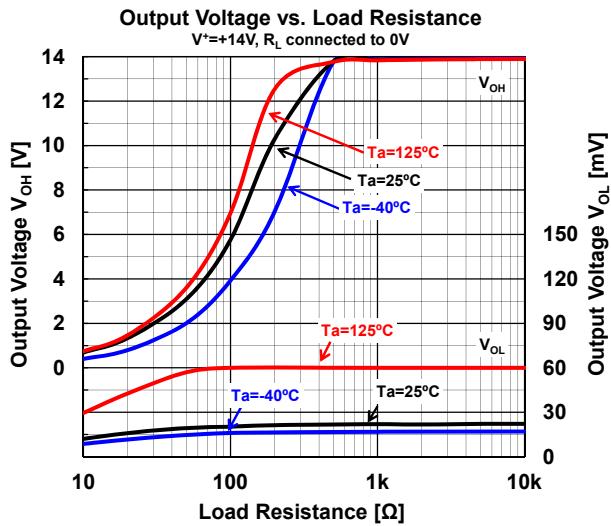

■ MEMO

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NJR:

[MUSES8832E](#) [MUSES8832VA3](#)



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литер Н,
помещение 100-Н Офис 331