

## DC to 30GHz Broadband MMIC Medium-Power Amplifier

### Features

- High power from 1.5-20GHz:
  - 24dBm Psat, 21dBm P1dB
- Excellent 0.04-30GHz specs:
  - Flat gain (10.5 ± 0.75dB)
  - Great return loss (16dB)
  - High Psat (23dBm), P1dB (20dBm)
- High isolation (>30dB)
- >30dB dynamic gain control
- Integrated temperature-referenced power detector output
- 100% DC, RF, and visually tested
- Size: 1640x835um (64.6x32.9mil)

### Description

The MMA024AA is an eight stage traveling wave amplifier. The amplifier has been designed for high output power, excellent return loss, and high isolation. The amplifier typically delivers 24dBm Psat and 21dBm P1dB at 20GHz.

### Application


The MMA024AA Broadband MMIC Medium-Power Amplifier is designed for broadband power applications in RF and microwave communications, test equipment and military systems. By using specific external components, the bandwidth of operation can be extended below 40MHz.

**Key Characteristics:** Vdd=8V, Idd=250mA, Zo=50Ω

Specifications pertain to wafer measurements with RF probes and DC bias cards @ 25°C


Parameter	Description	1.5 - 20GHz			0.04 - 30GHz		
		Min	Typ	Max	Min	Typ	Max
S21 (dB)	Small Signal Gain	9	10.5	-	9	10.5	-
Flatness (±dB)	Gain Flatness	-	0.75	1.25	-	0.75	1.25
S11 (dB)	Input Match	-	-17	-13	-	-16	-12
S22 (dB)	Output Match	-	-17	-12	-	-16	-12
S12 (dB)	Reverse Isolation	-	-36	-30	-	-30	-25
P1dB (dBm)	1dB Compressed Output Power	19	21	-	18.5	20.5	-
Psat (dBm)	Saturated Output Power	22.5	24	-	21.5	23	-
Pout @ 16dB (dBm)	Output Power at 16dB Gain	20	22	-	-	-	-
NF (dB)	Noise Figure	-	8	-	-	8	-
RF <sub>det</sub> (mV/mW)	RF Detector Sensitivity	-	0.8	-	-	0.8	-

## S21

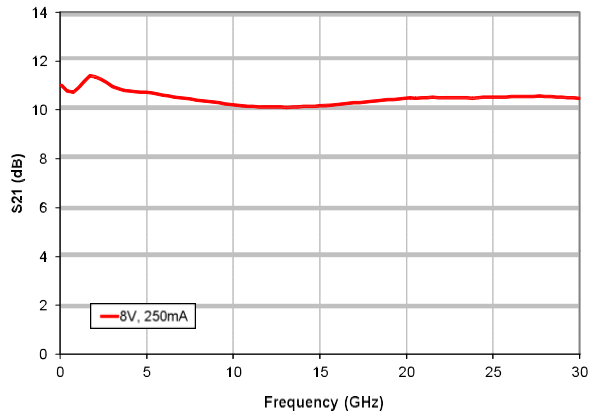


Typical IC performance measured on-wafer

## Noise Figure

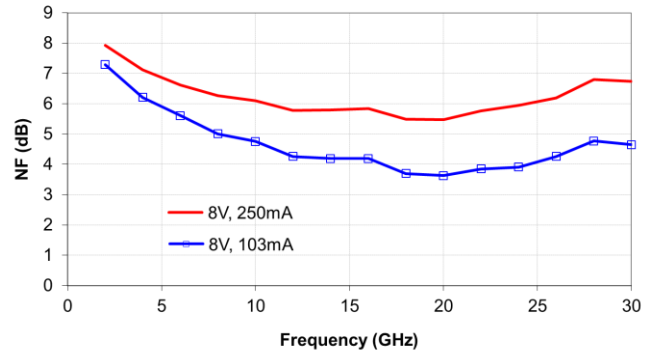


Typical IC performance with package de-embedded

## S11, S22

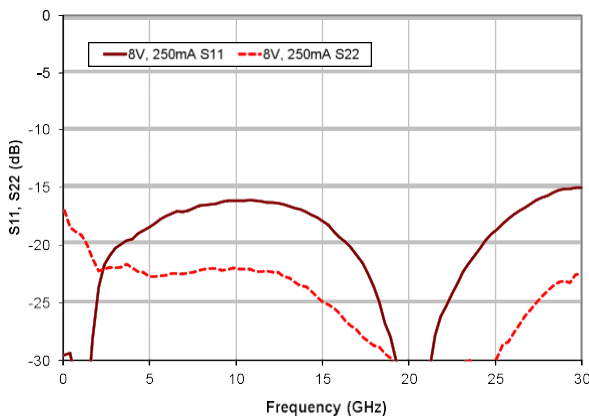


Typical IC performance measured on-wafer

## S12

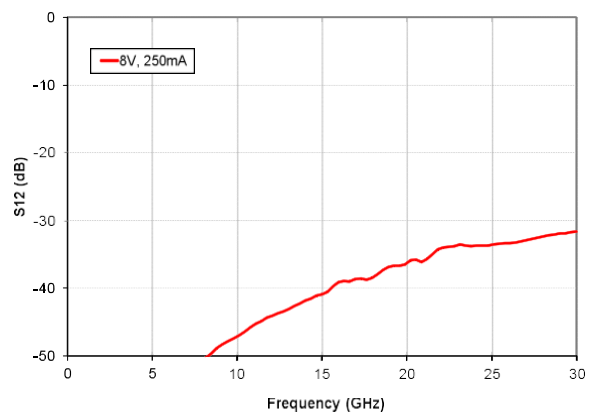


Typical IC performance measured on-wafer

## Output Power

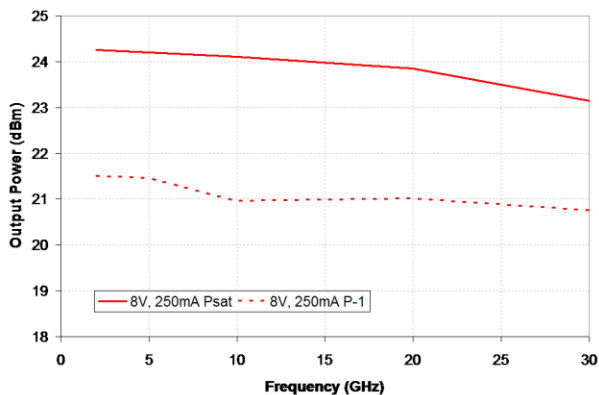

Typical IC performance measured on-wafer

## Group Delay

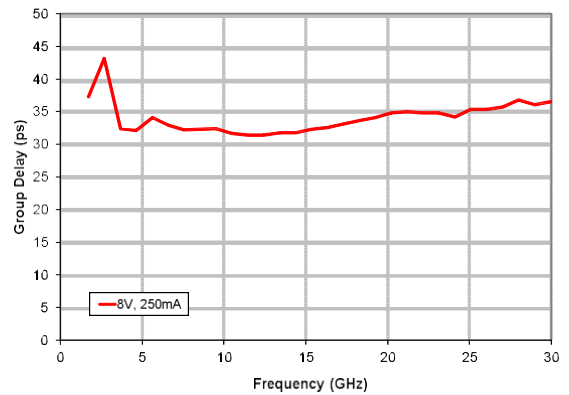

Typical IC performance measured on-wafer

**Table 1: Supplemental Specifications**

Parameter	Description	Min	Typ	Max
V <sub>dd</sub>	Drain Bias Voltage	-	8V	8.2V
I <sub>dd</sub>	Drain Bias Current	-	250mA	300mA
V <sub>g1</sub>	1st Gate Bias Voltage	-4V	-	+0.5V
V <sub>g2</sub>	2nd Gate Bias Voltage	V <sub>dd</sub> - V <sub>g2</sub> < 7V	N/C	+4V
P <sub>in</sub>	Input Power (CW)	-	-	23dBm
P <sub>dc</sub>	Power Dissipation	-	2.0W	-
T <sub>ch</sub>	Channel Temperature	-	-	150°C
Θ <sub>ch</sub>	Thermal Resistance (T <sub>case</sub> =85°C)	-	21° C/W	-



Caution, ESD  
Sensitive Device

**DC Bias:**

The MMA024AA is biased by applying a positive voltage to the drain ( $V_{dd}$ ), then setting the drain current ( $I_{dd}$ ) using a negative voltage on the gate ( $V_{g1}$ ).

When zero volts is applied to the gate, the drain to source channel is open; this results in high  $I_{dd}$ . When  $V_{g1}$  is biased negatively, the channel is pinched off and  $I_{dd}$  decreases.

The nominal bias is  $V_{dd}=8.0V$ ,  $I_{dd}=250mA$ . Improved noise or power performance can be achieved with application-specific biasing.

**Gain Control:**

Dynamic gain control is available when operating the amplifier in the linear gain region. Negative voltage applied to the second gate ( $V_{g2}$ ) reduces amplifier gain.

**RF Power Detection:**

RF output power can be calculated from the difference between the RF detector voltage and the DC detector voltage, minus a DC offset. Please consult the power detector application note available from the Microsemi webpage.

**Low-Frequency Use:**

The MMA024AA has been designed so that the bandwidth can be extended to low frequencies. The low end corner frequency of the device is primarily determined by the external biasing and AC coupling circuitry.

**Matching:**

The amplifier incorporates on-chip termination resistors on the RF input and output. These resistors are RF grounded through on-chip capacitors, which are small and become open circuits at frequencies below 1GHz.

A pair of gate and drain termination bypass pads are provided for connecting external capacitors required for the low frequency extension network. These capacitors should be 10x the value of the DC blocking capacitors.

**DC Blocks:**

The amplifier is DC coupled to the RF input and output pads; DC voltage on these pads must be isolated from external circuitry.


For operation above 2GHz, a series DC-blocking capacitor with minimum value of 20pF is recommended; operation above 40MHz requires a minimum of 120pF.

**Bias Inductor:**

DC bias applied to the drain ( $V_{dd}$ ) must be decoupled with an off-chip RF choke inductor. The amount of bias inductance will determine the low frequency operating point. Inductive biasing can also be applied to the chip through the RF output.


For many applications above 2GHz, a bondwire from the  $V_{dd}$  pad will suffice as the biasing inductor. Ensure the correct bond length as shown in the assembly diagrams.

## Simplified Circuit Schematic

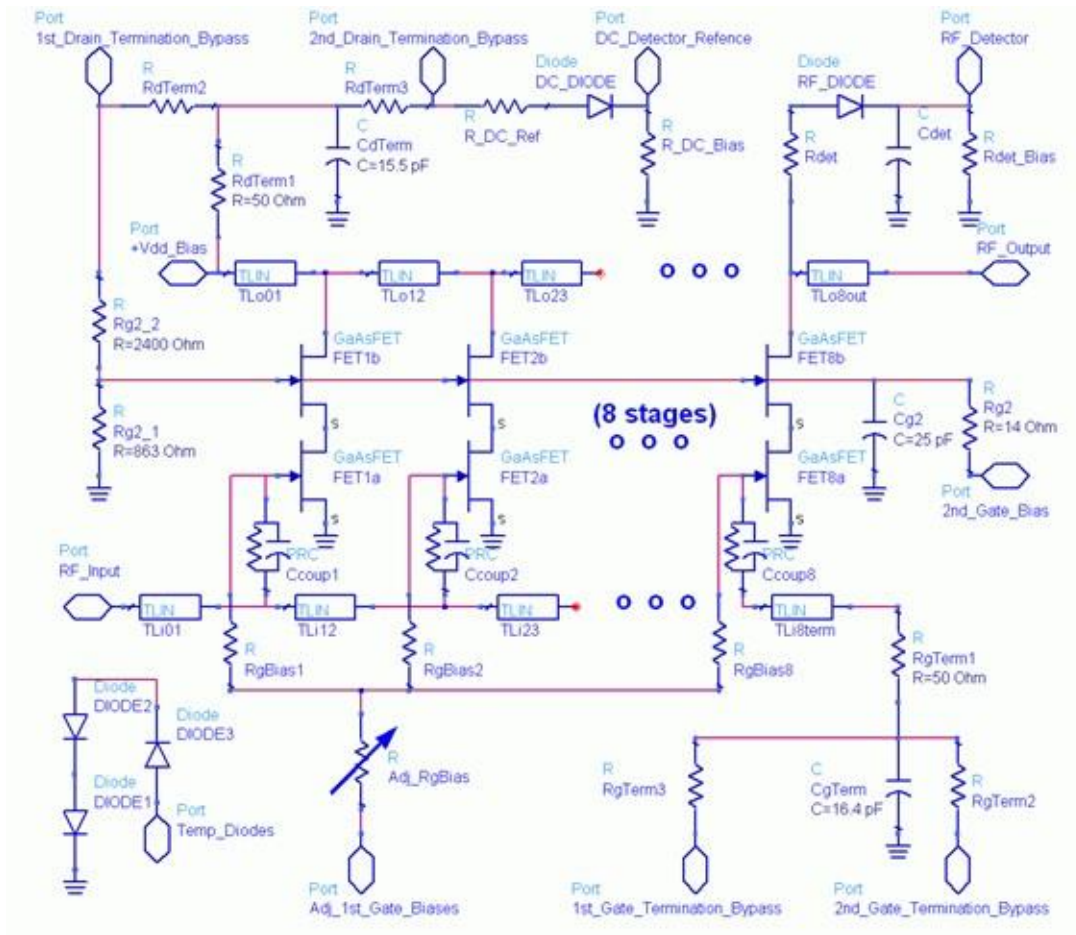


## Die size, pad locations, and pad descriptions



Chip size: 1640x835um (64.6x32.9mil)  
 Chip size tolerance: ±5um (0.2mil)  
 Chip thickness: 100 ±10um (4 ±0.4mil)  
 Pad dimensions: 80x80um (3.1x3.1mil)

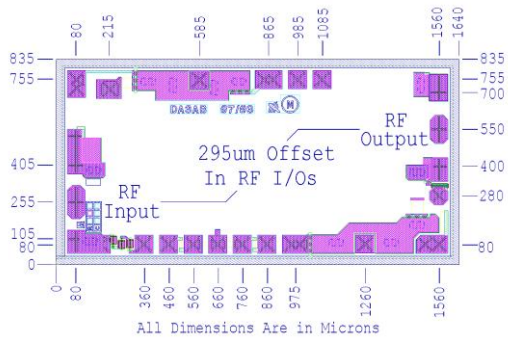

**30GHz bonding diagram**

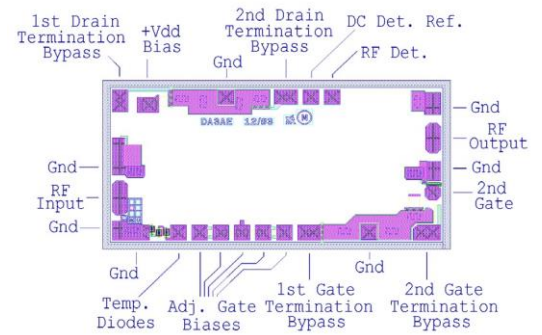

**40MHz - 30GHz bonding diagram**

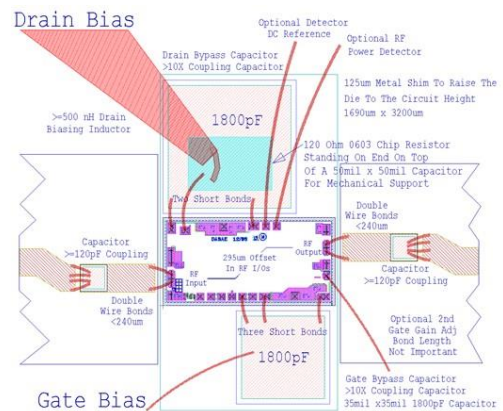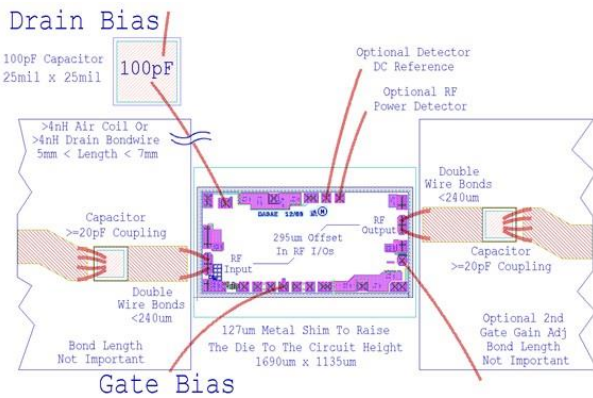

### Pick-up and Chip Handling:

This MMIC has exposed air bridges on the top surface. **Do not pick up chip with vacuum on the die center;** handle from edges or with a collet.

### Thermal Heat Sinking:

To avoid damage and for optimum performance, you must observe the maximum channel temperature and ensure adequate heat sinking.

### ESD Handling and Bonding:

**This MMIC is ESD sensitive;** preventive measures should be taken during handling, die attach, and bonding.

**Epoxy die attach is recommended.** Please review our application note MM-APP-0001 handling and die attach recommendations, on our website for more handling, die attach and bonding information.

---

Information contained in this document is proprietary to Microsemi. This document may not be modified in any way without the express written consent of Microsemi. Product processing does not necessarily include testing of all parameters. Microsemi reserves the right to change the configuration and performance of the product and to discontinue product at any time.

---

**Microsemi Corporate Headquarters**

One Enterprise, Aliso Viejo CA 92656 USA  
Within the USA: +1 (949) 380-6100  
Sales: +1 (949) 380-6136  
Fax: +1 (949) 215-4996

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense and security, aerospace, and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs, and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif. and has approximately 3,400 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

---

© 2014 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.





## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331