

32.0-46.0 GHz GaAs MMIC Balanced Mixer

September 2007 - Rev 04-Sep-07


Features

- ✕ Fundamental Balanced Mixer
- ✕ 7.0 dB Conversion Loss
- ✕ +24 dBm Input Third Order Intercept
- ✕ 100% On-Wafer RF Testing
- ✕ 100% Visual Inspection to MIL-STD-883 Method 2010

General Description

Mimix Broadband's 32.0-46.0 GHz GaAs MMIC fundamental balanced mixer has been optimized for use as a down-converter. The device has a conversion loss of 7.0 dB with a +24.0 dBm input third order intercept point. This MMIC uses Mimix Broadband's 0.15 μ m GaAs PHEMT device model technology, and is based upon electron beam lithography to ensure high repeatability and uniformity. The chip has surface passivation to protect and provide a rugged part with backside via holes and gold metallization to allow either a conductive epoxy or eutectic solder die attach process. This device is well suited for Millimeter-wave Point-to-Point Radio, LMDS, SATCOM and VSAT applications.

Chip Device Layout

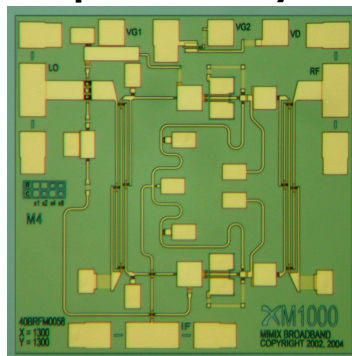

Absolute Maximum Ratings

Gate Bias Voltage (Vg)	+0.3 VDC
Input Power (RF Pin)	+20.0 dBm
Storage Temperature (Tstg)	-65 to +165 °C
Operating Temperature (Ta)	-55 to +125 °C





Electrical Characteristics (Ambient Temperature T = 25° C)

Parameter	Units	Min.	Typ.	Max.
Frequency Range (RF) Upper Sideband	GHz	32.0	-	46.0
Frequency Range (RF) Lower Sideband	GHz	33.0	-	44.0
Frequency Range (LO)	GHz	29.0	-	47.0
Frequency Range (IF)	GHz	DC	-	3.0
RF Return Loss (S11)	dB	-	15.0	-
IF Return Loss (S22)	dB	-	10.0	-
LO Return Loss (S33)	dB	-	20.0	-
Conversion Loss (S21)	dB	-	7.0	-
LO Input Drive (P _{LO})	dBm	-	+15.0	-
Isolation LO/RF	dB	-	TBD	-
Isolation LO/IF	dB	-	TBD	-
Isolation RF/IF	dB	-	TBD	-
Input Third Order Intercept (IIP3)	dBm	-	+24.0	-
Gate Bias Voltage (Vg1)	VDC	-2.0	-0.6	+0.1

32.0-46.0 GHz GaAs MMIC Balanced Mixer

September 2007 - Rev 04-Sep-07

Mixer Measurements

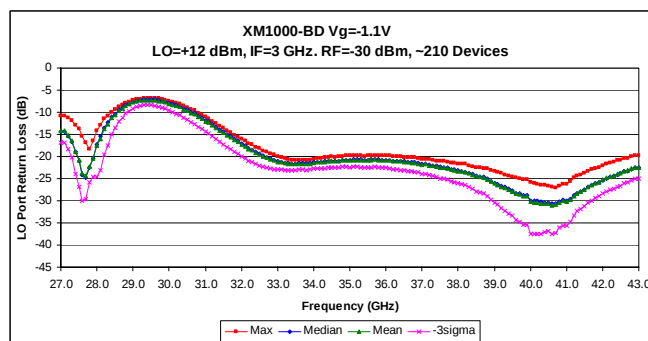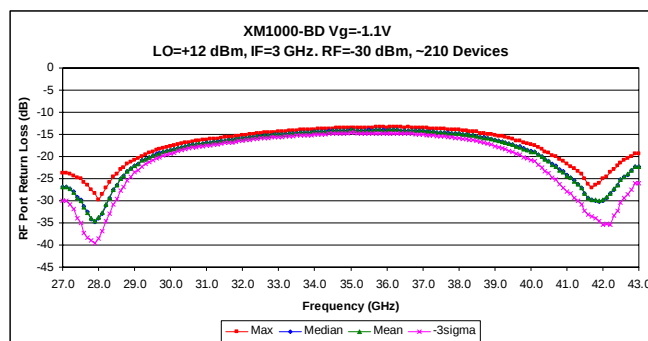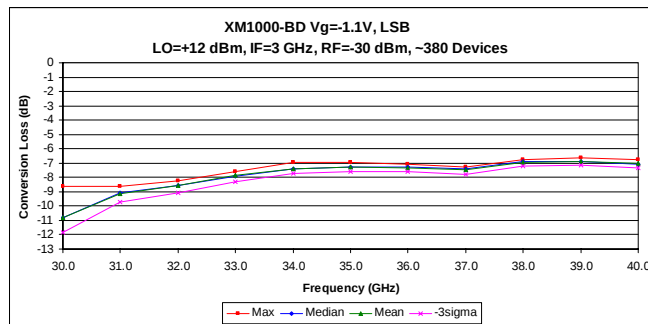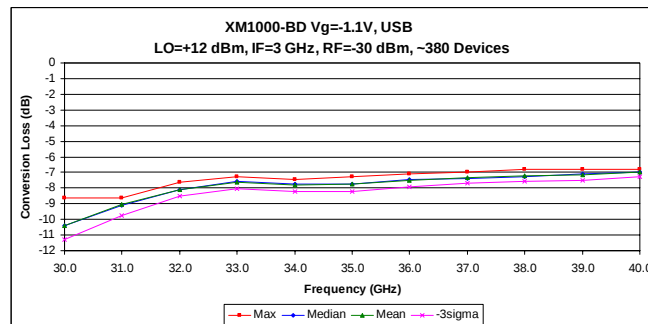


32.0-46.0 GHz GaAs MMIC Balanced Mixer


September 2007 - Rev 04-Sep-07

Mixer Measurements (cont.)


XM1000-BD: USB Conversion gain (dB) vs. RF freq (GHz)
Vg = -1.1V, LO = 12dBm, IF = 1GHz

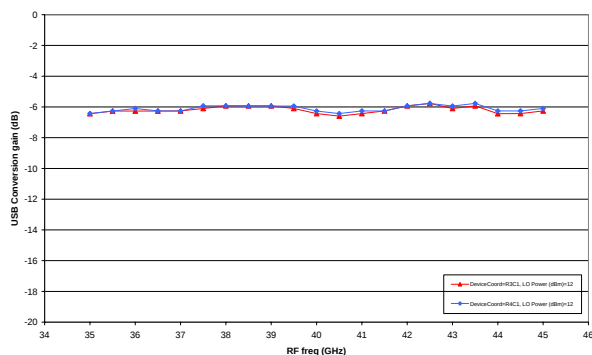


XM1000-BD: LSB Conversion gain (dB) vs. RF freq (GHz)
Vg = -1.1V, LO = 12dBm, IF = 1GHz

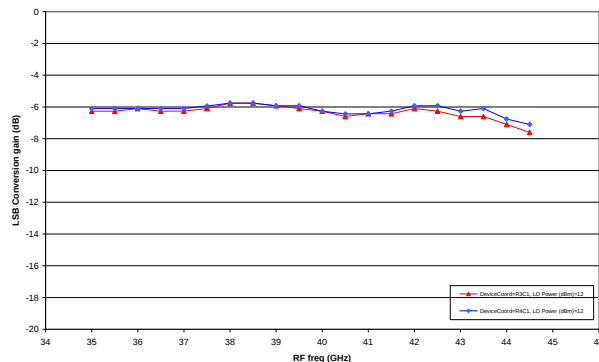


XM1000-BD: USB Conversion gain (dB) vs. RF freq (GHz)
Vg = -1.1V, LO = 12dBm, IF = 3GHz

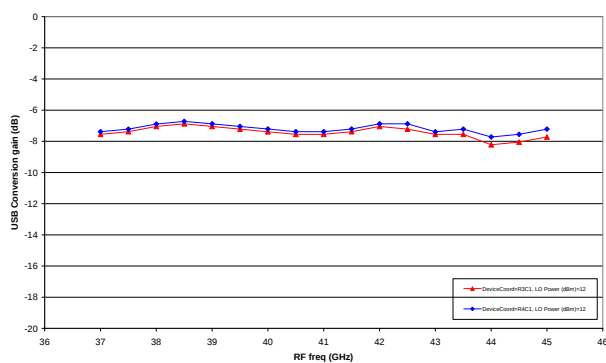


XM1000-BD: LSB Conversion gain (dB) vs. RF freq (GHz)
Vg = -1.1V, LO = 12dBm, IF = 3GHz

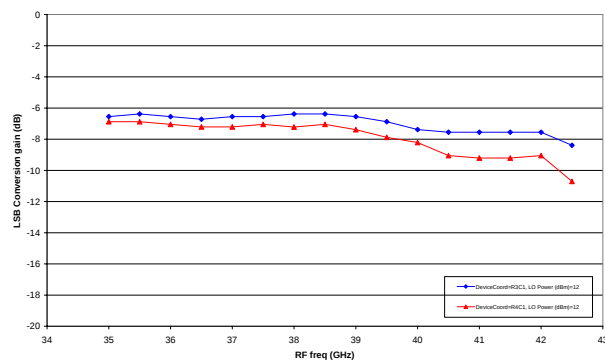

XM1000-BD: USB Conversion gain (dB) vs. RF freq (GHz)
Vg = -1.1V, LO = 15dBm, IF = 1GHz

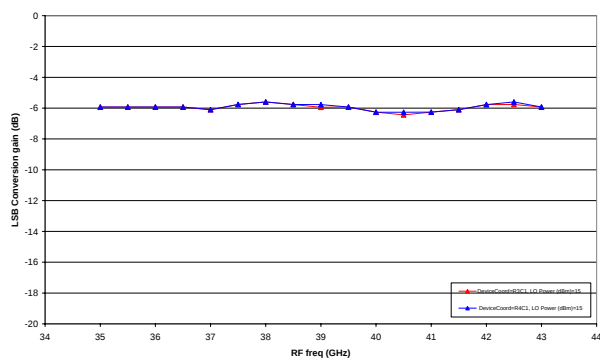





XM1000-BD: LSB Conversion gain (dB) vs. RF freq (GHz)
Vg = -1.1V, LO = 15dBm, IF = 3GHz

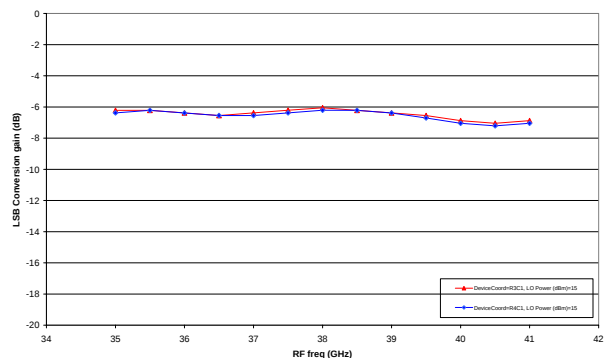

32.0-46.0 GHz GaAs MMIC Balanced Mixer

September 2007 - Rev 04-Sep-07


Mixer Measurements (cont.)

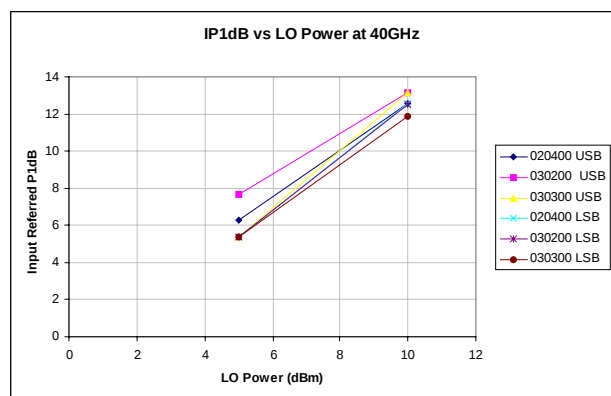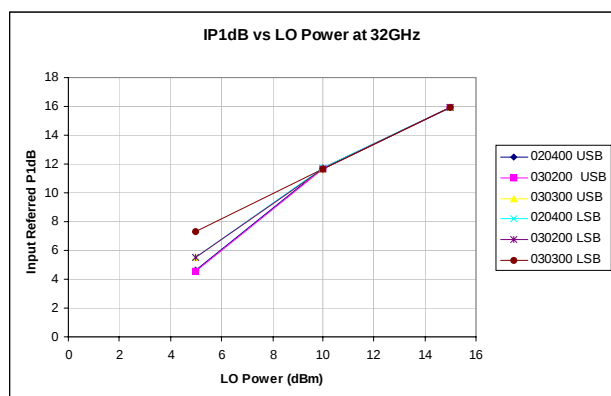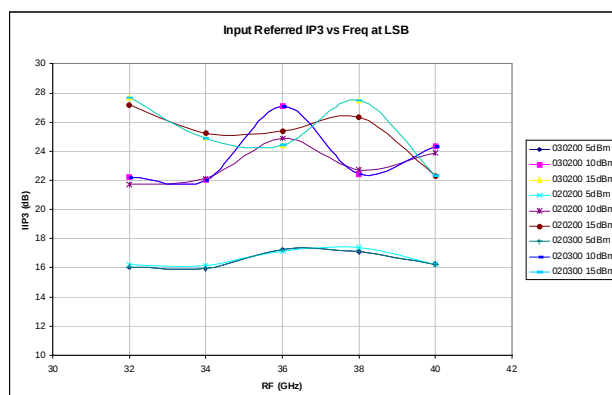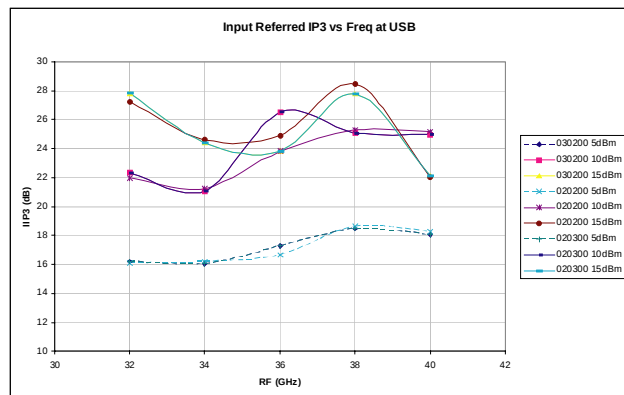

32.0-46.0 GHz GaAs MMIC Balanced Mixer

September 2007 - Rev 04-Sep-07

Mechanical Drawing

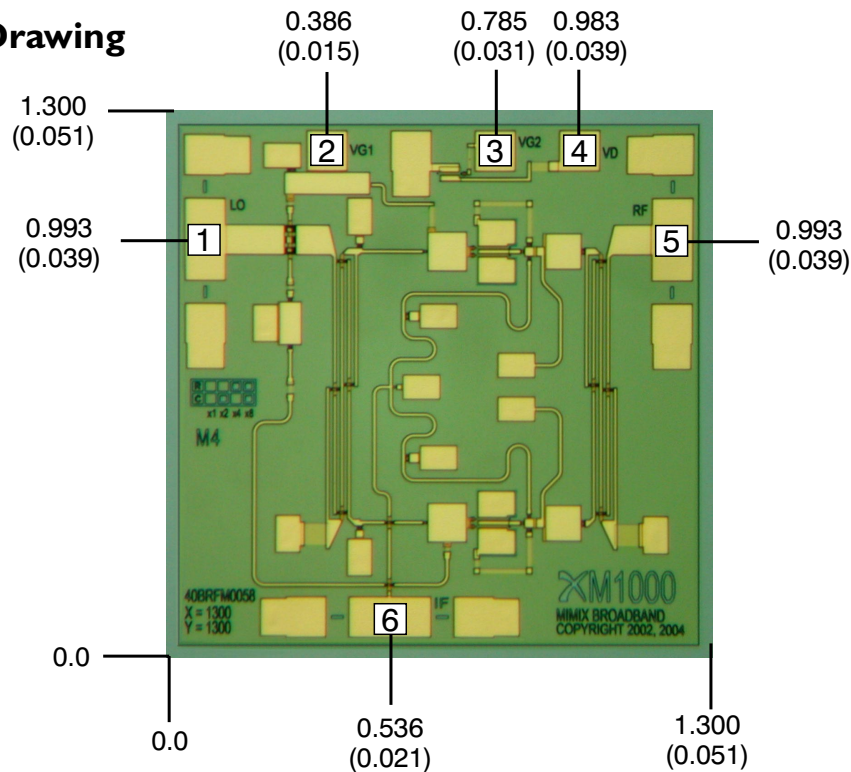

(Note: Engineering designator is 40BRFM0058)

Units: millimeters (inches) Bond pad dimensions are shown to center of bond pad.

Thickness: 0.110 +/- 0.010 (0.0043 +/- 0.0004), Backside is ground, Bond Pad/Backside Metallization: Gold

All DC Bond Pads are 0.100 x 0.100 (0.004 x 0.004). All RF Bond Pads are 0.100 x 0.200 (0.004 x 0.008)

Bond pad centers are approximately 0.109 (0.004) from the edge of the chip.

Dicing tolerance: +/- 0.005 (+/- 0.0002). Approximate weight: 1.048 mg.

Bond Pad #1 (LO)

Bond Pad #3 (Vg2)


Bond Pad #5 (RF)

Bond Pad #2 (Vg1)

Bond Pad #4 (Vd)

Bond Pad #6 (IF)


Bias Arrangement

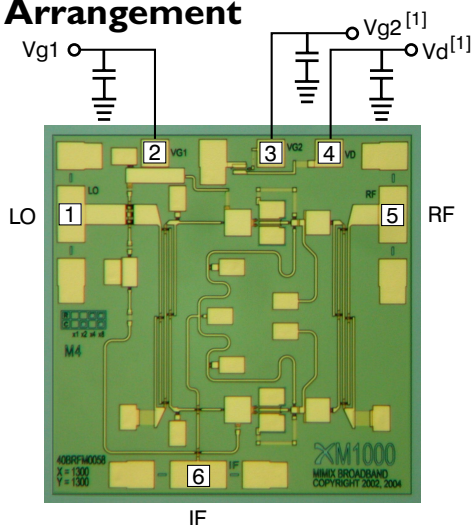

App Note [1] Biasing - As shown in the bonding diagram, the pHEMT mixer devices are operated using a separate gate voltage V_{g1} . Set $V_{g1} = -0.6V$ for optimum conversion loss performance. pHEMT test device (V_d, V_{g2}) with 100 Ohm resistor is provided so that mixer gate bias can be corrected for local V_{to} .

App Note [2] Bias Arrangement - Each DC pad (V_{g1}) needs to have DC bypass capacitance (~ 100 - 200 pF) as close to the device as possible. Additional DC bypass capacitance (~ 0.01 uF) is also recommended.

32.0-46.0 GHz GaAs MMIC Balanced Mixer



September 2007 - Rev 04-Sep-07

Handling and Assembly Information

CAUTION! - Mimix Broadband MMIC Products contain gallium arsenide (GaAs) which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- *Do not ingest.*
- *Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.*
- *Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.*

Life Support Policy - Mimix Broadband's products are not authorized for use as critical components in life support devices or systems without the express written approval of the President and General Counsel of Mimix Broadband. As used herein: (1) Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user. (2) A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ESD - Gallium Arsenide (GaAs) devices are susceptible to electrostatic and mechanical damage. Die are supplied in antistatic containers, which should be opened in cleanroom conditions at an appropriately grounded anti-static workstation. Devices need careful handling using correctly designed collets, vacuum pickups or, with care, sharp tweezers.

Die Attachment - GaAs Products from Mimix Broadband are 0.100 mm (0.004") thick and have vias through to the backside to enable grounding to the circuit. Microstrip substrates should be brought as close to the die as possible. The mounting surface should be clean and flat. If using conductive epoxy, recommended epoxies are Tanaka TS3332LD, Die Mat DM6030HK or DM6030HK-Pt cured in a nitrogen atmosphere per manufacturer's cure schedule. Apply epoxy sparingly to avoid getting any on to the top surface of the die. An epoxy fillet should be visible around the total die periphery. For additional information please see the Mimix "Epoxy Specifications for Bare Die" application note. If eutectic mounting is preferred, then a fluxless gold-tin (AuSn) preform, approximately 0.001² thick, placed between the die and the attachment surface should be used. A die bonder that utilizes a heated collet and provides scrubbing action to ensure total wetting to prevent void formation in a nitrogen atmosphere is recommended. The gold-tin eutectic (80% Au 20% Sn) has a melting point of approximately 280 °C (Note: Gold Germanium should be avoided). The work station temperature should be 310 °C +/- 10 °C. Exposure to these extreme temperatures should be kept to minimum. The collet should be heated, and the die pre-heated to avoid excessive thermal shock. Avoidance of air bridges and force impact are critical during placement.

Wire Bonding - Windows in the surface passivation above the bond pads are provided to allow wire bonding to the die's gold bond pads. The recommended wire bonding procedure uses 0.076 mm x 0.013 mm (0.003" x 0.0005") 99.99% pure gold ribbon with 0.5-2% elongation to minimize RF port bond inductance. Gold 0.025 mm (0.001") diameter wedge or ball bonds are acceptable for DC Bias connections. Aluminum wire should be avoided. Thermo-compression bonding is recommended though thermosonic bonding may be used providing the ultrasonic content of the bond is minimized. Bond force, time and ultrasonics are all critical parameters. Bonds should be made from the bond pads on the die to the package or substrate. All bonds should be as short as possible.

RoHS Compliant Parts - All Mimix products are RoHS compliant unless specifically ordered with Tin-Lead finish.

Ordering Information

Part Number for Ordering	Description
XM1000-BD-000V	"V" - vacuum release gel paks
XM1000-BD-EV1	XM1000 die evaluation module



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331