



ON Semiconductor®

<http://onsemi.com>

# LC87F0G08A

CMOS LSI

## 8-bit 1-chip Microcontroller

8K-byte Flash ROM / 256-byte RAM / 24-pin

### Features

- a  $10 \times 20$  amplifier
- a 8/10-bit High-speed PWM(150kHz)
- a Reference Voltage Generator Circuit(2V/4V) for an AD converter
- a Temperature sensor
- an internal reset circuit
- a 7-channel AD converter with 12-/8-bit resolution selector
- Internal oscillation circuits (30kHz/1MHz/8MHz)

### Performance


- 83.3ns (12.0MHz)  $V_{DD}=2.7V$  to  $5.5V$   $T_a=-40^{\circ}C$  to  $+85^{\circ}C$
- 125ns (8.0MHz)  $V_{DD}=2.0V$  to  $5.5V$   $T_a=-40^{\circ}C$  to  $+85^{\circ}C$
- 250ns (4.0MHz)  $V_{DD}=1.8V$  to  $5.5V$   $T_a=-40^{\circ}C$  to  $+85^{\circ}C$

### Function Descriptions


- Ports
  - I/O ports : 18
  - Reference voltage outputs : 1 (VREF)
  - Power supply pins : 3 ( $V_{SS1}$ ,  $V_{SS2}$ ,  $V_{DD1}$ )
- Timers (3ch)
  - Timer 0 : 16-bit timer/counter with a capture register.
  - Timer 1 : 16-bit timer/counter that supports PWM/toggle outputs
  - a Base timer serving as a realtime clock
- SIO (1ch)
  - SIO1 : 8-bit asynchronous/synchronous serial interface
- Comparator
- Watchdog Timer
- Frequency tunable 12-bit PWM  $\times 2$ ch
- System Clock Divider Function
- CF Oscillation Circuit, X'tal Oscillation Circuit
- 15 sources, 10 vectors interrupts
- On-chip Debugger Function

### Application

- Shaver, Battery charge control

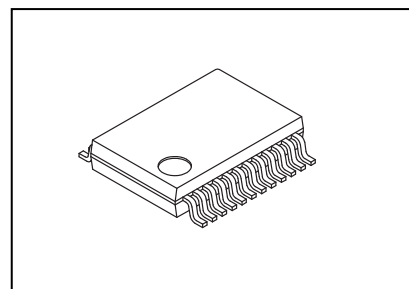

SSOP24(225mil)

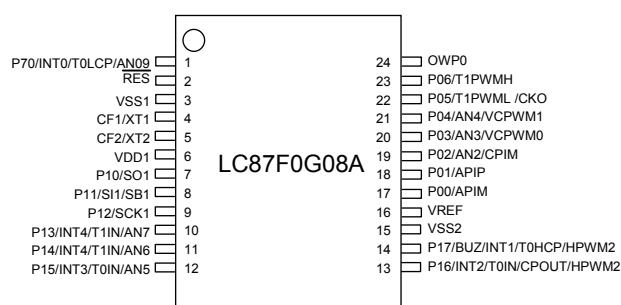

Pin Assignment (Top view)

\* This product is licensed from Silicon Storage Technology, Inc. (USA).

### ORDERING INFORMATION

See detailed ordering and shipping information on page 31 of this data sheet.

## Function Details

### ■Flash ROM

- Capable of on-board programming with a wide range of supply voltages : 2.2 to 5.5V
- Block-erasable in 128 byte units
- Writes data in 2-byte units
- $8192 \times 8$  bits

### ■RAM

- $256 \times 9$  bits

### ■Bus Cycle Time

- 83.3ns ( 12MHz,  $V_{DD}=2.7V$  to 5.5V,  $T_a=-40^{\circ}C$  to  $85^{\circ}C$ )
- 125ns ( 8MHz,  $V_{DD}=2.0V$  to 5.5V,  $T_a=-40^{\circ}C$  to  $85^{\circ}C$ )
- 250ns ( 4MHz,  $V_{DD}=1.8V$  to 5.5V,  $T_a=-40^{\circ}C$  to  $85^{\circ}C$ )

Note : The bus cycle time here refers to the ROM read speed.

### ■Minimum Instruction Cycle Time (tCYC)

- 250ns (12MHz,  $V_{DD}=2.7V$  to 5.5V,  $T_a=-40^{\circ}C$  to  $85^{\circ}C$ )
- 375ns ( 8MHz,  $V_{DD}=2.0V$  to 5.5V,  $T_a=-40^{\circ}C$  to  $85^{\circ}C$ )
- 750ns ( 4MHz,  $V_{DD}=1.8V$  to 5.5V,  $T_a=-40^{\circ}C$  to  $85^{\circ}C$ )

### ■Potrs

- Normal withstand voltage I/O ports whose I/O direction can be designated in 1-bit units  
18(P0n, P1n, P70, CF1, CF2)
- Reset pins  
1( $\overline{RES}$ )
- Power supply pins  
3( $V_{SS1}$ ,  $V_{SS2}$ ,  $V_{DD1}$ )
- Reference voltage outputs  
1( $V_{REF}$ )
- Dedicated debugger port  
1(OWP0)

### ■Timers

- Timer 0 : 16-bit timer/counter with 2 capture registers.
  - Mode 0 : 8-bit timer with an 8-bit programmable prescaler (with two 8-bit capture registers)  $\times$  2 channels
  - Mode 1 : 8-bit timer with an 8-bit programmable prescaler (with two 8-bit capture registers)  
+ 8-bit counter (with two 8-bit capture registers)
  - Mode 2 : 16-bit timer with an 8-bit programmable prescaler (with two 16-bit capture registers)
  - Mode 3 : 16-bit counter (with two 16-bit capture registers)
- Timer 1 : 16-bit timer/counter that supports PWM/toggle outputs
  - Mode 0 : 8-bit timer with an 8-bit prescaler (with toggle outputs) + 8-bit timer/  
counter with an 8-bit prescaler (with toggle outputs)
  - Mode 1 : 8-bit PWM with an 8-bit prescaler  $\times$  2 channels
  - Mode 2 : 16-bit timer/counter with an 8-bit prescaler (with toggle outputs)  
(toggle outputs also possible from lower-order 8 bits)
  - Mode 3 : 16-bit timer with an 8-bit prescaler (with toggle outputs)  
(lower-order 8 bits may be used as a PWM output)
- Base timer
  - (1) The clock is selectable from the subclock (32.768kHz crystal oscillation), the low speed RC, system clock, and timer 0 prescaler output.
  - (2) with an 8-bit programmable prescaler
  - (3) Interrupts programmable in 5 different time schemes

### ■SIO

- SIO1 : 8-bit asynchronous/synchronous serial interface
  - Mode 0 : Synchronous 8-bit serial I/O (2- or 3-wire configuration, 2 to 512 tCYC transfer clocks)
  - Mode 1 : Asynchronous serial I/O (half-duplex, 8 data bits, 1 stop bit, 8 to 2048 tCYC baudrates)
  - Mode 2 : Bus mode 1 (start bit, 8 data bits, 2 to 512 tCYC transfer clocks)
  - Mode 3 : Bus mode 2 (start detect, 8 data bits, stop detect)

### ■AD Converter:

- AD converter input port with  $10 \times /20 \times$  amplifier (1channel)
- AD converter input port (7channel)
  - 12-/8-bit resolution selectable AD converter
- Selectable reference voltage source for an AD converter  
( Selectable from  $V_{DD}$  , Internal Reference Voltage Generator Circuit(VREF) .)

### ■Internal Reference Voltage Generator Circuit(VREF)

- Generates 2.0V/4.0V for AD converter.

### ■Comparator

Comparator input pin (1 channel)  
Comparator output pin (1 channel)  
Comparator output set high when (comparator input level) < 1.22V  
Comparator output set low when (comparator input level) > 1.22V

### ■Clock Output Function

- Generates clocks with a clock rate of 1/1, 1/2, 1/4, 1/8, 1/16, 1/32, or 1/64 of the source oscillation clock that is selected as the system clock.

### ■Watchdog Timer

- Generates an internal reset on an overflow occurring in the timer running on the low-speed RC oscillator clock (approx. 30kHz) or subclock.
- Operating mode at standby is selectable from 3 modes  
(continue counting/suspend operation/suspend counting with the count value retained)

**■Interrupts**

- 15 sources, 10 vectors

- 1) Provides three levels (low (L), high (H), and highest (X)) of multiplex interrupt control. Any interrupt requests of the level equal to or lower than the current interrupt are not accepted.
- 2) When interrupt requests to two or more vector addresses occur at the same time, the interrupt of the highest level takes precedence over the other interrupts. For interrupts of the same level, the interrupt into the smallest vector address is given priority.

| No. | Vector Address | Level  | Interrupt Source |
|-----|----------------|--------|------------------|
| 1   | 00003H         | X or L | INT0             |
| 2   | 0000BH         | X or L | INT1             |
| 3   | 00013H         | H or L | INT2/T0L/INT4    |
| 4   | 0001BH         | H or L | INT3/BT          |
| 5   | 00023H         | H or L | T0H              |
| 6   | 0002BH         | H or L | T1L/T1H          |
| 7   | 00033H         | H or L | HPWM2            |
| 8   | 0003BH         | H or L | SIO1             |
| 9   | 00043H         | H or L | ADC              |
| 10  | 0004BH         | H or L | P0/VCPWM         |

- Priority levels  $X > H > L$
- Of interrupts of the same level, the one with the smallest vector address takes precedence.

**■Subroutine Stack Levels: Up to 128levels (the stack is allocated in RAM.)****■High-speed Multiplication/Division Instructions**

- 16 bits  $\times$  8 bits (5 tCYC execution time)
- 24 bits  $\times$  16 bits (12 tCYC execution time)
- 16 bits  $\div$  8 bits (8 tCYC execution time)
- 24 bits  $\div$  16 bits (12 tCYC execution time)

**■Oscillation Circuits**

- Internal oscillation circuits
  - 1) Low-speed RC oscillation circuit: For system clock (approx.30kHz)
  - 2) Medium-speed RC oscillation circuit: For system clock (1MHz)
  - 3) Hi-speed RC oscillation circuit1: For system clock (8MHz)
  - 4) Hi-speed RC oscillation circuit2: For High speed PWM (40MHz)

**■System Clock Divider Function**

- Can run on low consumption current.
- Minimum instruction cycle selectable from 375ns, 750ns, 1.5 $\mu$ s, 3.0 $\mu$ s, 6.0 $\mu$ s, 12.0 $\mu$ s, 24.0 $\mu$ s, 48.0 $\mu$ s, and 96.0 $\mu$ s (at 8MHz main clock)

**■Internal Reset Circuit**

- Power-on reset (POR) function
  - 1) POR reset is generated only at power-on time.
  - 2) The POR release level is 1.67V.
- Low-voltage detection reset (LVD) function
  - 1) LVD and POR functions are combined to generate resets when power is turned on and when power voltage falls below a certain level.
  - 2) The use/disuse of the LVD function and the low voltage threshold level can be selected from 7 levels (1.91V, 2.01V, 2.31V, 2.51V, 2.81V, 3.79V and 4.28V), through option configuration.

## ■ Standby Function

- HALT mode: Halts instruction execution while allowing the peripheral circuits to continue operation.
  - 1) Oscillation is not halted automatically.
  - 2) There are three ways of resetting the HALT mode.
    - (1) Setting the reset pin to the low level
    - (2) Having the watchdog timer or LVD function generate a reset
    - (3) Having an interrupt generated
- HOLD mode: Suspends instruction execution and the operation of the peripheral circuits.
  - 1) The CF, RC and crystal oscillators automatically stop operation.

Note: The low-speed RC oscillator is controlled directly by the watchdog timer; its oscillation in the standby mode is also controlled by the watchdog timer.
  - 2) There are four ways of resetting the HOLD mode:
    - (1) Setting the reset pin to the lower level
    - (2) Having the watchdog timer or LVD function generate a reset
    - (3) Having an interrupt source established at one of the INT0, INT1, INT2 and INT4 pins  
\* INT0 and INT1 can be used in the level sense mode only.
    - (4) Having an interrupt source established at port 0.
- X'tal HOLD mode: Suspends instruction execution and the operation of the peripheral circuits except the base timer. (when X'tal oscillation or low-speed RC oscillation is selected).
  - 1) The CF, low-speed, and medium-speed RC oscillators automatically stop operation.

Note: The low-speed RC oscillator is controlled directly by the watchdog timer; its oscillation in the standby mode is also controlled by the watchdog timer.

Note: If the base timer is run with low-speed RC oscillation selected as the base timer input clock source and the X'tal HOLD mode is entered, the low-speed RC oscillator retains the state that is established when the X'tal HOLD mode is entered.
  - 2) The state of crystal oscillation established when the X'tal HOLD mode is entered is retained.
  - 3) There are five ways of resetting the X'tal HOLD mode.
    - (1) Setting the reset pin to the low level
    - (2) Having the watchdog timer or LVD function generate a reset
    - (3) Having an interrupt source established at one of the INT0, INT1, INT2, and INT4 pins  
\* INT0 and INT1 can be used in the level sense mode only.
    - (4) Having an interrupt source established at port 0
    - (5) Having an interrupt source established in the base timer circuit

## ■ VCPWM: Frequency tunable 12-bit PWM × 2ch

## ■ High speed PWM (HPWM2)

8-/10- bits PWM × 1ch

- 1) The PWM clock is selectable from system clock and Hi-speed RC2 (40MHz)
- 2) The PWM type is selectable from 8 bits(Normal mode) and 10 bits( additive puls mode).

## ■ Temperature sensor

- Sensor voltage can be compared by the AD converter.

## ■ On-chip Debugger Function

- Supports software debugging with the IC mounted on the target board.
- Provides 1 channel of on-chip debugger pin.  
OWP0

## ■ Data Security Function

- Protects the program data stored in flash memory from unauthorized read or copy.

Note: This data security function does not necessarily provide absolute data security.

## ■ Package Form

- SSOP24 (225mil): Lead-free and halogen-free type

## LC87F0G08A

### ■Development Tools

- On-chip debugger: TCB87 Type C (1-wire interface cable) + LC87F0G08A

### ■Programming Boards

| Package        | Programming boards |
|----------------|--------------------|
| SSOP24(225mil) | W87F0GS            |

### ■Flash Programmer

| Maker                                                                 |                                      | Model                                                  | Supported version                                                          | Device    |
|-----------------------------------------------------------------------|--------------------------------------|--------------------------------------------------------|----------------------------------------------------------------------------|-----------|
| Flash Support Group,<br>Inc.<br>(FSG)                                 | Single<br>Programmer                 | AF9709C                                                | Rev 03.28 or later                                                         | 87F008SU  |
| Flash Support Group,<br>Inc.<br>(FSG)<br>+<br>Our company<br>(Note 1) | Onboard<br>Single/Gang<br>Programmer | AF9101/AF9103(Main unit)<br>(FSG models)               | (Note 2)                                                                   | -         |
|                                                                       |                                      | SIB87 Type C(Inter Face Driver)<br>(Our company model) |                                                                            |           |
| Our company                                                           | Single/Gang<br>Programmer            | SKK Type B / SKK Type C                                | Application Version<br>1.08 or later<br>Chip Data Version<br>2.46 or later | LC87F0G08 |
|                                                                       | Onboard<br>Single/Gang<br>Programmer | SKK-DBG Type C                                         |                                                                            |           |

For information about AF-Series :

Flash Support Group, Inc.

TEL: +81-53-459-1050

E-mail: sales@j-fsg.co.jp


Note1: On-board-programmer from FSG (AF9101/AF9103) and serial interface driver from Our company (SIB87 Type C) together can give a PC-less, standalone on-board-programming capabilities.

Note2: It needs a special programming devices and applications depending on the use of programming environment.  
Please ask FSG or Our company for the information.



# LC87F0G08A

## Pin Assignment

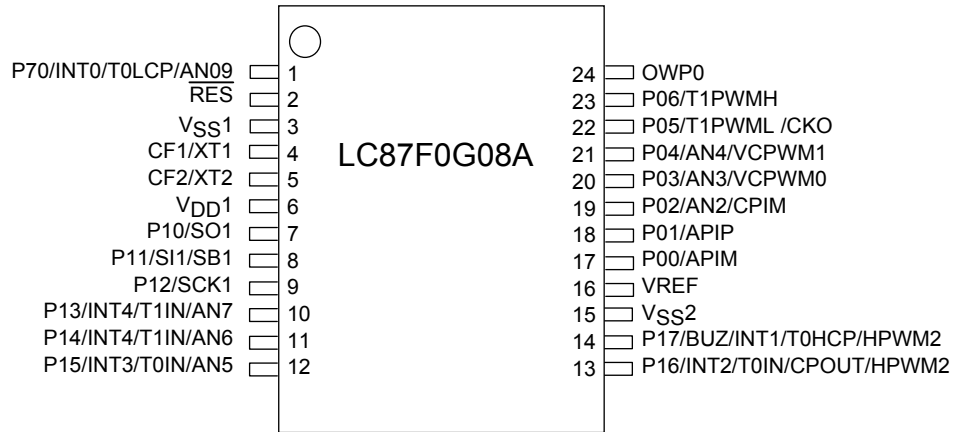


SSOP24(225mil) "Lead-/Halogen-free Type"

| SSOP24 | NAME                |
|--------|---------------------|
| 1      | P70/INT0/T0LCP/AN09 |
| 2      | RES                 |
| 3      | V <sub>SS</sub> 1   |
| 4      | CF1/XT1             |
| 5      | CF2/XT2             |
| 6      | V <sub>DD</sub> 1   |
| 7      | P10/SO1             |
| 8      | P11/SI1/SB1         |
| 9      | P12/SCK1            |
| 10     | P13/INT4/T1IN/AN7   |
| 11     | P14/INT4/T1IN/AN6   |
| 12     | P15/INT3/T0IN/AN5   |

| SSOP24 | NAME                      |
|--------|---------------------------|
| 13     | P16/INT2/T0IN/CPOUT/HPWM2 |
| 14     | P17/BUZ/INT1/T0HCP/HPWM2  |
| 15     | V <sub>SS</sub> 2         |
| 16     | VREF                      |
| 17     | P00/APIM                  |
| 18     | P01/APIP                  |
| 19     | P02/AN2/CPIM              |
| 20     | P03/AN3/VCPWM0            |
| 21     | P04/AN4/VCPWM1            |
| 22     | P05/T1PWML/CKO            |
| 23     | P06/T1PWMH                |
| 24     | OWP0                      |

# System Block Diagram

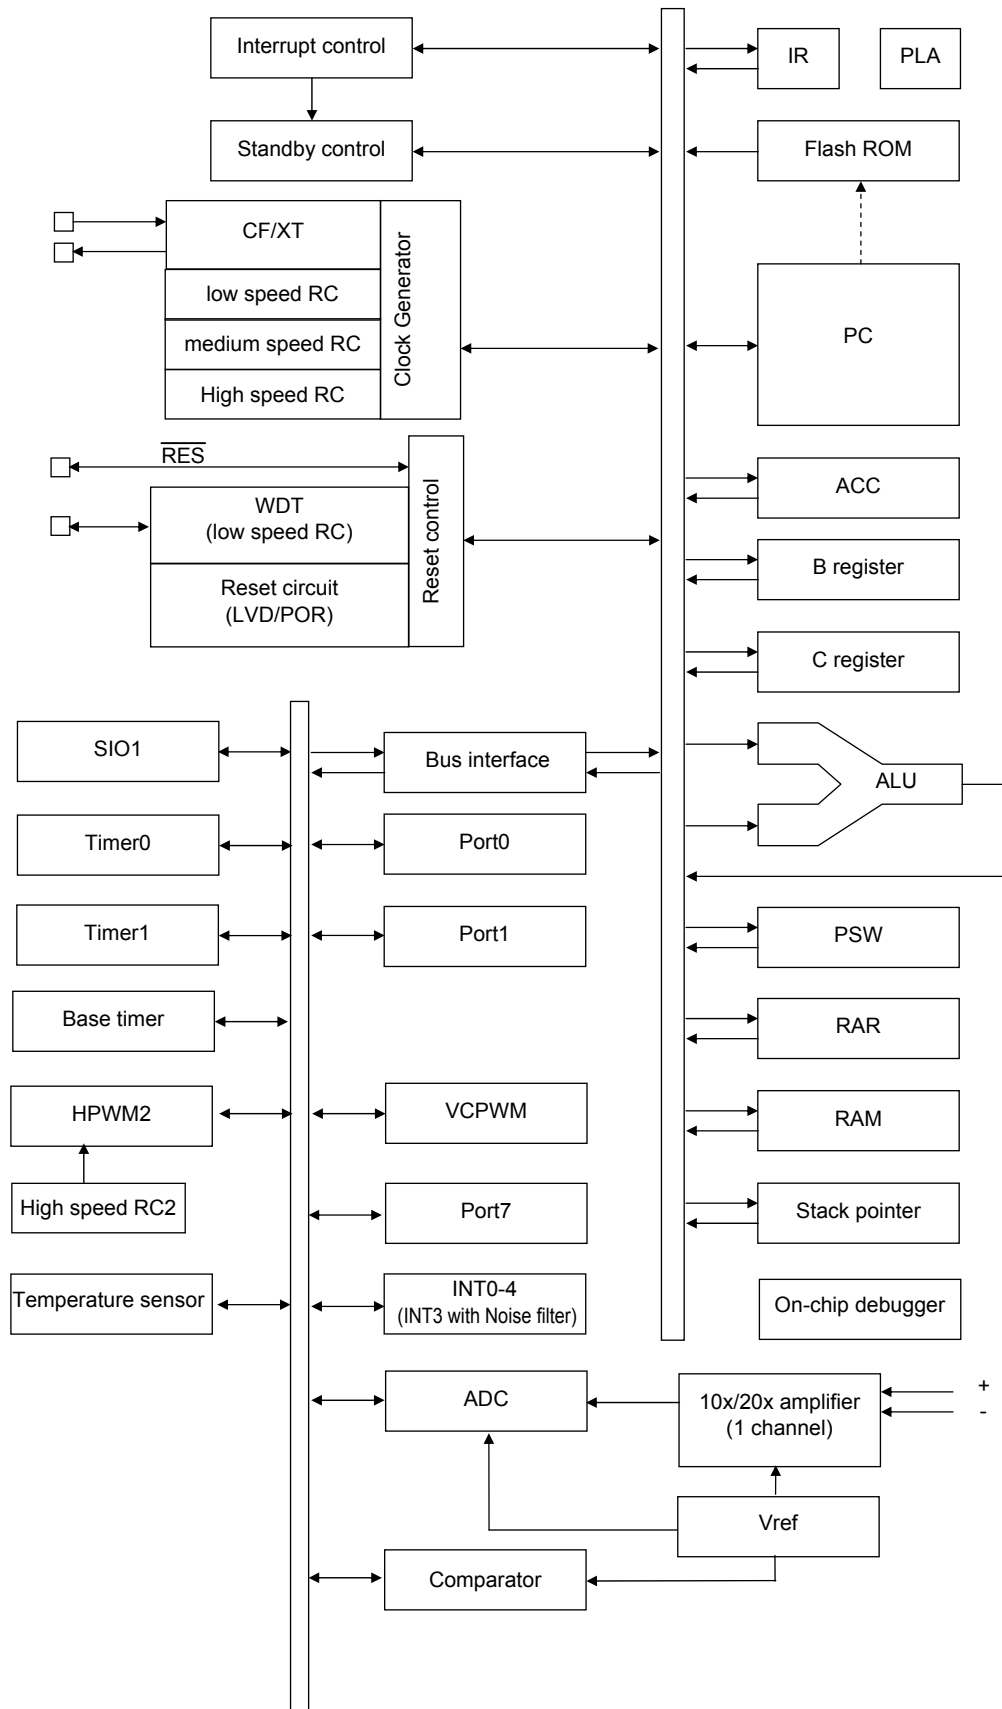

# LC87F0G08A

## Pin Description

| Pin Name          | I/O    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Option  |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
|-------------------|--------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------|------------------|------------------|---------|---------|------|--------|--------|---------|--------|--------|------|--------|--------|--------|---------|---------|------|--------|--------|--------|---------|---------|------|--------|--------|--------|---------|---------|-----|
| V <sub>SS</sub> 1 | -      | - power supply pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | No      |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| V <sub>DD</sub> 1 | -      | + power supply pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | No      |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| V <sub>SS</sub> 2 | -      | - power supply pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | No      |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| VREF              | I/O    | Reference voltage output(2.0V/4.0V) or External input                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | No      |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| OWP0              | I/O    | On-chip debugger pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | No      |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| Port 0            | I/O    | <ul style="list-style-type: none"><li>• 7-bit I/O port</li><li>• I/O specifiable in 1-bit units.</li><li>• Pull-up resistors can be turned on and off in 1-bit units.</li></ul><br><ul style="list-style-type: none"><li>• Pin functions</li></ul> P00 (AN0), P01 (AN1): AD converter input port with 10x/20x operational amplifier<br>P02: AD converter input port (AN2) / Comparator input (CPIM)<br>P03: AD converter input port (AN3) / VCPWM0 output<br>P04: AD converter input port (AN4) / VCPWM1 output<br>P05: Timer 1 PWML output / System clock output<br>P06: Timer 1 PWMH output<br>P07: On-chip debugger pin (OWP0)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Yes     |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| P00 to P06        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| Port 1            | I/O    | <ul style="list-style-type: none"><li>• 8-bit I/O port</li><li>• I/O specifiable in 1-bit units.</li><li>• Pull-up resistors can be turned on and off in 1-bit units.</li></ul><br><ul style="list-style-type: none"><li>• Pin functions</li></ul> P10: SIO1 data output<br>P11: SIO1 data input/bus input/output<br>P12: SIO1 clock input/output<br>P13: INT4 input/HOLD release input/timer 1 event input/timer 0L capture input/ timer 0H capture input/ AD converter input port (AN7)<br>P14: INT4 input/HOLD release input/timer 1 event input/timer 0L capture input/ timer 0H capture input/ AD converter input port (AN6)<br>P15: INT3 input(with noise filter)/timer 0 event input/timer 0H capture input/ AD converter input port (AN5)<br>P16: INT2 input/HOLD release input/timer 0 event input/ timer 0L capture input/HPWM2 output<br>P17: beeper output/INT1 input/HOLD release input/timer 0H capture input/HPWM2 output<br><br>Interrupt acknowledge type <table><tr><td></td><td>Rising</td><td>Falling</td><td>Rising &amp; Falling</td><td>H level</td><td>L level</td></tr><tr><td>INT1</td><td>enable</td><td>enable</td><td>disable</td><td>enable</td><td>enable</td></tr><tr><td>INT2</td><td>enable</td><td>enable</td><td>enable</td><td>disable</td><td>disable</td></tr><tr><td>INT3</td><td>enable</td><td>enable</td><td>enable</td><td>disable</td><td>disable</td></tr><tr><td>INT4</td><td>enable</td><td>enable</td><td>enable</td><td>disable</td><td>disable</td></tr></table> |         | Rising  | Falling          | Rising & Falling | H level | L level | INT1 | enable | enable | disable | enable | enable | INT2 | enable | enable | enable | disable | disable | INT3 | enable | enable | enable | disable | disable | INT4 | enable | enable | enable | disable | disable | Yes |
|                   |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Rising  | Falling | Rising & Falling | H level          | L level |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| INT1              | enable | enable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | disable | enable  | enable           |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| INT2              | enable | enable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | enable  | disable | disable          |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| INT3              | enable | enable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | enable  | disable | disable          |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| INT4              | enable | enable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | enable  | disable | disable          |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |
| P10 to P15        |        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |         |         |                  |                  |         |         |      |        |        |         |        |        |      |        |        |        |         |         |      |        |        |        |         |         |      |        |        |        |         |         |     |

Continued on next page.

# LC87F0G08A

Continued from preceding page.

| Pin Name                | I/O | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Option                           |         |                  |                  |         |         |      |        |        |         |        |        |    |
|-------------------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|---------|------------------|------------------|---------|---------|------|--------|--------|---------|--------|--------|----|
| Port 7                  | I/O | <ul style="list-style-type: none"><li>• 1-bit I/O port</li><li>• I/O specifiable</li><li>• Pull-up resistors can be turned on and off.</li></ul><br><ul style="list-style-type: none"><li>• Pin functions</li></ul> <p>P70 : INT0 input/HOLD release input/timer 0L capture input/AD converter input port (AN9)</p> <p>Interrupt acknowledge type</p> <table><tr><td></td><td>Rising</td><td>Falling</td><td>Rising &amp; Falling</td><td>H level</td><td>L level</td></tr><tr><td>INT0</td><td>enable</td><td>enable</td><td>disable</td><td>enable</td><td>enable</td></tr></table> |                                  | Rising  | Falling          | Rising & Falling | H level | L level | INT0 | enable | enable | disable | enable | enable | No |
|                         |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Rising                           | Falling | Rising & Falling | H level          | L level |         |      |        |        |         |        |        |    |
| INT0                    |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | enable                           | enable  | disable          | enable           | enable  |         |      |        |        |         |        |        |    |
| P70                     |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                  |         |                  |                  |         |         |      |        |        |         |        |        |    |
|                         |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                  |         |                  |                  |         |         |      |        |        |         |        |        |    |
| $\overline{\text{RES}}$ | I   | External reset input/internal reset output pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Yes<br>Internal pullup<br>ON/OFF |         |                  |                  |         |         |      |        |        |         |        |        |    |
| CF1/XT1                 | I/O | <ul style="list-style-type: none"><li>• Ceramic oscillator/32.768kHz crystal oscillator input pin</li></ul><br><ul style="list-style-type: none"><li>• Pin functions</li><li>• 1-bit I/O port</li><li>• I/O specifiable<br/>(only Nch-open drain)</li></ul>                                                                                                                                                                                                                                                                                                                           | No                               |         |                  |                  |         |         |      |        |        |         |        |        |    |
| CF2/XT2                 | I/O | <ul style="list-style-type: none"><li>• Ceramic oscillator/32.768kHz crystal oscillator output pin</li></ul><br><ul style="list-style-type: none"><li>• Pin functions</li><li>• 1-bit I/O port</li><li>• I/O specifiable</li></ul>                                                                                                                                                                                                                                                                                                                                                    | No                               |         |                  |                  |         |         |      |        |        |         |        |        |    |
| OWP0                    | I/O | On-chip debugger pin                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | No                               |         |                  |                  |         |         |      |        |        |         |        |        |    |

## Port Output Types

The table below lists the types of port outputs and the presence/absence of a pull-up resistor.  
Data can be read into any input port even if it is in the output mode.

| Port Name  | Option selected in units of | Option type | Output type                                                                | Pull-up resistor |
|------------|-----------------------------|-------------|----------------------------------------------------------------------------|------------------|
| P00 to P06 | 1 bit                       | 1           | CMOS                                                                       | Programmable     |
|            |                             | 2           | Nch-open drain                                                             | Programmable     |
| P10 to P17 | 1 bit                       | 1           | CMOS                                                                       | Programmable     |
|            |                             | 2           | Nch-open drain                                                             | Programmable     |
| CF1/XT1    | -                           | No          | Nch-open drain<br>when general I/O port is selected.                       | No               |
| CF2/XT2    | -                           | No          | CMOS / Nch-open drain<br>when general I/O port is selected. (programmable) | No               |
| P70        | -                           | No          | Nch-open drain                                                             | Programmable     |

## User Option Table

| Option Name                          | Option Type            | Flash Version | Option Selected in Units of | Option Selection                                                 |
|--------------------------------------|------------------------|---------------|-----------------------------|------------------------------------------------------------------|
| Port output form                     | P00 to P06             | enable        | 1 bit                       | CMOS                                                             |
|                                      |                        |               |                             | Nch-open drain                                                   |
|                                      | P10 to P17             | enable        | 1 bit                       | CMOS                                                             |
|                                      |                        |               |                             | Nch-open drain                                                   |
| Program start address                | -                      | enable        | -                           | 00000h or 01E00h<br>When protected area 1) is selected           |
|                                      |                        |               |                             | 00000h<br>When either of protected area 2), 3) or 4) is selected |
| Protected area (Note1)               | -                      | enable        | -                           | 1) 1800h-1FFFh                                                   |
|                                      |                        |               |                             | 2) 0000h-1DFFh, 1F00h-1FFFh                                      |
|                                      |                        |               |                             | 3) 0000h-1CFFh, 1F00h-1FFFh                                      |
|                                      |                        |               |                             | 4) 0000h-1AFFh, 1F00h-1FFFh                                      |
| Reset pin                            | Internal pullup ON/OFF | enable        | -                           | ON                                                               |
|                                      |                        |               |                             | OFF                                                              |
| Low-voltage detection reset function | Detect function        | enable        | -                           | Enable: Use                                                      |
|                                      |                        |               |                             | Disable: Not Used                                                |
|                                      | Detect level           | enable        | -                           | 7-level                                                          |
| Power-on reset function              | Power-On reset level   | enable        | -                           | 1-level                                                          |

Note1: onboard programming inhibited address

## Recommended Unused Pin Connections

| Port Name  | Recommended Unused Pin Connections |                             |
|------------|------------------------------------|-----------------------------|
|            | Board                              | Software                    |
| P00 to P07 | Open                               | Output low                  |
| P10 to P17 | Open                               | Output low                  |
| P70        | Open                               | Output low                  |
| CF1/XT1    | Open                               | General I/O port output low |
| CF2/XT2    | Open                               | General I/O port output low |
| OWP0       | Pulled low with a 100kΩ resistor   | -                           |


## On-chip Debugger Pin Connection Requirements

For the treatment of the on-chip debugger pins, refer to the separately available documents entitled “Rd87 On-chip Debugger Installation Manual”

## Power Pin Treatment Recommendations (VDD1, VSS1)

Connect bypass capacitors that meet the following conditions between the VDD1 and VSS1 pins:

- Connect among the VDD1 and VSS1 pins and bypass capacitors C1 and C2 with the shortest possible heavy lead wires, making sure that the impedances between the both pins and the bypass capacitors are as equal as possible ( $L1=L1'$ ,  $L2=L2'$ ).
- Connect a large-capacity capacitor C1 and a small-capacity capacitor C2 in parallel.  
The capacitance of C2 should be approximately 0.1μF.

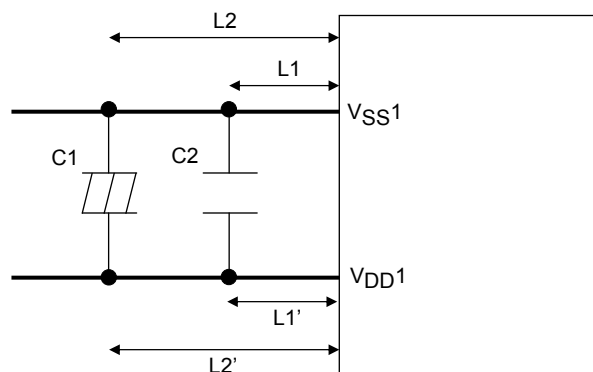

# LC87F0G08A

**Absolute Maximum Ratings** at Ta = 25°C, VSS1 = VSS2 = 0V

| Parameter                     |                                   | Symbol   | Pin/Remarks                                          | Conditions                                                                                                        | VDD[V] | Specification |     |         |      |
|-------------------------------|-----------------------------------|----------|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|--------|---------------|-----|---------|------|
|                               |                                   |          |                                                      |                                                                                                                   |        | min           | typ | max     | unit |
| Maximum supply voltage        |                                   | VDDMAX   | VDD1                                                 |                                                                                                                   |        | -0.3          | to  | +6.5    | V    |
| Input/output voltage          |                                   | VIO      | Port0,1<br>Port7<br>CF1,CF2, $\overline{\text{RES}}$ |                                                                                                                   |        | -0.3          | to  | VDD+0.3 |      |
| High level output current     | Peak output current               | IOPH(1)  | Port0<br>Port1<br>CF2                                | <ul style="list-style-type: none"> <li>When CMOS output type is selected</li> <li>Per 1 applicable pin</li> </ul> |        | -10           |     |         | mA   |
|                               | Average output current (Note 1-1) | IOMH(1)  | Port0<br>Port1<br>CF2                                | <ul style="list-style-type: none"> <li>When CMOS output type is selected</li> <li>Per 1 applicable pin</li> </ul> |        | -7.5          |     |         |      |
|                               | Total output current              | ΣIOAH(1) | Port0,1, CF2                                         | Total current of all applicable pins                                                                              |        | -30           |     |         |      |
| Low level output current      | Peak output current               | IOPL(1)  | Port0                                                | • Per 1 applicable pin                                                                                            |        |               |     | 20      | mA   |
|                               |                                   | IOPL(2)  | Port1                                                | • Per 1 applicable pin                                                                                            |        |               |     | 20      |      |
|                               |                                   | IOPL(3)  | Port7,CF1,CF2                                        | • Per 1 applicable pin                                                                                            |        |               |     | 10      |      |
|                               | Average output current (Note 1-1) | IOML(1)  | Port0                                                | • Per 1 applicable pin                                                                                            |        |               |     | 15      |      |
|                               |                                   | IOML(2)  | Port1                                                | • Per 1 applicable pin                                                                                            |        |               |     | 15      |      |
|                               |                                   | IOML(3)  | Port7,CF1,CF2                                        | • Per 1 applicable pin                                                                                            |        |               |     | 7.5     |      |
|                               | Total output current              | ΣIOAL(1) | Port0,1,7, CF1,CF2                                   | Total current of all applicable pins                                                                              |        |               |     | 80      |      |
| Allowable power Dissipation   |                                   | Pdmax(1) | SSOP24(225mil)                                       | Ta=-40 to + 85°C<br>Package with thermal resistance board (Note 1-2)                                              |        |               |     | 260     | mW   |
| Operating ambient Temperature |                                   | Topr     |                                                      |                                                                                                                   |        | -40           |     | +85     | °C   |
| Storage ambient temperature   |                                   | Tstg     |                                                      |                                                                                                                   |        | -55           |     | +125    |      |

Note 1-1: The average output current is an average of current values measured over 100ms intervals.

Note 1-2: SEMI standards thermal resistance board (size: 76.1×114.3×1.6mm, glass epoxy) is used.

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

# LC87F0G08A

**Allowable Operating Conditions** at Ta = -40°C to +85°C, VSS1 = VSS2 = 0V

| Parameter                                 | Symbol               | Pin/Remarks                      | Conditions                                                                                                                                                       | VDD[V]      | Specification     |        |                   | unit          |
|-------------------------------------------|----------------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------|--------|-------------------|---------------|
|                                           |                      |                                  |                                                                                                                                                                  |             | min               | typ    | max               |               |
| Operating supply voltage<br>(Note 2-1)    | VDD(1)               | VDD1                             | $0.245\mu\text{s} \leq \text{tCYC} \leq 200\mu\text{s}$                                                                                                          |             | 2.7               |        | 5.5               | V             |
|                                           | VDD(2)               |                                  | $0.367\mu\text{s} \leq \text{tCYC} \leq 200\mu\text{s}$                                                                                                          |             | 2.0               |        | 5.5               |               |
|                                           | VDD(3)               |                                  | $0.735\mu\text{s} \leq \text{tCYC} \leq 200\mu\text{s}$                                                                                                          |             | 1.8               |        | 5.5               |               |
| Memory sustaining supply voltage          | VHD                  | VDD1                             | RAM and register contents sustained in HOLD mode.                                                                                                                |             | 1.6               |        |                   |               |
| High level input voltage                  | VIH(1)               | Port 0,1<br>P70                  |                                                                                                                                                                  | 1.8 to 5.5  | $0.3V_{DD} + 0.7$ |        | VDD               |               |
|                                           | VIH(4)               | CF1,CF2, $\overline{\text{RES}}$ |                                                                                                                                                                  | 1.8 to 5.5  | $0.75V_{DD}$      |        | VDD               |               |
| Low level input voltage                   | VIL(1)               | Port 0,1<br>P70                  |                                                                                                                                                                  | 4.0 to 5.5  | VSS               |        | $0.1V_{DD} + 0.4$ |               |
|                                           |                      |                                  |                                                                                                                                                                  | 1.8 to 4.0  | VSS               |        | $0.2V_{DD}$       |               |
|                                           | VIL(4)               | CF1,CF2, $\overline{\text{RES}}$ |                                                                                                                                                                  | 1.8 to 5.5  | VSS               |        | $0.25V_{DD}$      |               |
| Instruction cycle time<br>(Note 2-2)      | tCYC<br>(Note 2-2)   |                                  |                                                                                                                                                                  | 2.7 to 5.5  | 0.245             |        | 200               | $\mu\text{s}$ |
|                                           |                      |                                  |                                                                                                                                                                  | 2.0 to 5.5  | 0.367             |        | 200               |               |
|                                           |                      |                                  |                                                                                                                                                                  | 1.8 to 5.5  | 0.735             |        | 200               |               |
| External system clock frequency           | FEXCF                | CF1                              | <ul style="list-style-type: none"> <li>CF2 pin open</li> <li>System clock frequency division ratio=1/1</li> <li>External system clock duty=50 ± 5%</li> </ul>    | 2.7 to 5.5  | 0.1               |        | 12                | MHz           |
|                                           |                      |                                  |                                                                                                                                                                  | 2.2 to 5.5  | 0.1               |        | 8                 |               |
| Oscillation frequency range<br>(Note 2-3) | FmCF(1)              | CF1,CF2                          | When 12MHz ceramic oscillation<br>See Fig. 1.                                                                                                                    | 2.7 to 5.5  |                   | 12     |                   | MHz           |
|                                           | FmCF(2)              | CF1,CF2                          | When 8MHz ceramic oscillation<br>See Fig. 1.                                                                                                                     | 2.2 to 5.5  |                   | 8      |                   |               |
|                                           | FmCF(3)              | CF1,CF2                          | When 4MHz ceramic oscillation<br>See Fig. 1.                                                                                                                     | 1.8 to 5.5  |                   | 4      |                   |               |
|                                           | FmFRC(1)             |                                  | Internal high-speed RC oscillation<br>Ta=-10°C to +85°C<br>(Note 2-4)                                                                                            | 1.8 to 5.5  | 7.76              | 8.0    | 8.24              |               |
|                                           | FmFRC(2)             |                                  | Internal high-speed RC oscillation<br>Ta=-40°C to +85°C<br>(Note 2-4)                                                                                            | 1.8 to 5.5  | 7.60              | 8.0    | 8.40              |               |
|                                           | FmRC                 |                                  | Internal medium-speed RC oscillation                                                                                                                             | 1.8 to 5.5  | 0.5               | 1.0    | 2.0               |               |
|                                           | FmSRC                |                                  | Internal low-speed RC oscillation<br>(Note 2-5)                                                                                                                  | 1.8 to 5.5  | 27                | 30     | 33                | kHz           |
|                                           | FsX'tal              | XT1,XT2                          | 32.768kHz crystal oscillation<br>See Fig. 2.                                                                                                                     | 1.8 to 5.5  |                   | 32.768 |                   | kHz           |
|                                           | FmPWMRC              |                                  | Internal high-speed RC oscillation<br>for HPWM2                                                                                                                  | 2.7 to 5.5  | 38                | 40     | 42                | MHz           |
| Oscillation Stabilization Time            | tmsCF                | CF1,CF2                          | <ul style="list-style-type: none"> <li>When oscillation circuit is switched from "oscillation stopped" to "oscillation enabled".</li> <li>See Fig. 3.</li> </ul> | See Table 1 |                   |        |                   | $\mu\text{s}$ |
|                                           | tmsFRC<br>(Note 2-4) |                                  |                                                                                                                                                                  | 1.8 to 5.5  |                   |        | 100               |               |
|                                           | tmsPWMR<br>C         |                                  |                                                                                                                                                                  | 1.8 to 5.5  |                   |        | 100               |               |
|                                           | tmsRC                |                                  |                                                                                                                                                                  | 1.8 to 5.5  |                   | 0      |                   |               |
|                                           | tmsSRC<br>(Note2-5)  |                                  |                                                                                                                                                                  | 1.8 to 5.5  |                   |        | 1                 | ms            |
|                                           | tmsX'tal             | XT1,XT2                          |                                                                                                                                                                  | See Table 2 |                   |        |                   |               |

Note 2-1: VDD must be held greater than or equal to 2.7V in the flash ROM onboard programming mode.

Note 2-2: Relationship between tCYC and oscillation frequency is 3/FmCF at a division ratio of 1/1 and 6/FmCF at a division ratio of 1/2.

Note 2-3: See Tables 1 and 2 for the oscillation constants.

Note 2-4: An oscillation stabilization time of 100 $\mu\text{s}$  or longer must be provided before switching the system clock source after the state of the high-speed RC oscillation circuit is switched from "oscillation stopped" to "oscillation enabled".

Note 2-5: An oscillation stabilization time of 1ms or longer must be provided before switching the system clock source after the state of the low-speed RC oscillation circuit is switched from "oscillation stopped" to "oscillation enabled".

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

# LC87F0G08A

**Electrical Characteristics** at Ta = -40°C to +85°C, VSS1 = VSS2 = 0V

| Parameter                 | Symbol              | Pin/Remarks                                | Conditions                                                                                                                 | VDD[V]     | Specification        |                     |     |               |
|---------------------------|---------------------|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------|------------|----------------------|---------------------|-----|---------------|
|                           |                     |                                            |                                                                                                                            |            | min                  | typ                 | max | unit          |
| High level input current  | I <sub>IH</sub> (1) | Port 0, 1, Port 7, $\overline{\text{RES}}$ | Output disabled<br>Pull-up resistor off<br>V <sub>IN</sub> =V <sub>DD</sub><br>(Including output Tr's off leakage current) | 1.8 to 5.5 |                      |                     | 1   | $\mu\text{A}$ |
|                           | I <sub>IH</sub> (2) | CF1                                        | V <sub>IN</sub> =V <sub>DD</sub>                                                                                           | 1.8 to 5.5 |                      |                     | 15  |               |
| Low level input current   | I <sub>IL</sub> (1) | Port 0, 1, Port 7, $\overline{\text{RES}}$ | Output disabled<br>Pull-up resistor off<br>V <sub>IN</sub> =V <sub>SS</sub><br>(Including output Tr's off leakage current) | 1.8 to 5.5 | -1                   |                     |     | $\mu\text{A}$ |
|                           | I <sub>IL</sub> (2) | CF1                                        | V <sub>IN</sub> =V <sub>SS</sub>                                                                                           | 1.8 to 5.5 | -15                  |                     |     |               |
| High level output voltage | V <sub>OH</sub> (1) | Port 0, 1, CF2                             | I <sub>OH</sub> =-1mA                                                                                                      | 4.5 to 5.5 | V <sub>DD</sub> -1   |                     |     | V             |
|                           | V <sub>OH</sub> (2) |                                            | I <sub>OH</sub> =-0.2mA                                                                                                    | 1.8 to 5.5 | V <sub>DD</sub> -0.4 |                     |     |               |
| Low level output voltage  | V <sub>OL</sub> (1) | Port 0, 1, P70, CF1, CF2                   | I <sub>OL</sub> =10mA                                                                                                      | 4.5 to 5.5 |                      |                     | 1.5 |               |
|                           | V <sub>OL</sub> (2) |                                            | I <sub>OL</sub> =1.0mA                                                                                                     | 1.8 to 5.5 |                      |                     | 0.4 |               |
| Pull-up resistance        | Rpu(1)              | Port 0, 1, P70                             | V <sub>OH</sub> =0.9V <sub>DD</sub>                                                                                        | 4.5 to 5.5 | 15                   | 35                  | 80  | k $\Omega$    |
|                           | Rpu(2)              |                                            |                                                                                                                            | 1.8 to 4.5 | 18                   | 50                  | 230 |               |
|                           | Rpu(3)              | $\overline{\text{RES}}$                    |                                                                                                                            | 1.8 to 5.5 | 300                  | 400                 | 500 |               |
| Hysteresis voltage        | VHYS(1)             | Port 0, 1, P70                             |                                                                                                                            | 2.7 to 5.5 |                      | 0.1V <sub>DD</sub>  |     | V             |
|                           |                     | $\overline{\text{RES}}$                    |                                                                                                                            | 1.8 to 5.5 |                      | 0.07V <sub>DD</sub> |     |               |
| Pin capacitance           | CP                  | All pins                                   | For pins other than that under test:<br>V <sub>IN</sub> =V <sub>SS</sub><br>f=1MHz<br>Ta=25°C                              | 1.8 to 5.5 |                      | 10                  |     | pF            |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# LC87F0G08A

## SIO1 Serial I/O Characteristics (Note 4-1)

| Parameter     |                   |                        | Symbol   | Pin/<br>Remarks       | Conditions                                                                                                                                                     | V <sub>DD</sub> [V] | Specification |     |                    |      |
|---------------|-------------------|------------------------|----------|-----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------|-----|--------------------|------|
|               |                   |                        |          |                       |                                                                                                                                                                |                     | min           | typ | max                | unit |
| Serial clock  | Input clock       | Frequency              | tSCK(1)  | SCK1(P12)             | • See Fig. 5.                                                                                                                                                  | 1.8 to 5.5          | 2             |     |                    | tCYC |
|               |                   | Low level pulse width  | tSCKL(1) |                       |                                                                                                                                                                |                     | 1             |     |                    |      |
|               |                   | High level pulse width | tSCKH(1) |                       |                                                                                                                                                                |                     | 1             |     |                    |      |
|               | Output clock      | Frequency              | tSCK(2)  | SCK1(P12)             | • CMOS output type selected<br>• See Fig. 5.                                                                                                                   | 1.8 to 5.5          | 2             |     |                    | tSCK |
|               |                   | Low level pulse width  | tSCKL(2) |                       |                                                                                                                                                                |                     | 1/2           |     |                    |      |
|               |                   | High level pulse width | tSCKH(2) |                       |                                                                                                                                                                |                     | 1/2           |     |                    |      |
| Serial input  | Data setup time   |                        | tsDI(1)  | SI1(P11),<br>SB1(P11) | • Specified with respect to rising edge of SIOCLK.<br>• See Fig. 5.                                                                                            | 1.8 to 5.5          | 0.05          |     |                    | μs   |
|               | Data hold time    |                        | thDI(1)  |                       |                                                                                                                                                                |                     | 0.05          |     |                    |      |
| Serial output | Output delay time |                        | tdDO(1)  | SO1(P10),<br>SB1(P11) | • Specified with respect to falling edge of SIOCLK<br>• Specified as the time up to the beginning of output change in open drain output mode.<br>• See Fig. 5. | 1.8 to 5.5          |               |     | (1/3)tCYC<br>+0.08 |      |

Note 4-1: These specifications are theoretical values. Margins must be allowed according to the actual operating conditions.

## Pulse Input Conditions at Ta = -40°C to +85°C, V<sub>SS1</sub> = V<sub>SS2</sub> = 0V

| Parameter                  | Symbol             | Pin/Remarks                                              | Conditions                                                                          | V <sub>DD</sub> [V] | Specification |     |     |      |
|----------------------------|--------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------|---------------|-----|-----|------|
|                            |                    |                                                          |                                                                                     |                     | min           | typ | max | unit |
| High/low level pulse width | tPIH(1)<br>tPIL(1) | INT0(P70),<br>INT1(P71),<br>INT2(P16),<br>INT4(P13, P14) | • Interrupt source flag can be set.<br>• Event inputs for timer 0 or 1 are enabled. | 1.8 to 5.5          | 1             |     |     | tCYC |
|                            | tPIH(2)<br>tPIL(2) | INT3(P15) when noise filter time constant is 1/1         | • Interrupt source flag can be set.<br>• Event inputs for timer 0 are enabled.      | 1.8 to 5.5          | 2             |     |     |      |
|                            | tPIH(3)<br>tPIL(3) | INT3(P15) when noise filter time constant is 1/32        | • Interrupt source flag can be set.<br>• Event inputs for timer 0 are enabled.      | 1.8 to 5.5          | 64            |     |     |      |
|                            | tPIH(4)<br>tPIL(4) | INT3(P15) when noise filter time constant is 1/128       | • Interrupt source flag can be set.<br>• Event inputs for timer 0 are enabled.      | 1.8 to 5.5          | 256           |     |     |      |
|                            | tPIL(5)            | RES                                                      | • Resetting is enabled.                                                             | 1.8 to 5.5          | 200           |     |     | μs   |

# LC87F0G08A

## AD Converter Characteristics at $V_{SS1} = V_{SS2} = 0V$

<12bits AD Converter Mode/ $T_a = -40^{\circ}C$  to  $+85^{\circ}C$ >

| Parameter                  | Symbol  | Pin/Remarks                                  | Conditions                                                       | Specification |          |     |           |         |
|----------------------------|---------|----------------------------------------------|------------------------------------------------------------------|---------------|----------|-----|-----------|---------|
|                            |         |                                              |                                                                  | $V_{DD}[V]$   | min      | typ | max       | unit    |
| Resolution                 | N       | AN2(P02)                                     |                                                                  | 1.8 to 5.5    |          | 12  |           | bit     |
| Absolute accuracy          | ET      | AN3(P03)<br>AN4(P04)                         | (Note 6-1)                                                       | 1.8 to 5.5    |          |     | $\pm 16$  | LSB     |
| Conversion time            | TCAD    | AN5(P15)<br>AN6(P14)<br>AN7(P13)<br>AN9(P70) | • See conversion time calculation method.<br>(Note 6-2)          | 2.7 to 5.5    | 32       |     | 115       | $\mu s$ |
|                            |         |                                              |                                                                  | 2.2 to 5.5    | 134      |     | 215       |         |
|                            |         |                                              |                                                                  | 1.8 to 5.5    | 400      |     | 430       |         |
| Analog input voltage range | VAIN(1) | (Note 6-3)                                   | When $V_{DD}$ is selected                                        | 1.8 to 5.5    | $V_{SS}$ |     | $V_{DD}$  | V       |
|                            | VAIN(2) |                                              | When internal $V_{REF}=4V$ is selected.<br>$V_{REF} \leq V_{DD}$ | 4.3 to 5.5    | $V_{SS}$ |     | $V_{REF}$ |         |
|                            |         |                                              | When internal $V_{REF}=2V$ is selected.<br>$V_{REF} \leq V_{DD}$ | 2.3 to 3.6    | $V_{SS}$ |     | $V_{REF}$ |         |
| Analog port input current  | IAINH   |                                              | $V_{AIN}=V_{DD}$                                                 | 1.8 to 5.5    |          |     | 1         | $\mu A$ |
|                            | IAINL   |                                              | $V_{AIN}=V_{SS}$                                                 | 1.8 to 5.5    | -1       |     |           |         |

<8bits AD Converter Mode/ $T_a = -40^{\circ}C$  to  $+85^{\circ}C$ >

| Parameter                  | Symbol  | Pin/Remarks                                  | Conditions                                                       | Specification |          |     |           |         |
|----------------------------|---------|----------------------------------------------|------------------------------------------------------------------|---------------|----------|-----|-----------|---------|
|                            |         |                                              |                                                                  | $V_{DD}[V]$   | min      | typ | max       | unit    |
| Resolution                 | N       | AN2(P02)                                     |                                                                  | 1.8 to 5.5    |          | 8   |           | bit     |
| Absolute accuracy          | ET      | AN3(P03)<br>AN4(P04)                         | (Note 6-1)                                                       | 1.8 to 5.5    |          |     | $\pm 1.5$ | LSB     |
| Conversion time            | TCAD    | AN5(P15)<br>AN6(P14)<br>AN7(P13)<br>AN9(P70) | • See conversion time calculation method.<br>(Note 6-2)          | 2.7 to 5.5    | 20       |     | 90        | $\mu s$ |
|                            |         |                                              |                                                                  | 2.2 to 5.5    | 80       |     | 135       |         |
|                            |         |                                              |                                                                  | 1.8 to 5.5    | 245      |     | 265       |         |
| Analog input voltage range | VAIN(1) | (Note 6-3)                                   | When $V_{DD}$ is selected                                        | 1.8 to 5.5    | $V_{SS}$ |     | $V_{DD}$  | V       |
|                            | VAIN(2) |                                              | When internal $V_{REF}=4V$ is selected.<br>$V_{REF} \leq V_{DD}$ | 4.3 to 5.5    | $V_{SS}$ |     | $V_{REF}$ |         |
|                            |         |                                              | When internal $V_{REF}=2V$ is selected.<br>$V_{REF} \leq V_{DD}$ | 2.3 to 3.6    | $V_{SS}$ |     | $V_{REF}$ |         |
| Analog port input current  | IAINH   |                                              | $V_{AIN}=V_{DD}$                                                 | 1.8 to 5.5    |          |     | 1         | $\mu A$ |
|                            | IAINL   |                                              | $V_{AIN}=V_{SS}$                                                 | 1.8 to 5.5    | -1       |     |           |         |

<Conversion time calculation method>

12bits AD Converter Mode:  $TCAD(\text{Conversion time}) = ((52/(\text{AD division ratio}))+2) \times (1/3) \times t_{CYC}$

8bits AD Converter Mode:  $TCAD(\text{Conversion time}) = ((32/(\text{AD division ratio}))+2) \times (1/3) \times t_{CYC}$

## LC87F0G08A

### <Recommended Operating Conditions>

| External oscillation (FmCF) | Operating supply voltage range (V <sub>DD</sub> ) | System division ratio (SYSDIV) | Cycle time (tCYC) | AD division ratio (ADDIV) | AD conversion time (TCAD) |          |
|-----------------------------|---------------------------------------------------|--------------------------------|-------------------|---------------------------|---------------------------|----------|
|                             |                                                   |                                |                   |                           | 12bit AD                  | 8bit AD  |
| CF-8MHz                     | 2.7V to 5.5V                                      | 1/1                            | 375ns             | 1/8                       | 52.25μs                   | 32.25μs  |
|                             | 2.2V to 5.5V                                      | 1/1                            | 375ns             | 1/32                      | 208.25μs                  | 128.25μs |
| CF-4MHz                     | 2.7V to 5.5V                                      | 1/1                            | 750ns             | 1/8                       | 104.5μs                   | 64.5μs   |
|                             | 2.2V to 5.5V                                      | 1/1                            | 750ns             | 1/16                      | 208.5μs                   | 128.5μs  |
|                             | 1.8V to 5.5V                                      | 1/1                            | 750ns             | 1/32                      | 416.5μs                   | 256.5μs  |

Note 6-1: The quantization error ( $\pm 1/2\text{LSB}$ ) is excluded from the absolute accuracy. The absolute accuracy is measured when no change occurs in the I/O state of the pins that are adjacent to the analog input channel during AD conversion processing.

Note 6-2: The conversion time refers to the interval from the time a conversion starting instruction is issued till the time the complete digital value against the analog input value is loaded in the result register.

The conversion time is twice the normal value when one of the following conditions occurs:

- The first AD conversion executed in the 12-bit AD conversion mode after a system reset
- The first AD conversion executed after the AD conversion mode is switched from 8-bit to 12-bit AD conversion mode

Note 6-3: See section 8, “10×/20× amplifier characteristics”, for analog channel 0 (10×/20× amplifier output).

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

### Reference Voltage Generator Circuit (VREF) Characteristics

at Ta = -40°C to +85°C, V<sub>SS1</sub> = V<sub>SS2</sub> = 0V

| Parameter                                  | Symbol  | Pin/Remarks        | Conditions | Specification       |                      |     |                 |      |
|--------------------------------------------|---------|--------------------|------------|---------------------|----------------------|-----|-----------------|------|
|                                            |         |                    |            | V <sub>DD</sub> [V] | min                  | typ | max             | unit |
| VREF=2V voltage accuracy                   | VREF2VO | VREF<br>(Note 7-2) |            | 1.8 to 2.0          | V <sub>DD</sub> -0.1 |     | V <sub>DD</sub> | V    |
|                                            |         |                    |            | 2.0 to 5.5          | 1.90                 |     | 2.02            |      |
|                                            |         |                    |            | 2.3 to 5.5          | 1.98                 |     | 2.02            |      |
| VREF=4V voltage accuracy                   | VREF4VO |                    |            | 1.8 to 4.0          | V <sub>DD</sub> -0.1 |     | V <sub>DD</sub> |      |
|                                            |         |                    |            | 4.0 to 5.5          | 3.90                 |     | 4.04            |      |
|                                            |         |                    |            | 4.3 to 5.5          | 3.96                 |     | 4.04            |      |
| VREFoutput current                         | VREFIO  |                    |            | 1.8 to 5.5          | V <sub>SS</sub>      |     | 0.5             | mA   |
| Operation stabilization time<br>(Note 7-1) | tVREFW  |                    |            | 1.8 to 5.5          |                      |     | 5               | ms   |

Note 7-1: Refers to the interval between the time VR12ON and VR24ON are set to 1 and the time operation gets stabilized.

Note 7-2: An external 4.7μF capacitor must be connected to the VREF pin to stabilize the VREF voltage.

# LC87F0G08A

## 10x/20x Amplifier Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = 0V

| Parameter                               | Symbol               | Pin/Remarks          | Conditions                                                                                                                                                                                                              |             | V <sub>DD</sub> [V] | Specification |     |      |      |
|-----------------------------------------|----------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------------|---------------|-----|------|------|
|                                         |                      |                      |                                                                                                                                                                                                                         |             |                     | min           | typ | max  | unit |
| 20x Amplifier gain                      | APGAIN20<br>See Fig7 | P00/APIP<br>P01/APIP | <ul style="list-style-type: none"><li>• Ta=-40 to +85°C</li><li>1)APDIR=0 &amp; GAIN20=1.</li><li>• P01=0V,P00≤0V or P00=0V,P01≥0V</li><li>2)APDIR=1 &amp; GAIN20=1.</li><li>• P01=0V,P00≥0V or P00=0V,P01≤0V</li></ul> |             | 4.3 to 5.0          |               | 20  |      |      |
| 20x Amplifier offset                    | VAPIO20              |                      |                                                                                                                                                                                                                         |             |                     | 200           |     | 600  | mV   |
| 20x Amplifier input voltage range       | VAPIM20-1            | P00/APIP             | 1)                                                                                                                                                                                                                      | P01/APIP=0V |                     | -0.17         |     | 0    | V    |
|                                         | VAPIP20-1            | P01/APIP             |                                                                                                                                                                                                                         | P00/APIP=0V |                     | 0             |     | 0.17 |      |
|                                         | VAPIM20-2            | P00/APIP             | 2)                                                                                                                                                                                                                      | P01/APIP=0V |                     | 0             |     | 0.17 | V    |
|                                         | VAPIP20-2            | P01/APIP             |                                                                                                                                                                                                                         | P00/APIP=0V |                     | -0.17         |     | 0    |      |
| 10x Amplifier gain                      | APGAIN10<br>See Fig7 | P00/APIP<br>P01/APIP | <ul style="list-style-type: none"><li>• Ta=-40 to +85°C</li><li>3)APDIR=0 &amp; GAIN20=0.</li><li>• P01=0V,P00≤0V or P00=0V,P01≥0V</li><li>4)APDIR=1 &amp; GAIN20=0.</li><li>• P01=0V,P00≥0V or P00=0V,P01≤0V</li></ul> |             |                     |               | 10  |      |      |
| 10x Amplifier offset                    | VAPIO10              |                      |                                                                                                                                                                                                                         |             |                     | 100           |     | 300  | mV   |
| 10x Amplifier input voltage range       | VAPIM10-3            | P00/APIP             | 3)                                                                                                                                                                                                                      | P01/APIP=0V |                     | -0.24         |     | 0    | V    |
|                                         | VAPIP10-3            | P01/APIP             |                                                                                                                                                                                                                         | P00/APIP=0V |                     | 0             |     | 0.24 |      |
|                                         | VAPIM10-4            | P00/APIP             | 4)                                                                                                                                                                                                                      | P01/APIP=0V |                     | 0             |     | 0.24 | V    |
|                                         | VAPIP10-4            | P01/APIP             |                                                                                                                                                                                                                         | P00/APIP=0V |                     | -0.24         |     | 0    |      |
| Amplifier input port input current      | IAPINL               | P00/APIP             | P00/APIP=V <sub>SS</sub> -0.2V                                                                                                                                                                                          |             |                     | -1            |     |      | μA   |
|                                         | IAPINH               | P01/APIP             | P01/APIP=V <sub>DD</sub>                                                                                                                                                                                                |             |                     |               |     | 1    |      |
| Operation stabilization time (Note 8-1) | tAPW                 |                      |                                                                                                                                                                                                                         |             |                     |               |     | 20   | μs   |

Note 8-1: Refers to the interval between the time APON is set to 1 and the time operation gets stabilized.

<Amplifier input vaoltage calculation method:See Fig7>

$$VAPFUL = (VREFAD - VAPIO) / APGAIN$$

( VREFAD can be selected from internal-VREF4V, internal-VREF2V and VDD. )

Note: VAPFUL must not exceed VAPIP or VAPIM.

## LC87F0G08A

### Comparator Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = 0V

| Parameter                               | Symbol | Pin/Remarks | Conditions                                                                   | V <sub>DD</sub> [V] | Specification   |      |                 |      |
|-----------------------------------------|--------|-------------|------------------------------------------------------------------------------|---------------------|-----------------|------|-----------------|------|
|                                         |        |             |                                                                              |                     | min             | typ  | max             | unit |
| Comparator threshold voltage (Note 9-1) | VCMVT  | P02/CPIM    |                                                                              | 2.5 to 5.5          | 1.12            | 1.22 | 1.32            | V    |
| Input voltage range                     | VCMIN  |             |                                                                              | 2.5 to 5.5          | V <sub>SS</sub> |      | V <sub>DD</sub> | V    |
| Offset voltage                          | VOFF   |             | • Within input voltage range                                                 | 2.5 to 5.5          |                 | ±10  | ±30             | mV   |
| Response time                           | tRT    |             | • Within input voltage range<br>• Input amplitude =100mV<br>• Overdrive=50mV | 2.5 to 5.5          |                 | 200  | 600             | ns   |
| Operation stabilization time (Note 9-2) | tCMW   |             |                                                                              | 2.5 to 5.5          |                 |      | 1.0             | μs   |

Note 9-1: Comparator output=High level when (P02/CPIM voltage) < VCMVT

Comparator output=Low level when (P02/CPIM voltage) > (VCMVT +VOFF)

Note 9-2: Refers to the interval between the time CPON is set to 1 and the time operation gets stabilized.

### Temperature Sensor Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = 0V

<4-diode mode>

| Parameter                                 | Symbol    | Pin/Remarks | Conditions                | V <sub>DD</sub> [V] | Specification |       |       |       |
|-------------------------------------------|-----------|-------------|---------------------------|---------------------|---------------|-------|-------|-------|
|                                           |           |             |                           |                     | min           | typ   | max   | unit  |
| Output voltage                            | VOTMP4(1) |             | Ta=-40°C                  | 5.0                 | 3.23          | 3.25  | 3.27  | V     |
|                                           | VOTMP4(2) |             | Ta=+25°C                  | 5.0                 | 2.75          | 2.77  | 2.80  |       |
|                                           | VOTMP4(3) |             | Ta=+85°C                  | 5.0                 | 2.28          | 2.31  | 2.34  |       |
| sensitivity                               | Vsen4     |             | Ta=-40 to +85°C           | 3.5 to 5.5          | -7.63         | -7.54 | -7.45 | mV/°C |
| Absolute accuracy (Note 10-1) (Note 10-2) | ETTMP4    | Vref=4[V]   | Ta=(60±10) °C (Note 10-3) | 3.5 to 5.5          |               | ±2.5  | ±5    | °C    |
|                                           |           |             | Ta=-40 to +85°C           | 3.5 to 5.5          |               | ±5    | ±10   |       |

<2-diode mode>

| Parameter                                 | Symbol    | Pin/Remarks | Conditions                | V <sub>DD</sub> [V] | Specification |       |       |       |
|-------------------------------------------|-----------|-------------|---------------------------|---------------------|---------------|-------|-------|-------|
|                                           |           |             |                           |                     | min           | typ   | max   | unit  |
| Output voltage                            | VOTMP2(1) |             | Ta=-40°C                  | 3.3                 | 1.61          | 1.63  | 1.64  | V     |
|                                           | VOTMP2(2) |             | Ta=+25°C                  | 3.3                 | 1.37          | 1.39  | 1.40  |       |
|                                           | VOTMP2(3) |             | Ta=+85°C                  | 3.3                 | 1.14          | 1.16  | 1.17  |       |
| sensitivity                               | Vsen2     |             | Ta=-40 to +85°C           | 2.0 to 5.5          | -3.81         | -3.77 | -3.72 | mV/°C |
| Absolute accuracy (Note 10-1) (Note 10-2) | ETTMP2    | Vref=2[V]   | Ta=(60±10) °C (Note 10-4) | 2.0 to 5.5          |               | ±2.5  | ±5    | °C    |
|                                           |           |             | Ta=-40 to +85°C           | 2.0 to 5.5          |               | ±5    | ±10   |       |

Note 10-1: There are cases when the absolute accuracy specification value is exceeded when a large current flows through the ports.

Note 10-2: Including error of AD Converter.

Note 10-3: When using the Temperature sensor 60°C 2-diodes reference register D2TL/ D2TH.

Note 10-4: When using the Temperature sensor 60°C 4-diodes reference register D4TL/ D4TH.

## LC87F0G08A

### Power-on Reset (POR) Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = 0V

| Parameter                            | Symbol | Pin / Remarks | Conditions                             | Option Selected Voltage | Specification |     |      |      |
|--------------------------------------|--------|---------------|----------------------------------------|-------------------------|---------------|-----|------|------|
|                                      |        |               |                                        |                         | min           | typ | max  | unit |
| POR release voltage                  | PORRL  |               | Option selected (Note 11-1)            | 1.67V                   | 1.10          |     | 1.79 | V    |
| Detection voltage unpredictable area | POUKS  |               | See Fig. 8. (Note 11-2)                |                         |               | 0.7 | 0.95 |      |
| Power supply rise time               | PORIS  |               | Power startup time from VDD=0V to 1.6V |                         |               |     | 100  | ms   |

Note 11-1: The POR release voltage can be selected when the low-voltage detection feature is deselected.

Note 11-2: There is an unpredictable area before the transistor starts to turn on.

### Low Voltage Detection Reset (LVD) Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = 0V

| Parameter                                                  | Symbol | Pin / Remarks | Conditions                                          | Option Selected Voltage | Specification |      |      |      |
|------------------------------------------------------------|--------|---------------|-----------------------------------------------------|-------------------------|---------------|------|------|------|
|                                                            |        |               |                                                     |                         | min           | typ  | max  | unit |
| LVD reset voltage (Note 12-2)                              | LVDET  |               | Option selected See Fig. 9. (Note 12-1) (Note 12-3) | 1.91V                   | 1.81          | 1.91 | 2.01 | V    |
|                                                            |        |               |                                                     | 2.01V                   | 1.91          | 2.01 | 2.11 |      |
|                                                            |        |               |                                                     | 2.31V                   | 2.21          | 2.31 | 2.41 |      |
|                                                            |        |               |                                                     | 2.51V                   | 2.41          | 2.51 | 2.61 |      |
|                                                            |        |               |                                                     | 2.81V                   | 2.71          | 2.81 | 2.93 |      |
|                                                            |        |               |                                                     | 3.79V                   | 3.69          | 3.79 | 3.92 |      |
|                                                            |        |               |                                                     | 4.28V                   | 4.18          | 4.28 | 4.41 |      |
| LVD voltage hysteresis                                     | LVHYS  |               |                                                     | 1.91V                   |               | 55   |      | mV   |
|                                                            |        |               |                                                     | 2.01V                   |               | 55   |      |      |
|                                                            |        |               |                                                     | 2.31V                   |               | 55   |      |      |
|                                                            |        |               |                                                     | 2.51V                   |               | 55   |      |      |
|                                                            |        |               |                                                     | 2.81V                   |               | 60   |      |      |
|                                                            |        |               |                                                     | 3.79V                   |               | 65   |      |      |
|                                                            |        |               |                                                     | 4.28V                   |               | 65   |      |      |
| Detection voltage unpredictable area                       | LVUKS  |               | See Fig. 9. (Note 12-4)                             |                         |               | 0.7  | 0.95 | V    |
| Minimum low voltage detection width (response sensitivity) | TLVDW  |               | LVDET-0.5V See Fig. 10.                             |                         | 0.2           |      |      | ms   |

Note 12-1: The LVD reset voltage can be selected from 7 levels when the low-voltage detection feature is selected.

Note 12-2: The hysteresis voltage is not included in the LVD reset voltage specification value.

Note 12-3: There are cases when the LVD reset voltage specification value is exceeded when a greater change in the output level or large current is applied to the port.

Note 12-4: There is an unpredictable area before the transistor starts to turn on.

# LC87F0G08A

## Consumption Current Characteristics at Ta = -40°C to +85°C, VSS1 = VSS2 = 0V

| Parameter                                                           | Symbol   | Pin /<br>Remarks             | Conditions                                                                                                                                                                                                               | Specification       |     |      |      |      |
|---------------------------------------------------------------------|----------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----|------|------|------|
|                                                                     |          |                              |                                                                                                                                                                                                                          | V <sub>DD</sub> [V] | min | typ  | max  | unit |
| Normal mode<br>consumption<br>current<br>(Note 13-1)<br>(Note 13-2) | IDDOP(1) | V <sub>DD</sub> <sup>1</sup> | <ul style="list-style-type: none"><li>• FmCF=8MHz ceramic oscillation mode</li><li>• System clock set to 8MHz mode</li><li>• Internal low-/medium-speed RC oscillation stopped</li></ul>                                 | 2.2 to 5.5          |     | 3.8  | 5.2  | mA   |
|                                                                     |          |                              | <ul style="list-style-type: none"><li>• Internal high-speed RC oscillation stopped</li><li>• Frequency division ratio set to 1/1</li></ul>                                                                               | 2.2 to 3.6          |     | 2.2  | 2.9  |      |
|                                                                     | IDDOP(2) |                              | <ul style="list-style-type: none"><li>• FmCF=4MHz ceramic oscillation mode</li><li>• System clock set to 4MHz mode</li><li>• Internal low-/medium-speed RC oscillation stopped</li></ul>                                 | 1.8 to 5.5          |     | 2.1  | 3.5  |      |
|                                                                     |          |                              | <ul style="list-style-type: none"><li>• Internal high-speed RC oscillation stopped</li><li>• Frequency division ratio set to 1/1</li></ul>                                                                               | 1.8 to 3.6          |     | 1.1  | 1.7  |      |
|                                                                     | IDDOP(3) |                              | <ul style="list-style-type: none"><li>• FsX'tal=32.768kHz crystal oscillation mode</li><li>• Internal low-speed RC oscillation stopped</li><li>• System clock set to internal medium-speed RC oscillation mode</li></ul> | 1.8 to 5.5          |     | 0.23 | 0.39 |      |
|                                                                     |          |                              | <ul style="list-style-type: none"><li>• Internal high-speed RC oscillation stopped</li><li>• Frequency division ratio set to 1/2</li></ul>                                                                               | 1.8 to 3.6          |     | 0.13 | 0.19 |      |
|                                                                     | IDDOP(4) |                              | <ul style="list-style-type: none"><li>• FsX'tal=32.768kHz crystal oscillation mode</li><li>• Internal low-/medium-speed RC oscillation stopped</li></ul>                                                                 | 1.8 to 5.5          |     | 2.7  | 3.6  |      |
|                                                                     |          |                              | <ul style="list-style-type: none"><li>• System clock set to internal high-speed RC oscillation mode</li><li>• Frequency division ratio set to 1/1</li></ul>                                                              | 1.8 to 3.6          |     | 1.7  | 2.3  |      |
|                                                                     | IDDOP(5) |                              | <ul style="list-style-type: none"><li>• External oscillation FsX'tal/FmCF stopped</li><li>• System clock set to internal low-speed RC oscillation mode</li><li>• Internal medium-speed RC oscillation stopped</li></ul>  | 1.8 to 5.5          |     | 10   | 42   | μA   |
|                                                                     |          |                              | <ul style="list-style-type: none"><li>• Internal high-speed RC oscillation stopped</li><li>• Frequency division ratio set to 1/1</li></ul>                                                                               | 1.8 to 3.6          |     | 6    | 21   |      |
|                                                                     | IDDOP(6) |                              | <ul style="list-style-type: none"><li>• FsX'tal=32.768kHz crystal oscillation mode</li><li>• System clock set to 32.768kHz mode</li><li>• Internal low-/medium-speed RC oscillation stopped</li></ul>                    | 1.8 to 5.5          |     | 46   | 101  |      |
|                                                                     |          |                              | <ul style="list-style-type: none"><li>• Internal high-speed RC oscillation stopped</li><li>• Frequency division ratio set to 1/2</li></ul>                                                                               | 1.8 to 3.6          |     | 16   | 40   |      |

Continued on next page.

# LC87F0G08A

Continued from preceding page.

continued from preceding page.

| Parameter                                                         | Symbol     | Pin / Remarks    | Conditions                                                                                                                                                                                                                                                                                                                        | Specification       |     |       |      |      |
|-------------------------------------------------------------------|------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-----|-------|------|------|
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | V <sub>DD</sub> [V] | min | Typ   | max  | unit |
| HALT mode consumption current<br>(Note 13-1)<br>(Note 13-2)       | IDDHALT(1) | V <sub>DD1</sub> | HALT mode <ul style="list-style-type: none"> <li>FmCF=8MHz ceramic oscillation mode</li> <li>System clock set to 8MHz mode</li> <li>Internal low-/medium-speed RC oscillation stopped</li> <li>Internal high-speed RC oscillation stopped</li> <li>Frequency division ratio set to 1/1</li> </ul>                                 | 2.2 to 5.5          |     | 2.0   | 3.2  | mA   |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 2.2 to 3.6          |     | 1.0   | 1.6  |      |
|                                                                   | IDDHALT(2) |                  | HALT mode <ul style="list-style-type: none"> <li>FmCF=4MHz ceramic oscillation mode</li> <li>System clock set to 4MHz mode</li> <li>Internal low-/medium-speed RC oscillation stopped</li> <li>Internal high-speed RC oscillation stopped</li> <li>Frequency division ratio set to 1/1</li> </ul>                                 | 1.8 to 5.5          |     | 1.2   | 2.4  |      |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 0.5   | 1.0  |      |
|                                                                   | IDDHALT(3) |                  | HALT mode <ul style="list-style-type: none"> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>Internal low-speed RC oscillation stopped</li> <li>System clock set to internal medium-speed RC oscillation mode</li> <li>Internal high-speed RC oscillation stopped</li> <li>Frequency division ratio set to 1/2</li> </ul> | 1.8 to 5.5          |     | 0.12  | 0.25 |      |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 0.06  | 0.11 |      |
|                                                                   | IDDHALT(4) |                  | HALT mode <ul style="list-style-type: none"> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>Internal low-/medium-speed RC oscillation stopped</li> <li>System clock set to internal high-speed RC oscillation mode</li> <li>Frequency division ratio set to 1/1</li> </ul>                                               | 1.8 to 5.5          |     | 1.1   | 1.7  |      |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 0.7   | 1.0  |      |
|                                                                   | IDDHALT(5) |                  | HALT mode <ul style="list-style-type: none"> <li>External oscillation FsX'tal/FmCF stopped</li> <li>System clock set to internal low-speed RC oscillation mode</li> <li>Internal medium-speed RC oscillation stopped</li> <li>Internal high-speed RC oscillation stopped</li> <li>Frequency division ratio set to 1/1</li> </ul>  | 1.8 to 5.5          |     | 3.8   | 37   | μA   |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 2.4   | 17   |      |
|                                                                   | IDDHALT(6) |                  | HALT mode <ul style="list-style-type: none"> <li>FsX'tal=32.768kHz crystal oscillation mode</li> <li>System clock set to 32.768kHz mode</li> <li>Internal low-/medium-speed RC oscillation stopped</li> <li>Internal high-speed RC oscillation stopped</li> <li>Frequency division ratio set to 1/2</li> </ul>                    | 1.8 to 5.5          |     | 42    | 97   |      |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 13    | 38   |      |
| HOLD mode consumption current<br>(Note 13-1)<br>(Note 13-2)       | IDDHOLD(1) | V <sub>DD1</sub> | HOLD mode                                                                                                                                                                                                                                                                                                                         | 1.8 to 5.5          |     | 0.023 | 33.2 | μA   |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 0.012 | 14.2 |      |
|                                                                   | IDDHOLD(2) |                  | HOLD mode <ul style="list-style-type: none"> <li>LVD option selected</li> </ul>                                                                                                                                                                                                                                                   | 1.8 to 5.5          |     | 1.09  | 26.9 |      |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 0.86  | 11.8 |      |
| Timer HOLD mode consumption current<br>(Note 13-1)<br>(Note 13-2) | IDDHOLD(3) | V <sub>DD1</sub> | Timer HOLD mode <ul style="list-style-type: none"> <li>FsX'tal=32.768kHz crystal oscillation mode</li> </ul>                                                                                                                                                                                                                      | 1.8 to 5.5          |     | 39    | 94   |      |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 12    | 36   |      |
|                                                                   | IDDHOLD(4) |                  | Timer HOLD mode <ul style="list-style-type: none"> <li>FmSRC=30kHz internal low-speed RC oscillation mode</li> </ul>                                                                                                                                                                                                              | 1.8 to 5.5          |     | 0.63  | 34   |      |
|                                                                   |            |                  |                                                                                                                                                                                                                                                                                                                                   | 1.8 to 3.6          |     | 0.53  | 15   |      |

Note 13-1: The consumption current value includes none of the currents that flow into the output transistors and internal pull-up resistors.

Note 13-2: Unless otherwise specified, the consumption current for the LVD circuit is not included.

## LC87F0G08A

### F-ROM Programming Characteristics at Ta = +10°C to +55°C, VSS1 = VSS2 = 0V

| Parameter                   | Symbol   | Pin/Remarks | Conditions                                                 | Specification |     |     |     |      |
|-----------------------------|----------|-------------|------------------------------------------------------------|---------------|-----|-----|-----|------|
|                             |          |             |                                                            | VDD[V]        | min | typ | max | unit |
| Onboard programming current | IDDFW(1) | VDD1        | • Excluding power dissipation in the microcontroller block | 2.2 to 5.5    |     | 5   | 10  | mA   |
| Programming time            | tFW(1)   |             | • Erasing time                                             | 2.2 to 5.5    |     | 20  | 30  | ms   |
|                             | tFW(2)   |             | • Programming time                                         |               |     | 40  | 60  | μs   |

## Characteristics of a Sample Main System Clock Oscillation Circuit

Given below are the characteristics of a sample main system clock oscillation circuit that are measured using a SANYO-designated oscillation characteristics evaluation board and external components with circuit constant values with which the oscillator vendor confirmed normal and stable oscillation.

Table 1 Characteristics of a Sample Main System Clock Oscillator Circuit with a Ceramic Oscillator

■MURATA Manufacturing Co., Ltd.

| Nominal Frequency | Type | Oscillator Name | Circuit Constant |         |        |        | Operating Voltage Range [V] | Oscillation Stabilization Time |          | Remarks                   |
|-------------------|------|-----------------|------------------|---------|--------|--------|-----------------------------|--------------------------------|----------|---------------------------|
|                   |      |                 | C1 [pF]          | C2 [pF] | Rf [Ω] | Rd [Ω] |                             | typ [ms]                       | max [ms] |                           |
| 12MHz             | SMD  | CSTCE12M0G52-R0 | (10)             | (10)    | Open   | 680    | 2.6 to 5.5                  | 0.02                           | 0.3      | C1 and C2 integrated type |
| 8MHz              | SMD  | CSTCE8M00G52-R0 | (10)             | (10)    | Open   | 1k     | 2.1 to 5.5                  | 0.02                           | 0.3      |                           |
| 4MHz              | SMD  | CSTCR4M00G53-R0 | (15)             | (15)    | Open   | 1.5k   | 1.8 to 5.5                  | 0.03                           | 0.45     |                           |

## Characteristics of a Sample Subsystem Clock Oscillation Circuit

Given below are the characteristics of a sample subsystem clock oscillation circuit that are measured using a SANYO-designated oscillation characteristics evaluation board and external components with circuit constant values with which the oscillator vendor confirmed normal and stable oscillation.

Table 2 Characteristics of a Sample Subsystem Clock Oscillator Circuit that Uses a Crystal Oscillator

■EPSON TOYOCOM

| Nominal Frequency | Type | Oscillator Name | Circuit Constant |         |        |        | Operating Voltage Range [V] | Oscillation Stabilization Time |          | Remarks                     |
|-------------------|------|-----------------|------------------|---------|--------|--------|-----------------------------|--------------------------------|----------|-----------------------------|
|                   |      |                 | C1 [pF]          | C2 [pF] | Rf [Ω] | Rd [Ω] |                             | typ [ms]                       | max [ms] |                             |
| 32.768kHz         | SMD  | MC-306          | 9                | 9       | Open   | 330k   | 1.8 to 5.5                  | 1.4                            | 4.0      | Applicable CL value = 7.0pF |

The oscillation stabilization time refers to the time interval that is required for the oscillation to get stabilized in the following cases (see Figure 3):

- Till the oscillation gets stabilized after the instruction for starting the subclock oscillation circuit is executed
- Till the oscillation gets stabilized after the HOLD mode is released.

Note: The components that are involved in oscillation should be placed as close to the IC and to one another as possible because they are vulnerable to the influences of the circuit pattern.

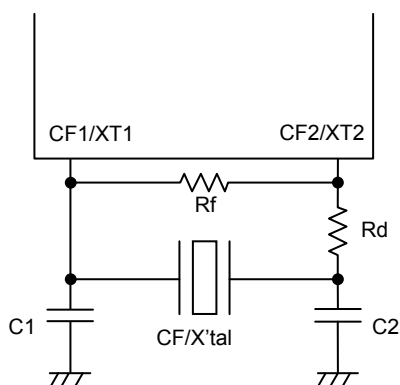


Figure 1 CF/XT Oscillator Circuit






Figure 2 AC Timing Measurement Point

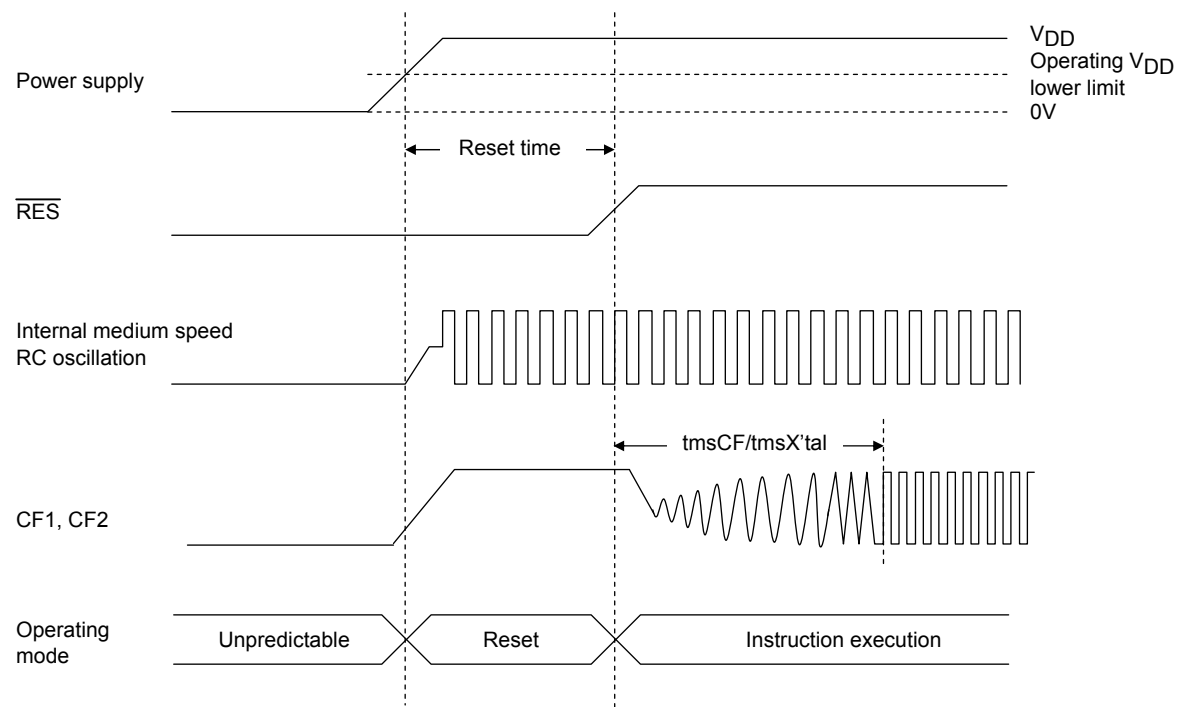


Reset Time and Oscillation Stabilization Time

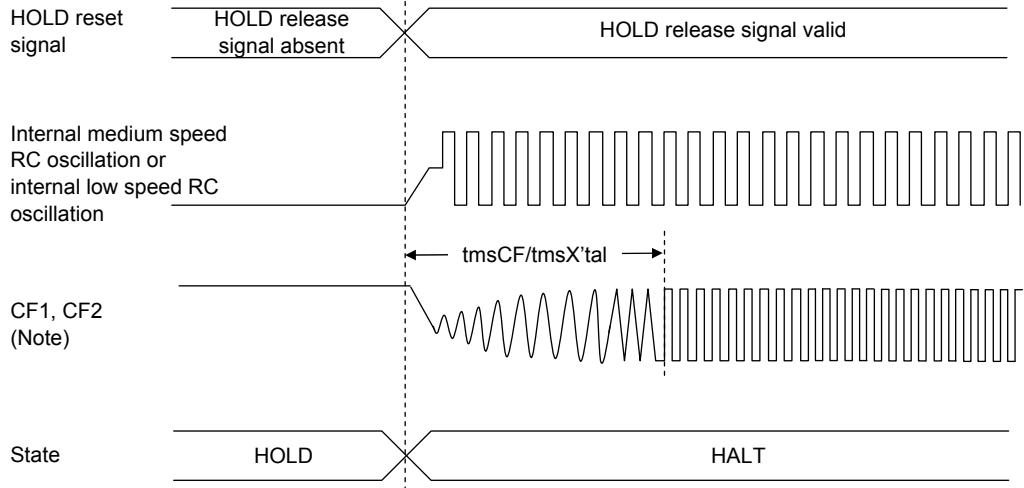

HOLD Release Signal and Oscillation Stabilization Time

Note: When an external oscillation circuit is selected.

Figure 3 Oscillation Stabilization Time

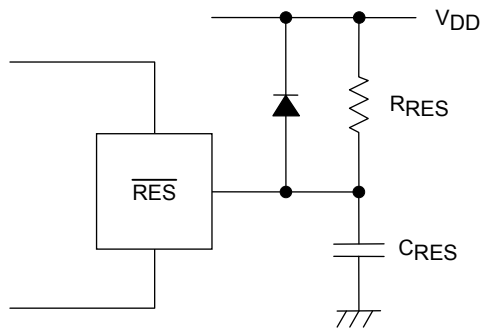

Note:

The external circuit for reset may vary depending on the usage of POR and LVD. See "Reset Function" in the user's manual.

Figure 4 Sample Reset Circuit

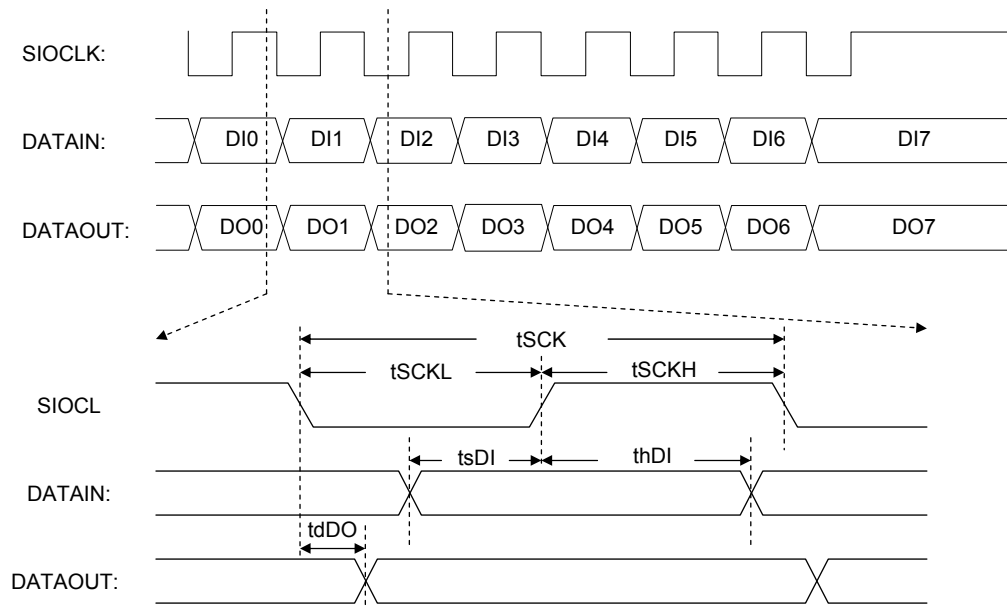


Figure 5 Serial I/O Waveform

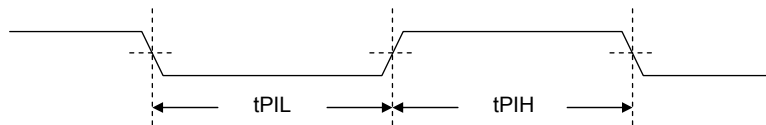


Figure 6 Pulse Input Timing Signal Waveform

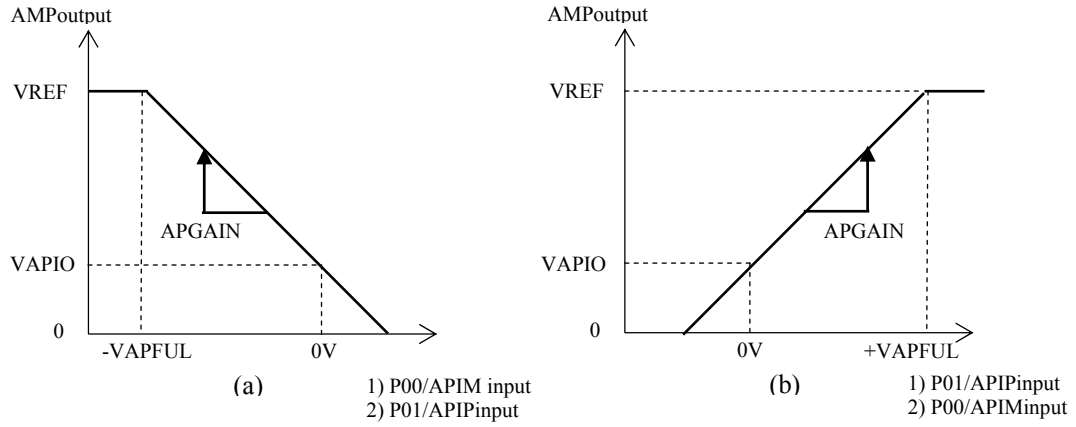


Figure 7 10x/20x Amplifier Characteristics

- (a) 1) When P01/APIP is 0V,  $P00/APIM \leq 0V$ .  
2) When P00/APIM is 0V,  $P01/APIP \leq 0V$ .
- (b) 1) When P00/APIM is 0V,  $P01/APIP \geq 0V$ .  
2) When P01/APIP is 0V,  $P00/APIM \geq 0V$ .

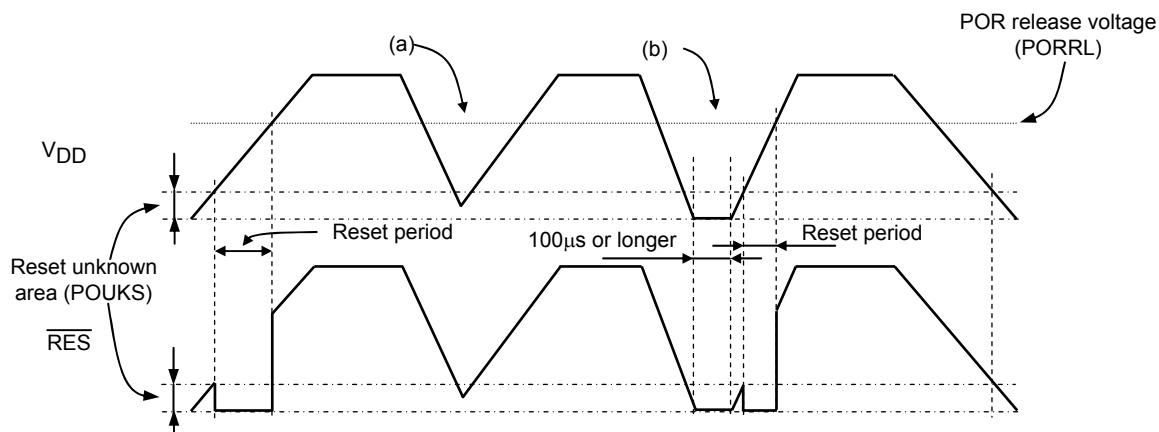


Figure 8 Example of POR Only (LVD Deselected) Mode Waveforms (at Reset Pin with  $R_{RES}$  Pull-up Resistor Only)

- The POR function generates a reset only when the power voltage goes up from the  $V_{SS}$  level.
- No stable reset will be generated if power is turned on again when the power level does not go down to the  $V_{SS}$  level as shown in (a). If such a case is anticipated, use the LVD function together with the POR function or implement an external reset circuit as shown below.
- A reset is generated only when the power level goes down to the  $V_{SS}$  level as shown in (b) and power is turned on again after this condition continues for 100µs or longer.

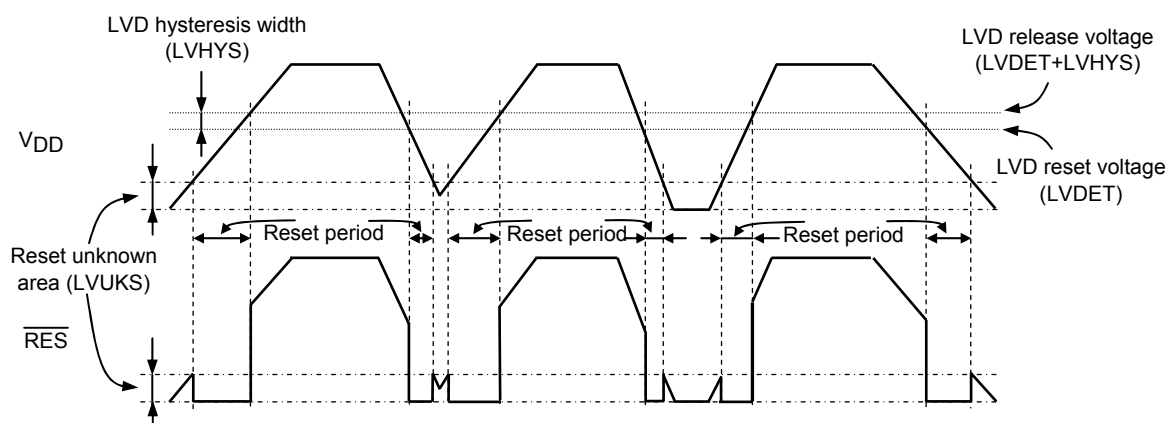


Figure 9 Example of POR + LVD Mode Waveforms (at Reset Pin with  $R_{RES}$  Pull-up Resistor Only)

- Resets are generated both when power is turned on and when the power level lowers.
- A hysteresis width (LVHYS) is provided to prevent the repetitions of reset release and entry cycles near the detection level.

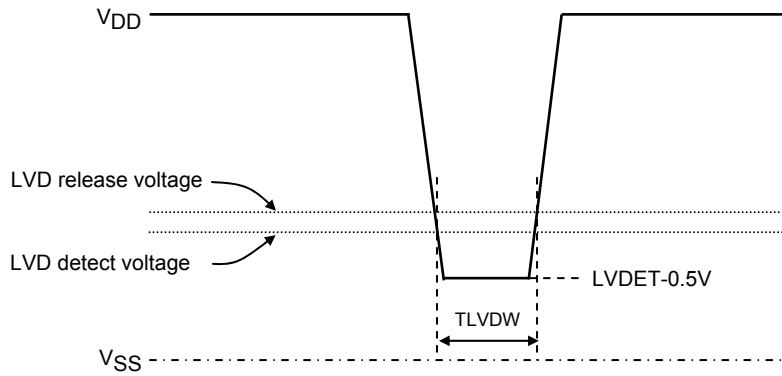


Figure 10 Minimum Low Voltage Detection Width (Example of Voltage Sag/Fluctuation Waveform)

## ORDERING INFORMATION

| Device           | Package                                    | Shipping (Qty / Packing) |
|------------------|--------------------------------------------|--------------------------|
| LC87F0G08AUJA-AH | SSOP24(225mil)<br>(Pb-Free / Halogen Free) | 2000 / Tape & Reel       |
| LC87F0G08AUJA-FH | SSOP24(225mil)<br>(Pb-Free / Halogen Free) | 2000 / Tape & Reel       |
| LC87F0G08AUJA-ZH | SSOP24(225mil)<br>(Pb-Free / Halogen Free) | 1400 / Fan-Fold          |

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ON Semiconductor:](#)

[LC87F0G08AUJA-AH](#) [LC87F0G08AUJA-FH](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331