
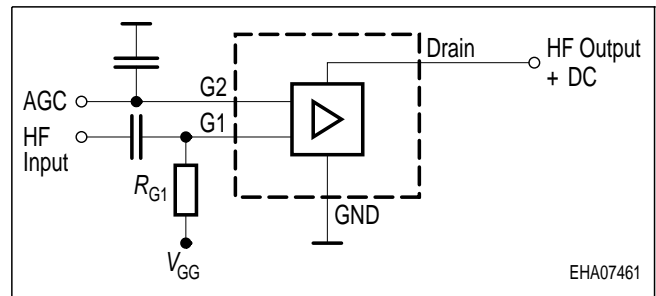


Silicon N-Channel MOSFET Tetrode

- Low noise gain controlled input stages of UHF- and VHF - tuners with 3 V up to 5 V supply voltage
- Integrated gate protection diodes
- Excellent noise figure
- High gain, high forward transadmittance
- Improved cross modulation at gain reduction
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101

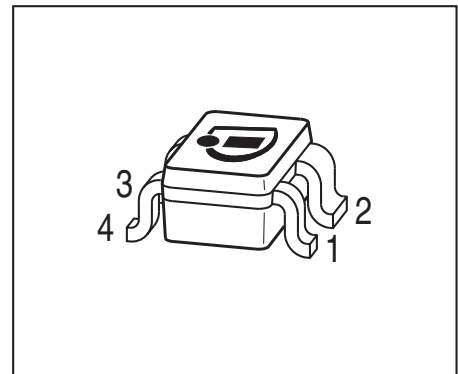

ESD (Electrostatic discharge) sensitive device, observe handling precaution!

| Type | Package | Pin Configuration | | | | | | Marking |
|---------|---------|-------------------|-------|--------|--------|---|---|---------|
| BF5020 | SOT143 | 1 = S | 2 = D | 3 = G2 | 4 = G1 | - | - | KYs |
| BF5020R | SOT143R | 1 = D | 2 = S | 3 = G1 | 4 = G2 | - | - | KYs |
| BF5020W | SOT343 | 1 = D | 2 = S | 3 = G1 | 4 = G2 | - | - | KYs |

Maximum Ratings

| Parameter | Symbol | Value | Unit |
|--|--------------------|-------------|------------------|
| Drain-source voltage | V_{DS} | 8 | V |
| Continuous drain current | I_D | 25 | mA |
| Gate 1/ gate 2-source current | I_{G1S}, I_{G2S} | ± 10 | mA |
| Gate 1/ gate 2-source voltage | V_{G1S}, V_{G2S} | ± 6 | V |
| Total power dissipation | P_{tot} | | mW |
| $T_S \leq 76 \text{ }^\circ\text{C}$, BF5020, BF5020R | | 200 | |
| $T_S \leq 94 \text{ }^\circ\text{C}$, BF5020W | | 200 | |
| Storage temperature | T_{stg} | -55 ... 150 | $^\circ\text{C}$ |
| Channel temperature | T_{ch} | 150 | |

Thermal Resistance

| Parameter | Symbol | Value | Unit |
|---|-------------|--------------------------|------|
| Channel - soldering point ¹⁾ BF5020, BF5020R BF5020W | R_{thchs} | ≤ 370 ≤ 280 | K/W |

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Values | | | Unit |
|-----------|--------|--------|------|------|------|
| | | min. | typ. | max. | |

DC Characteristics





| | | | | | |
|---|-----------------|----|-----|-----|----|
| Drain-source breakdown voltage $I_D = 20 \mu\text{A}$, $V_{G1S} = 0$, $V_{G2S} = 0$ | $V_{(BR)DS}$ | 12 | - | - | V |
| Gate1-source breakdown voltage $+I_{G1S} = 10 \text{ mA}$, $V_{G2S} = 0$, $V_{DS} = 0$ | $+V_{(BR)G1SS}$ | 6 | - | 15 | |
| Gate2-source breakdown voltage $+I_{G2S} = 10 \text{ mA}$, $V_{G1S} = 0$, $V_{DS} = 0$ | $+V_{(BR)G2SS}$ | 6 | - | 15 | |
| Gate1-source leakage current $V_{G1S} = 6 \text{ V}$, $V_{G2S} = 0$, $V_{DS} = 0$ | $+I_{G1SS}$ | - | - | 50 | nA |
| Gate2-source leakage current $V_{G2S} = 6 \text{ V}$, $V_{G1S} = 0$, $V_{DS} = 0$ | $+I_{G2SS}$ | - | - | 50 | |
| Drain current $V_{DS} = 5 \text{ V}$, $V_{G1S} = 0$, $V_{G2S} = 4 \text{ V}$ | I_{DSS} | - | - | 100 | |
| Drain-source current $V_{DS} = 5 \text{ V}$, $V_{G2S} = 4 \text{ V}$, $R_{G1} = 120 \text{ k}\Omega$ | I_{DSX} | - | 14 | - | mA |
| Gate1-source pinch-off voltage $V_{DS} = 5 \text{ V}$, $V_{G2S} = 4 \text{ V}$, $I_D = 20 \mu\text{A}$ | $V_{G1S(p)}$ | - | 0.7 | - | V |
| Gate2-source pinch-off voltage $V_{DS} = 5 \text{ V}$, $I_D = 20 \mu\text{A}$, $V_{G1S} = 2 \text{ V}$ | $V_{G2S(p)}$ | - | 0.7 | - | |

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified



| Parameter | Symbol | Values | | | Unit |
|---|--------------|--------|------|------|------------|
| | | min. | typ. | max. | |
| AC Characteristics - (verified by random sampling) | | | | | |
| Forward transconductance $V_{DS} = 5\text{ V}$, $I_D = 10\text{ mA}$, $V_{G2S} = 4\text{ V}$ | g_{fs} | - | 34 | - | mS |
| Gate1 input capacitance $V_{DS} = 5\text{ V}$, $I_D = 10\text{ mA}$, $V_{G2S} = 4\text{ V}$ | C_{g1ss} | - | 2.4 | - | pF |
| Output capacitance $V_{DS} = 5\text{ V}$, $I_D = 10\text{ mA}$, $V_{G2S} = 4\text{ V}$ | C_{dss} | - | 1 | - | |
| Power gain $V_{DS} = 5\text{ V}$, $I_D = 10\text{ mA}$, $V_{G2S} = 4\text{ V}$, $f = 800\text{ MHz}$ $V_{DS} = 5\text{ V}$, $I_D = 10\text{ mA}$, $V_{G2S} = 4\text{ V}$, $f = 45\text{ MHz}$ | G_p | - | 26 | - | dB |
| | | - | 32 | - | |
| Noise figure $V_{DS} = 5\text{ V}$, $I_D = 10\text{ mA}$, $V_{G2S} = 4\text{ V}$, $f = 800\text{ MHz}$ $V_{DS} = 5\text{ V}$, $I_D = 10\text{ mA}$, $V_{G2S} = 4\text{ V}$, $f = 45\text{ MHz}$ | F | - | 1.2 | - | dB |
| | | - | 0.8 | - | |
| Gain control range $V_{DS} = 5\text{ V}$, $V_{G2S} = 4\dots 0\text{ V}$ | ΔG_p | - | 45 | - | |
| Cross-modulation ¹⁾ , $V_{DS} = 5\text{ V}$, $R_{G1} = 120\text{ k}\Omega$ AGC = 0 AGC = 10 dB AGC = 40 dB | X_{mod} | - | 98 | - | dB μ V |
| | | - | 96 | - | |
| | | - | 106 | - | |



¹Input level for $k = 1\%$; $f_w = 50\text{ MHz}$, $f_{unw} = 60\text{ MHz}$

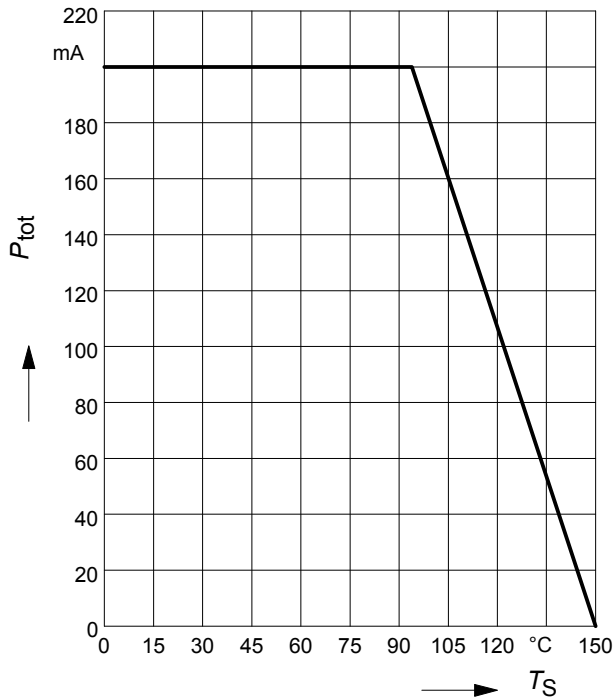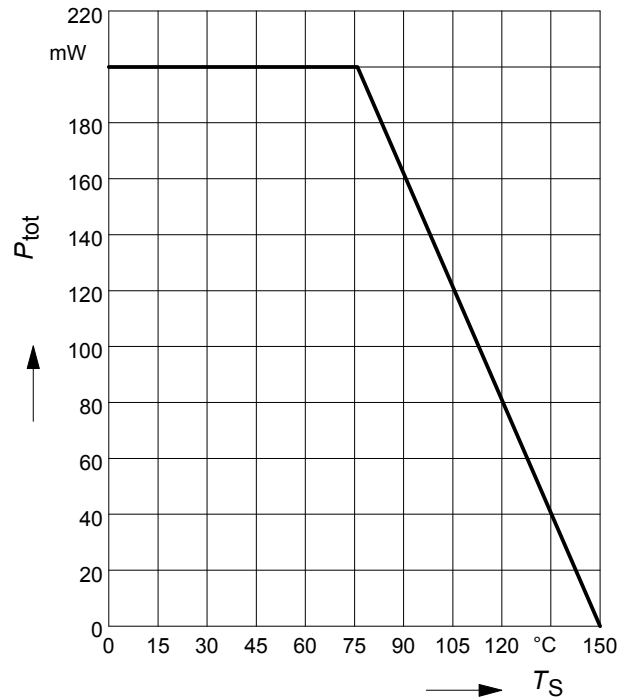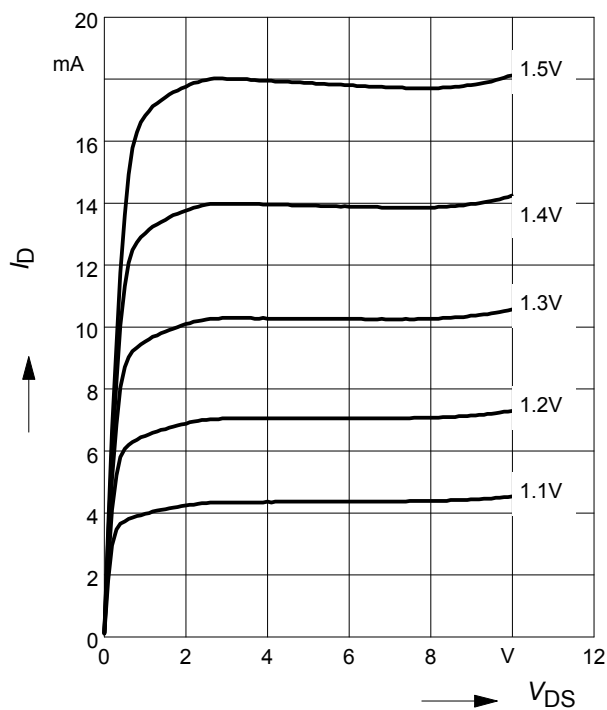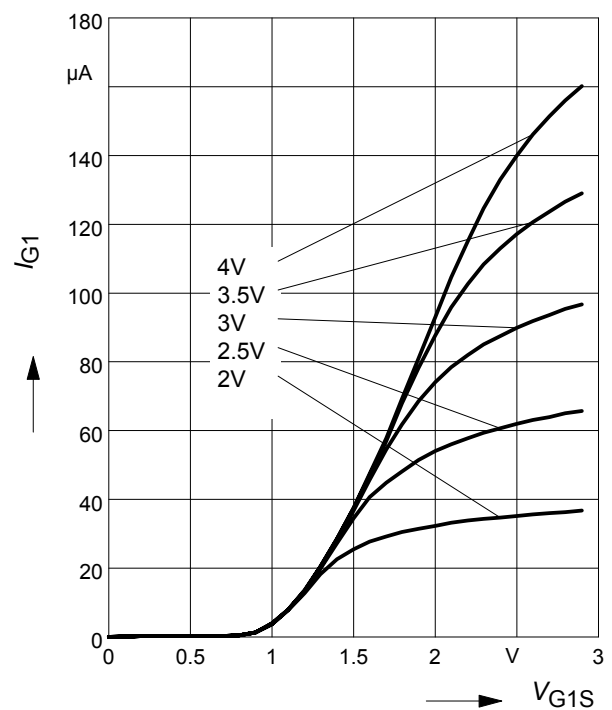Total power dissipation $P_{tot} = f(T_S)$
BF5020W

Total power dissipation $P_{tot} = f(T_S)$
BF5020, BF5020R

Output characteristics $I_D = f(V_{DS})$

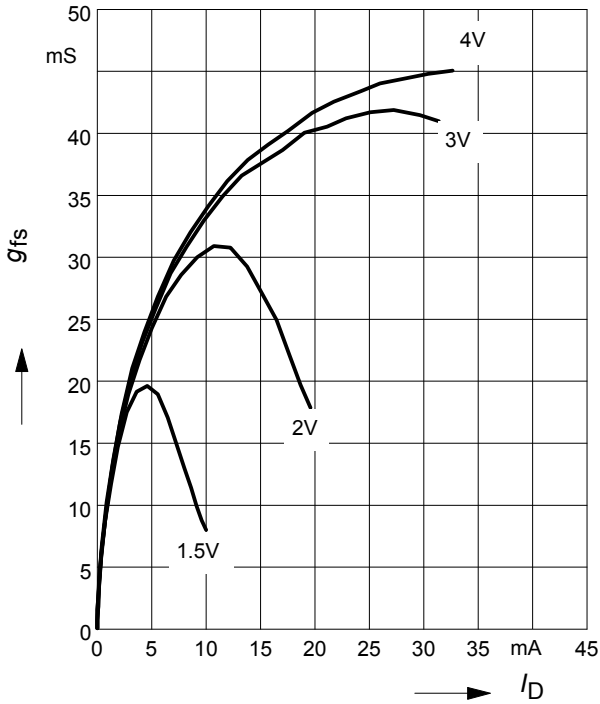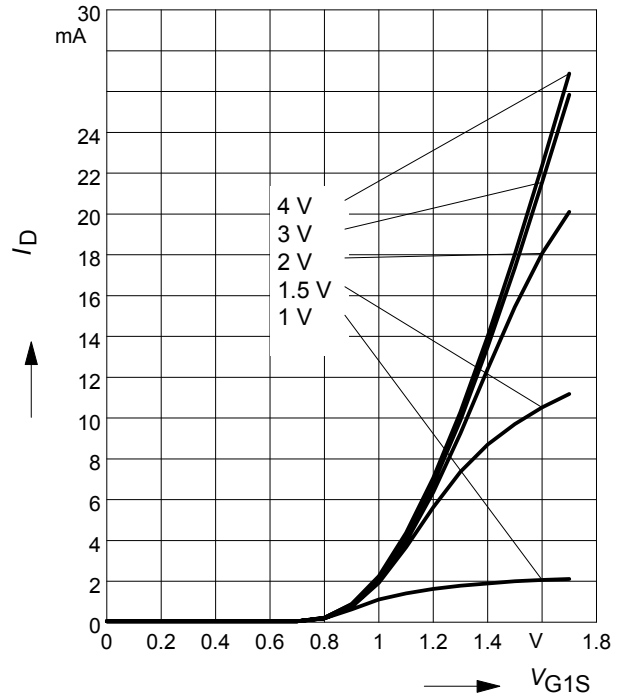Gate 1 current $I_{G1} = f(V_{G1S})$
 $V_{DS} = 5V$
 $V_{G2S} = \text{Parameter}$

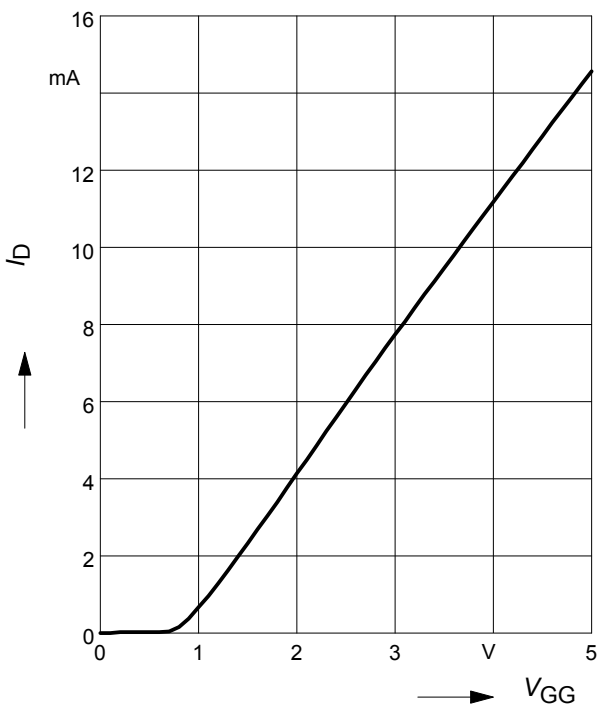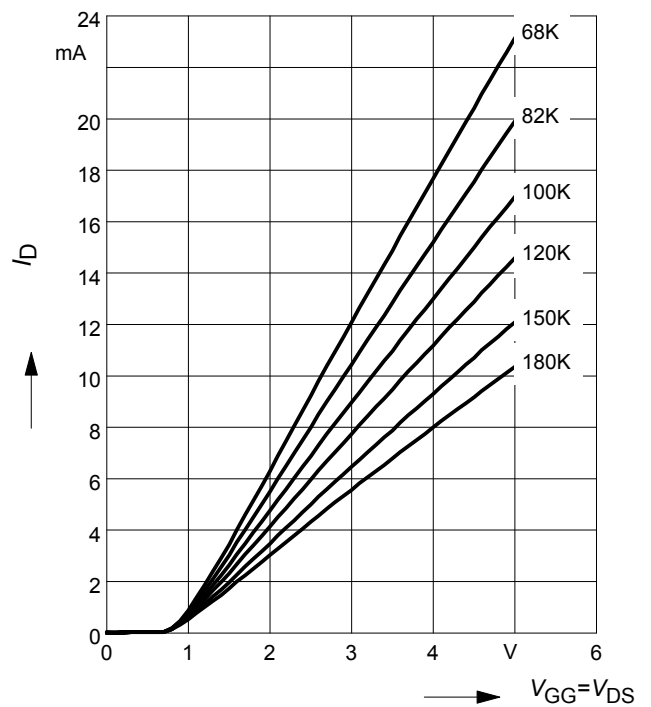
Gate 1 forward transconductance


$$g_{fs} = f(I_D)$$

 $V_{DS} = 5V, V_{G2S} = \text{Parameter}$

Drain current $I_D = f(V_{G1S})$
 $V_{DS} = 5V$
 $V_{G2S} = \text{Parameter}$

Drain current $I_D = f(V_{GG})$
 $V_{DS} = 5V, V_{G2S} = 4V, R_{G1} = 120\text{ k}\Omega$

 (connected to V_{GG} , $V_{GG} = \text{gate1}$ supply voltage)

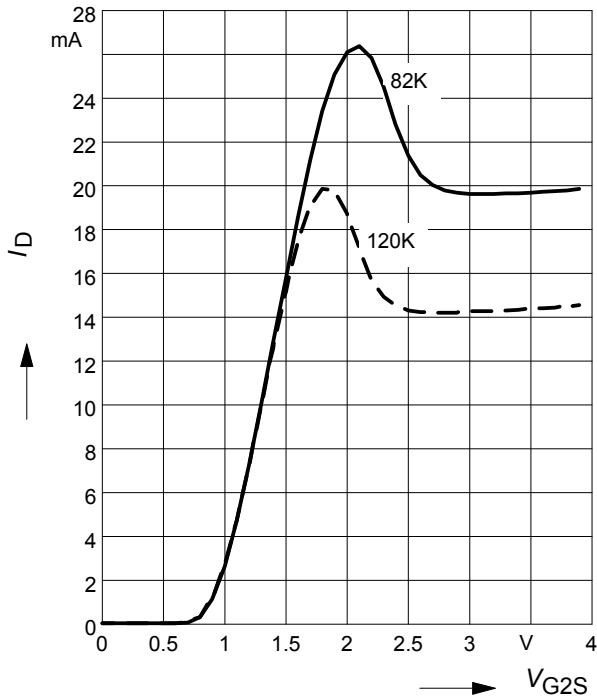Drain current $I_D = f(V_{GG})$
 $V_{G2S} = 4V$
 $R_{G1} = \text{Parameter in k}\Omega$


Drain current $I_D = f(V_{G2S})$


$V_{DS} = 5\text{ V}$, $R_{G1} = \text{Parameter in k}\Omega$



AGC characteristic $AGC = f(V_{G2S})$

$f = 50\text{ MHz}$


measured in test circuit, see page 7

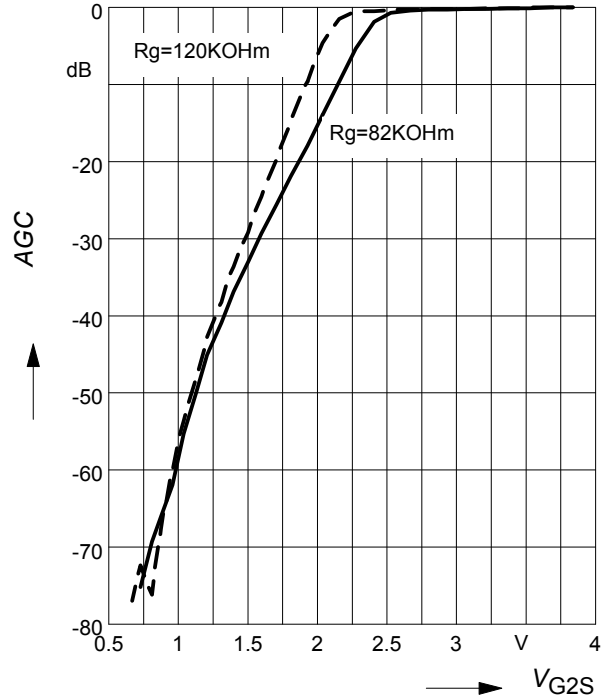

AGC characteristic $AGC = f(V_{G2S})$

$f = 800\text{ MHz}$


measured in test circuit, see page 7

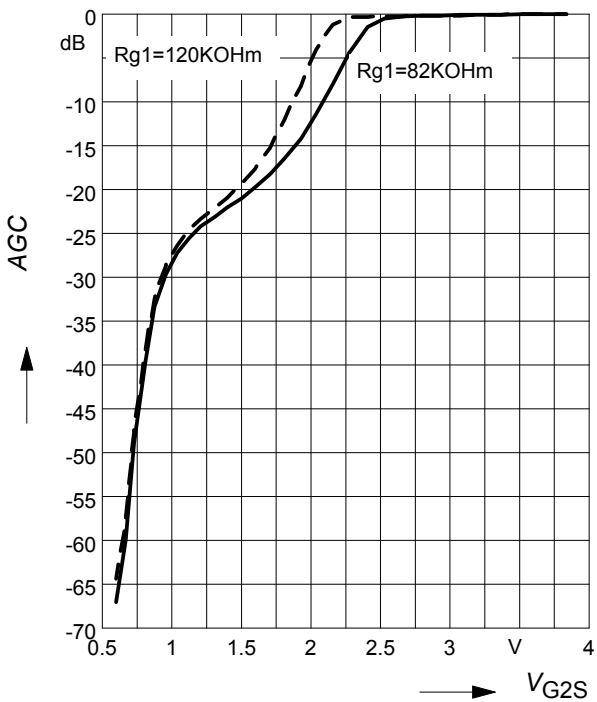


Crossmodulation $V_{unw} = (AGC)$

$V_{DS} = 5\text{ V}$


measured in test circuit, see page 7

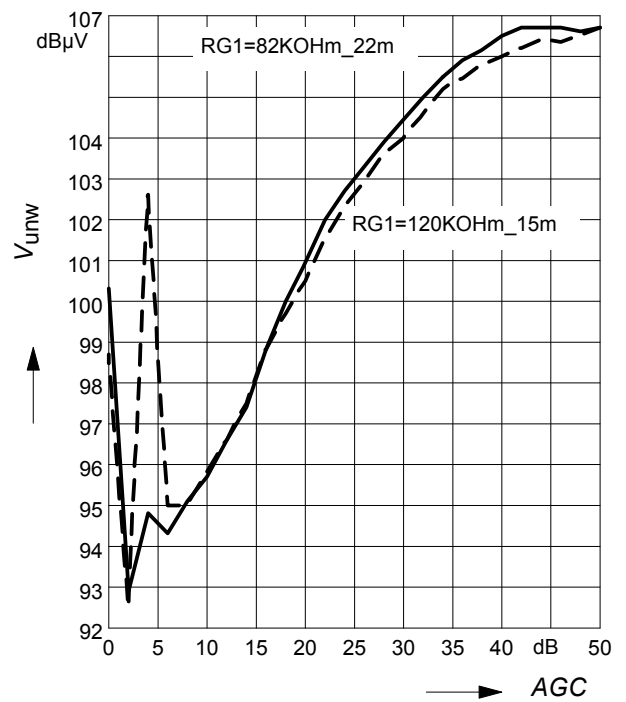


Test circuit for Crossmodulation / AGC

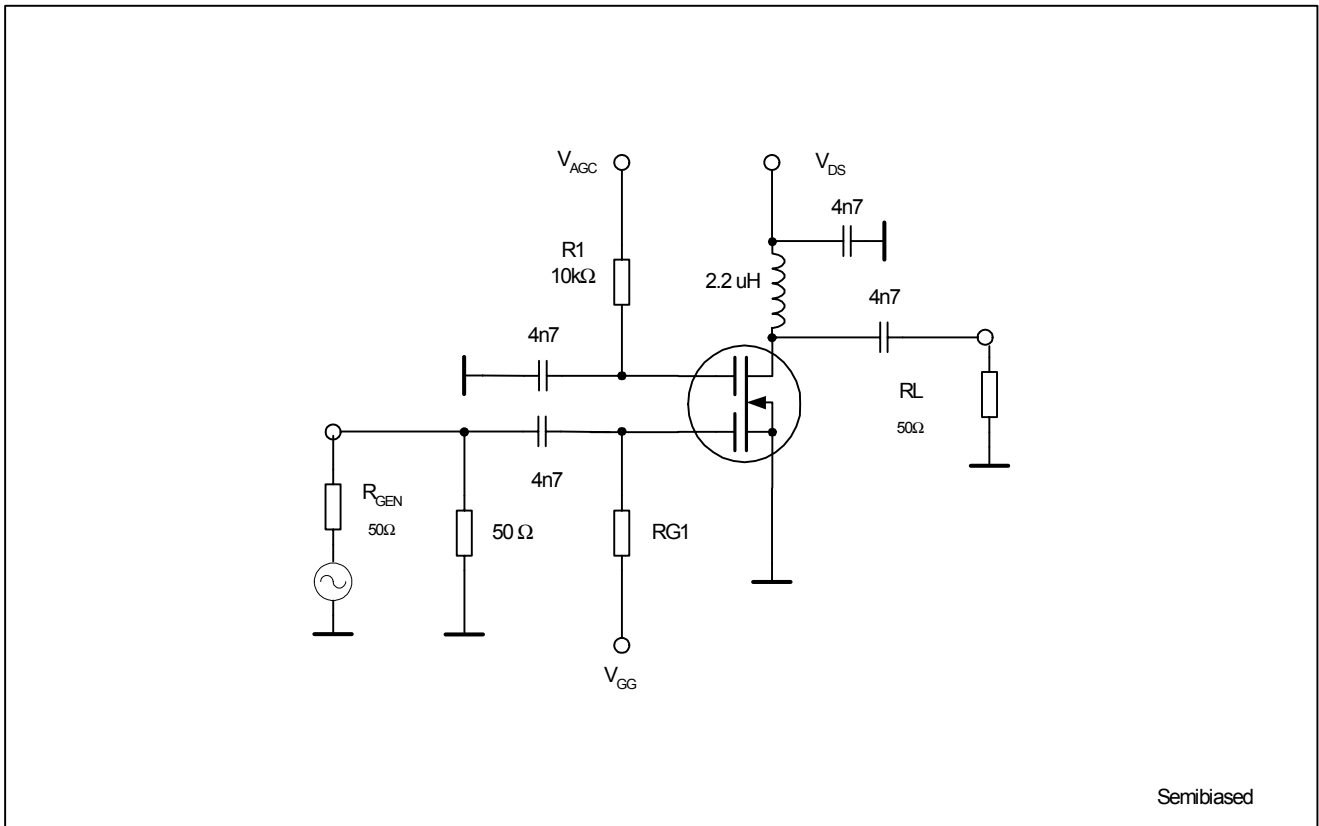


Package Outline

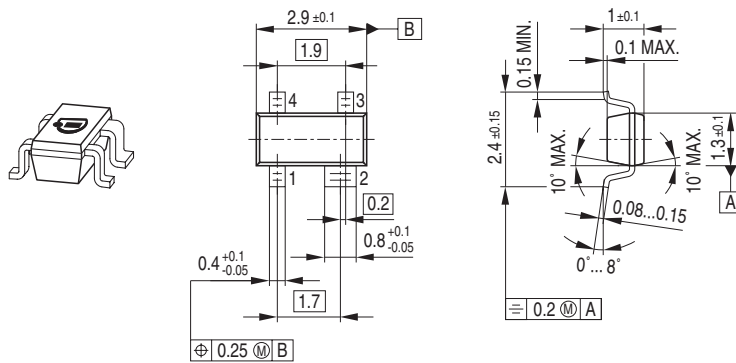

Foot Print




Marking Layout (Example)

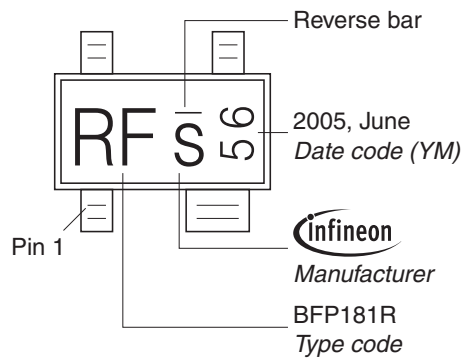

Standard Packing

Reel \varnothing 180 mm = 3.000 Pieces/Reel
 Reel \varnothing 330 mm = 10.000 Pieces/Reel

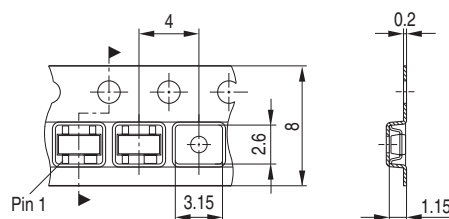

Edition 2006-02-01
Published by
Infineon Technologies AG
81726 München, Germany
© Infineon Technologies AG 2007.
All Rights Reserved.

Attention please!

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331