

CDM2208-800FP

SILICON
N-CHANNEL POWER MOSFET
8.0 AMP, 800 VOLT



TO-220FP CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CDM2208-800FP is an 800 volt N-Channel MOSFET designed for high voltage, fast switching applications such as Power Factor Correction (PFC), lighting and power inverters. This MOSFET combines high voltage capability with low $r_{DS(ON)}$, low threshold voltage, and low gate charge for optimal efficiency.

MARKING CODE: CDM8-800FP

APPLICATIONS:

- Power Factor Correction
- Alternative energy inverters
- Solid State Lighting (SSL)

FEATURES:

- High voltage capability ($V_{DS}=800V$)
- Low gate charge ($Q_{g(tot)}=24.45nC$ TYP)
- Low $r_{DS(ON)}$ (1.42Ω TYP)

MAXIMUM RATINGS: ($T_C=25^\circ C$ unless otherwise noted)

	SYMBOL		UNITS
Drain-Source Voltage	V_{DS}	800	V
Gate-Source Voltage	V_{GS}	30	V
Continuous Drain Current (Steady State)	I_D	8.0	A
Maximum Pulsed Drain Current, $t_p=10\mu s$	I_{DM}	32	A
Continuous Source Current (Body Diode)	I_S	8.0	A
Maximum Pulsed Source Current (Body Diode)	I_{SM}	32	A
Single Pulse Avalanche Energy (Note 1)	E_{AS}	534	mJ
Power Dissipation	P_D	57	W
Operating and Storage Junction Temperature	T_J, T_{stg}	-55 to +150	$^\circ C$
Thermal Resistance	θ_{JC}	2.19	$^\circ C/W$
Thermal Resistance	θ_{JA}	120	$^\circ C/W$

Note 1: $L=30mH$, $I_{AS}=5.5A$, $V_{DD}=135V$, $R_G=25\Omega$, Initial $T_J=25^\circ C$


ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ C$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{GSSS}, I_{GSSR}	$V_{GS}=30V, V_{DS}=0$		30	100	nA
I_{DSS}	$V_{DS}=800V, V_{GS}=0$		0.05	1.0	μA
BV_{DSS}	$V_{GS}=0, I_D=250\mu A$	800			V
$V_{GS(th)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	2.0	2.9	4.0	V
V_{SD}	$V_{GS}=0, I_S=8.0A$		0.9	1.4	V
$r_{DS(ON)}$	$V_{GS}=10V, I_D=4.0A$		1.42	1.6	Ω
C_{rss}	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$		2.7		pF
C_{iss}	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$		1110		pF
C_{oss}	$V_{DS}=25V, V_{GS}=0, f=1.0MHz$		104		pF

R4 (23-December 2015)


CDM2208-800FP**SILICON
N-CHANNEL POWER MOSFET
8.0 AMP, 800 VOLT****ELECTRICAL CHARACTERISTICS - Continued:** ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	TYP	UNITS
$Q_{g(\text{tot})}$	$V_{DS}=640\text{V}$, $V_{GS}=10\text{V}$, $I_D=8.0\text{A}$ (Note 2)	24.45	nC
Q_{gs}	$V_{DS}=640\text{V}$, $V_{GS}=10\text{V}$, $I_D=8.0\text{A}$ (Note 2)	5.76	nC
Q_{gd}	$V_{DS}=640\text{V}$, $V_{GS}=10\text{V}$, $I_D=8.0\text{A}$ (Note 2)	9.94	nC
$t_{d(\text{on})}$	$V_{DD}=400\text{V}$, $I_D=8.0\text{A}$, $R_G=25\Omega$ (Note 2)	19	ns
t_r	$V_{DD}=400\text{V}$, $I_D=8.0\text{A}$, $R_G=25\Omega$ (Note 2)	34	ns
$t_{d(\text{off})}$	$V_{DD}=400\text{V}$, $I_D=8.0\text{A}$, $R_G=25\Omega$ (Note 2)	65	ns
t_f	$V_{DD}=400\text{V}$, $I_D=8.0\text{A}$, $R_G=25\Omega$ (Note 2)	37	ns
t_{rr}	$V_{GS}=0$, $I_S=8.0\text{A}$, $di/dt=100\text{A}/\mu\text{s}$ (Note 2)	310	ns
Q_{rr}	$V_{GS}=0$, $I_S=8.0\text{A}$, $di/dt=100\text{A}/\mu\text{s}$ (Note 2)	0.53	μC

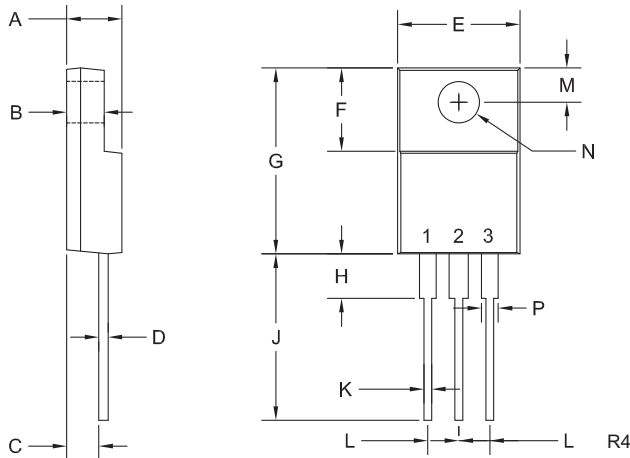Note 2: Pulse Width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$ **TO-220FP CASE - MECHANICAL OUTLINE**

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.165	0.202	4.20	5.12
B	0.090	0.130	2.30	3.30
C	0.098	0.122	2.50	3.10
D	-	0.031	-	0.80
E	0.382	0.418	9.70	10.63
F	0.238	0.276	6.06	7.00
G	0.583	0.640	14.80	16.25
H	-	0.161	-	4.10
J	0.506	0.543	12.85	13.80
K	0.020	0.031	0.50	0.79
L	0.100		2.54	
M	0.120	0.140	3.05	3.55
N (DIA)	0.116	0.134	2.95	3.40
P	0.039	0.058	1.00	1.47

TO-220FP (REV: R4)

PIN CONFIGURATION**LEAD CODE:**

- 1) Gate
- 2) Drain
- 3) Source

MARKING CODE: CDM8-800FP

R4 (23-December 2015)


CDM2208-800FP

SILICON
N-CHANNEL POWER MOSFET
8.0 AMP, 800 VOLT




TYPICAL ELECTRICAL CHARACTERISTICS


Output Characteristics

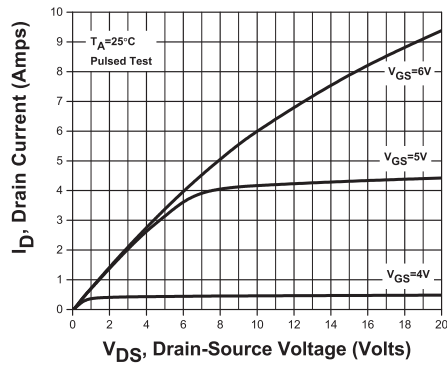


Drain Source On Resistance

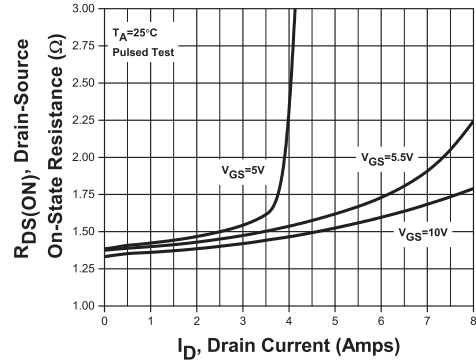


Capacitance

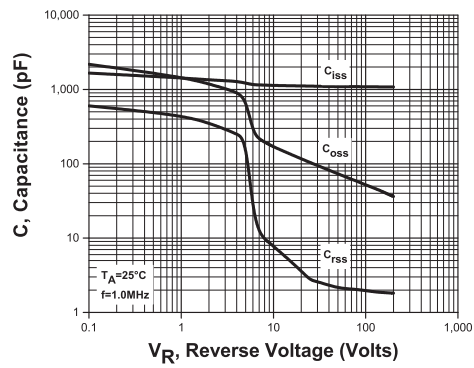

Transfer Characteristics

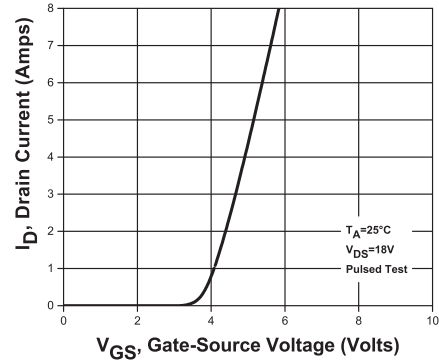

Power Derating

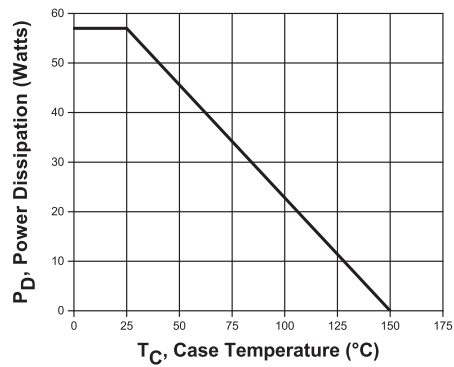

R4 (23-December 2015)

PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331