

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## General Description

The MAX9517/MAX9524 are low-power video amplifiers with integrated reconstruction filters. Specially suited for standard-definition video signals, such as composite and luma, these devices are ideal for a wide range of applications such as cell phones and security/CCTV cameras. Video signals should be DC-coupled into the MAX9517 input and AC-coupled into the MAX9524 input.

The MAX9517/MAX9524 have two single-pole, single-throw (SPST) analog switches that can be used to route stereo audio, video, or digital signals. The reconstruction filter typically has  $\pm 1\text{dB}$  passband flatness at 9MHz and 52dB attenuation at 27MHz. The amplifiers have a gain of  $2\text{V/V}$ , and the outputs can be DC-coupled to a load of  $75\Omega$ , which is equivalent to two video loads. The outputs can be AC-coupled to a load of  $150\Omega$ , which is equivalent to one video load.

The MAX9517/MAX9524 operate from a 2.7V to 3.6V single supply and are specified over the  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$  automotive temperature range. The MAX9517/MAX9524 are available in a small 12-pin TQFN (3mm x 3mm) package.

## Features

- ◆ Integrated Reconstruction Filter for Standard-Definition Video
- ◆ 9MHz,  $\pm 1\text{dB}$  Passband
- ◆ 52dB Attenuation at 27MHz
- ◆ Dual SPST Switches
- ◆ Fixed Gain of  $2\text{V/V}$
- ◆ DC- or AC-Coupled Output
- ◆ 2.7V to 3.6V Single-Supply Operation

## Applications

Security/CCTV Cameras  
Mobile Phones/Cell Phones  
Digital Still Cameras (DSC)  
Camcorders (DVC)  
Portable Media Players (PMP)

## Ordering Information

| PART        | INPUT TYPE | PIN-PACKAGE | PKG CODE | TOP MARK |
|-------------|------------|-------------|----------|----------|
| MAX9517ATC+ | DC BIAS    | 12 TQFN-EP* | T1233+4  | ABF      |
| MAX9524ATC+ | AC CLAMP   | 12 TQFN-EP* | T1233+4  | ABE      |


**Note:** All devices are specified over the  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$  operating temperature range.

+Denotes a lead-free package.

\*EP = Exposed pad.

Pin Configuration appears at end of data sheet.

## Functional Diagrams

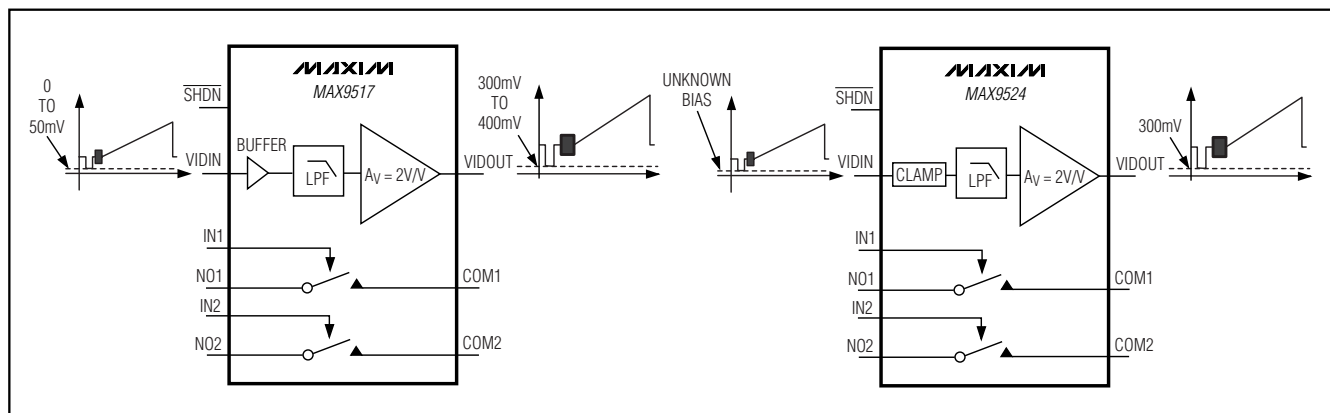

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## ABSOLUTE MAXIMUM RATINGS

|                                                              |                                   |
|--------------------------------------------------------------|-----------------------------------|
| V <sub>DD</sub> to GND .....                                 | -0.3V to +4V                      |
| VIDIN to GND .....                                           | -0.3V to +4V                      |
| COM <sub>-</sub> , NO <sub>-</sub> to GND .....              | -0.3V to (V <sub>DD</sub> + 0.3V) |
| SHDN, IN <sub>-</sub> to GND .....                           | -0.3V to +4V                      |
| VIDOUT Short-Circuit Duration to V <sub>DD</sub> , GND ..... | Continuous                        |
| Continuous Input Current                                     |                                   |
| VIDIN, IN <sub>-</sub> , SHDN .....                          | ±20mA                             |
| COM <sub>-</sub> , NO <sub>-</sub> .....                     | ±100mA                            |

|                                                                          |                 |
|--------------------------------------------------------------------------|-----------------|
| Peak Current                                                             |                 |
| COM <sub>-</sub> , NO <sub>-</sub> (pulsed at 1ms, 10% duty cycle) ..... | ±200mA          |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C)                    |                 |
| 12-Pin TQFN (derate 14.7mW/°C above +70°C) .....                         | 1177mW          |
| Operating Temperature Range .....                                        | -40°C to +125°C |
| Junction Temperature .....                                               | +150°C          |
| Storage Temperature Range .....                                          | -65°C to +150°C |
| Lead Temperature (soldering 10s) .....                                   | +300°C          |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V<sub>DD</sub> = SHDN = 3.3V, GND = 0V, no load, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                      | SYMBOL            | CONDITIONS                                                                                                                  |                                                     | MIN  | TYP  | MAX  | UNITS            |
|--------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|------|------|------|------------------|
| Supply Voltage Range           | V <sub>DD</sub>   | Guaranteed by PSRR                                                                                                          |                                                     | 2.7  |      | 3.6  | V                |
| Supply Current                 | I <sub>DD</sub>   | MAX9517                                                                                                                     |                                                     |      | 3.5  | 7    | mA               |
|                                |                   | MAX9524                                                                                                                     |                                                     |      | 4.25 | 8    |                  |
| Shutdown Supply Current        | I <sub>SHDN</sub> | V <sub>SHDN</sub> = GND                                                                                                     |                                                     |      |      | 1    | μA               |
| VIDEO                          |                   |                                                                                                                             |                                                     |      |      |      |                  |
| DC BUFFER INPUTS (MAX9517)     |                   |                                                                                                                             |                                                     |      |      |      |                  |
| Input Voltage Range            | V <sub>IN</sub>   | Guaranteed by output-voltage swing                                                                                          | V <sub>DD</sub> = 2.7V                              | 0    |      | 1.05 | V                |
|                                |                   |                                                                                                                             | V <sub>DD</sub> = 3V                                | 0    |      | 1.2  |                  |
| Input Current                  | I <sub>IN</sub>   | V <sub>IN</sub> = 0V                                                                                                        |                                                     |      | 3.5  | 10   | μA               |
| Input Resistance               | R <sub>IN</sub>   |                                                                                                                             |                                                     |      | 300  |      | kΩ               |
| DC Voltage Gain                | A <sub>v</sub>    | R <sub>L</sub> = 150Ω to GND                                                                                                | V <sub>DD</sub> = 2.7V, 0 ≤ V <sub>IN</sub> ≤ 1.05V | 1.95 | 2.00 | 2.04 | V/V              |
|                                |                   |                                                                                                                             | V <sub>DD</sub> = 3V, 0 ≤ V <sub>IN</sub> ≤ 1.2V    | 1.95 | 2.00 | 2.04 |                  |
| Output Level                   |                   | Measured at V <sub>OUT</sub> , V <sub>IDIN</sub> = 0.1μF to GND, R <sub>L</sub> = 150Ω to GND                               |                                                     | 200  | 300  | 410  | mV               |
| Output-Voltage Swing           |                   | Measured at output, V <sub>DD</sub> = 2.7V, 0 ≤ V <sub>IN</sub> ≤ 1.05V, R <sub>L</sub> = 150Ω to -0.2V                     |                                                     | 2.1  |      |      | V <sub>P-P</sub> |
|                                |                   | Measured at output, V <sub>DD</sub> = 2.7V, 0 ≤ V <sub>IN</sub> ≤ 1.05V, R <sub>L</sub> = 150Ω to V <sub>DD</sub> /2        |                                                     | 2.1  |      |      |                  |
|                                |                   | Measured at output, V <sub>DD</sub> = 3V, 0 ≤ V <sub>IN</sub> ≤ 1.2V, R <sub>L</sub> = 150Ω to -0.2V                        |                                                     | 2.4  |      |      |                  |
|                                |                   | Measured at output, V <sub>DD</sub> = 3V, 0 ≤ V <sub>IN</sub> ≤ 1.2V, R <sub>L</sub> = 150Ω to V <sub>DD</sub> /2           |                                                     | 2.4  |      |      |                  |
|                                |                   | Measured at output, V <sub>DD</sub> = 3.135V, 0 ≤ V <sub>IN</sub> ≤ 1.05V, R <sub>L</sub> = 75Ω to -0.2V                    |                                                     | 2.1  |      |      |                  |
| SYNC-TIP CLAMP INPUT (MAX9524) |                   |                                                                                                                             |                                                     |      |      |      |                  |
| Sync-Tip Clamp Level           | V <sub>CLP</sub>  | Sync-tip clamp                                                                                                              |                                                     | 0.23 |      | 0.39 | V                |
| Input Voltage Range            |                   | V <sub>DD</sub> = 2.7V to 3.6V                                                                                              |                                                     |      |      | 1.05 | V <sub>P-P</sub> |
|                                |                   | V <sub>DD</sub> = 3V to 3.6V                                                                                                |                                                     |      |      | 1.2  |                  |
| Sync Crush                     |                   | Sync-tip clamp, percentage reduction in sync pulse (0.3V <sub>P-P</sub> ), guaranteed by input clamping current measurement |                                                     |      |      | 2    | %                |

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = \overline{SHDN} = 3.3V$ ,  $GND = 0V$ , no load,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                 | SYMBOL    | CONDITIONS                                                                                                        |                                                 | MIN  | TYP   | MAX  | UNITS            |
|-------------------------------------------|-----------|-------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|------|-------|------|------------------|
| Input Clamping Current                    |           | Sync-tip clamp                                                                                                    |                                                 |      | 1     | 2    | $\mu A$          |
| Maximum Input Source Resistance           |           |                                                                                                                   |                                                 |      | 300   |      | $\Omega$         |
| DC Voltage Gain (Note 2)                  | $A_V$     | $R_L = 150\Omega$ to GND                                                                                          | $V_{DD} = 2.7V$ ,<br>$0 \leq V_{IN} \leq 1.05V$ | 1.95 | 2.00  | 2.04 | V/V              |
|                                           |           |                                                                                                                   | $V_{DD} = 3V$ ,<br>$0 \leq V_{IN} \leq 1.2V$    | 1.95 | 2.00  | 2.04 |                  |
| Output Level                              |           | Measured at $V_{OUT}$ , $V_{IDIN} = 0.1\mu F$ to GND, $R_L = 150\Omega$ to GND                                    |                                                 | 0.21 | 0.30  | 0.39 | V                |
| Output-Voltage Swing                      |           | Measured at output, $V_{DD} = 2.7V$ , $V_{IN} = V_{CLP}$ to $(V_{CLP} + 1.05V)$ , $R_L = 150\Omega$ to $-0.2V$    |                                                 |      | 2.1   |      | V <sub>P-P</sub> |
|                                           |           | Measured at output, $V_{DD} = 2.7V$ , $V_{IN} = V_{CLP}$ to $(V_{CLP} + 1.05V)$ , $R_L = 150\Omega$ to $V_{DD}/2$ |                                                 |      | 2.1   |      |                  |
|                                           |           | Measured at output, $V_{DD} = 3V$ , $V_{IN} = V_{CLP}$ to $(V_{CLP} + 1.2V)$ , $R_L = 150\Omega$ to $-0.2V$       |                                                 |      | 2.4   |      |                  |
|                                           |           | Measured at output, $V_{DD} = 3V$ , $V_{IN} = V_{CLP}$ to $(V_{CLP} + 1.2V)$ , $R_L = 150\Omega$ to $V_{DD}/2$    |                                                 |      | 2.4   |      |                  |
|                                           |           | Measured at output, $V_{DD} = 3.135V$ , $V_{IN} = V_{CLP}$ to $(V_{CLP} + 1.05V)$ , $R_L = 75\Omega$ to $-0.2V$   |                                                 |      | 2.1   |      |                  |
| Output Short-Circuit Current              |           | Short to GND (sourcing)                                                                                           |                                                 |      | 140   |      | mA               |
|                                           |           | Short to $V_{CC}$ (sinking)                                                                                       |                                                 |      | 70    |      |                  |
| Output Resistance                         | $R_{OUT}$ | $V_{OUT} = 1.5V$ , $-10mA \leq I_{LOAD} \leq +10mA$                                                               |                                                 |      | 0.2   |      | $\Omega$         |
| Output Leakage Current                    |           | $\overline{SHDN} = GND$                                                                                           |                                                 |      |       | 1    | $\mu A$          |
| Power-Supply Rejection Ratio              |           | $2.7V \leq V_{DD} \leq 3.6V$                                                                                      |                                                 | 48   |       |      | dB               |
| Standard-Definition Reconstruction Filter |           | $\pm 1dB$ passband flatness                                                                                       |                                                 |      | 9     |      | MHz              |
|                                           |           | $V_{VIDOUT} = 2V_{P-P}$ , reference frequency is 100kHz                                                           | $f = 5.5MHz$                                    |      | +0.15 |      | dB               |
|                                           |           |                                                                                                                   | $f = 10MHz$                                     |      | -3    |      |                  |
|                                           |           |                                                                                                                   | $f = 27MHz$                                     |      | -52   |      |                  |
| Differential Gain                         | DG        | 5-step modulated staircase of 129mV step size and 286mV <sub>P-P</sub> subcarrier amplitude; $f = 4.43MHz$        |                                                 |      | 1     |      | %                |
| Differential Phase                        | DP        | 5-step modulated staircase of 129mV step size and 286mV <sub>P-P</sub> subcarrier amplitude; $f = 4.43MHz$        |                                                 |      | 0.4   |      | Degrees          |
| 2T Pulse-to-Bar K Rating                  |           | Bar time is 18 $\mu s$ , the beginning 2.5% and the ending 2.5% of the bar time are ignored, $2T = 200ns$         |                                                 |      | 0.6   |      | K%               |
| 2T Pulse Response                         |           | $2T = 200ns$                                                                                                      |                                                 |      | 0.2   |      | K%               |
| 2T Bar Response                           |           | Bar time is 18 $\mu s$ , the beginning 2.5% and the ending 2.5% of the bar time are ignored, $2T = 200ns$         |                                                 |      | 0.2   |      | K%               |

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = \text{SHDN} = 3.3\text{V}$ ,  $\text{GND} = 0\text{V}$ , no load,  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                                         | SYMBOL                                    | CONDITIONS                                                                                                                                      | MIN                                                  | TYP  | MAX      | UNITS    |
|---------------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|------|----------|----------|
| Nonlinearity                                      |                                           | 5-step staircase, $f = 4.43\text{MHz}$                                                                                                          |                                                      | 0.5  |          | %        |
| Group Delay Distortion                            |                                           | $100\text{kHz} \leq f \leq 5.5\text{MHz}$ , outputs are $2V_{P-P}$                                                                              |                                                      | 12   |          | ns       |
| Peak Signal to RMS Noise                          |                                           | $100\text{kHz} \leq f \leq 5.5\text{MHz}$                                                                                                       |                                                      | 71   |          | dB       |
| Power-Supply Rejection Ratio                      |                                           | $f = 1\text{MHz}$ , $100\text{mV}_{P-P}$                                                                                                        |                                                      | 29   |          | dB       |
| Output Impedance                                  |                                           | $f = 5.5\text{MHz}$                                                                                                                             |                                                      | 4.8  |          | $\Omega$ |
| All-Hostile Crosstalk                             |                                           | $f = 4.43\text{MHz}$                                                                                                                            |                                                      | -64  |          | dB       |
| <b>ANALOG SWITCHES</b>                            |                                           |                                                                                                                                                 |                                                      |      |          |          |
| Analog Signal Range                               | $V_{\text{COM}_-}$ ,<br>$V_{\text{NO}_-}$ |                                                                                                                                                 | 0                                                    |      | $V_{DD}$ | V        |
| On-Resistance (Note 3)                            | $R_{\text{ON}}$                           | $V_{DD} = 2.7\text{V}$ , $I_{\text{COM}_-} = 10\text{mA}$ , $V_{\text{NO}_-} = 1.5\text{V}$                                                     |                                                      | 1.7  | 5.0      | $\Omega$ |
| On-Resistance Match Between Channels (Notes 3, 4) | $\Delta R_{\text{ON}}$                    | $V_{DD} = 2.7\text{V}$ , $I_{\text{COM}_-} = 10\text{mA}$ , $V_{\text{NO}_-} = 1.5\text{V}$                                                     |                                                      |      | 0.4      | $\Omega$ |
| On-Resistance Flatness (Note 5)                   | $R_{\text{FLAT(ON)}}$                     | $V_{DD} = 2.7\text{V}$ , $I_{\text{COM}_-} = 10\text{mA}$ , $V_{\text{NO}_-} = 1.0\text{V}$ ,<br>$1.5\text{V}$ , $2.0\text{V}$                  |                                                      | 0.5  | 1.5      | $\Omega$ |
| $\text{NO}_-$ Off-Leakage Current (Note 3)        | $I_{\text{NO}_-}(\text{OFF})$             | $V_{DD} = 3.6\text{V}$ , $V_{\text{COM}_-} = 0.3\text{V}$ , $3.3\text{V}$ ;<br>$V_{\text{NO}_-} = 3.3\text{V}$ , $0.3\text{V}$                  | -2                                                   |      | +2       | nA       |
| $\text{COM}_-$ On-Leakage Current (Note 3)        | $I_{\text{COM}_-}(\text{ON})$             | $V_{DD} = 3.6\text{V}$ , $V_{\text{COM}_-} = 0.3\text{V}$ , $3.3\text{V}$ ;<br>$V_{\text{NO}_-} = 0.3\text{V}$ , $3.3\text{V}$ , or unconnected | -2.5                                                 |      | +2.5     | nA       |
| Turn-On Time                                      | $t_{\text{ON}}$                           | $V_{\text{NO}_-} = 1.5\text{V}$ ; $R_L = 300\Omega$ , $C_L = 35\text{pF}$ ,<br>$V_{\text{IH}} = 1.5\text{V}$ , $V_{\text{IL}} = 0\text{V}$      |                                                      |      | 100      | ns       |
| Turn-Off Time                                     | $t_{\text{OFF}}$                          | $V_{\text{NO}_-} = 1.5\text{V}$ ; $R_L = 300\Omega$ , $C_L = 35\text{pF}$ ,<br>$V_{\text{IH}} = 1.5\text{V}$ , $V_{\text{IL}} = 0\text{V}$      |                                                      |      | 100      | ns       |
| Skew (Note 3)                                     | $t_{\text{SKEW}}$                         | $R_S = 39\Omega$ , $C_L = 50\text{pF}$                                                                                                          |                                                      |      | 2        | ns       |
| Charge Injection                                  | Q                                         | $V_{\text{GEN}} = 1.5\text{V}$ , $R_{\text{GEN}} = 0\Omega$ , $C_L = 1\text{nF}$                                                                |                                                      | 10   |          | pC       |
| Off-Isolation                                     | $V_{\text{ISO}}$                          | $f = 10\text{MHz}$ ; $V_{\text{NO}_-} = 1V_{P-P}$ ; $R_L = 50\Omega$ ,<br>$C_L = 5\text{pF}$                                                    |                                                      | -55  |          | dB       |
|                                                   |                                           | $f = 1\text{MHz}$ ; $V_{\text{NO}_-} = 1V_{P-P}$ ; $R_L = 50\Omega$ , $C_L = 5\text{pF}$                                                        |                                                      | -80  |          |          |
| On-Channel -3dB Bandwidth                         | BW                                        | Signal = $0\text{dBm}$ , $R_L = 50\Omega$ , $C_L = 5\text{pF}$                                                                                  |                                                      | 300  |          | MHz      |
| Total Harmonic Distortion                         | THD                                       | $V_{\text{COM}_-} = 2V_{P-P}$ , $R_L = 600\Omega$                                                                                               |                                                      | 0.03 |          | %        |
| $\text{NO}_-$ Off-Capacitance                     | $C_{\text{NO}_-}(\text{OFF})$             | $f = 1\text{MHz}$                                                                                                                               |                                                      | 20   |          | pF       |
| Switch On-Capacitance                             | $C_{\text{ON}}$                           | $f = 1\text{MHz}$                                                                                                                               |                                                      | 50   |          | pF       |
| Switch-to-Switch                                  | $V_{\text{CT}}$                           | $f = 10\text{MHz}$ ; $V_{\text{NO}_-} = 1V_{P-P}$ , $R_L = 50\Omega$ ,<br>$C_L = 5\text{pF}$                                                    |                                                      | -80  |          | dB       |
|                                                   |                                           | $f = 1\text{MHz}$ ; $V_{\text{NO}_-} = 1V_{P-P}$ , $R_L = 50\Omega$ ,<br>$C_L = 5\text{pF}$                                                     |                                                      | -110 |          |          |
| $\text{NO}_-$ -to-VIDOUT                          |                                           | Video circuit is on,<br>switches are open                                                                                                       | $f = 10\text{MHz}$ ;<br>$V_{\text{NO}_-} = 1V_{P-P}$ | -55  |          | dB       |
|                                                   |                                           |                                                                                                                                                 | $f = 1\text{MHz}$ ;<br>$V_{\text{NO}_-} = 1V_{P-P}$  | -80  |          |          |

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = \overline{\text{SHDN}} = 3.3\text{V}$ ,  $\text{GND} = 0\text{V}$ , no load,  $T_A = T_{\text{MIN}}$  to  $T_{\text{MAX}}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                                                 | SYMBOL          | CONDITIONS                                                                                                                 | MIN                        | TYP | MAX                        | UNITS         |
|-----------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------------------------------------|----------------------------|-----|----------------------------|---------------|
| <b>CROSSTALK</b>                                          |                 |                                                                                                                            |                            |     |                            |               |
| VIDOUT-to-NO_                                             |                 | Video circuit is on, $f = 20\text{kHz}$ , $\text{VIDOUT} = 2\text{V}_{\text{P-P}}$ , $R_L = 50\Omega$ , $C_L = 5\text{pF}$ |                            | 90  |                            | dB            |
| VIDIN-to-COM                                              |                 | Video circuit is shutdown, $f = 20\text{kHz}$ , $0.25\text{V}_{\text{P-P}}$ at VIDIN, $R_L = 600\Omega$                    |                            | 100 |                            | dB            |
| VIDOUT-to-COM                                             |                 | Video circuit is on, $f = 20\text{kHz}$ , $\text{VIDOUT} = 2\text{V}_{\text{P-P}}$ , $R_L = 50\Omega$ , $C_L = 5\text{pF}$ |                            | 90  |                            | dB            |
| <b>LOGIC SIGNAL (IN1 AND IN2)</b>                         |                 |                                                                                                                            |                            |     |                            |               |
| Logic-Low Threshold                                       | $V_{\text{IL}}$ |                                                                                                                            |                            |     | 0.5                        | V             |
| Logic-High Threshold                                      | $V_{\text{IH}}$ |                                                                                                                            | 1.4                        |     |                            | V             |
| Logic-Input Current                                       | $I_{\text{IN}}$ |                                                                                                                            |                            |     | 10                         | $\mu\text{A}$ |
| <b>LOGIC SIGNAL (<math>\overline{\text{SHDN}}</math>)</b> |                 |                                                                                                                            |                            |     |                            |               |
| Logic-Low Threshold                                       | $V_{\text{IL}}$ |                                                                                                                            |                            |     | $0.3 \times V_{\text{DD}}$ | V             |
| Logic-High Threshold                                      | $V_{\text{IH}}$ |                                                                                                                            | $0.7 \times V_{\text{DD}}$ |     |                            | V             |
| Logic-Input Current                                       | $I_{\text{IN}}$ |                                                                                                                            |                            |     | 10                         | $\mu\text{A}$ |

**Note 1:** All devices are 100% production tested at  $T_A = +25^\circ\text{C}$ . Specifications over temperature limits are guaranteed by design.

**Note 2:** Voltage gain ( $A_V$ ) is a two-point measurement in which the output-voltage swing is divided by the input-voltage swing.


**Note 3:** Guaranteed by design.

**Note 4:**  $\Delta\text{RON} = \text{RON}(\text{MAX}) - \text{RON}(\text{MIN})$ .

**Note 5:** Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal ranges.

## Typical Operating Characteristics









( $V_{DD} = \overline{\text{SHDN}} = 3.3\text{V}$ . Video outputs have  $R_L = 150\Omega$  connected to GND.  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

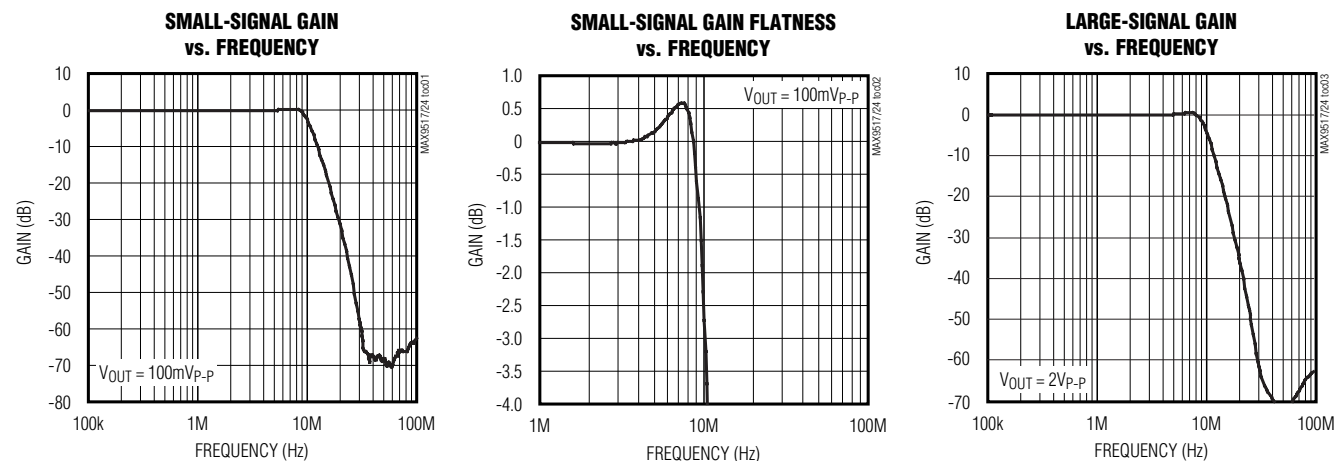

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## Typical Operating Characteristics (continued)

( $V_{DD} = \overline{\text{SHDN}} = 3.3\text{V}$ . Video outputs have  $R_L = 150\Omega$  connected to GND.  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

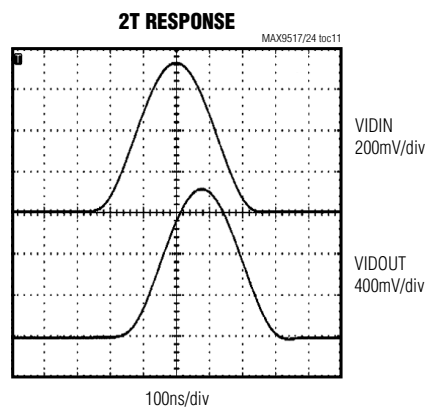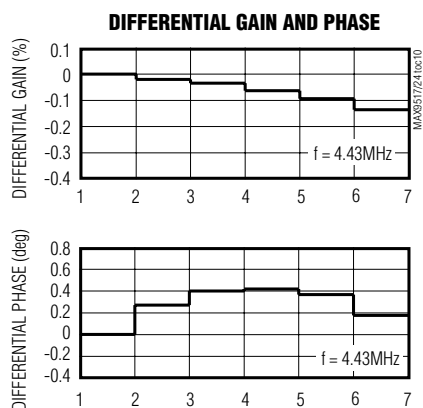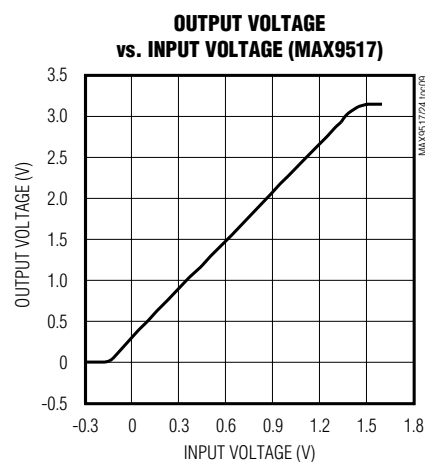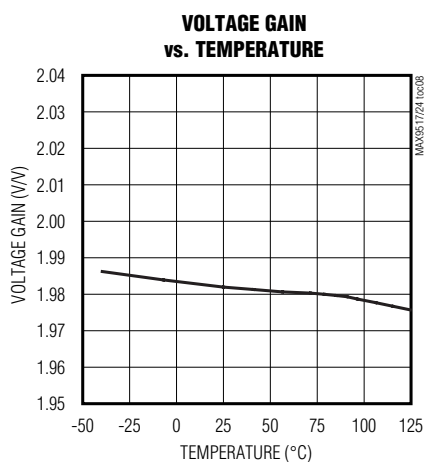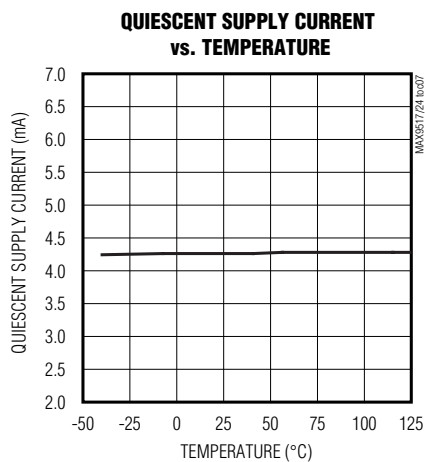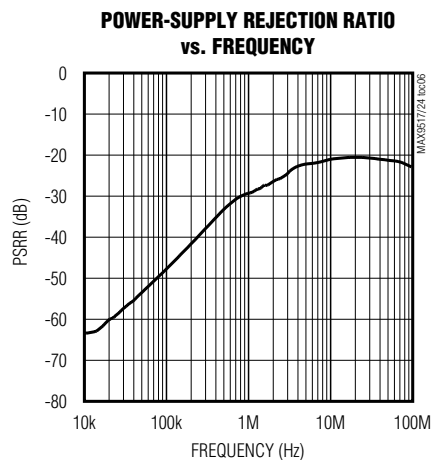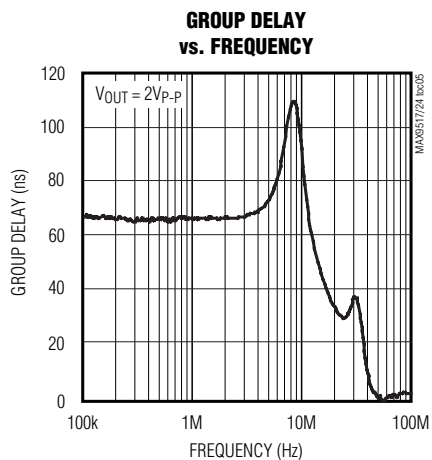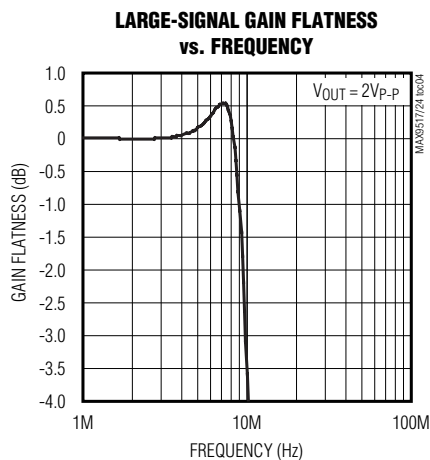


# Standard-Definition Video Filter Amplifiers with Dual SPST Switches


## Typical Operating Characteristics (continued)

( $V_{DD} = \overline{SHDN} = 3.3V$ . Video outputs have  $R_L = 150\Omega$  connected to GND.  $T_A = +25^\circ C$ , unless otherwise noted.)


12.5T RESPONSE

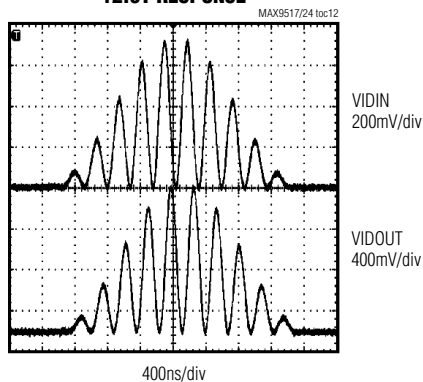


NTC-7 VIDEO TEST SIGNAL

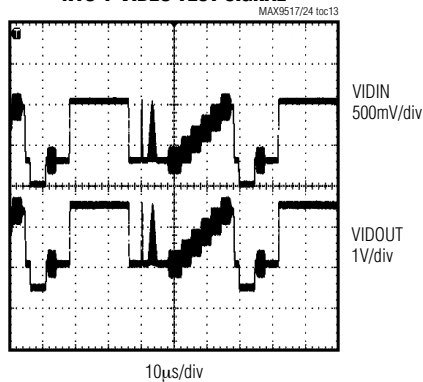


PAL MULTIBURST RESPONSE

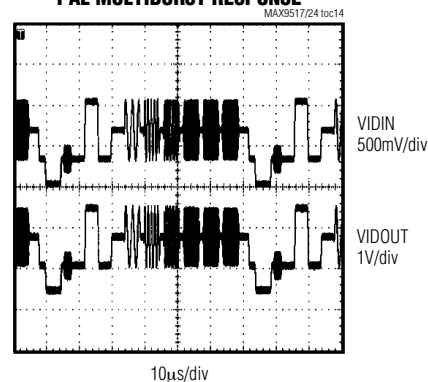


PAL COLOR BARS

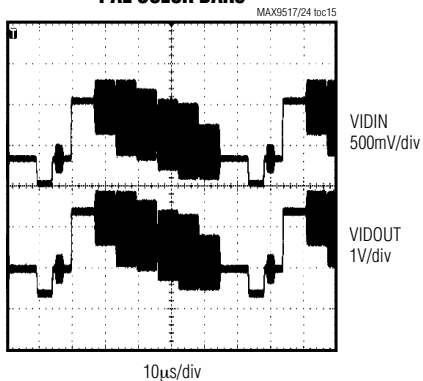


FIELD SQUARE-WAVE RESPONSE

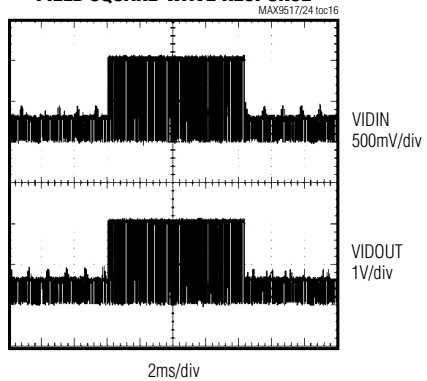


SWITCH INPUT-TO-INPUT CROSSTALK  
vs. FREQUENCY

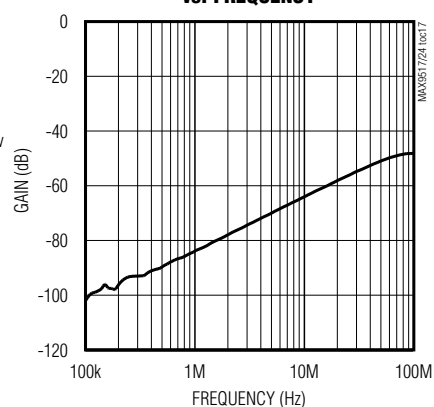

SWITCH OUTPUT-TO-OUTPUT CROSSTALK  
vs. FREQUENCY

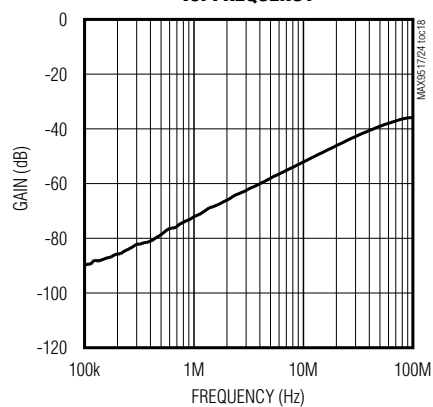





OUTPUT IMPEDANCE  
vs. FREQUENCY

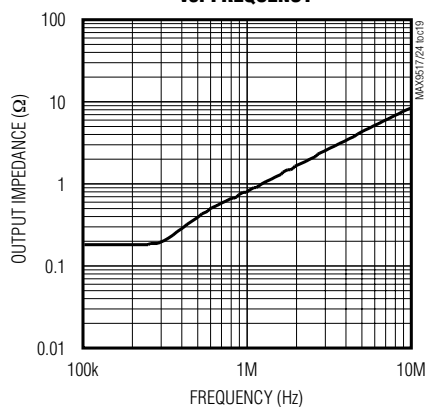

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## Typical Operating Characteristics (continued)

( $V_{DD} = \overline{SHDN} = 3.3V$ . Video outputs have  $R_L = 150\Omega$  connected to GND.  $T_A = +25^\circ C$ , unless otherwise noted.)

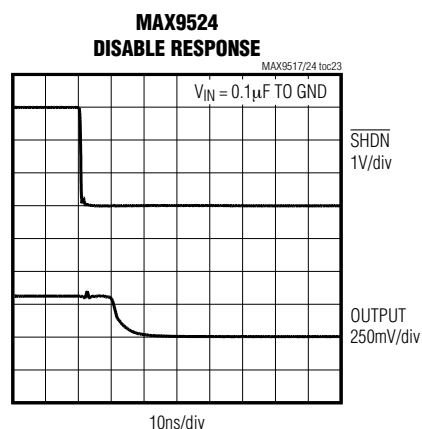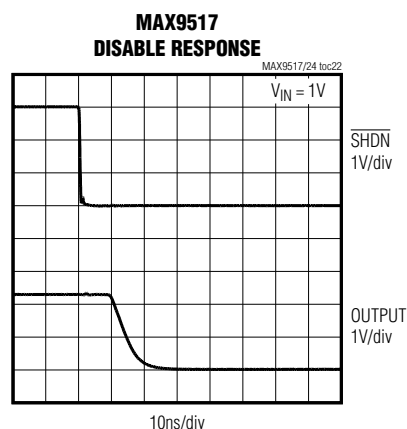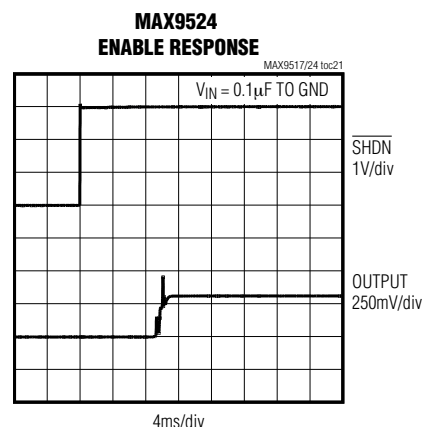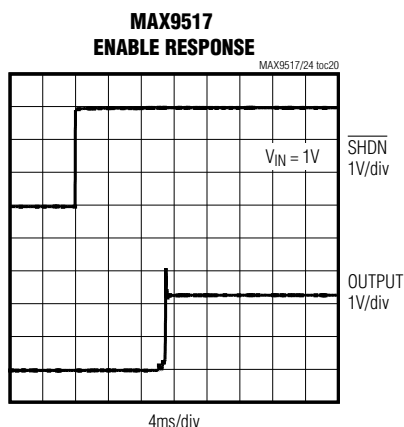

## Pin Description

| PIN | NAME              | FUNCTION                                                                   |
|-----|-------------------|----------------------------------------------------------------------------|
| 1   | N.C.              | No Connection. Not internally connected.                                   |
| 2   | COM1              | Analog Switch 1 Common Terminal                                            |
| 3   | COM2              | Analog Switch 2 Common Terminal                                            |
| 4   | VIDOUT            | Video Output                                                               |
| 5   | GND               | Ground                                                                     |
| 6   | VIDIN             | Video Input                                                                |
| 7   | NO2               | Analog Switch 2 Normally Open Terminal                                     |
| 8   | NO1               | Analog Switch 1 Normally Open Terminal                                     |
| 9   | $\overline{SHDN}$ | Active-Low Shutdown Input. Connect to GND to place device in shutdown.     |
| 10  | IN1               | Analog Switch 1 Digital Control Input                                      |
| 11  | IN2               | Analog Switch 2 Digital Control Input                                      |
| 12  | $V_{DD}$          | Positive Power Supply. Bypass to GND with a 0.1μF capacitor.               |
| —   | EP                | Exposed Paddle. Connect EP to GND. EP is also internally connected to GND. |

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## Detailed Description

The MAX9517/MAX9524 consist of a lowpass filter and an output amplifier capable of driving a standard  $150\Omega$  video load to ground. The MAX9517 has an input buffer and the MAX9524 has an input sync-tip clamp. The MAX9517/MAX9524 both have two SPST analog switches that can be used to route audio, video, or digital signals. The output amplifiers provide a fixed gain of 2V/V.

The MAX9517/MAX9524 filter and amplify the video DAC output. External video signals, in which the DC bias is usually not known, can be AC-coupled to the MAX9524.

### Input with DC Buffer (MAX9517)

The input of the MAX9517 can be directly connected to the video source if the signal is approximately between ground and 1V. This specification is commonly found at the output of most video DACs.

DC-coupling requires that the input signals are ground referenced so that the sync tip of composite or luma signals is within 50mV of ground.

### Input with Sync-Tip Clamp (MAX9524)

When the bias of the incoming video signal is either unknown or not between ground and 1V (such as an external video source), use the MAX9524 to connect the video source through a  $0.1\mu\text{F}$  capacitor.

The VIDIN input of the MAX9524 can only handle signals with a sync pulse, such as composite video and luma. An internal sync-tip clamp sets the internal DC level of the video signal.

### Video Filter

The filter passband ( $\pm 1\text{dB}$ ) is typically 9MHz to make the device suitable for standard-definition video signals from all sources (including broadcast video and DVD). Broadcast video signals are channel limited: NTSC signals have 4.2MHz bandwidth, and PAL signals have 5MHz bandwidth. Video signals from a DVD player, however, are not channel limited; therefore, the bandwidth of DVD video signals can approach the Nyquist limit of 6.75MHz (recommendation ITU-R BT.601-5 specifies 13.5MHz as the sampling rate for standard-definition video). Therefore, the maximum bandwidth of the signal is 6.75MHz. To ease the filtering requirements, most modern video systems oversample by two times, clocking the video current DAC at 27MHz.

## Outputs

The video output amplifiers can both source and sink load current, allowing output loads to be DC- or AC-coupled. The amplifier output stage needs around 300mV of headroom from either supply rail. The parts have an internal level shift circuit that positions the sync tip at approximately 300mV at the output.

If the supply voltage is greater than 3.135V (5% below a 3.3V supply), each amplifier can drive two DC-coupled video loads to ground. If the supply is less than 3.135V, each amplifier can drive only one DC-coupled or AC-coupled video load.

## Shutdown

The MAX9517/MAX9524 draw less than  $1\mu\text{A}$  supply current when SHDN is low. In shutdown, the amplifier output becomes high impedance.

## SPST Analog Switches

**Table 1. Logic for Analog Switches**

| IN_ | SWITCH STATE |
|-----|--------------|
| 0   | OFF          |
| 1   | ON           |

## Applications Information

### Reducing Power Consumption in the Video DACs

The MAX9517/MAX9524 have high-impedance input buffers that can work with source resistances as high as  $300\Omega$ . To reduce power dissipation in the video DACs, the DAC output resistor can be scaled up in value. The reference resistor that sets the reference current inside the video DACs must also be similarly scaled up. For instance, if the output resistor is  $37.5\Omega$ , the DAC must source 26.7mA when the output is 1V. If the output resistor is increased to  $300\Omega$ , the DAC only needs to source 3.33mA when the output is 1V.

There is parasitic capacitance from the DAC output to ground. That capacitance in parallel with the DAC output resistor forms a pole that can potentially roll off the frequency response of the video signal. For example,  $300\Omega$  in parallel with 50pF creates a pole at 10.6MHz. To minimize this capacitance, reduce the area of the signal trace attached to the DAC output as much as possible, and place the MAX9517/MAX9524 as close as possible to the video DAC outputs.

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## AC-Coupling the Outputs

The outputs can be AC-coupled because the output stage can source and sink current as shown in Figure 1. Coupling capacitors should be 220 $\mu$ F or greater to keep the highpass filter formed by the 150 $\Omega$  equivalent resistance of the video transmission line to a corner frequency of 4.8Hz or below. The frame rate of PAL systems is 25Hz, and the frame rate of NTSC systems is 30Hz. The corner frequency should be well below the frame rate.

## Changing Between Video Output and Microphone Input on a Single Connector

A single pole on a mobile phone jack can be used for transmitting a video signal to a television or receiving the signal from the microphone of a headset. Figure 2 shows how the MAX9517 can transmit a video signal. Figure 3 shows how the MAX9517 can receive and pass on the signal from a microphone.

## Switching Between Video and Digital Signals

The dual SPST analog switches and the high-impedance output of the video amplifier enable video transmission, digital transmission, and digital reception all on a single pole of a connector. Figures 4, 5, and 6 show the different configurations of the MAX9517.

## Selecting Between Two Video Sources

The analog switches can multiplex between two video sources. For example, a mobile phone might have an application processor with an integrated video encoder and a mobile graphics processor with an integrated video encoder, each creating a composite video signal that is between 0 and 1V. Figure 7 shows this application

in which the MAX9517 chooses between two internal video sources. The two analog switches can be used as a 2:1 multiplexer to select which video DAC output is actually filtered, amplified, and then driven out to the connector. Close switch 1 to select the video from the application processor. Close switch 2 to select the video from the mobile graphics processor.

Figure 8 shows the application in which the MAX9524 chooses between two external video sources with unknown DC bias.

## Y/C Mixer with Chroma Mute

If the video application processor has two current output digital-to-analog converters (DACs) for luma (Y) and chroma (C), respectively, then the signals can be mixed together to create a composite video signal by summing the currents into a single resistor, as shown in Figure 9. The composite video signal should be AC-coupled into the MAX9524 because the composite video signal has a positive DC level shift. The sync-tip clamp of the MAX9524 will re-establish the DC bias level of the signal inside the chip.

The chroma current is connected to essentially a single-pole, double-throw (SPDT) switch. In one position, the switch routes the chroma current into the resistor. In the other position, the switch routes the chroma current into ground. For the Y/C mixer to work properly, the chroma current must be routed through analog switch 1 into the resistor.

If the chroma signal needs to be muted, then the chroma current is shunted to ground through analog switch 2. Analog switch 1 stays open. See Figure 10.

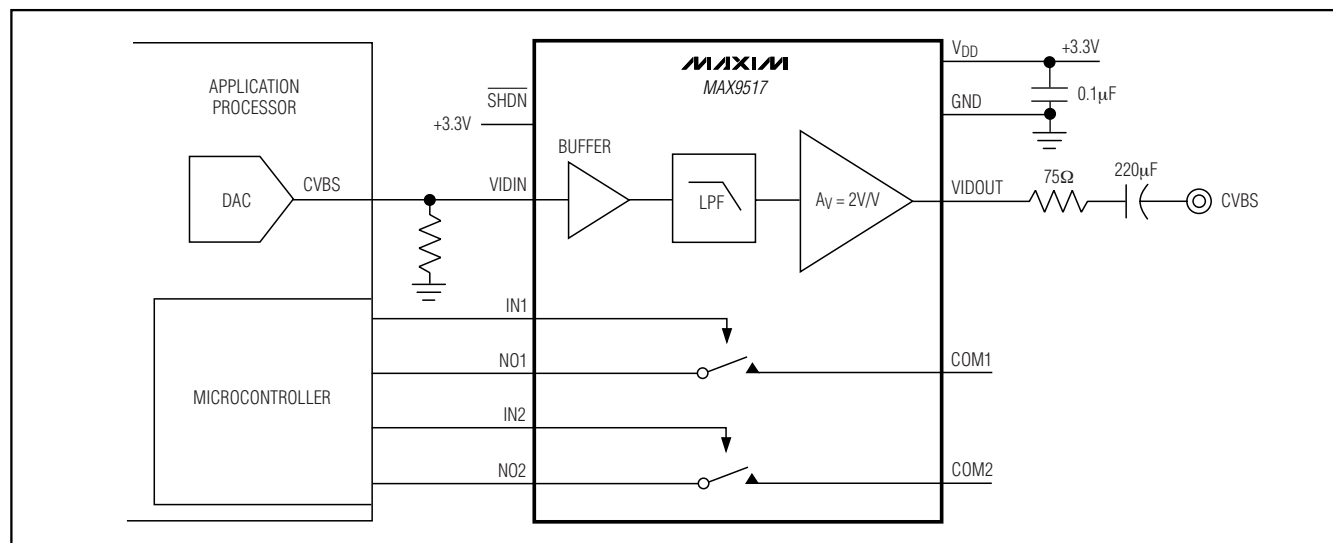


Figure 1. AC-Coupled Outputs

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

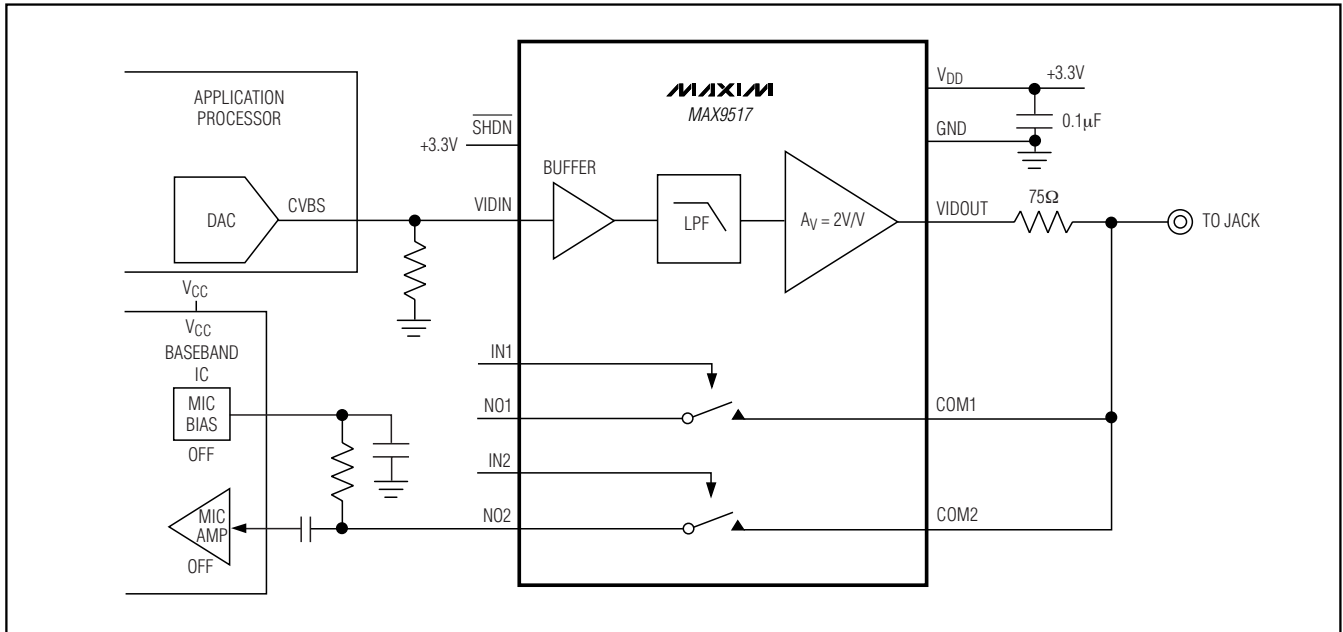


Figure 2. Video Output Configuration

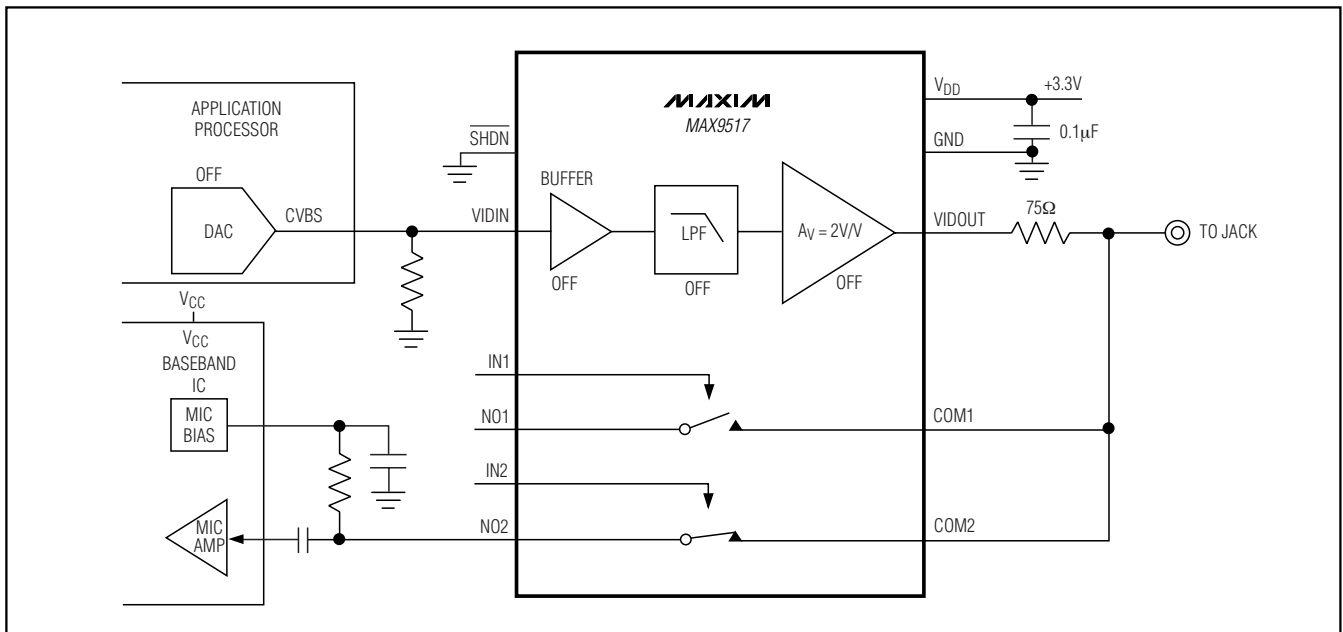


Figure 3. Microphone Input Configuration

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

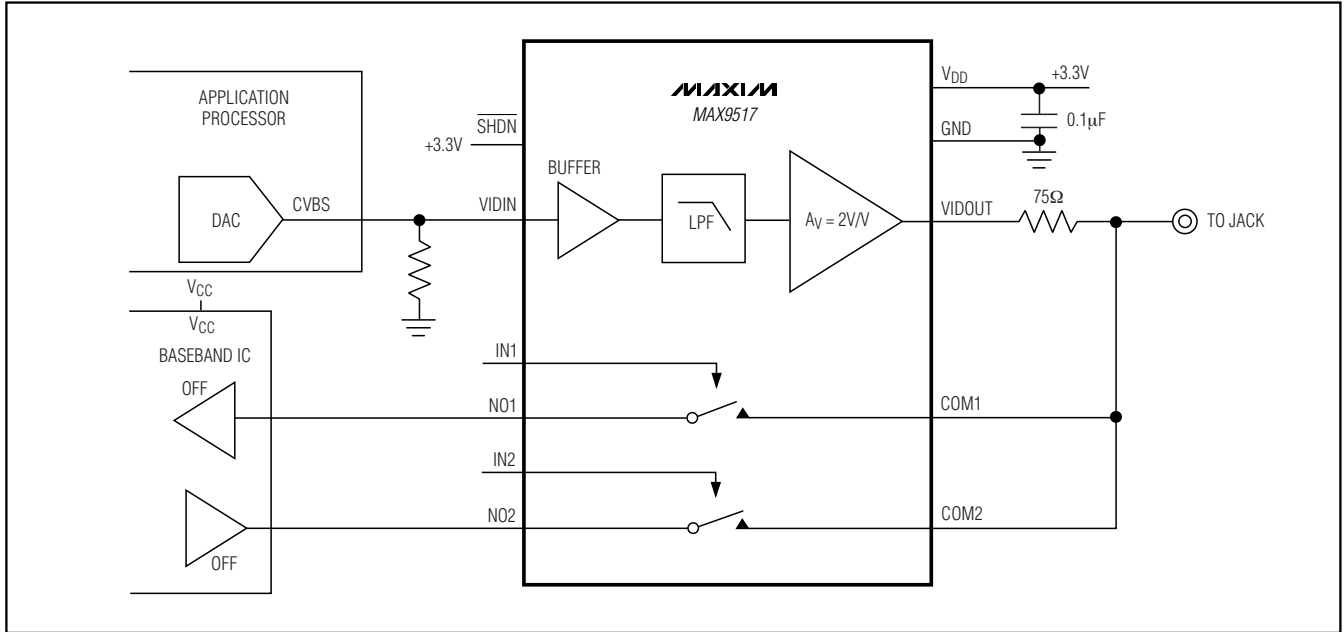


Figure 4. Video Output Configuration

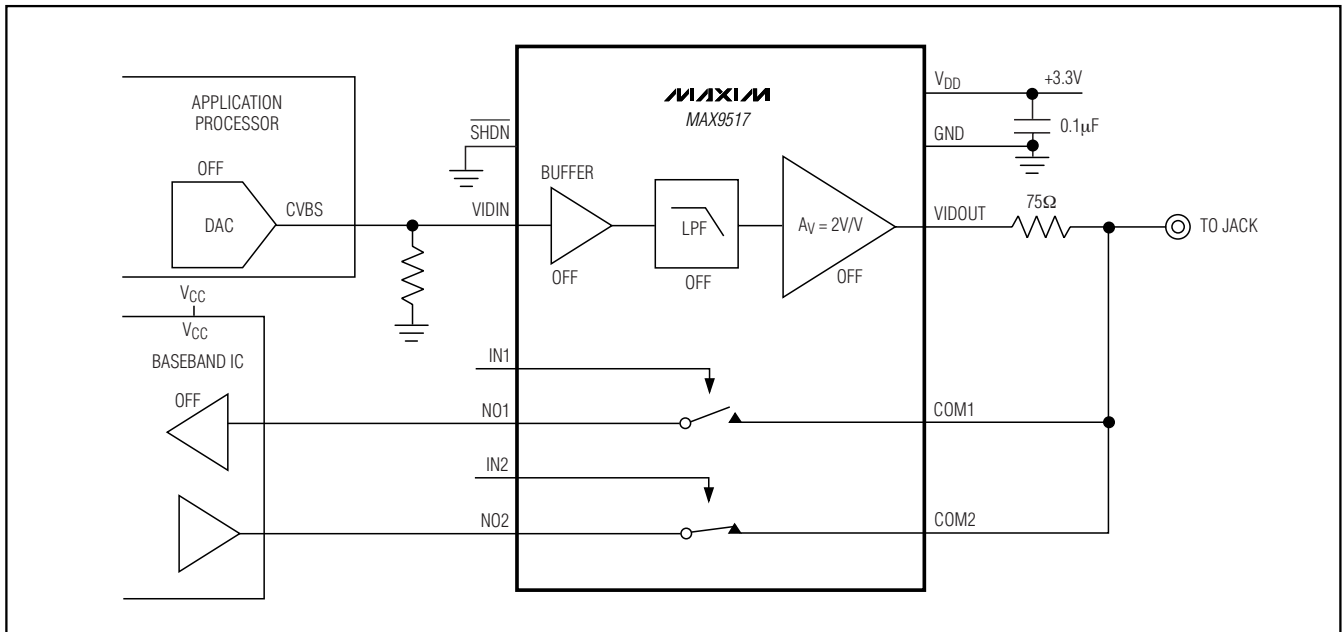


Figure 5. Digital Output Configuration

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

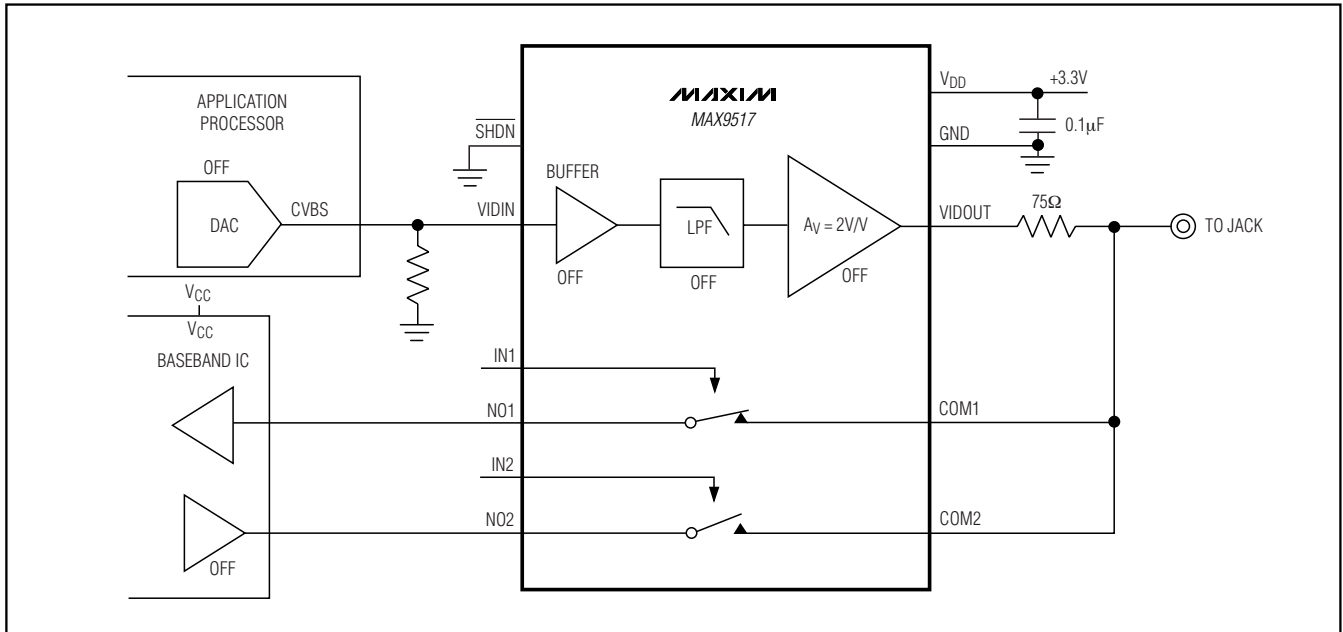


Figure 6. Digital Input Configuration

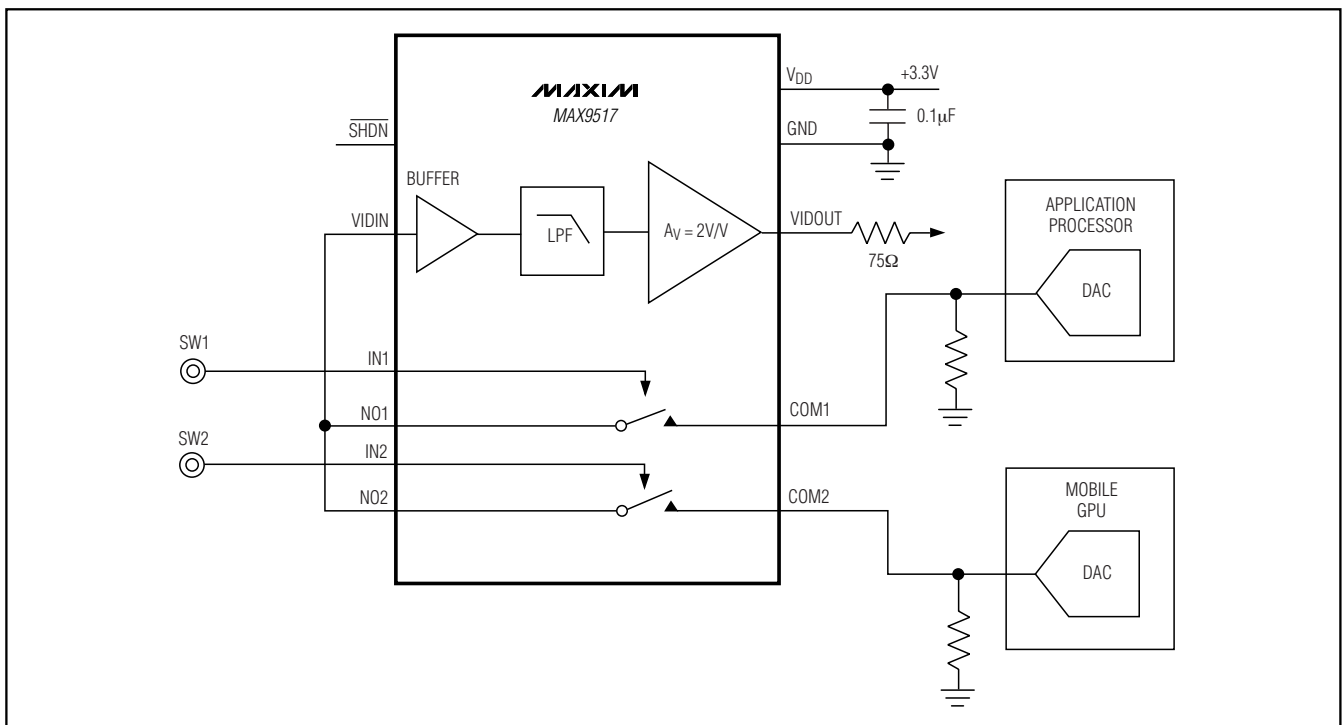


Figure 7. Selecting Between Two Internal Video Sources

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

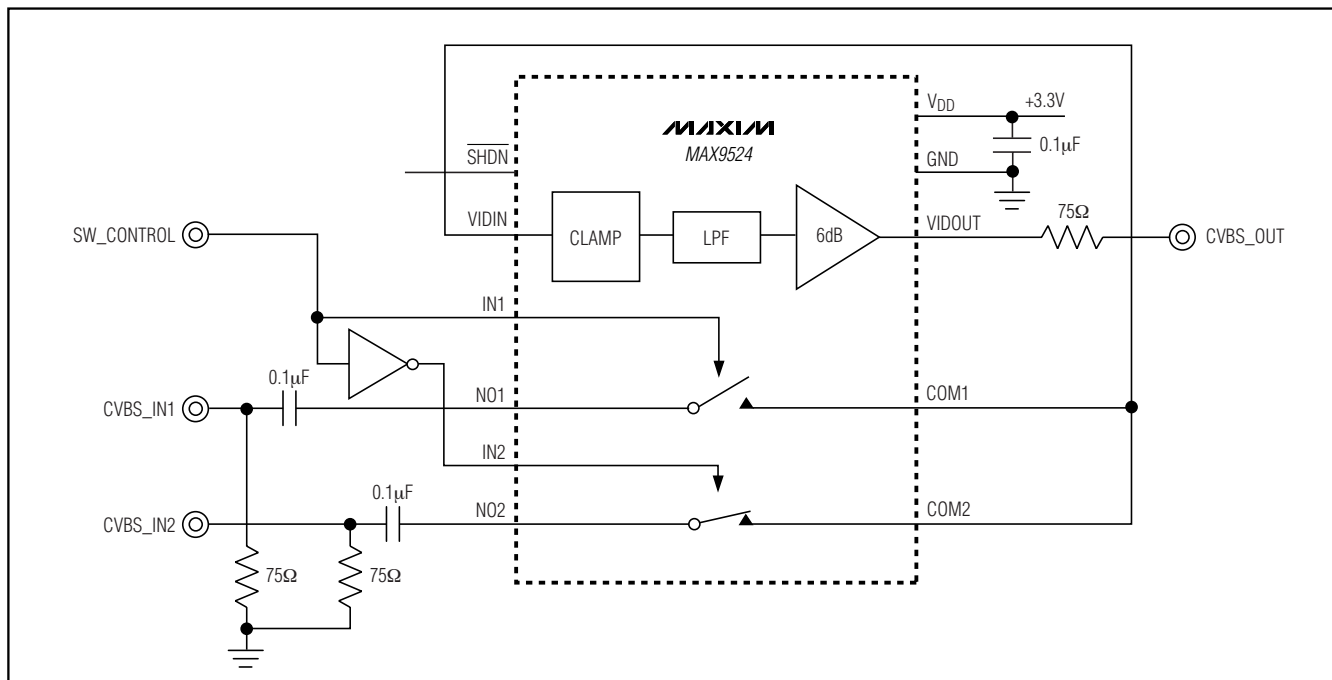


Figure 8. Selecting Between Two External Video Sources

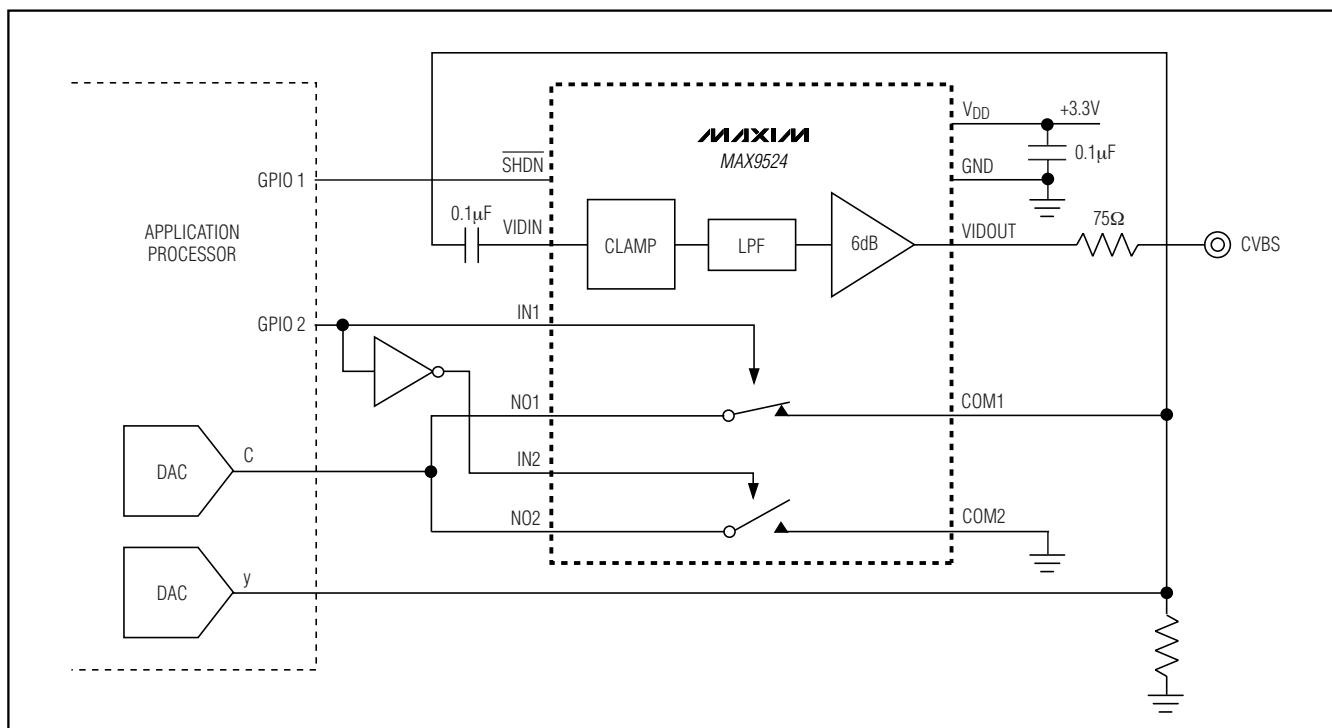


Figure 9. Luma and Chroma Mixer Circuit (Chroma Current Routed into Resistor)

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

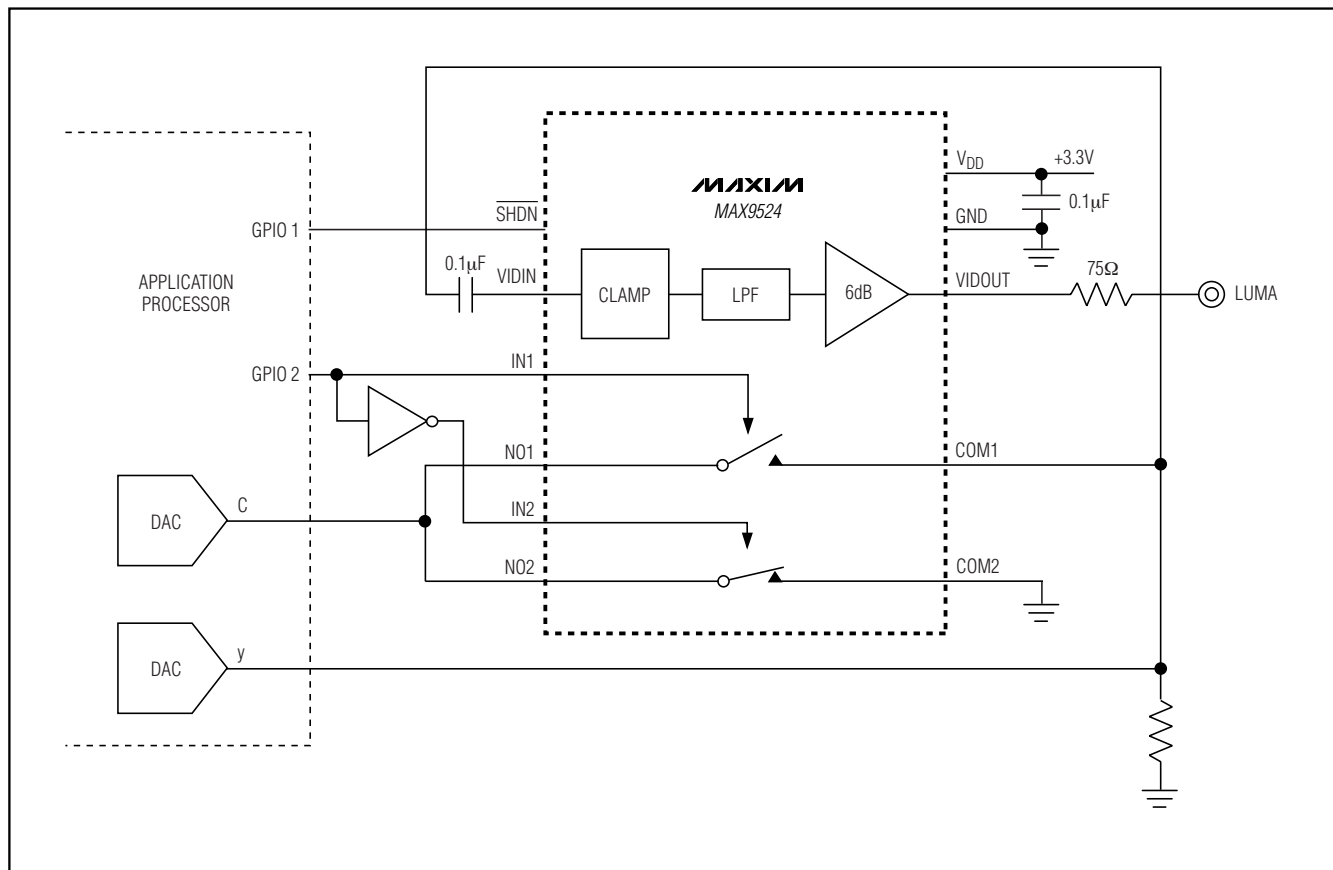


Figure 10. Luma and Chroma Mixer Circuit with Chroma Muted. Chroma Current is Shunted into Ground Through Analog Switch 2.

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## Anti-Alias Filter

The MAX9524 can also provide anti-alias filtering with buffer before an analog-to-digital converter (ADC), which would be present in an NTSC/PAL video decoder, for example. Figure 11 shows an example application circuit for MAX9524. An external composite video signal is applied to IN, which is terminated with  $75\Omega$  to ground. The signal is AC-coupled to VIDIN because the DC level of an external video signal is usually not well specified.

## Power-Supply Bypassing and Ground

The MAX9517/MAX9524 operate from a single-supply voltage down to 2.7V, allowing for low-power operation. Bypass  $V_{DD}$  to GND with a  $0.1\mu\text{F}$  capacitor. Place all external components as close as possible to the device.

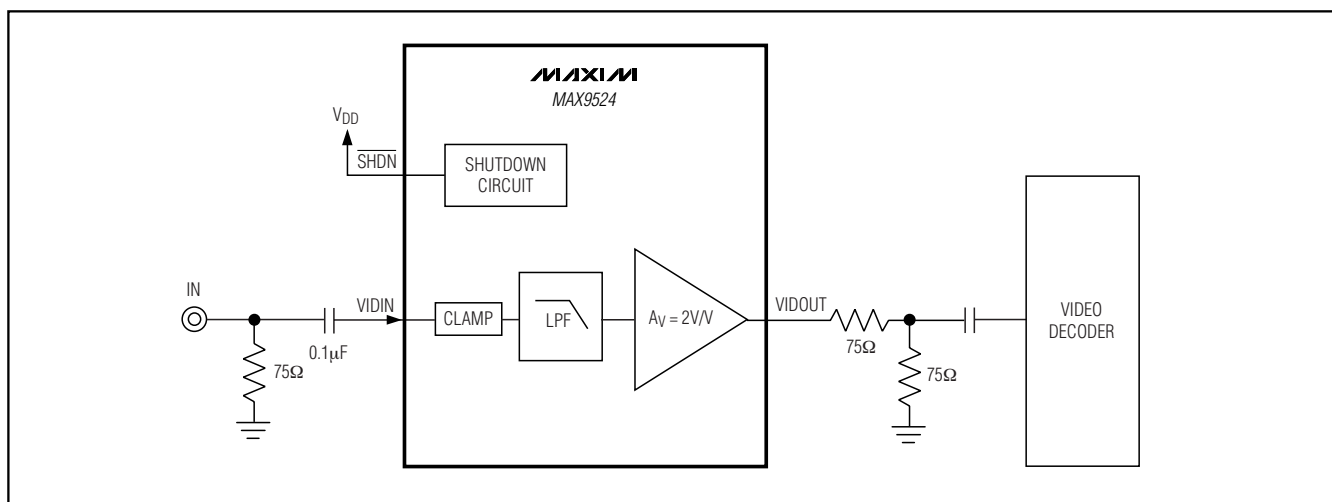


Figure 11. MAX9524 is Used as an Anti-Alias Filter with Buffer (Switches Can Route Other Signals)

## Switch Test Circuits/Timing Diagrams

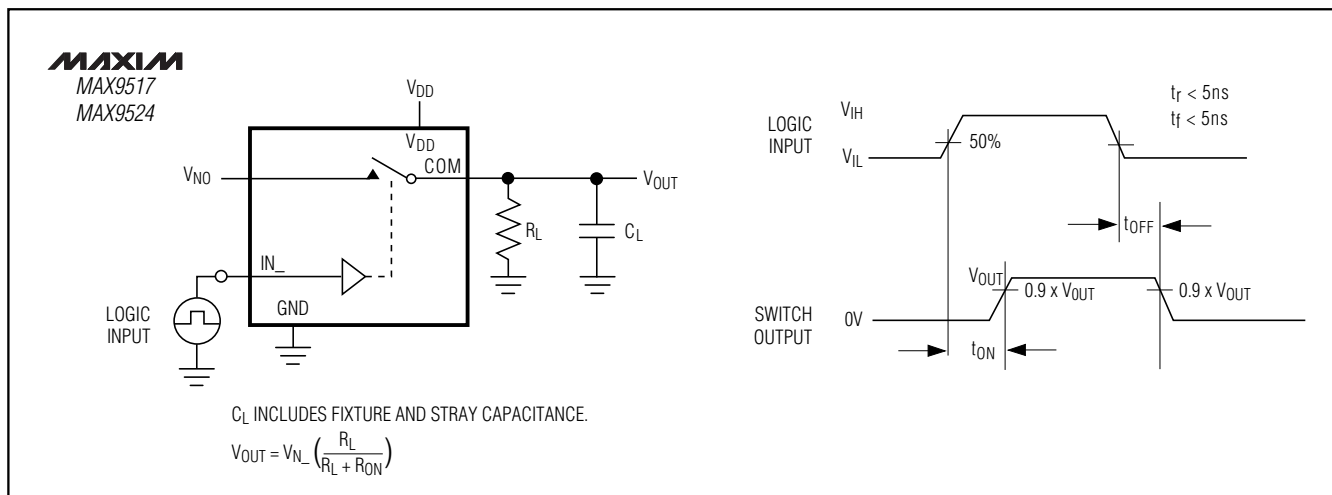


Figure 12. Switching Time

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## Switch Test Circuits/Timing Diagrams (continued)

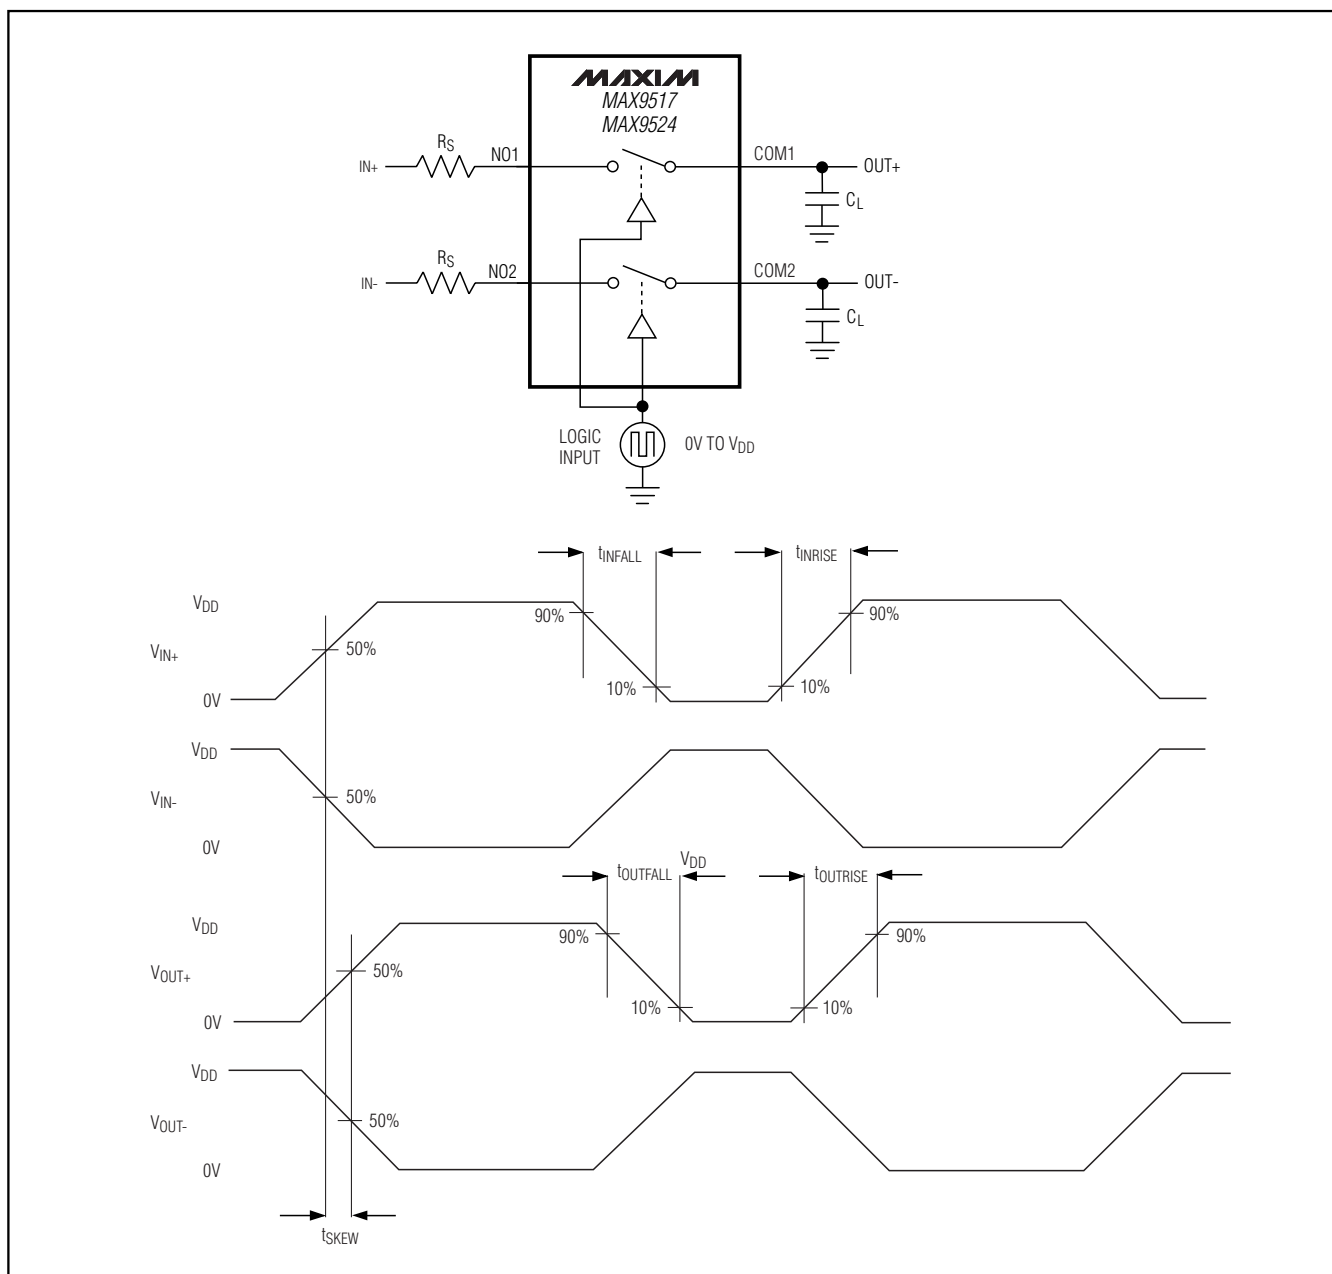


Figure 13. Output Signal Skew

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## Switch Test Circuits/Timing Diagrams (continued)

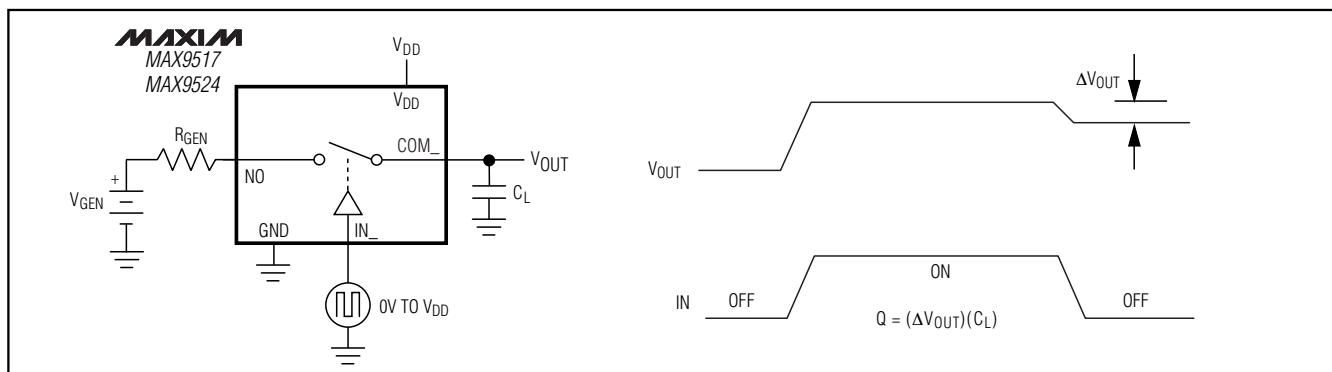


Figure 14. Charge Injection

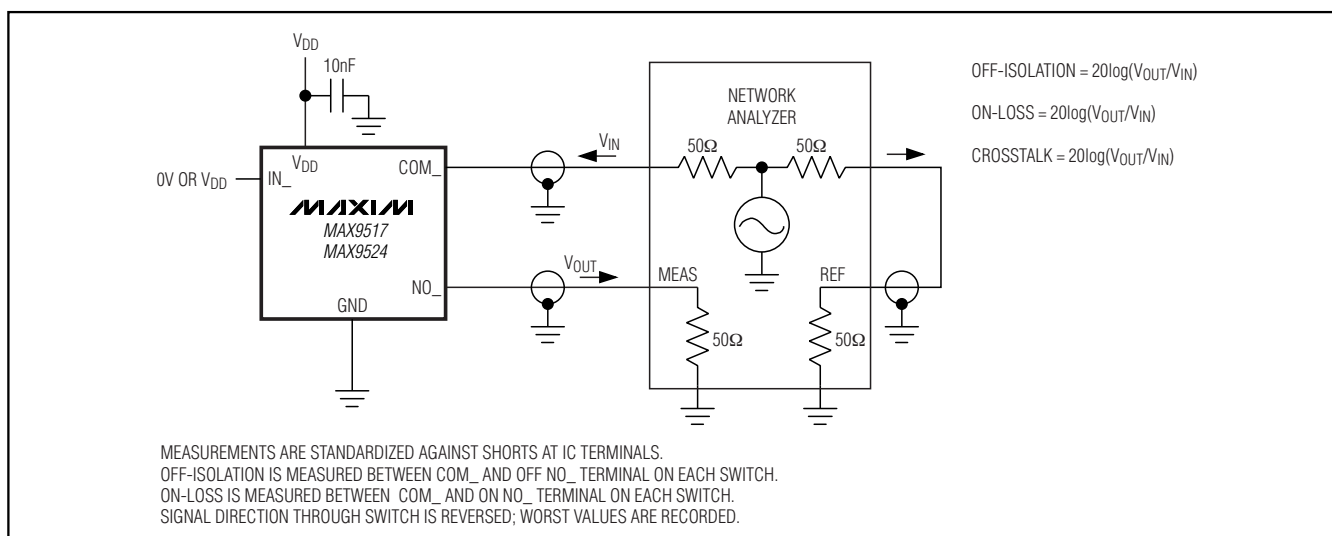


Figure 15. On-Loss, Off-Isolation, and Crosstalk



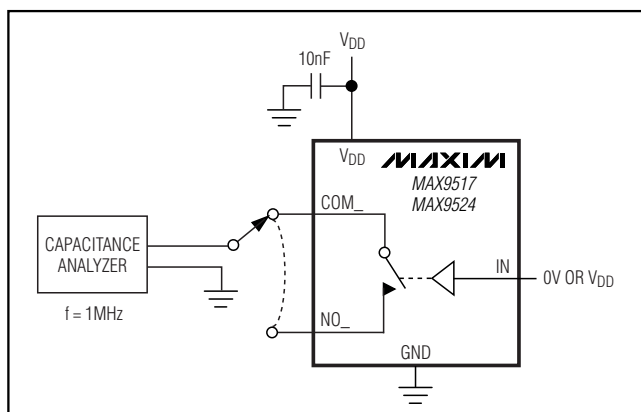


Figure 16. Channel Off-/On-Capacitance

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches


## Typical Operating Circuits

MAX9517/MAX9524

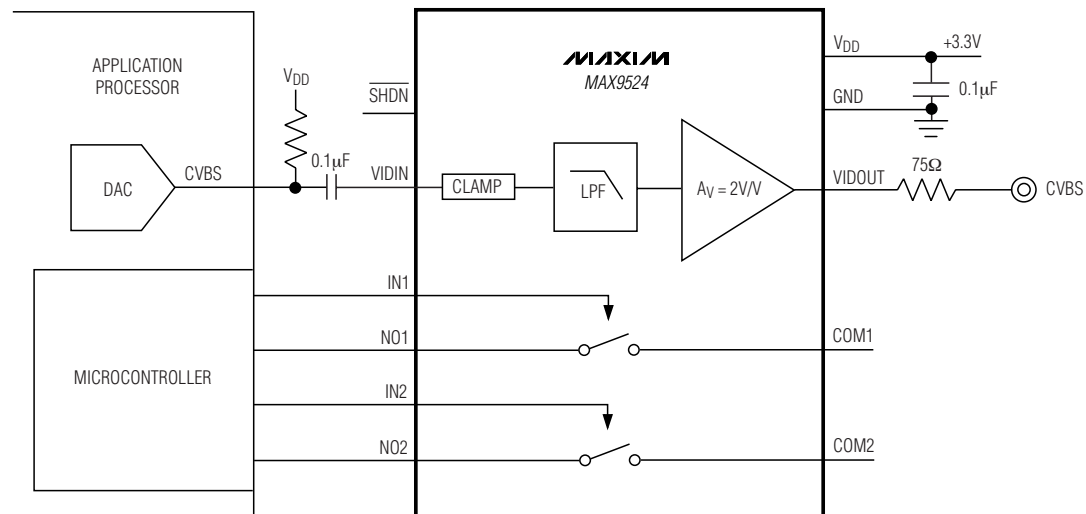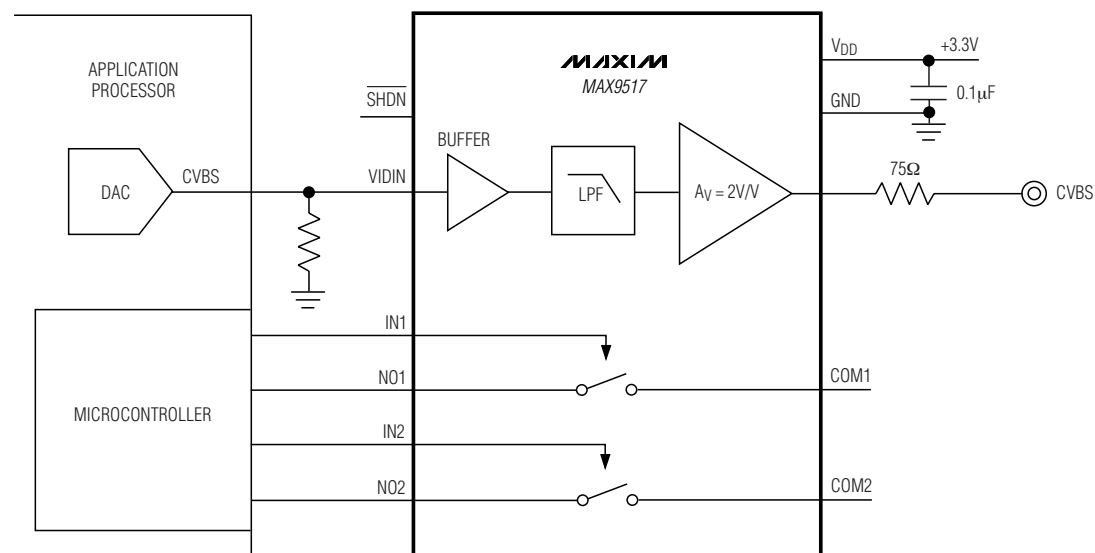

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## Pin Configuration

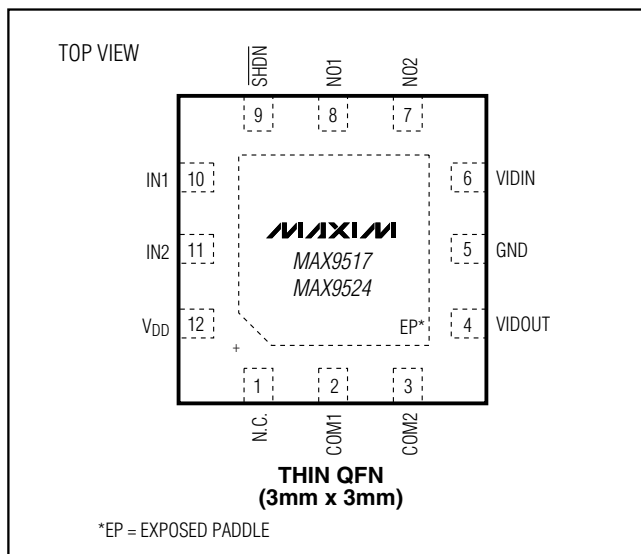

## Chip Information

PROCESS: BiCMOS

**MAX9517/MAX9524**

[illegible]

# Standard-Definition Video Filter Amplifiers with Dual SPST Switches

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

| PKG  | 8L 3x3    |      |      | 12L 3x3   |      |      | 16L 3x3   |      |      |
|------|-----------|------|------|-----------|------|------|-----------|------|------|
| REF. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. | MIN.      | NOM. | MAX. |
| A    | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 | 0.70      | 0.75 | 0.80 |
| b    | 0.25      | 0.30 | 0.35 | 0.20      | 0.25 | 0.30 | 0.20      | 0.25 | 0.30 |
| D    | 2.90      | 3.00 | 3.10 | 2.90      | 3.00 | 3.10 | 2.90      | 3.00 | 3.10 |
| E    | 2.90      | 3.00 | 3.10 | 2.90      | 3.00 | 3.10 | 2.90      | 3.00 | 3.10 |
| e    | 0.65 BSC. |      |      | 0.50 BSC. |      |      | 0.50 BSC. |      |      |
| L    | 0.35      | 0.55 | 0.75 | 0.45      | 0.55 | 0.65 | 0.30      | 0.40 | 0.50 |
| N    | 8         |      |      | 12        |      |      | 16        |      |      |
| ND   | 2         |      |      | 3         |      |      | 4         |      |      |
| NE   | 2         |      |      | 3         |      |      | 4         |      |      |
| A1   | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 | 0         | 0.02 | 0.05 |
| A2   | 0.20 REF  |      |      | 0.20 REF  |      |      | 0.20 REF  |      |      |
| k    | 0.25      | -    | -    | 0.25      | -    | -    | 0.25      | -    | -    |

| EXPOSED PAD VARIATIONS |      |      |      |      |      |      |             |        |
|------------------------|------|------|------|------|------|------|-------------|--------|
| PKG CODES              | D2   |      |      | E2   |      |      | PIN ID      | JEDEC  |
|                        | MIN. | NOM. | MAX. | MIN. | NOM. | MAX. |             |        |
| TQ833-1                | 0.25 | 0.70 | 1.25 | 0.25 | 0.70 | 1.25 | 0.35 x 45°  | WEED   |
| T1233-1                | 0.95 | 1.10 | 1.25 | 0.95 | 1.10 | 1.25 | 0.35 x 45°  | WEED-1 |
| T1233-3                | 0.95 | 1.10 | 1.25 | 0.95 | 1.10 | 1.25 | 0.35 x 45°  | WEED-1 |
| T1233-4                | 0.95 | 1.10 | 1.25 | 0.95 | 1.10 | 1.25 | 0.35 x 45°  | WEED-1 |
| T1633-2                | 0.95 | 1.10 | 1.25 | 0.95 | 1.10 | 1.25 | 0.35 x 45°  | WEED-2 |
| T1633F-3               | 0.65 | 0.80 | 0.95 | 0.65 | 0.80 | 0.95 | 0.225 x 45° | WEED-2 |
| T1633FH-3              | 0.65 | 0.80 | 0.95 | 0.65 | 0.80 | 0.95 | 0.225 x 45° | WEED-2 |
| T1633-4                | 0.95 | 1.10 | 1.25 | 0.95 | 1.10 | 1.25 | 0.35 x 45°  | WEED-2 |
| T1633-5                | 0.95 | 1.10 | 1.25 | 0.95 | 1.10 | 1.25 | 0.35 x 45°  | WEED-2 |

### NOTES:

1. DIMENSIONING & TOLERANCING CONFORM TO ASME Y14.5M-1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.
3. N IS THE TOTAL NUMBER OF TERMINALS.
4. THE TERMINAL #1 IDENTIFIER AND TERMINAL NUMBERING CONVENTION SHALL CONFORM TO JESD 95-1 SPP-012. DETAILS OF TERMINAL #1 IDENTIFIER ARE OPTIONAL, BUT MUST BE LOCATED WITHIN THE ZONE INDICATED. THE TERMINAL #1 IDENTIFIER MAY BE EITHER A MOLD OR MARKED FEATURE.
5. DIMENSION b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.20 mm AND 0.25 mm FROM TERMINAL TIP.
6. ND AND NE REFER TO THE NUMBER OF TERMINALS ON EACH D AND E SIDE RESPECTIVELY.
7. DEPOPULATION IS POSSIBLE IN A SYMMETRICAL FASHION.
8. COPLANARITY APPLIES TO THE EXPOSED HEAT SINK SLUG AS WELL AS THE TERMINALS.
9. DRAWING CONFORMS TO JEDEC MO220 REVISION C.
10. MARKING IS FOR PACKAGE ORIENTATION REFERENCE ONLY.
11. NUMBER OF LEADS SHOWN ARE FOR REFERENCE ONLY.
12. WARPAGE NOT TO EXCEED 0.10mm.

—DRAWING NOT TO SCALE—

|                                                                                       |                                        |                                              |
|---------------------------------------------------------------------------------------|----------------------------------------|----------------------------------------------|
|  |                                        |                                              |
| <b>TITLE:</b> PACKAGE OUTLINE<br>8, 12, 16L THIN QFN, 3x3x0.8mm                       |                                        |                                              |
| <b>APPROVAL</b>                                                                       | <b>DOCUMENT CONTROL NO.</b><br>21-0136 | <b>REV.</b><br>1 <sup>2</sup> / <sub>2</sub> |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

22 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331