




## T2 Terminator Tooling Specification Sheet Order No. 63856-2000



### FEATURES


- It is ideally suited for mid-volume bench operations
- This terminator can be installed in the TM42 and the TM40 press or Base Unit adapter for 3BF press
- Quick punch removal with the push of a button for fast and easy tooling change
- Track adjustment capabilities in the T2 Terminators for improved control of the bell mouth size and cutoff tab length
- T2 Terminator has standardized tooling with the Molex FineAdjust Applicator which will reduce your inventory requirements

### SCOPE

Products: KK® 3.96mm (.156") Centers Female Terminals 18-20 AWG.

| Terminal Series No. | Terminal Order No. | Wire Size |                 | Insulation Diameter |           | Strip Length |           |
|---------------------|--------------------|-----------|-----------------|---------------------|-----------|--------------|-----------|
|                     |                    | AWG       | mm <sup>2</sup> | mm                  | In.       | mm           | In.       |
| 45570               | 45570-3000         | 18-20     | 0.82-0.52       | 1.70-2.85           | .067-.112 | 2.40-3.40    | .094-.134 |
|                     | 45570-3002         | 18-20     | 0.82-0.52       | 1.70-2.85           | .067-.112 | 2.40-3.40    | .094-.134 |
|                     | 45570-3004         | 18-20     | 0.82-0.52       | 1.70-2.85           | .067-.112 | 2.40-3.40    | .094-.134 |

### DEFINITION OF TERMS

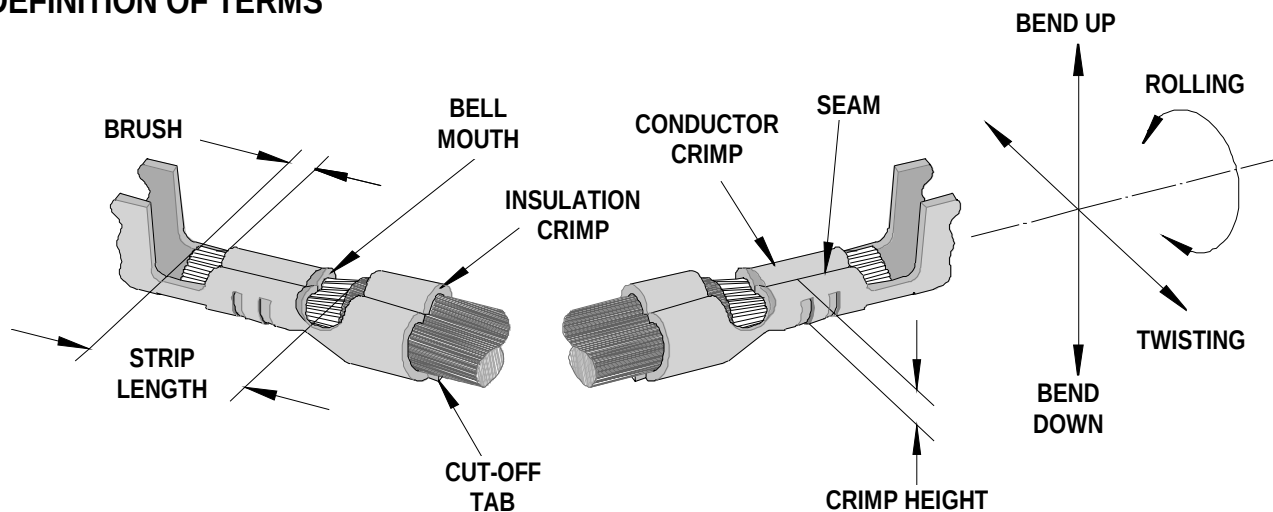

The above terminal drawing is a generic terminal representation. It is not an image of a terminal listed in the scope.

**CRIMP SPECIFICATION**

| Terminal<br>Series No. | Bell mouth |           | Cut-off Tab Maximum |      | Conductor Brush |           |
|------------------------|------------|-----------|---------------------|------|-----------------|-----------|
|                        | mm         | In.       | mm                  | In.  | mm              | In.       |
| 45570                  | 0.20-0.50  | .008-.020 | 0.40                | .015 | 0.30-0.90       | .012-.035 |

| Terminal<br>Series No. | Bend up | Bend down | Twist  | Roll | Punch Width (Ref) |      |            |      | Seam<br>Seam shall not be open<br>and no wire allowed out of<br>the crimping area |
|------------------------|---------|-----------|--------|------|-------------------|------|------------|------|-----------------------------------------------------------------------------------|
|                        | Degree  |           | Degree |      | Conductor         |      | Insulation |      |                                                                                   |
|                        |         |           |        |      | mm                | In   | mm         | In   |                                                                                   |
| 45570                  | 5       | 1         | 4      | 8    | 1.80              | .071 | 3.00       | .118 |                                                                                   |

After crimping, the conductor profile should measure the following.

| Terminal<br>Series No. | Wire Size |                 | Crimp Height |           | Pull Force Minimum |       |
|------------------------|-----------|-----------------|--------------|-----------|--------------------|-------|
|                        | AWG       | mm <sup>2</sup> | mm           | In.       | N                  | Lb.   |
| 45570                  | 18        | 0.82            | 1.20-1.30    | .047-.051 | 89.0               | 20.00 |
|                        | 20        | 0.52            | 1.10-1.20    | .043-.047 | 57.9               | 13.00 |


Pull Force should be measured with no influence from the insulation crimp.

The above specifications are guidelines to an optimum crimp.

**PARTS LIST**

| <b>T2 Terminator 63856-2000</b>                                              |                  |                        |                              |                 |
|------------------------------------------------------------------------------|------------------|------------------------|------------------------------|-----------------|
| <b>Item</b>                                                                  | <b>Order No.</b> | <b>Engineering No.</b> | <b>Description</b>           | <b>Quantity</b> |
| <b>Perishable Tooling</b>                                                    |                  |                        |                              |                 |
|                                                                              | 63856-2070       | 63856-2070             | Tool Kit (All "Y" Items)     | REF             |
| 1                                                                            | 63444-1820       | 63444-1820             | Conductor Punch              | 1 Y             |
| 2                                                                            | 63445-1836       | 63445-1836             | Conductor Anvil              | 1 Y             |
| 3                                                                            | 63446-3002       | 63446-3002             | Insulation Punch             | 1 Y             |
| 4                                                                            | 63445-3017       | 63445-3017             | Insulation Anvil             | 1 Y             |
| 5                                                                            | 63443-0002       | 63443-0002             | Cut-Off Plunger              | 2 Y             |
| 6                                                                            | 63443-0012       | 63443-0012             | Front Plunger Retainer       | 1 Y             |
| 7                                                                            | 63443-1002       | 63443-1002             | Rear Plunger Retainer        | 1 Y             |
| 8                                                                            | 63443-1403       | 63443-1403             | Cut-off Die Blade            | 1 Y             |
| <b>Other Components (REF 562050)</b>                                         |                  |                        |                              |                 |
| 9                                                                            | 11-18-4083       | 60707-8                | Feed Guide                   | 1               |
| 10                                                                           | 11-24-1067       | 4996-4                 | Cut-Off Plunger Spring       | 2               |
| 11                                                                           | 63443-0025       | 63443-0025             | Key                          | 1               |
| 12                                                                           | 63443-0085       | 63443-0085             | Wire Stop L-Bracket          | 1               |
| 13                                                                           | 63443-0091       | 63443-0091             | Wire Stop                    | 1               |
| 14                                                                           | 63443-1741       | 63443-1741             | 17.00mm Height Spacer        | 1               |
| 15                                                                           | 63443-2204       | 63443-2204             | 4.00mm Coarse Spacer         | 1               |
| 16                                                                           | 63443-2310       | 63443-2310             | 3.50mm Fine Spacer           | 1               |
| 17                                                                           | 63443-3160       | 63443-3160             | Front Plunger Striker        | 1               |
| 18                                                                           | 63443-6009       | 63443-6009             | Rear Cover                   | 1               |
| 19                                                                           | 63459-0003       | 63459-0003             | Relief Groove Terminal Track | 1               |
| 20                                                                           | 63800-8502       | 63800-8502             | Rear Plunger Striker         | 1               |
| <b>Frame</b>                                                                 |                  |                        |                              |                 |
| 21                                                                           | 63800-8500       | 63800-8500             | T2 Terminator                | 1               |
| <b>Hardware</b>                                                              |                  |                        |                              |                 |
| 22                                                                           | N/A              | N/A                    | M3 by 6 Long SHCS            | 2**             |
| 23                                                                           | N/A              | N/A                    | M3 by 6 Long FHCS            | 1**             |
| 24                                                                           | N/A              | N/A                    | M4 by 6 Long SHCS            | 1**             |
| 25                                                                           | N/A              | N/A                    | M4 by 12 Long BHCS           | 2**             |
| 26                                                                           | N/A              | N/A                    | M4 by 14 Long SHCS           | 2**             |
| 27                                                                           | N/A              | N/A                    | M4 by 30 Long SHCS           | 1**             |
| 28                                                                           | N/A              | N/A                    | M4 by 50 Long SHCS           | 1**             |
| 29                                                                           | N/A              | N/A                    | M5 by 10 Long SHCS           | 1**             |
| 30                                                                           | N/A              | N/A                    | M5 by 12 Long SHCS           | 1**             |
| 31                                                                           | N/A              | N/A                    | #10-32 by 3/8" Long BHCS     | 1**             |
| ** Available from an industrial supply company such as MSC (1-800-645-7270). |                  |                        |                              |                 |

## Assembly Drawing

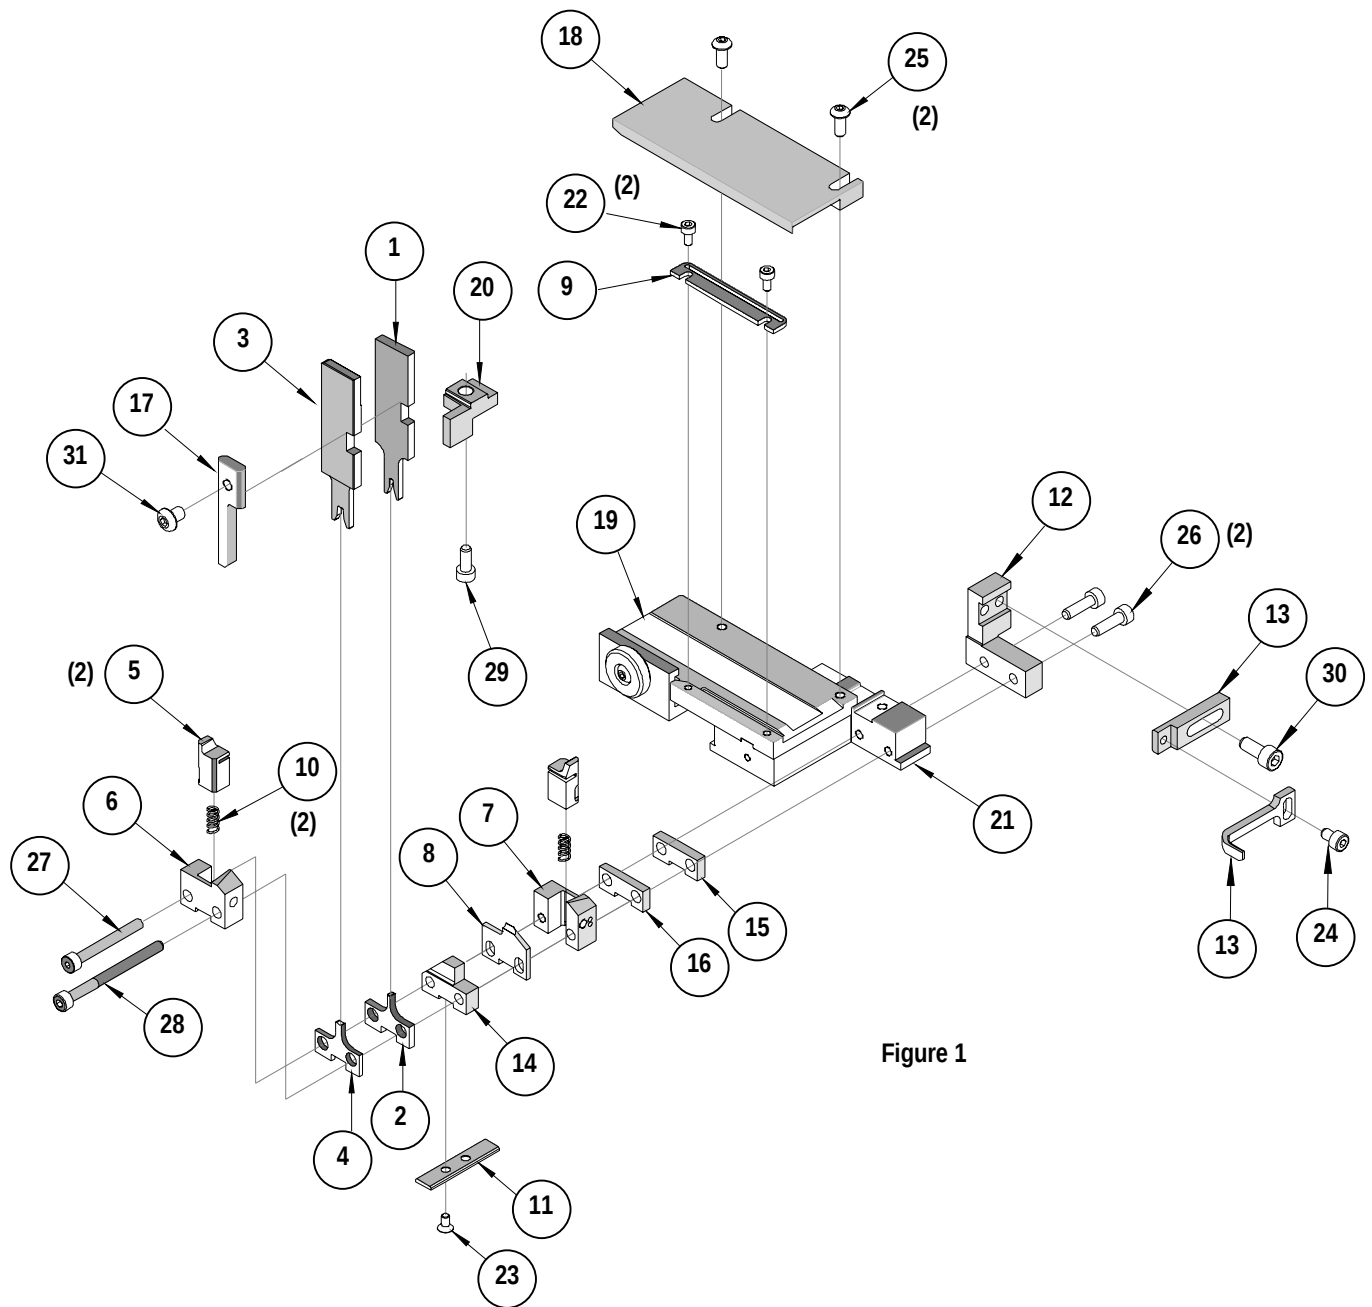

## NOTES

Depending on the press vintage a feed finger assembly is supplied with the T2 Terminator.

1. To remove the existing feed finger assembly loosens the M4 x 10 mm set screw in the feed lever.
2. Select T2 Feed finger assembly from Terminator box.
3. Insert a screwdriver into the slot behind the feed lever and force the feed arm spring to the right.
4. Slide the T2 feed finger shaft for TM42 (11-40-5307) or (11-40-0123) for TM40 /Base Unit into the feed lever and to the left of the feed arm spring.
5. Release the feed arm spring.
6. Position feed finger for selected product. (Refer to Figure 5.1 in the T2 Manual).

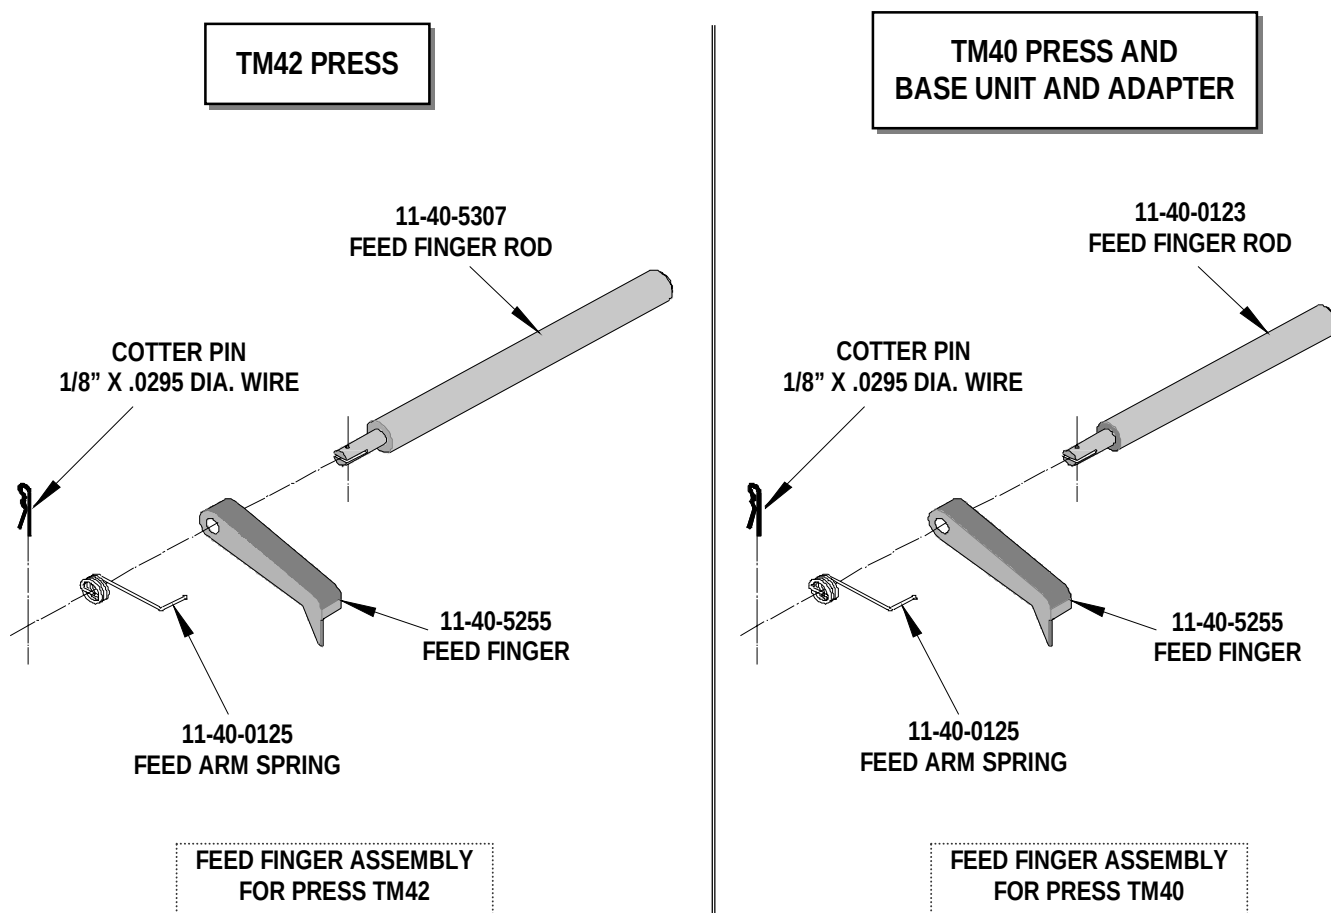


Figure 2

## NOTES

1. Molex recommends an extra perishable tooling kit be maintained at your facility.
2. Verify tooling alignment by manually cycling the press before crimping under power. Check that all screws are tight.
3. Slugs, Terminals, Dirt and Oil should be kept clear of work area.
4. This Terminator should be only used in a Molex TM42, TM40, or 3BF Press with a Base Unit adaptor.
5. Wear safety glasses at all times.
6. For recommended maintenance refer to the TM40, TM42 Manual.

**CAUTION:** To prevent injury never operate this Terminator without the guards supplied with the press in place. Reference the TM42 press manufacturer's instruction manual.

**CAUTION:** Molex crimp specifications are valid only when used with Molex terminals, applicators and tooling.

**Americas Headquarters**

Lisle, Illinois 60532 U.S.A.  
1-800-78MOLEX  
amerinfo@molex.com

**Far East North Headquarters**

Yamato, Kanagawa, Japan  
81-462-65-2324  
feninfo@molex.com

**Far East South Headquarters**

Jurong, Singapore  
65-6-268-6868  
fesinfo@molex.com

**European Headquarters**

Munich, Germany  
49-89-413092-0  
eurinfo@molex.com

**Corporate Headquarters**

2222 Wellington Ct.  
Lisle, IL 60532 U.S.A.  
630-969-4550  
Fax: 630-969-1352

Visit our Web site at <http://www.molex.com>



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331