
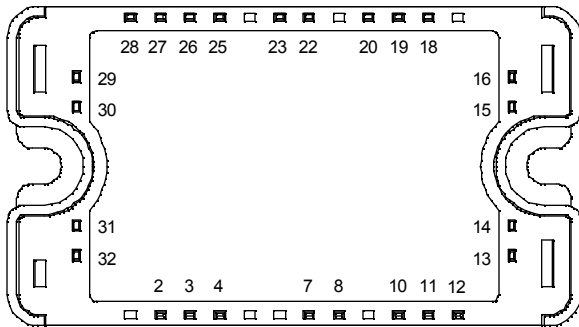


## Dual Buck chopper MOSFET Power Module

$$V_{DSS} = 100V$$

$$R_{DSon} = 19m\Omega \text{ typ @ } T_j = 25^\circ C$$

$$I_D = 70A \text{ @ } T_c = 25^\circ C$$

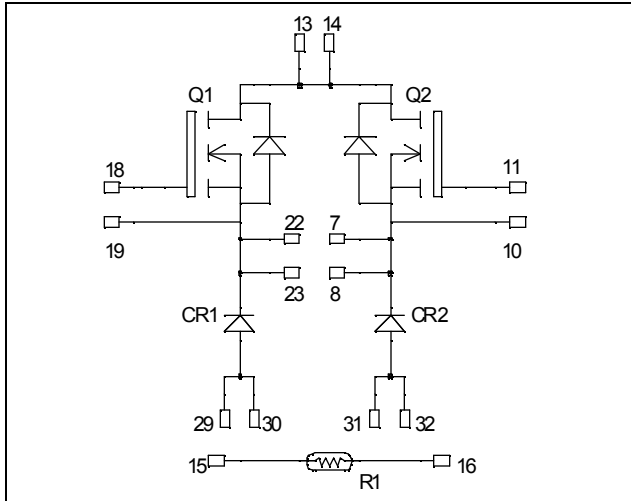

All multiple inputs and outputs must be shorted together  
 Example: 13/14 ; 29/30 ; 22/23 ...

### Application

- AC and DC motor control
- Switched Mode Power Supplies

### Features

- Power MOS V<sup>®</sup> MOSFETs
  - Low  $R_{DSon}$
  - Low input and Miller capacitance
  - Low gate charge
  - Avalanche energy rated
  - Very rugged
- Kelvin source for easy drive
- Very low stray inductance
  - Symmetrical design
- Internal thermistor for temperature monitoring
- High level of integration

### Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- Each leg can be easily paralleled to achieve a single buck of twice the current capability
- RoHS Compliant

### Absolute maximum ratings

| Symbol     | Parameter                                         | Max ratings        | Unit      |
|------------|---------------------------------------------------|--------------------|-----------|
| $V_{DSS}$  | Drain - Source Breakdown Voltage                  | 100                | V         |
| $I_D$      | Continuous Drain Current                          | $T_c = 25^\circ C$ | A         |
|            |                                                   | $T_c = 80^\circ C$ |           |
| $I_{DM}$   | Pulsed Drain current                              | 300                |           |
| $V_{GS}$   | Gate - Source Voltage                             | $\pm 30$           | V         |
| $R_{DSon}$ | Drain - Source ON Resistance                      | 21                 | $m\Omega$ |
| $P_D$      | Maximum Power Dissipation                         | $T_c = 25^\circ C$ | W         |
| $I_{AR}$   | Avalanche current (repetitive and non repetitive) | 75                 | A         |
| $E_{AR}$   | Repetitive Avalanche Energy                       | 30                 | mJ        |
| $E_{AS}$   | Single Pulse Avalanche Energy                     | 1500               |           |

**CAUTION:** These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed. See application note APT0502 on [www.microsemi.com](http://www.microsemi.com)

**All ratings @  $T_j = 25^\circ\text{C}$  unless otherwise specified**

**Electrical Characteristics**

| Symbol       | Characteristic                  | Test Conditions                     |                           | Min | Typ | Max       | Unit             |
|--------------|---------------------------------|-------------------------------------|---------------------------|-----|-----|-----------|------------------|
| $I_{DSS}$    | Zero Gate Voltage Drain Current | $V_{GS} = 0V, V_{DS} = 100V$        | $T_j = 25^\circ\text{C}$  |     |     | 250       | $\mu\text{A}$    |
|              |                                 | $V_{GS} = 0V, V_{DS} = 80V$         | $T_j = 125^\circ\text{C}$ |     |     | 1000      |                  |
| $R_{DS(on)}$ | Drain – Source on Resistance    | $V_{GS} = 10V, I_D = 35A$           |                           |     | 19  | 21        | $\text{m}\Omega$ |
| $V_{GS(th)}$ | Gate Threshold Voltage          | $V_{GS} = V_{DS}, I_D = 1\text{mA}$ |                           | 2   |     | 4         | V                |
| $I_{GSS}$    | Gate – Source Leakage Current   | $V_{GS} = \pm 30V, V_{DS} = 0V$     |                           |     |     | $\pm 100$ | nA               |

**Dynamic Characteristics**

| Symbol       | Characteristic               | Test Conditions                                                                                                                    | Min | Typ  | Max | Unit          |
|--------------|------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----|---------------|
| $C_{iss}$    | Input Capacitance            | $V_{GS} = 0V$<br>$V_{DS} = 25V$<br>$f = 1\text{MHz}$                                                                               |     | 5100 |     | pF            |
| $C_{oss}$    | Output Capacitance           |                                                                                                                                    |     | 1900 |     |               |
| $C_{rss}$    | Reverse Transfer Capacitance |                                                                                                                                    |     | 800  |     |               |
| $Q_g$        | Total gate Charge            | $V_{GS} = 10V$<br>$V_{Bus} = 100V$<br>$I_D = 70A$                                                                                  |     | 200  |     | nC            |
| $Q_{gs}$     | Gate – Source Charge         |                                                                                                                                    |     | 40   |     |               |
| $Q_{gd}$     | Gate – Drain Charge          |                                                                                                                                    |     | 92   |     |               |
| $T_{d(on)}$  | Turn-on Delay Time           | <b>Inductive switching @ <math>125^\circ\text{C}</math></b><br>$V_{GS} = 15V$<br>$V_{Bus} = 66V$<br>$I_D = 70A$<br>$R_G = 5\Omega$ |     | 35   |     | ns            |
| $T_r$        | Rise Time                    |                                                                                                                                    |     | 70   |     |               |
| $T_{d(off)}$ | Turn-off Delay Time          |                                                                                                                                    |     | 95   |     |               |
| $T_f$        | Fall Time                    |                                                                                                                                    |     | 125  |     |               |
| $E_{on}$     | Turn-on Switching Energy     | <b>Inductive switching @ <math>25^\circ\text{C}</math></b><br>$V_{GS} = 15V, V_{Bus} = 66V$<br>$I_D = 70A, R_G = 5\Omega$          |     | 276  |     | $\mu\text{J}$ |
| $E_{off}$    | Turn-off Switching Energy    |                                                                                                                                    |     | 302  |     |               |
| $E_{on}$     | Turn-on Switching Energy     | <b>Inductive switching @ <math>125^\circ\text{C}</math></b><br>$V_{GS} = 15V, V_{Bus} = 66V$<br>$I_D = 70A, R_G = 5\Omega$         |     | 304  |     | $\mu\text{J}$ |
| $E_{off}$    | Turn-off Switching Energy    |                                                                                                                                    |     | 320  |     |               |

**Chopper diode ratings and characteristics**

| Symbol           | Characteristic                          | Test Conditions                                                 |                        | Min | Typ | Max | Unit |
|------------------|-----------------------------------------|-----------------------------------------------------------------|------------------------|-----|-----|-----|------|
| V <sub>RRM</sub> | Maximum Peak Repetitive Reverse Voltage |                                                                 |                        | 200 |     |     | V    |
| I <sub>RM</sub>  | Maximum Reverse Leakage Current         | V <sub>R</sub> =200V                                            | T <sub>j</sub> = 25°C  |     |     | 250 | μA   |
|                  |                                         |                                                                 | T <sub>j</sub> = 125°C |     |     | 500 |      |
| I <sub>F</sub>   | DC Forward Current                      |                                                                 | T <sub>c</sub> = 80°C  |     | 60  |     | A    |
| V <sub>F</sub>   | Diode Forward Voltage                   | I <sub>F</sub> = 60A                                            |                        |     | 1.1 |     | V    |
|                  |                                         | I <sub>F</sub> = 120A                                           |                        |     | 1.4 |     |      |
|                  |                                         | I <sub>F</sub> = 60A                                            | T <sub>j</sub> = 125°C |     | 0.9 |     |      |
| t <sub>rr</sub>  | Reverse Recovery Time                   | I <sub>F</sub> = 60A<br>V <sub>R</sub> = 133V<br>di/dt =200A/μs | T <sub>j</sub> = 25°C  |     | 31  |     | ns   |
|                  |                                         |                                                                 | T <sub>j</sub> = 125°C |     | 60  |     |      |
| Q <sub>rr</sub>  | Reverse Recovery Charge                 |                                                                 | T <sub>j</sub> = 25°C  |     | 60  |     | nC   |
|                  |                                         |                                                                 | T <sub>j</sub> = 125°C |     | 250 |     |      |

## Thermal and package characteristics

**Symbol Characteristic**

|            |                                                                                    |                | <i>Min</i> | <i>Typ</i> | <i>Max</i> | <i>Unit</i> |
|------------|------------------------------------------------------------------------------------|----------------|------------|------------|------------|-------------|
| $R_{thJC}$ | Junction to Case Thermal Resistance                                                | Transistor     |            |            | 0.6        | °C/W        |
|            |                                                                                    | Diode          |            |            | 0.9        |             |
| $V_{ISOL}$ | RMS Isolation Voltage, any terminal to case $t = 1$ min, $I_{iso} < 1$ mA, 50/60Hz |                | 2500       |            |            | V           |
| $T_J$      | Operating junction temperature range                                               |                | -40        |            | 150        | °C          |
| $T_{STG}$  | Storage Temperature Range                                                          |                | -40        |            | 125        |             |
| $T_C$      | Operating Case Temperature                                                         |                | -40        |            | 100        |             |
| Torque     | Mounting torque                                                                    | To heatsink M4 | 2.5        |            | 4.7        | N.m         |
| Wt         | Package Weight                                                                     |                |            |            | 110        | g           |

## Temperature sensor NTC (see application note APT0406 on [www.microsemi.com](http://www.microsemi.com) for more information).


**Symbol Characteristic**

|             |                     | <i>Min</i> | <i>Typ</i> | <i>Max</i> | <i>Unit</i> |
|-------------|---------------------|------------|------------|------------|-------------|
| $R_{25}$    | Resistance @ 25°C   |            | 50         |            | kΩ          |
| $B_{25/85}$ | $T_{25} = 298.15$ K |            | 3952       |            | K           |

$$R_T = \frac{R_{25}}{\exp \left[ B_{25/85} \left( \frac{1}{T_{25}} - \frac{1}{T} \right) \right]}$$






T: Thermistor temperature  
 $R_T$ : Thermistor value at T







## SP3 Package outline (dimensions in mm)

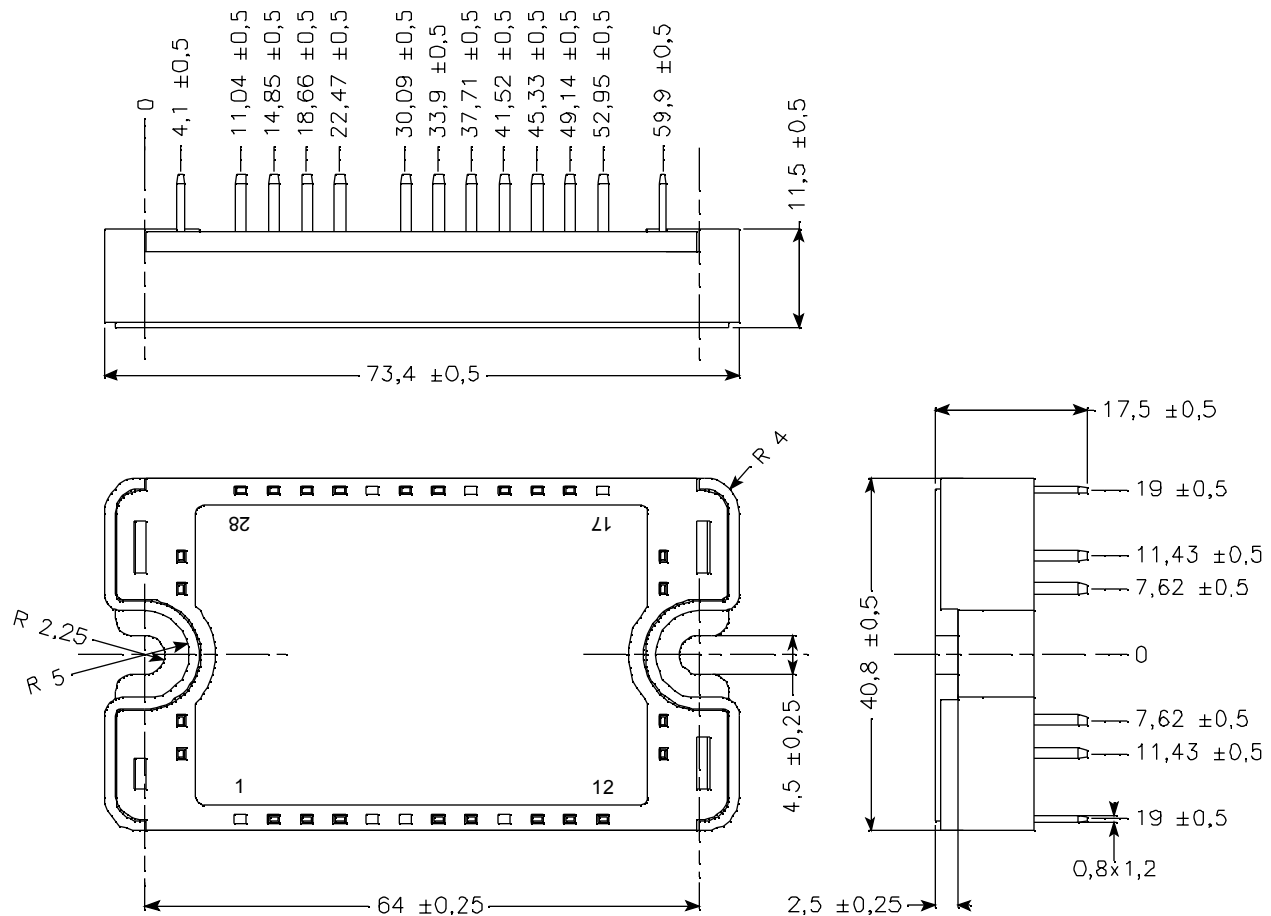


See application note 1901 - Mounting Instructions for SP3 Power Modules on [www.microsemi.com](http://www.microsemi.com)

## Typical Performance Curve

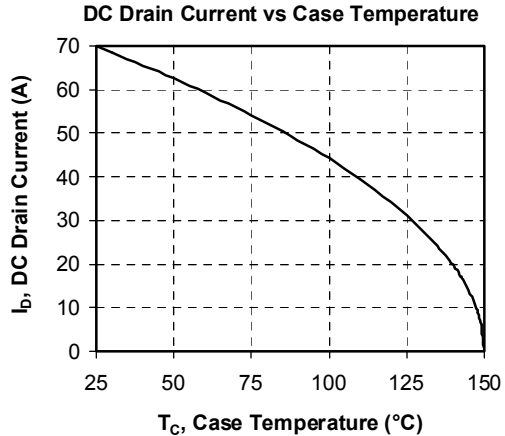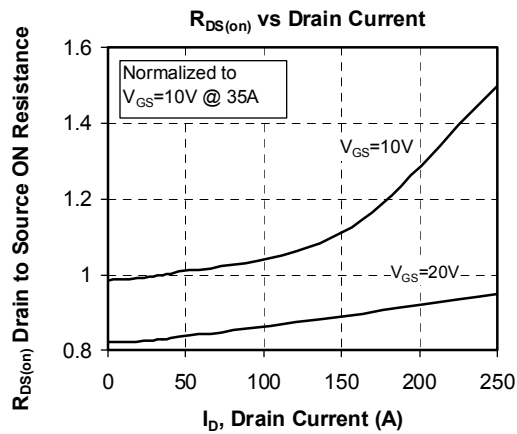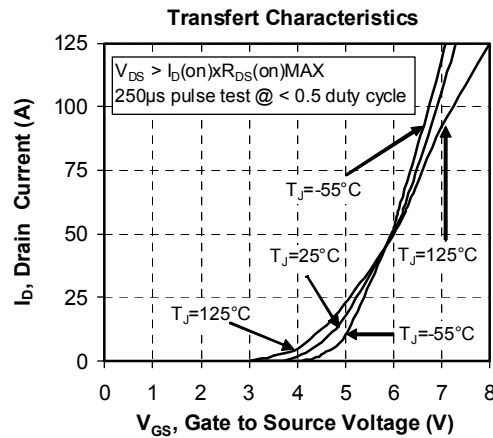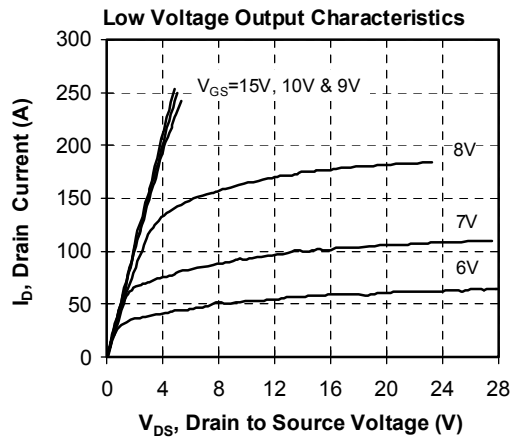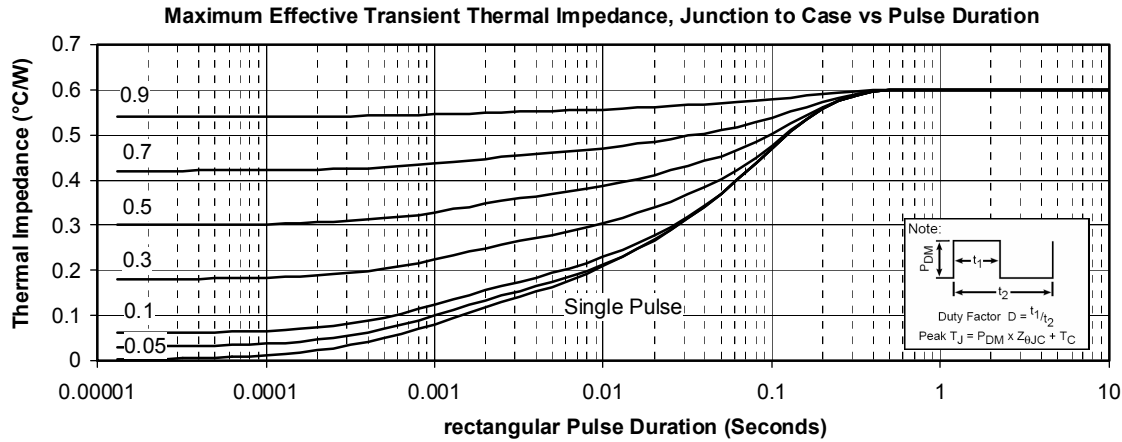


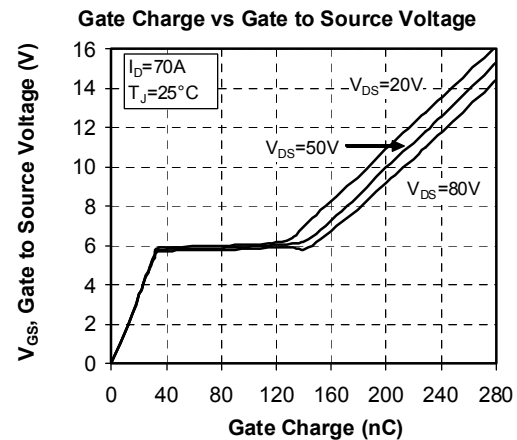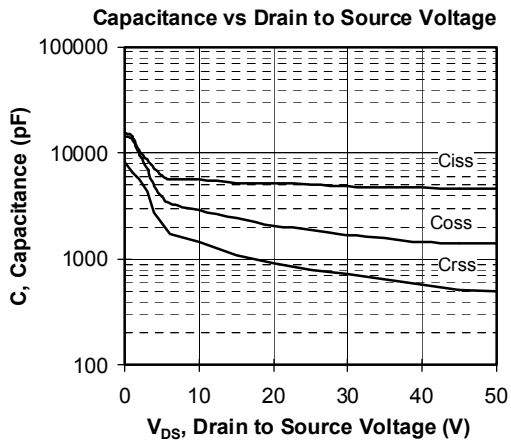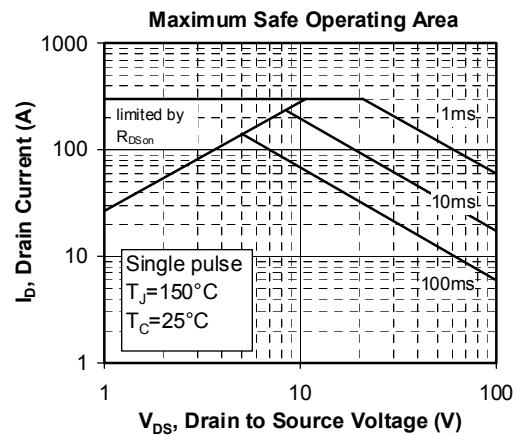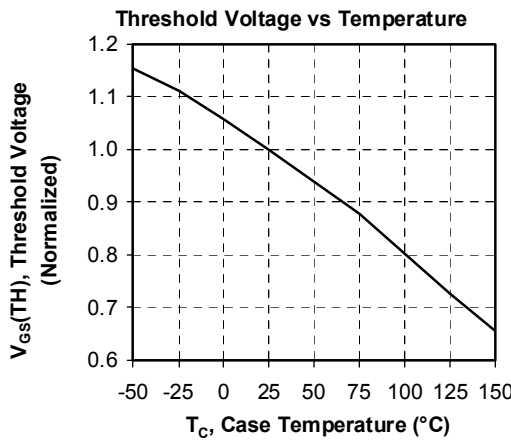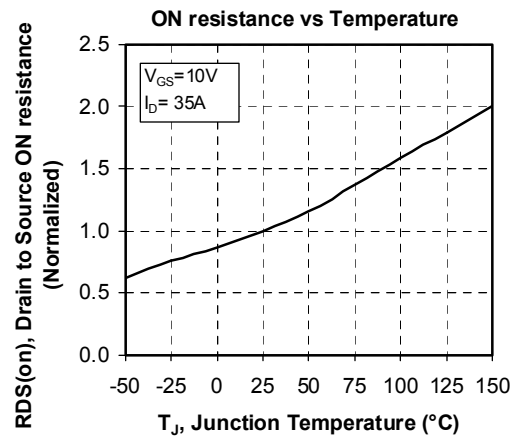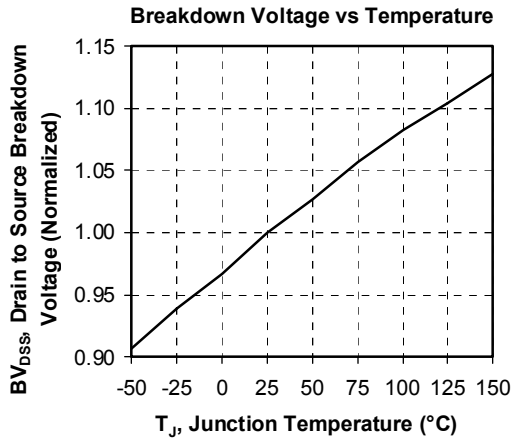


Delay Times vs Current

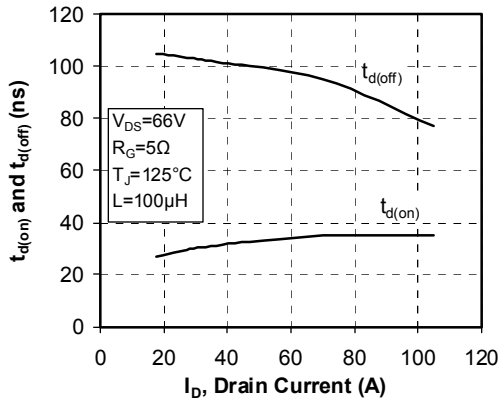


Rise and Fall times vs Current

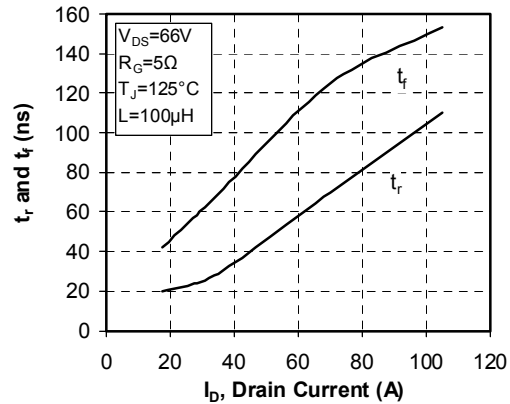


Switching Energy vs Current

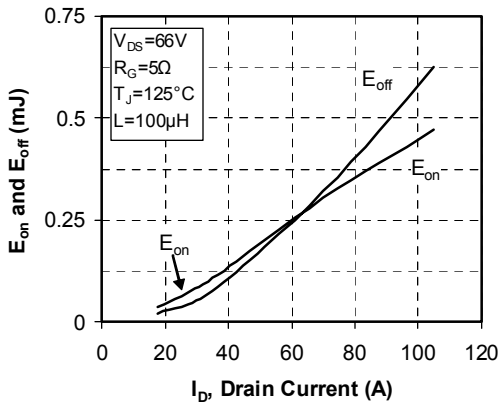


Switching Energy vs Gate Resistance

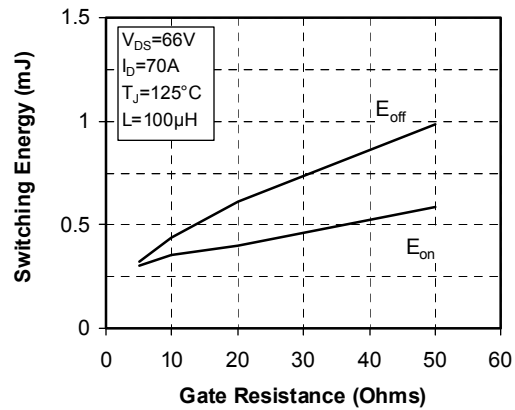

Operating Frequency vs Drain Current

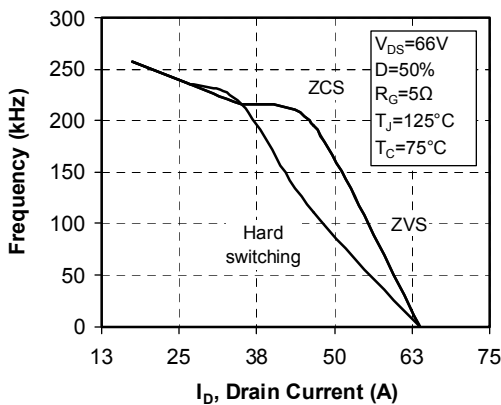

Source to Drain Diode Forward Voltage

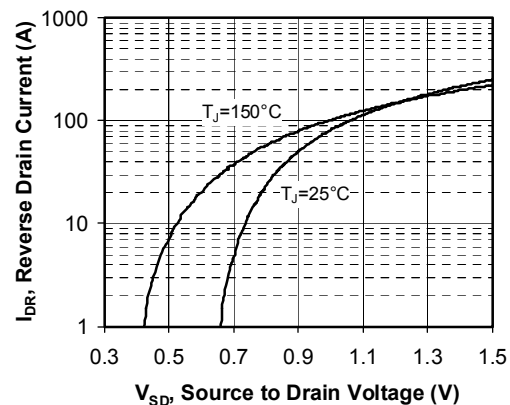

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S. patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S. and Foreign patents pending. All Rights Reserved.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331