



Test Procedure for the NCL30002LED1GEVB Evaluation Board

Overview

This procedure describes the calibration and functional testing of the high power factor NCL30002 buck LED driver. There are 4 versions covered by this test procedure.

	Non Dimming	Dimming
120V ac Nominal Mains	NCL30002LED1GEVB	NCL30002DIM1GEVB
230V ac Nominal Mains	NCL30002LED2GEVB	NCL30002DIM2GEVB


Basic Specifications

Input Voltage – 100 V ac to 132 V ac or 200V ac to 265V ac

Input Frequency – 50/60 Hz

Output Voltage – 22 V dc to 26 V dc

Output Current – 750 mA dc Nominal

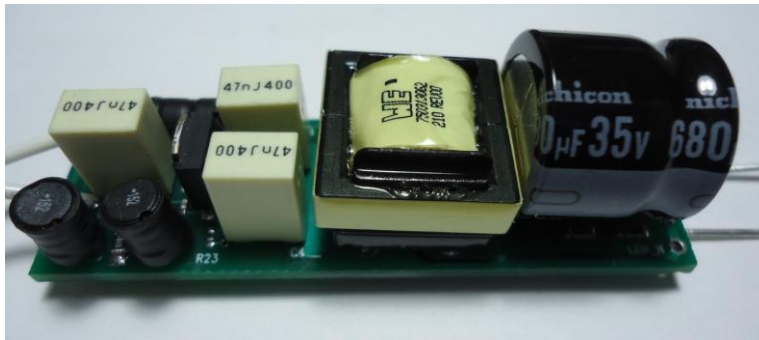



Equipment Needed

AC Source – 100V ac to 265 V ac 50/60 Hz Minimum 1A ac capability

AC Wattmeter – 30W Minimum, True RMS Input Voltage and Current, Power Factor 0.2% accuracy or better

DC Voltmeter – 30V dc minimum 0.1% accuracy or better

DC Ammeter – 1A dc minimum 0.1% accuracy or better

LED Load – 24 V dc nominal (8 LEDs) rated for at least 750 mA dc operation

Calibration Procedure

1. Connect the Unit Under Test (UUT) per the test set up in Figure 1

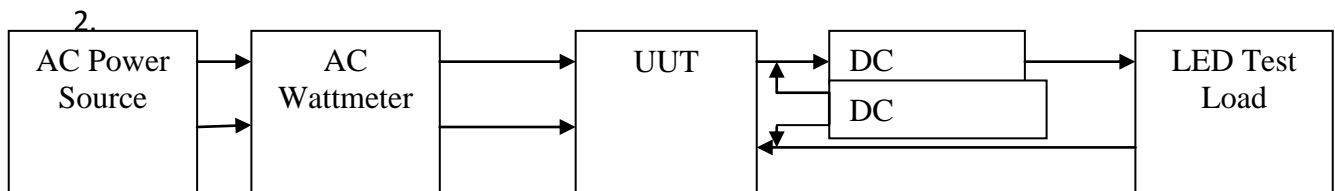


Figure 1 Test Set Up

3. Set the AC source to 120V \pm 1V ac RMS 60 Hz or 230V \pm 2V ac RMS 50 Hz.
4. Adjust R17 such that the output current at 100 V ac and 132 V ac or 200 V ac and 265 V ac are equal or as close as adjustment allows.

Note: Unless otherwise specified, all voltage measurements are taken at the terminals of the UUT.



Functional Test Procedure

NCL30002LED1GEVB / NCL30002DIM1GEVB

120V ac Nominal

Connect the UUT per figure 1

Test Condition	Test Variable	Test Limits		Pass / Fail (Circle One)
		Min	Max	
Vin = 120V ac	Output Current	713mA	788mA	Pass / Fail
Vin = 100V ac	Output Current	713mA	788mA	Pass / Fail
Vin = 132V ac	Output Current	713mA	788mA	Pass / Fail
Vin = 120V ac	Power Factor	0.9	-	Pass / Fail
Vin = 120V ac Vout = 24V	Non Dimming Efficiency ¹	88%	-	Pass / Fail
	Dimming ² Efficiency ¹	83%	-	Pass / Fail

NCL30002DIM2GEVB / NCL30002LED2GEVB

230V ac Nominal

Connect the UUT per figure 1

Test Condition	Test Variable	Test Limits		Pass / Fail (Circle One)
		Min	Max	
Vin = 230V ac	Output Current	713mA	788mA	Pass / Fail
Vin = 200V ac	Output Current	713mA	788mA	Pass / Fail
Vin = 265V ac	Output Current	713mA	788mA	Pass / Fail
Vin = 230V ac	Power Factor	0.9	-	Pass / Fail
Vin = 230V ac Vout = 24V	Non Dimming Efficiency ¹	88%	-	Pass / Fail
	Dimming ² Efficiency ¹	83%	-	Pass / Fail

$$1. \text{ Efficiency} = \frac{V_{out} \times I_{out}}{P_{in}} \times 100\%$$

- This measurement is taken without a dimmer in series.

Dimming Operation

NCL30002DIM1GEVB / NCL30002DIM2GEVB Only

- Operate the driver through the dimmer on the LED load at nominal line over the full range of the dimmer.

Verify that the LEDs dim smoothly over the full range of control.



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331