

The logo features a stylized graphic of three slanted bars in red, green, and blue.

Microtips

TECHNOLOGY

Model No: MVÖ€J€€ÖZS

TEL: 1-888-499-TIPS (8477)

FAX: (407) 273-0771

E-MAIL: mtusainfo@microtipsusa.com

WEB: www.microtipsusa.com

Record of Revision

| Date | Revision No. | Summary |
|------------|--------------|--------------------|
| 2017-04-17 | 1.0 | Rev 1.0 was issued |
| | | |

1. Scope

This data sheet is to introduce the specification of **MTD0900GZK** active matrix TFT module. It is composed of a color TFT-LCD panel, driver ICs, FPC and a backlight unit. The 9.0" display area contains 1024(RGB) x 600 pixels.

2. Application

Digital equipments which need color display, mobile navigator/video systems.

3. General Information

| Item | Contents | Unit |
|-------------------------------|---------------------------------|------|
| Size | 9.0 | inch |
| Resolution | 1024(RGB) x 600 | / |
| Interface | LVDS | / |
| Technology type | IPS | / |
| Pixel pitch | 0.1920 x 0.1902 | mm |
| Pixel Configuration | RGB stripes | |
| Outline Dimension (W x H x D) | 211.1 x 126.5 x 5.7 | mm |
| Active Area | 196.608 x 114.15 | mm |
| Display Mode | Transmissive Normally Black, | / |
| Backlight Type | LED | / |

5. Interface signals

FPC Connector is used for the module electronics interface. The recommended model is FH12A-40S-0.5SH manufactured by Hirose.

| Pin No. | Symbol | I/O | Function | Remark |
|---------|--------|-----|---|--------|
| 1 | VCOM | P | Common Voltage | |
| 2 | VDD | P | Power Voltage for digital circuit | |
| 3 | VDD | P | Power Voltage for digital circuit | |
| 4 | NC | - | No connection | |
| 5 | Reset | I | Global reset pin | |
| 6 | U/D | I | Vertical inversion | Note 2 |
| 7 | L/R | I | Horizontal inversion | Note 2 |
| 8 | STBYB | I | Standby mode, Normally pulled high STBYB="1", normal operation; STBYB="0", timing controller, source driver will turn off, all output are High-Z | |
| 9 | GND | P | Ground | |
| 10 | NINC | I | - LVDS differential clock input | |
| 11 | PINC | I | + LVDS differential clock input | |
| 12 | GND | P | Ground | |
| 13 | RXIN0- | I | - LVDS differential data input | |
| 14 | RXIN0+ | I | + LVDS differential data input | |
| 15 | GND | P | Ground | |
| 16 | RXIN1- | I | - LVDS differential data input | |
| 17 | RXIN1+ | I | + LVDS differential data input | |
| 18 | GND | P | Ground | |
| 19 | RXIN2- | I | - LVDS differential clock input | |
| 20 | RXIN2+ | I | + LVDS differential clock input | |
| 21 | GND | P | Ground | |
| 22 | RXIN3- | I | - LVDS differential data input | |
| 23 | RXIN3+ | I | + LVDS differential data input | |
| 24 | GND | P | Ground | |
| 25 | SELB | I | 6bit/8bit mode select | Note 1 |
| 26 | GND | P | Ground | |
| 27 | AVDD | P | Power for Analog Circuit | |
| 28 | GND | P | Ground | |
| 29 | VGH | P | Gate On Voltage | |
| 30 | BIST | - | Normal Operation/BIST pattern select BIST=H : BIST(DCLK input is not needed) BIST=L : Normal Operation (Default) | |
| 31 | NC | - | No Connection | |
| 32 | VGL | P | Gate OFF Voltage | |
| 33 | GND | P | Ground | |
| 34 | NC | - | No Connection | |

| | | | | |
|----|----|---|---------------|--|
| 35 | NC | - | No Connection | |
| 36 | NC | - | No Connection | |
| 37 | NC | - | No Connection | |
| 38 | NC | | No Connection | |
| 39 | NC | | No Connection | |
| 40 | NC | | No Connection | |

I: Input, o: output, p: power

Note 1: If LVDS input data is 6 bits, SELB must be set to High;

If LVDS input data is 8 bits, SELB must be set to Low.

When CABC off, don't connect DIMO, else connect it to backlight.

Note 2: When L/R="0", set right to left scan direction.

When L/R="1", set left to right scan direction.

When L/R="0", set top to bottom scan direction.

When L/R="1", set bottom to top scan direction.

6. Absolute maximum Ratings

6.1. Electrical Absolute max. ratings

| Item | Symbol | Values | | | Unit | Remark |
|--------------------------|-----------------|--------|-----|-----|------|--------|
| | | MIN | TYP | MAX | | |
| Digital Supply Voltage | VDD VDD_LVDS | -0.3 | - | 5 | V | |
| Analog Supply Voltage | AVDD | -0.5 | - | 15 | V | |
| Gate On Voltage | VGH | -0.3 | - | 25 | V | |
| Gate Off Voltage | VGL | -20 | - | 0.3 | V | |
| Gate On-Gate off Voltage | VGH-VGL | -0.3 | - | 40 | V | |

6.2. Environment Conditions

| Item | Symbol | MIN | MAX | Unit | Remark |
|-----------------------|--------|-----|-----|------|--------|
| Operating Temperature | TOPR | -20 | 70 | °C | |
| Storage Temperature | TSTG | -30 | 80 | °C | |

7. Electrical Specifications

7.1 Electrical characteristics

| Item | Symbol | Values | | | Unit | Remark |
|------------------------------|--------|--------|------|------|------|--------|
| | | MIN | TYP | MAX | | |
| Digital Supply Voltage | VDD | 3.0 | 3.3 | 3.6 | V | Note |
| TFT Gate ON Voltage | VGH | 22 | 23 | 24 | V | |
| TFT Gate OFF Voltage | VGL | -11 | -10 | -9 | V | |
| TFT Common Electrode Voltage | VCOM | 5.20 | 5.45 | 5.60 | V | |
| Analog Power Supply Voltage | AVDD | 12.2 | 12.5 | 12.8 | V | |


Note: TYP VCOM is only reference value. It must be optimized according to each LCM. Be sure to use VR and OP buffer on VCOM output. Please adjust VCOM to make the flicker level be minimum for getting excellent image.

7.2 Current Consumption

| Item | Symbol | Condition | Values | | | Unit | Remark |
|------------------|--------|------------|--------|-----|-----|------|--------|
| | | | MIN | TYP | MAX | | |
| Gate on Current | IVGH | VGH=23V | - | 0.5 | - | mA | |
| Gate off Current | IVGL | VGL=-10V | - | 2.0 | - | mA | |
| Digital Current | IVDD | VDD=3.3V | - | 22 | - | mA | |
| Analog Current | IAVDD | AVDD=12.5V | - | 42 | - | mA | |

7.3 LED Backlight

| Item | Symbol | Values | | | Unit | Remark |
|----------------------|------------------|--------|-----|------|------|--------------------------|
| | | MIN | TYP | MAX | | |
| LED Current | I _{LED} | - | 276 | - | mA | Total LED |
| Forward Voltage | V _F | 8.4 | 9.6 | 10.5 | V | I _F =276mA |
| Reverse Current | I _r | - | - | 50 | μA | V _R =5V, 1LED |
| Power dissipation | P _d | 2650 | | | mW | Total LED |
| Peak forward current | I _{fp} | 100 | | | mA | 1LED |
| Reverse voltage | V _R | 5 | | | V | 1LED |

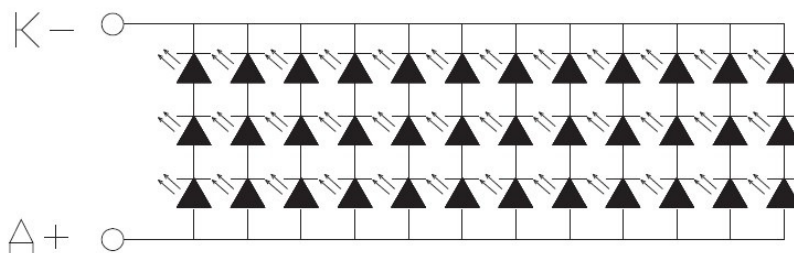

$$3 * 12 = 36EA \quad I_f = 276mA$$

8. Command/AC Timing

8.1 AC Electrical Characteristics

LVDS Mode AC Electrical Characteristics

(TA=-20 to 85°C, VDD=2.3 to 3.6V, AVDD=8 to 13.5V, GND=AGND=0V)


| Parameter | Symbol | Condition | MIN | MAX | Unit | Remark |
|------------------------|--------|--|-----|--------------|------|--------|
| Clock Frequency | RxFCLK | | 20 | | 71 | MHz |
| Input data skew margin | TRSKM | VID =400Mv RxVCM=1.2V RxFCLK=71MHz | 500 | | | ps |
| Clock High Time | TLVCH | | | 4/(7*RxFCLK) | | ns |
| Clock Low Time | TLVCL | | | 3/(7*RxFCLK) | | ns |
| PLL wake-up-time | TenPLL | | | | 150 | ns |

8.2 DC Electrical Characteristics

LVDS Mode DC Electrical Characteristics


(TA=-20 to 85°C, VDD=2.3 to 3.6V, AVDD=8 to 13.5V, GND=AGND=GND_LVDS=0V)

| Parameter | Symbol | Condition | MIN | MAX | Unit | Remark |
|---|---------|--------------------------------|----------|---------|-----------------|--------|
| Differential input high threshold voltage | RxVTH | RxVCM=1.2V | | | +0.1V | V |
| Differential input Low threshold voltage | RxVTL | | -0.1 | | | V |
| Input voltage range(single-end) | RxVIN | | 0 | | 2.4 | V |
| Differential input common mode voltage | RxVCM | | VID /2 | | 2.4- VID /2 | V |
| Differential input voltage | VID | | 0.2 | | 0.6 | V |
| Differential input leakage current | RxVTH | | -10 | | +10 | V |
| LVDS Digital Operating current | Iddlvsd | Fclk=65Mhz, VDD=3.3v | - | 40(TBD) | 50 | mA |
| LVDS Digital Standby current | Istlvds | Clock & all functions are stop | - | 10(TBD) | 50 | uA |

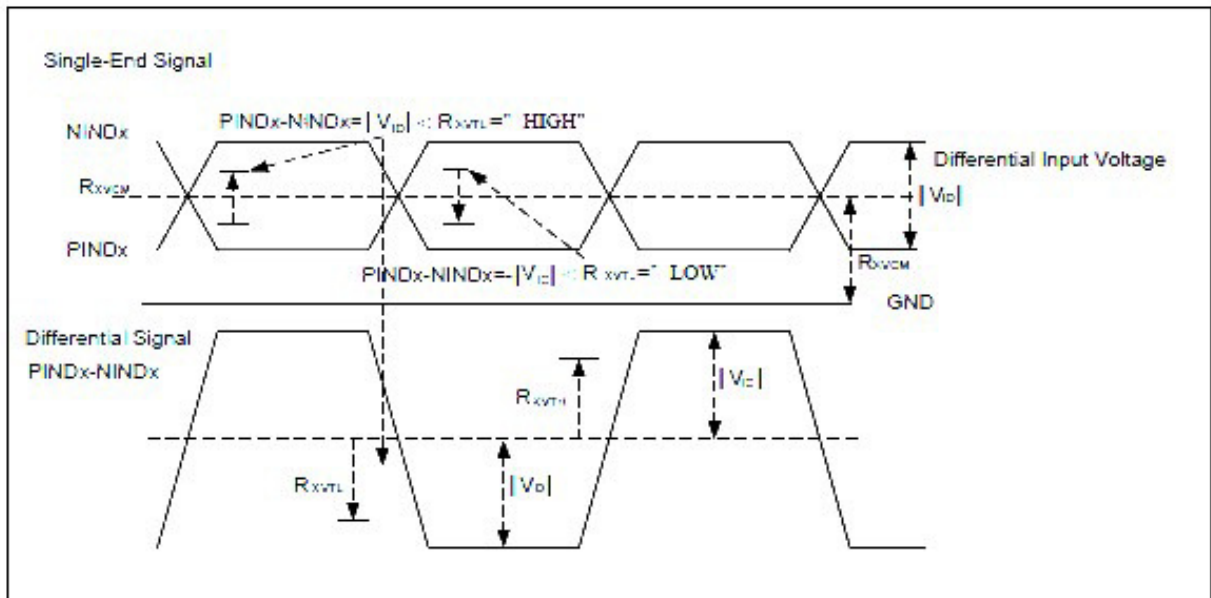


8.3 LVDS Data Input Format

8.3.1 6-bits LVDS Input (HSD=H)

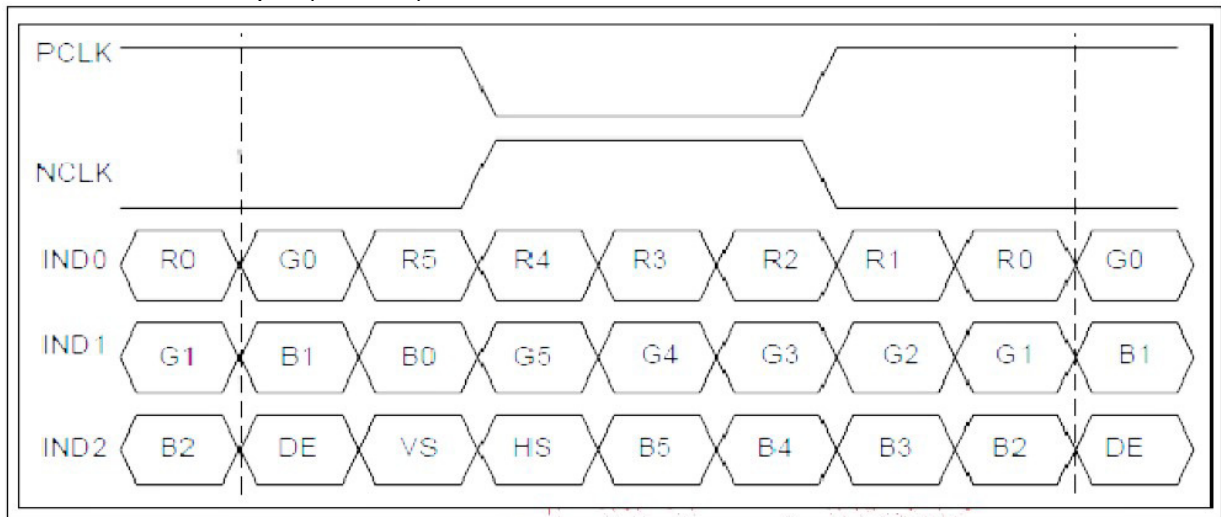

8.3.2 8-bits LVDS Input (HSD=L)

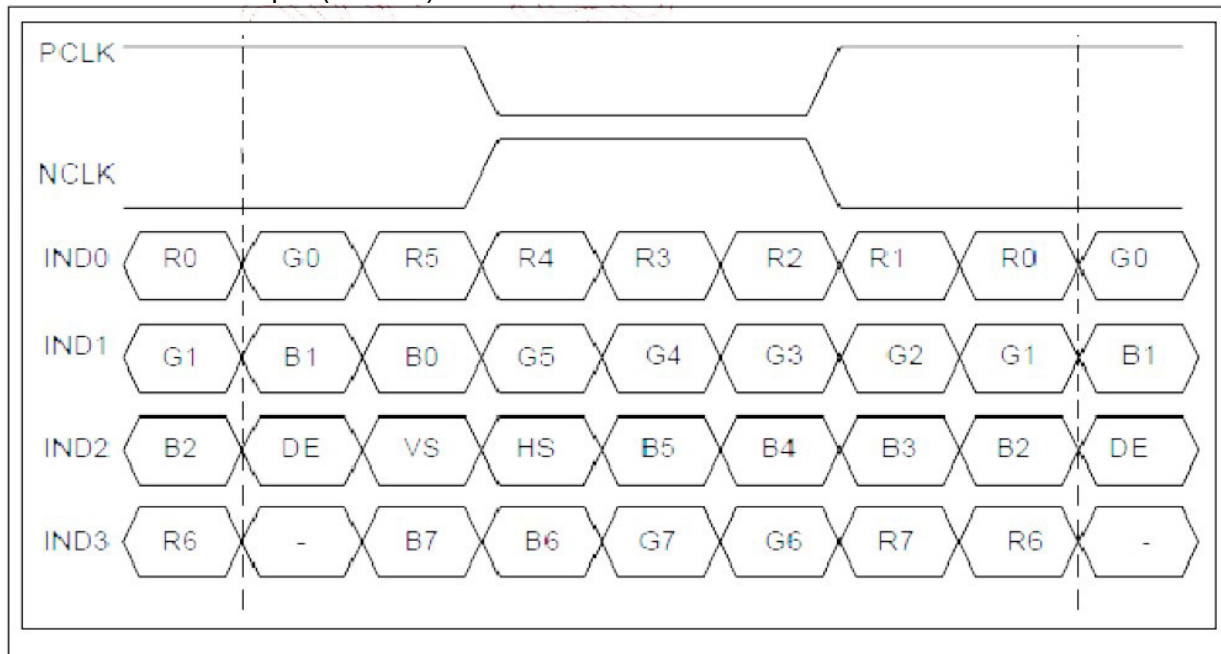

8.4 Input Timing Table

8.4.1 DE Mode

| Parameter | Symbol | Value | | | Unit |
|---------------------------------|----------|-------|------|------|------|
| | | Min | Typ | Max | |
| DCLK frequency @Frame rate=60hz | fclk | 40.8 | 51.2 | 67.2 | Mhz |
| Horizontal display area | thd | 1024 | | | DCLK |
| HSYNC period time | th | 1114 | 1344 | 1400 | DCLK |
| HSYNC blanking | thb+thfp | 90 | 320 | 376 | DCLK |
| Vertical display area | tvd | 600 | | | H |
| VSYNC period time | tv | 610 | 635 | 800 | H |
| VSYNC blanking | tvb+tvfp | 10 | 35 | 200 | H |

8.4.2 HV Mode

Horizontal Timing


| Parameter | | Symbol | Value | | | Unit |
|---------------------------------|------|--------|-------|------|------|------|
| | | | Min | Typ | Max | |
| DCLK frequency @Frame rate=60hz | | fclk | 44.9 | 51.2 | 63 | Mhz |
| Horizontal display area | | thd | 1024 | | | DCLK |
| 1 Horizontal Line | | th | 1200 | 1344 | 1400 | |
| HSYNC pulse width | Min. | thpw | 1 | | | |
| | Typ. | | - | | | |
| | Max. | | 140 | | | |
| HSYNC back porch | | thbp | 160 | 160 | 160 | |
| HSYNC front porch | | thfp | 16 | 160 | 216 | |

Vertical Timing

| Parameter | Symbol | Value | | | Unit |
|-----------------------|--------|-------|-----|-----|------|
| | | Min | Typ | Max | |
| Vertical display area | tvd | 600 | | | H |
| VSYNC period time | tv | 624 | 635 | 750 | H |
| VSYNC pulse width | tvpw | 1 | - | 20 | H |
| VSYNC back porch | tvb | 23 | 23 | 23 | H |
| VSYNC front porch | tvfp | 1 | 12 | 127 | H |

8.5 Power ON/OFF Sequence

In order to prevent IC from power on reset fail, the rising time (TPOR) of the digital power supply VDD should be maintained within the given specifications. Refer to "AC Characteristics" for more detail on timing.

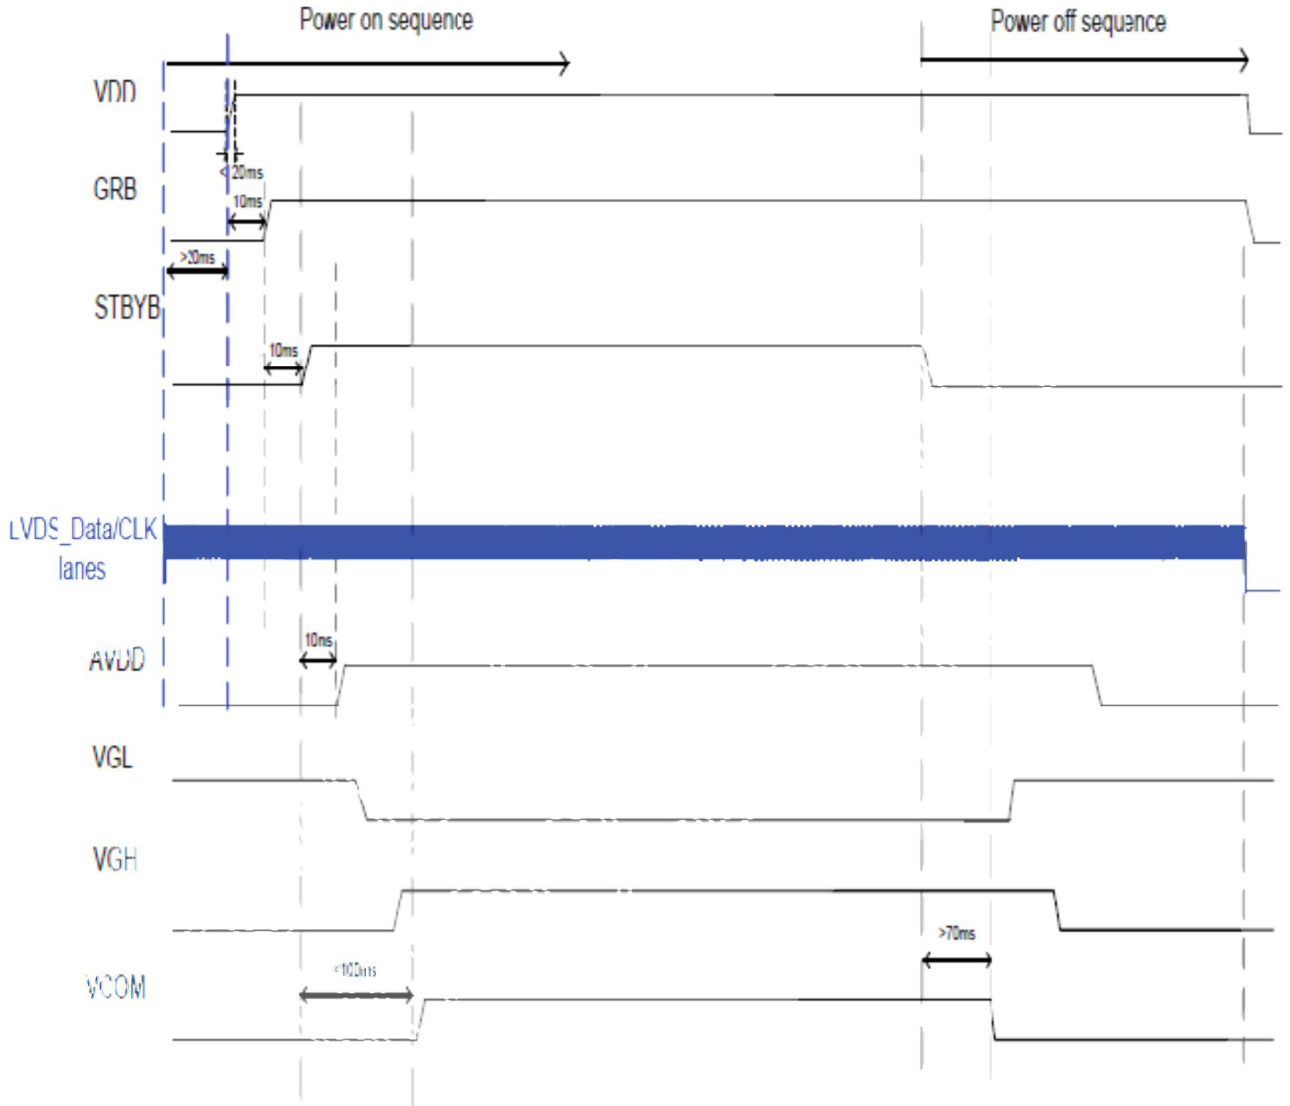

9 Optical Specification


Ta=25°C

| Item | Symbol | Condition | Min | Typ. | Max. | Unit | Remark | |
|----------------|------------|------------------|-----|-------|-------|-------------------|----------------|-----------------|
| Contrast Ratio | CR | $\theta=0^\circ$ | - | 600 | | | Note1 Note2 | |
| Response Time | Ton/ Toff | $\theta=0^\circ$ | - | 20 | 40 | ms | Note1 Note3 | |
| View Angles | θT | $CR \geq 10$ | 80 | 85 | - | Degree | Note4 | |
| | θB | | 80 | 85 | - | | | |
| | θL | | 80 | 85 | - | | | |
| | θR | | 80 | 85 | - | | | |
| Chromaticity | White | Brightness is on | x | 0.254 | 0.304 | 0.354 | - | Note5, Note1 |
| | | | y | 0.294 | 0.344 | 0.394 | | |
| | Red | | x | 0.561 | 0.611 | 0.661 | | |
| | | | y | 0.305 | 0.355 | 0.405 | | |
| | Green | | x | 0.252 | 0.302 | 0.352 | | |
| | | | y | 0.536 | 0.586 | 0.636 | | |
| | Blue | | x | 0.096 | 0.146 | 0.196 | | |
| | | | y | 0.067 | 0.117 | 0.167 | | |
| Luminance | L | | 400 | 450 | - | cd/m ² | Note1 Note6 | |
| Uniformity | U | | 70 | 75 | - | % | Note1 Note7 | |

Note 1: Definition of optical measurement system.

Temperature = 25°C(±3°C)

LED back-light: ON, Environment brightness < 150 lx

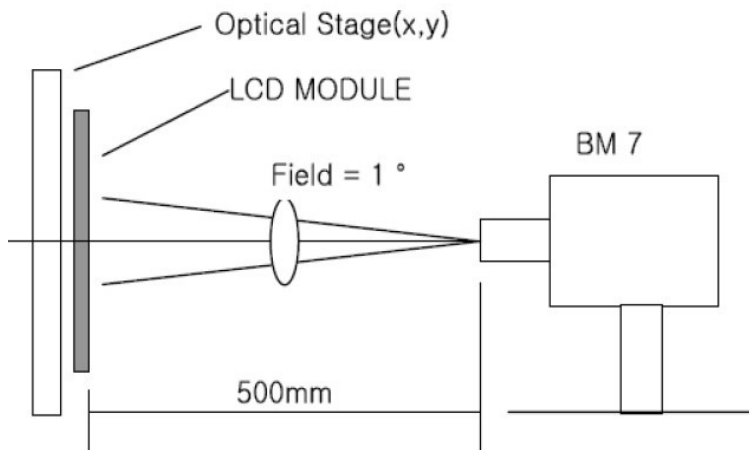


Note 2: Contrast ratio is defined as follow:

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$


Note 3: Response time is defined as follow:

Response time is the time required for the display to transition from black to white (Rise Time, T_r) and from white to black (Decay Time, T_f).

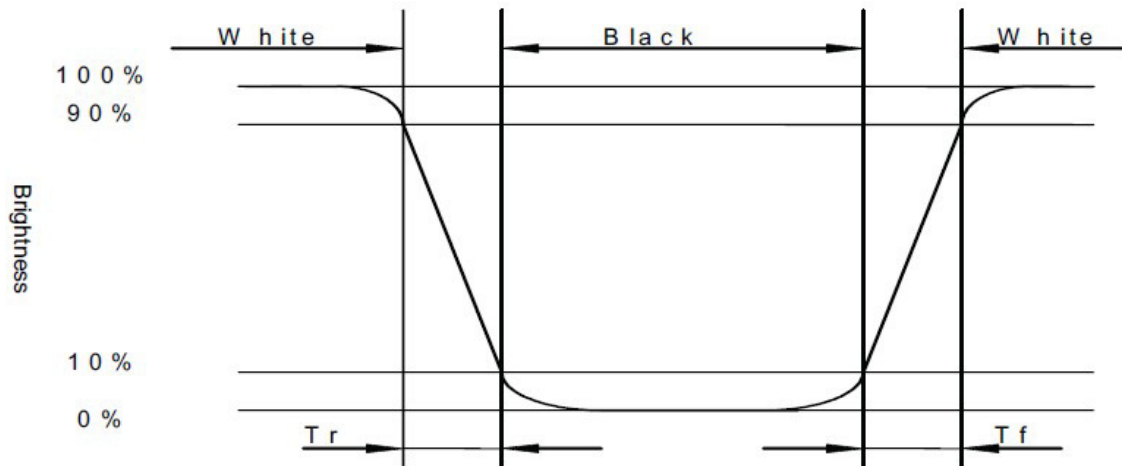


Note 4: Viewing angle range is defined as follow:

Viewing angle is measured at the center point of the LCD.

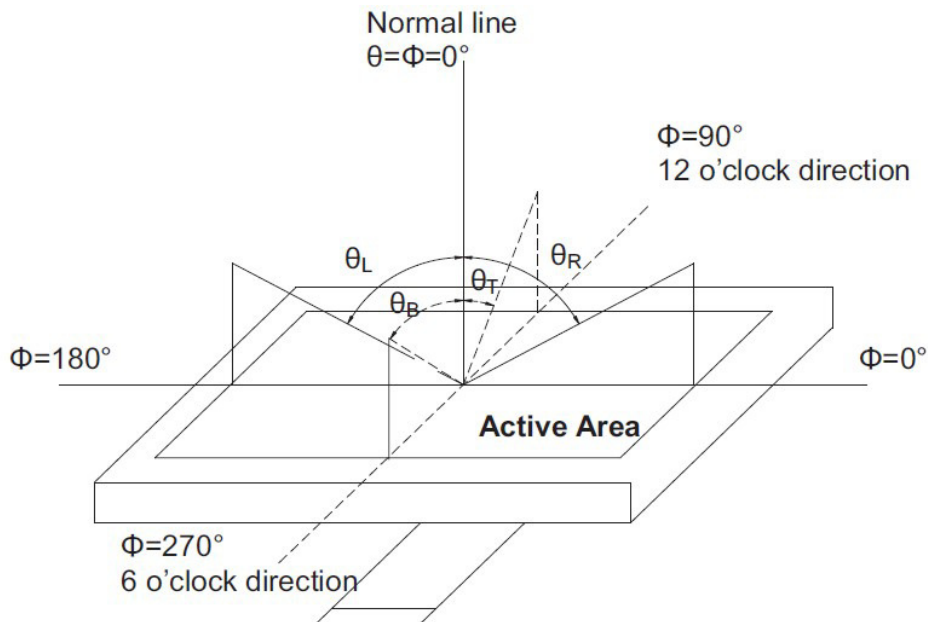

Note 5: Color chromaticity is defined as follow: (CIE1931)

Color coordinates measured at center point of LCD.

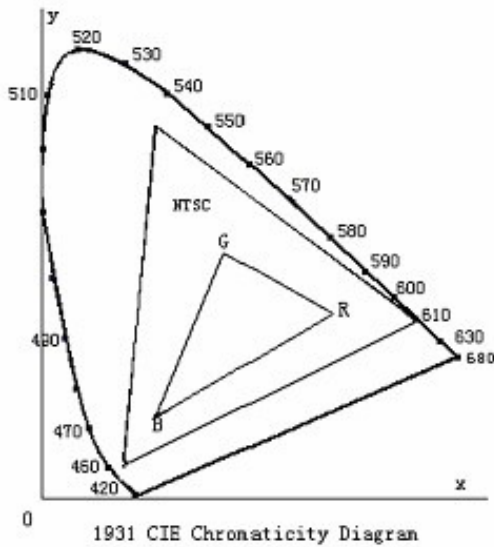

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$

Note 6: Luminance is defined as follow:

Luminance is defined as the brightness of all pixels “White” at the center of display area on optimum contrast.

Note 7: Luminance Uniformity is defined as follow:

Active area is divided into 9 measuring areas (Refer Fig. 2). Every measuring point is placed at the center of each measuring area.

$$\text{Uniformity (U)} = \frac{\text{Minimum Luminance(brightness) in 9 points}}{\text{Maximum Luminance(brightness) in 9 points}}$$

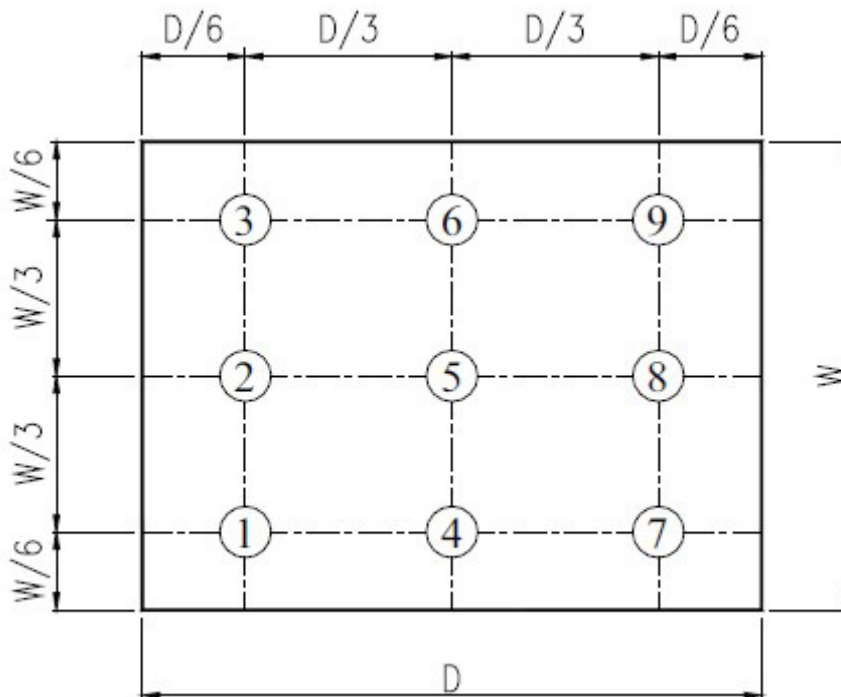


Fig. 2 Definition of uniformity

10 Environmental / Reliability Tests

| No | Test Item | Condition | Judgment criteria |
|----|-----------------------------------|--|---|
| 1 | High Temp Operation | Ts=+70°C, 120hrs | Per table in below |
| 2 | Low Temp Operation | Ta=-20°C, 120hrs | Per table in below |
| 3 | High Temp Storage | Ta=+80°C, 120hrs | Per table in below |
| 4 | Low Temp Storage | Ta=-30°C, 120hrs | Per table in below |
| 5 | High Temp & High Humidity Storage | Ta=+60°C, 90% RH 120hours | Per table in below (polarizer discoloration is excluded) |
| 6 | Thermal Shock (Non-operation) | -30°C 30 min~+80°C 30 min, Change time:5min, 5 Cycles | Per table in below |
| 7 | ESD (Non-Operation) | 150Pf,330Ω,Contact :±4KV,Air:±8KV 200pF,0Ω,±200V contact test | Per table in below |
| 8 | Vibration (Non-operation) | Frequency range: 10HZ~50HZ Stroke: 1.0mm, Sweep:10 HZ~50HZ , X, Y, Z 1 hours for each direction | Per table in below |
| 9 | Shock (Non-operation) | 980m/s ² , 6ms, ±X, Y, Z 3times for direction | Per table in below |
| 10 | Package Drop Test | Height:80 cm, 1 corner, 3 edges, 6 surfaces | Per table in below |

| INSPECTION | CRITERION(after test) |
|------------------------|---|
| Appearance | No Crack on the FPC, on the LCD Panel |
| Alignment of LCD Panel | No Bubbles in the LCD Panel No other Defects of Alignment in Active area |
| Electrical current | Within device specifications |
| Function / Display | No Broken Circuit, No Short Circuit or No Black line No Other Defects of Display |

11 Precautions for Use of LCD Modules

11.1 Safety

The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.

11.2 Handling

A. The LCD and touch panel is made of plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.

B. Do not handle the product by holding the flexible pattern portion in order to assure the reliability

C. Transparency is an important factor for the touch panel. Please wear clear finger sacks, gloves and mask to protect the touch panel from finger print or stain and also hold the portion outside the view area when handling the touch panel.

D. Provide a space so that the panel does not come into contact with other components.

E. To protect the product from external force, put a covering lens (acrylic board or similar board) and keep an appropriate gap between them.

F. Transparent electrodes may be disconnected if the panel is used under environmental conditions where dew condensation occurs.

G. Property of semiconductor devices may be affected when they are exposed to light, possibly resulting in IC malfunctions.

H. To prevent such IC malfunctions, your design and mounting layout shall be done in the way that the IC is not exposed to light in actual use.

11.3 Static Electricity

A. Ground soldering iron tips, tools and testers when they are in operation.

B. Ground your body when handling the products.

C. Power on the LCD module before applying the voltage to the input terminals.

D. Do not apply voltage which exceeds the absolute maximum rating.

E. Store the products in an anti-electrostatic bag or container.

F. Peel off the LCM protective film slowly since static electricity may be generated.

11.4 Storage

A. Store the products in a dark place at $+25^{\circ}\text{C} \pm 10^{\circ}\text{C}$ with low humidity (40% RH to 60% RH). Don't expose to sunlight or fluorescent light.

B. Storage in a clean environment, free from dust, active gas, and solvent.


11.5 Cleaning

A. Do not wipe the touch panel with dry cloth, as it may cause scratch.

B. Wipe off the stain on the product by using soft cloth moistened with ethanol. Do not allow ethanol to get in between the upper film and the bottom glass. It may cause peeling issue or defective operation. Do not use any organic solvent or detergent other than ethanol.

11.6 Cautions for installing and assembling

Bezel edge must be positioned in the area between the Active area and View area. The bezel may press the touch screen and cause activation if the edge touches the active area. A gap of approximately 0.5mm is needed between the bezel and the top electrode. It may cause unexpected activation if the gap is too narrow. There is a tolerance of 0.2 to 0.3mm for the outside dimensions of the touch panel and tail. A gap must be made to absorb the tolerance in the case and connector.

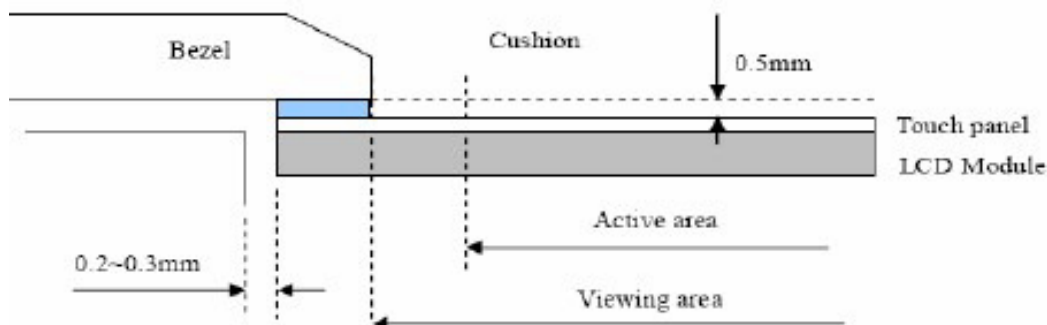



Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331