

# Asper 2.4G / GNSS Antenna

Part No. SRFWG018

flexiiANT<sup>®</sup>

Product Specification

## 1. Features


- Dual Antenna for 1559 – 1609 MHz and 2.4 – 2.5 GHz applications
- Wi-Fi,<sup>®</sup> Bluetooth, GNSS.
- Maintains high performance with good isolation within device: DFI (Designed For Integration)
- 1.13mm diameter RF cable with IPEX MHF connector
- Self-Adhesive mounted
- Quick integration minimizes design cycle
- High performance
- Available in 3 standard cable lengths

## 2. Description

Asper is a dual antenna that combines two separate antenna systems within a single flexible form factor. Intended for use with Wi-Fi, Bluetooth with positioning applications. Simple integration with plug and play simplicity. This product specification shows the performance of the antenna to cover a typical BT / Wi-Fi and GNSS bands: 2.4-2.5GHz / 1559-1609MHz.

## 3. Applications

- Sport cameras
- Trackers
- Dash cams
- Portable Devices
- Network Devices
- Wearable devices
- MIMO Systems

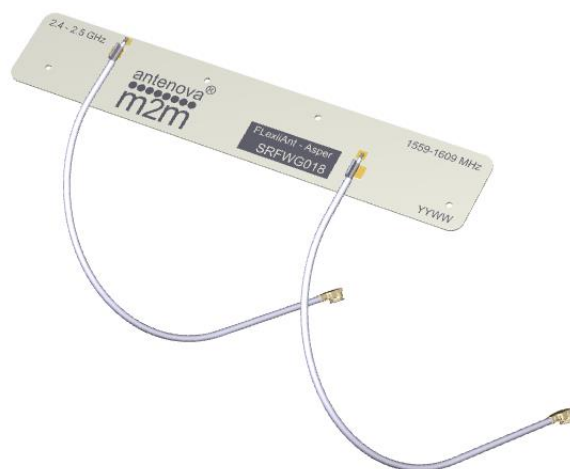

## 4. Part Number

**Asper: SRFWG018-xxx**



Note. -xxx refers to cable length option:

| Part Number  | Cable Length |
|--------------|--------------|
| SRFWG018-100 | 100mm        |
| SRFWG018-150 | 150mm        |
| SRFWG018-200 | 200mm        |

## 5. General Data

|                         |                             |
|-------------------------|-----------------------------|
| Product name            | Asper                       |
| Part Number             | SRFWG018                    |
| Frequency               | 1559 – 1609 MHz; 2.4-2.5GHz |
| Polarization            | Linear                      |
| Operating temperature   | -40°C to +85°C              |
| Impedance with matching | 50 Ω                        |
| Weight                  | < 0.5 g                     |
| Antenna Assembly type   | FPC Self-adhesive 3M 468MP  |
| Dimensions (Antenna)    | 81.0 x 14.0 x 0.15 (mm)     |
| Cable length            | 100 /150 / 200              |
| Connection              | MHF IPEX                    |


## 6. RF Characteristics

|                     | 1559 – 1609 MHz | 2.4 – 2.5 GHz | Conditions                                                                       |
|---------------------|-----------------|---------------|----------------------------------------------------------------------------------|
| Peak gain           | 4.25dBi         | 5.6dBi        | All data measured in a loaded condition adhered to a plastic carrier free space. |
| Average gain        | -1.1dBi         | -0.6dBi       |                                                                                  |
| Average efficiency  | >75%            | >85%          |                                                                                  |
| Maximum return loss | -18.4dB         | -14.5dB       |                                                                                  |
| Maximum VSWR        | 1.3:1           | 1.4:1         |                                                                                  |


# Antennas for Wireless M2M Applications

## 7. RF Performance 1559-1609MHz

### 7.1 Return Loss

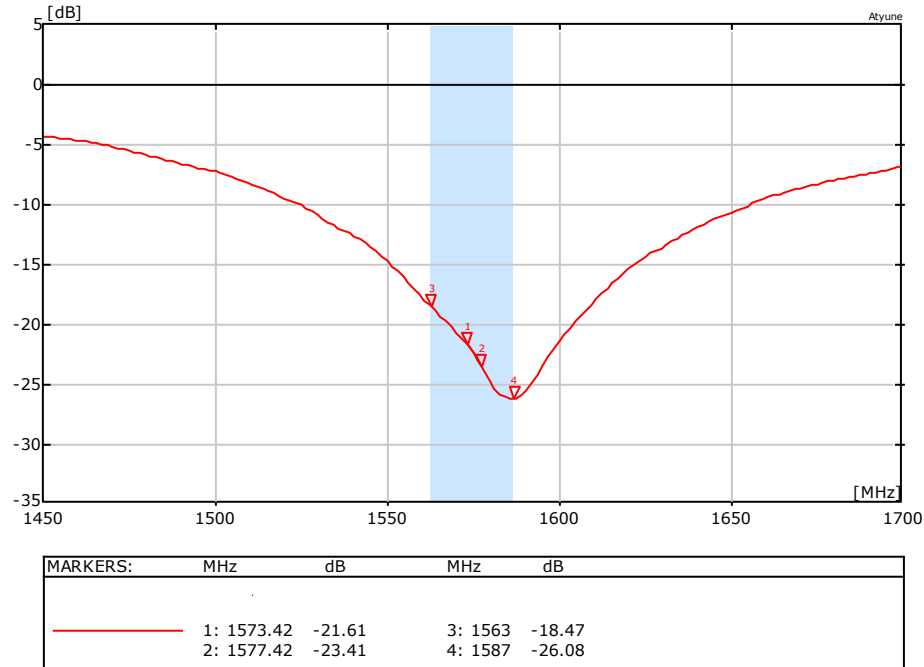

### 7.2 VSWR

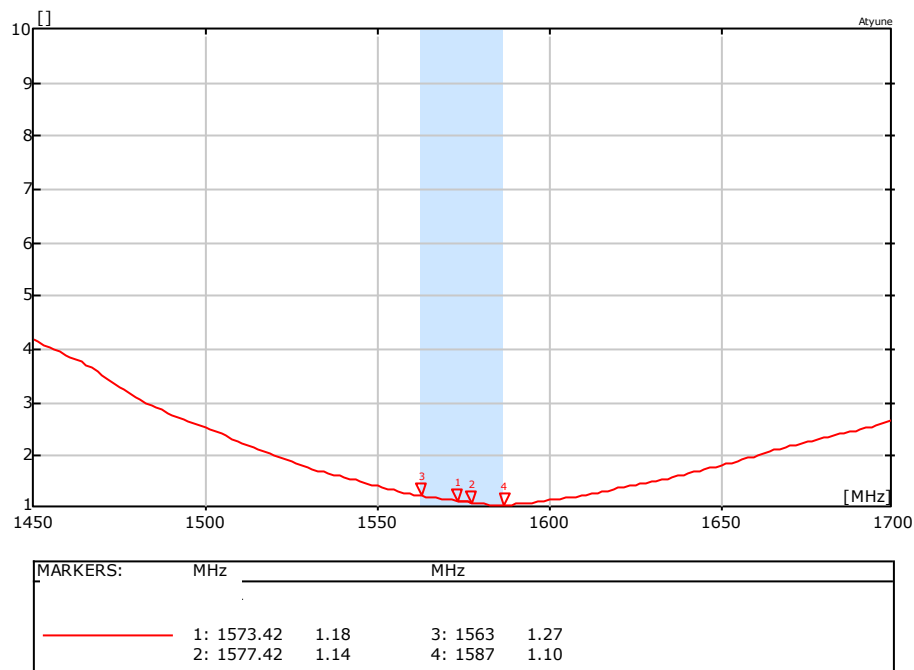

Antennas for Wireless M2M Applications


## 7.3 Antenna patterns GNSS

### 7.3.1 1559 MHz – 1609 MHz




#### 3D pattern at 1575 MHz

*Drag to rotate pattern and PCB by using Adobe Reader  
(Click to Activate)*

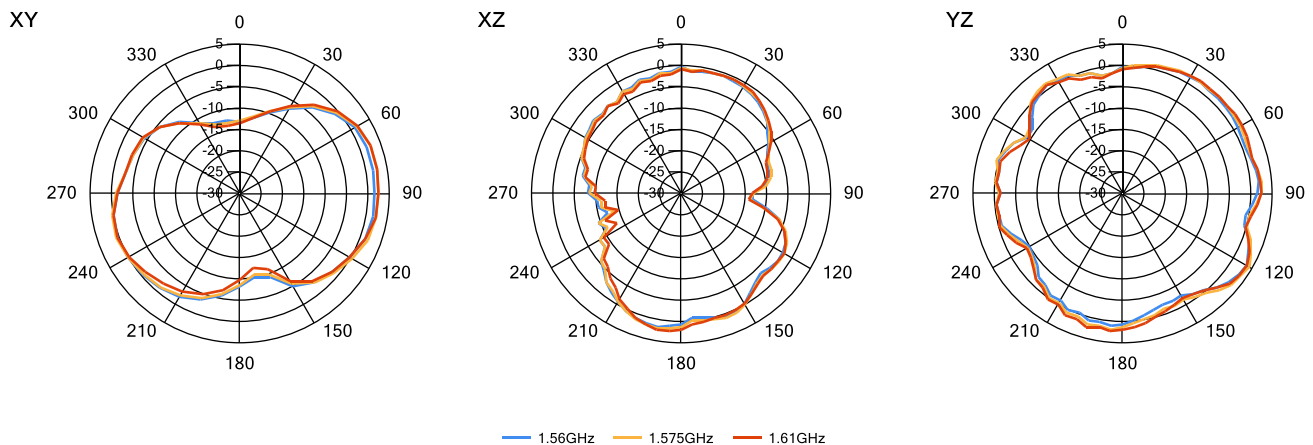


## 7. RF Performance 2.4-2.5GHz

### 7.1 Return Loss

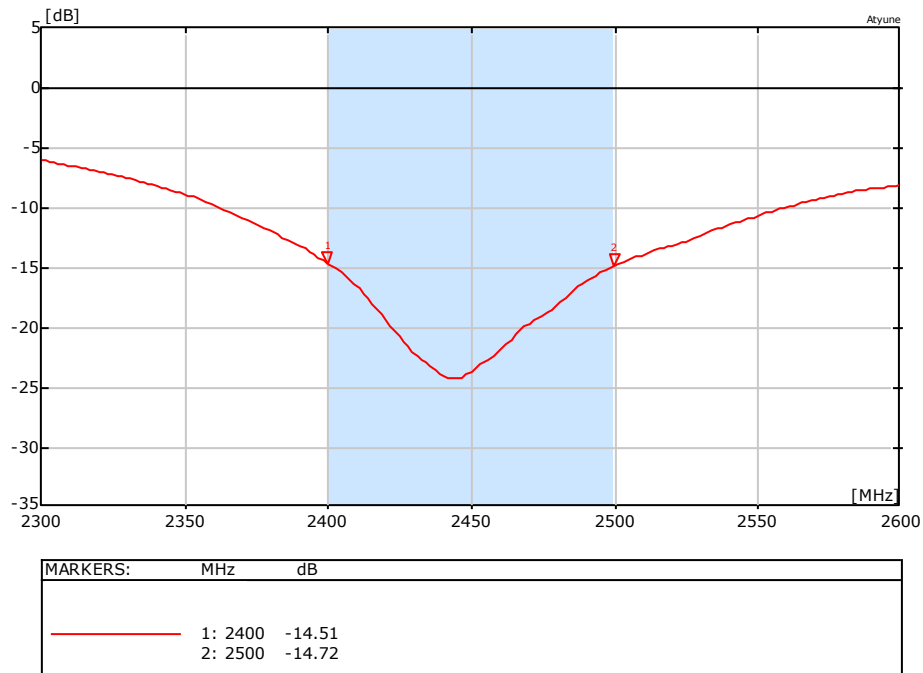


### 7.2 VSWR

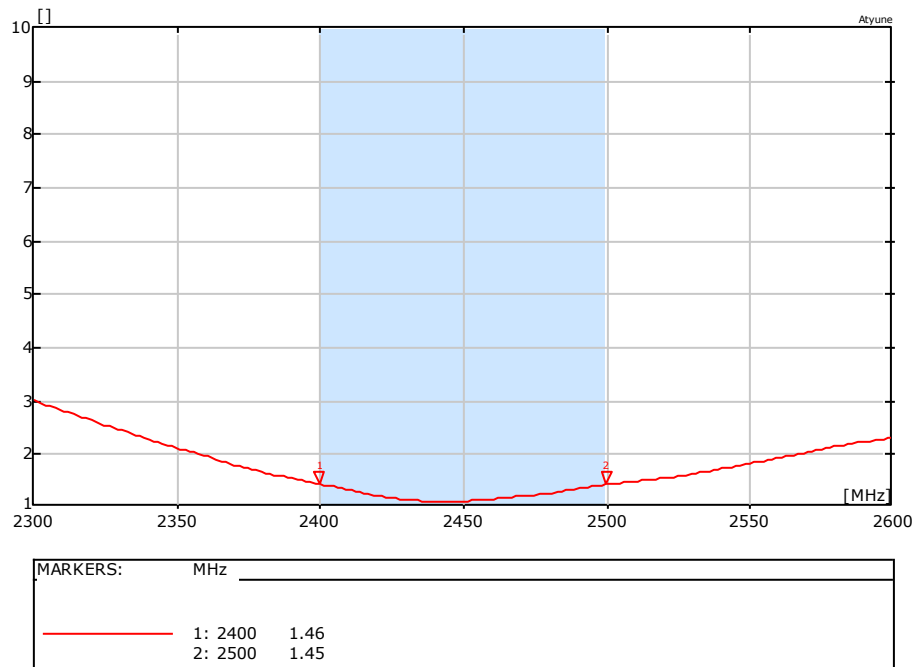

Antennas for Wireless M2M Applications


## 7.3 Antenna patterns

### 7.3.1 2400 MHz – 2500 MHz

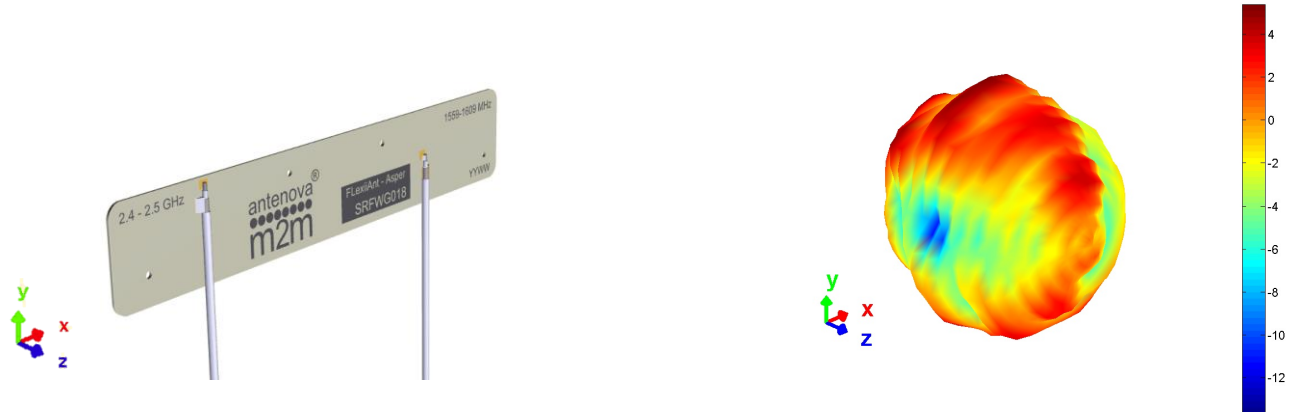


#### 3D pattern at 2.45GHz

*Drag to rotate pattern and PCB by using Adobe Reader  
(Click to Activate)*

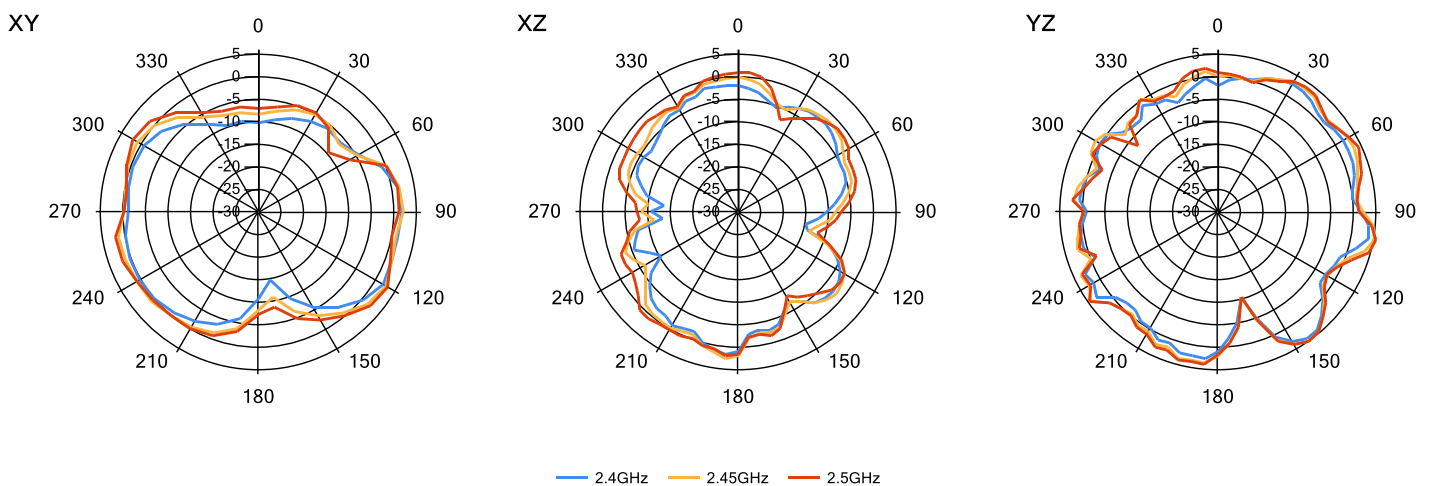


## 7.4 Isolation

The antennas isolation to each other is shown here tested free space. The isolation is <-17dB.

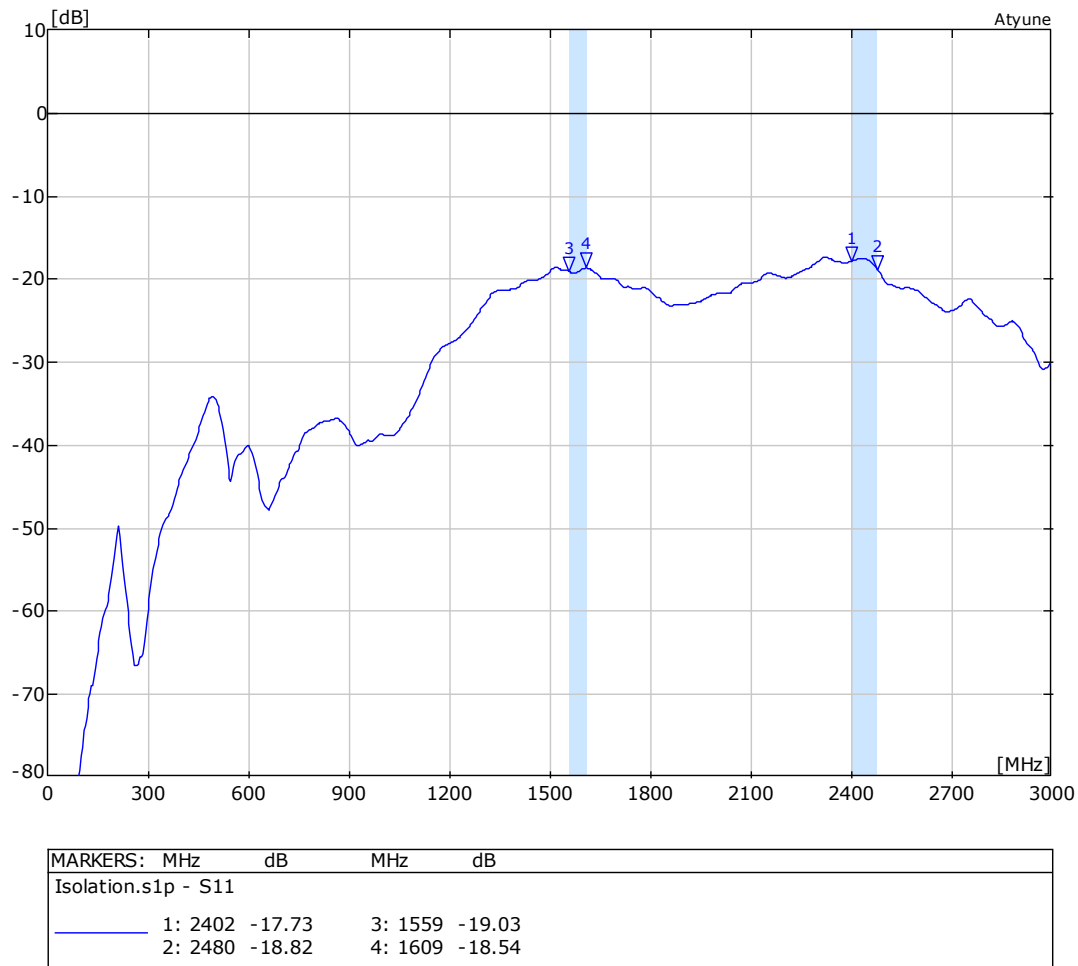

## 8. Antenna Dimensions

### 8.1 Dimensions FPC section

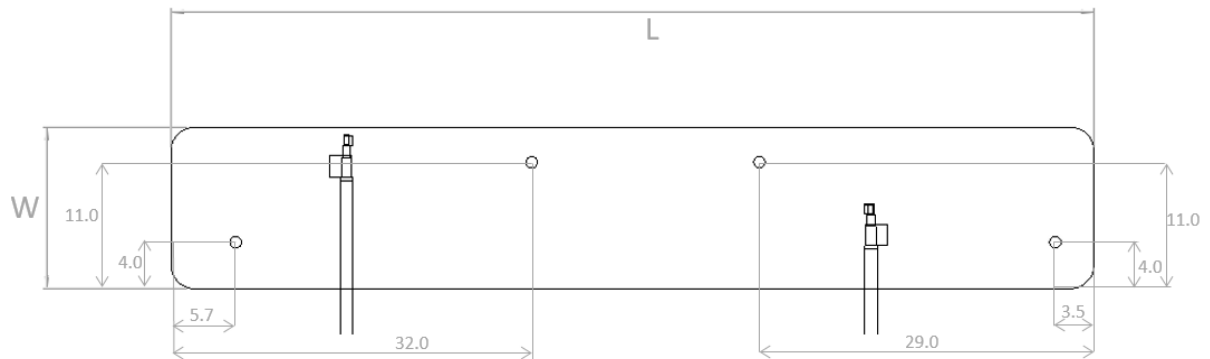


4 Holes = 1mm  $\varnothing$  (diameter)

| L                   | W                   | T                 |
|---------------------|---------------------|-------------------|
| Length              | Width               | Thickness         |
| 81.0 $\pm$ 0.2 (mm) | 14.0 $\pm$ 0.2 (mm) | 0.15 (mm) nominal |

All dimensions in mm

### 8.2 Dimensions assembled

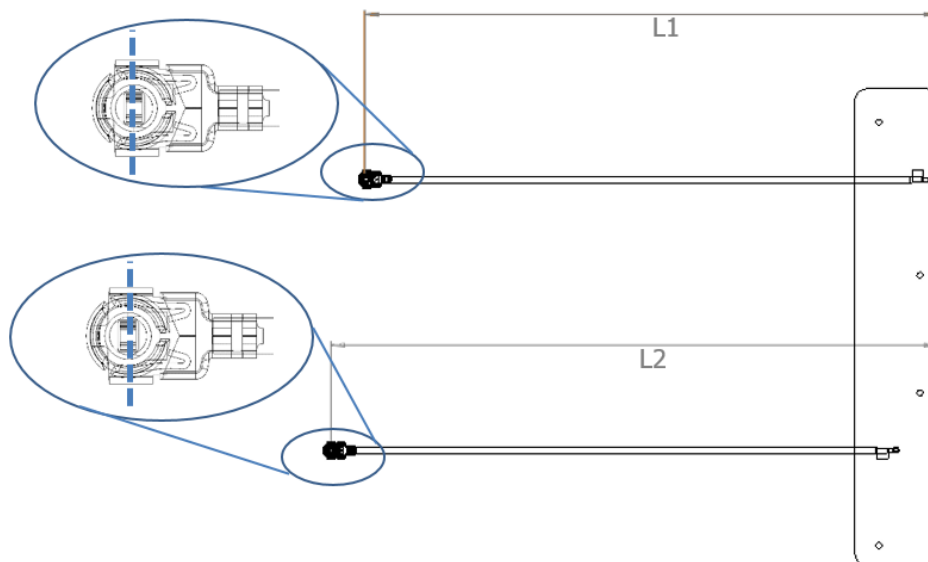


| SRFWG018-100       | SRFWG018-150       | SRFWG018-200       |
|--------------------|--------------------|--------------------|
| L1 (Wi-Fi)         | L1 (Wi-Fi)         | L1 (Wi-Fi)         |
| 101 $\pm$ 2.0 (mm) | 151 $\pm$ 2.0 (mm) | 201 $\pm$ 2.0 (mm) |
| L2 (GNSS)          | L2 (GNSS)          | L2 (GNSS)          |
| 107 $\pm$ 2.0 (mm) | 157 $\pm$ 2.0 (mm) | 207 $\pm$ 2.0 (mm) |

Antennas for Wireless M2M Applications




### 8.3 IPEX Connector

| I-PEX    |              |
|----------|--------------|
| Material | Copper Alloy |
| Plating  | Ag           |

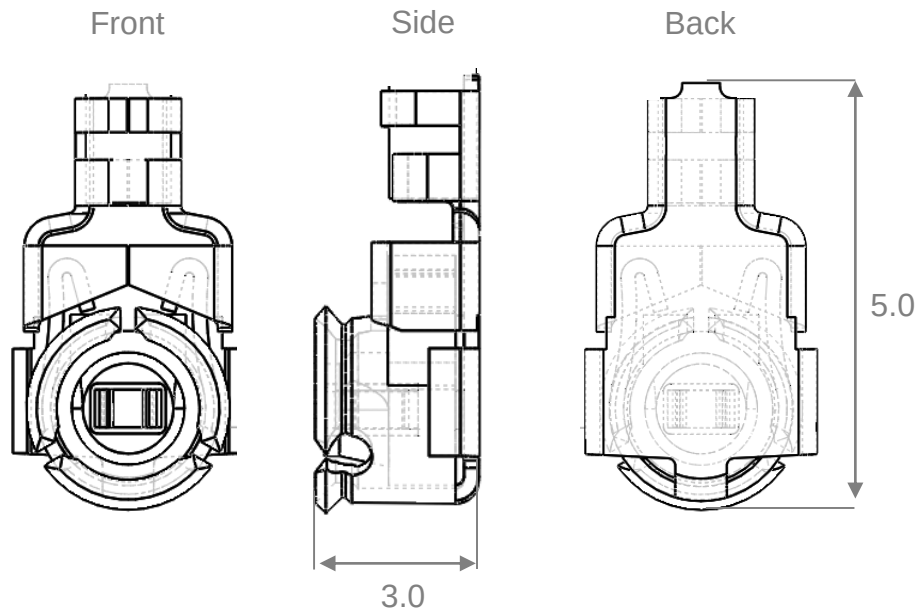


All dimensions in mm

## 8.4 Assembly

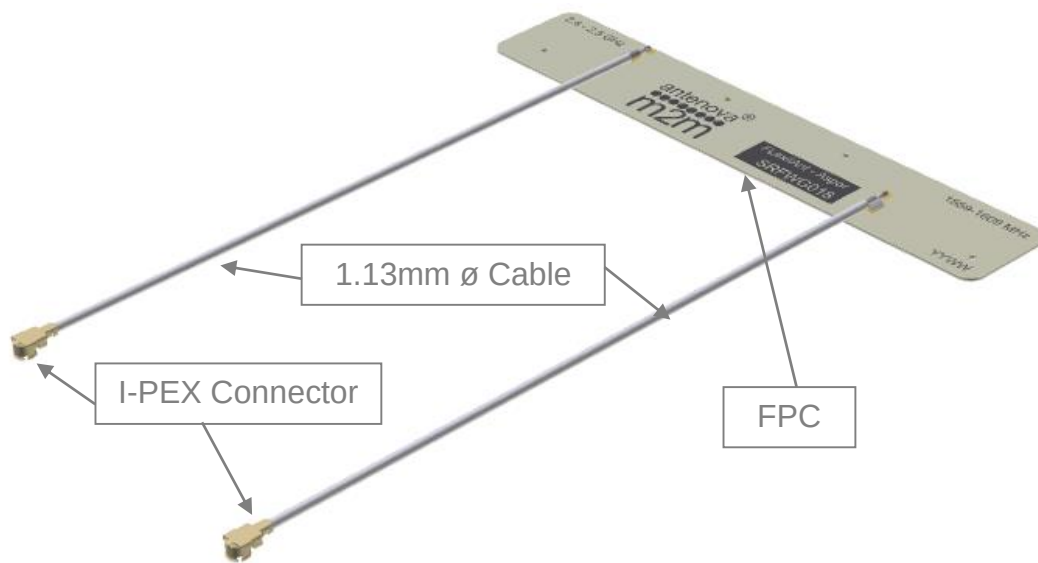

## 8.5 Antenna zones

The antenna contains two separate radiating structures, they are defined by the frequency band marked on the FPC and correspond to that side.

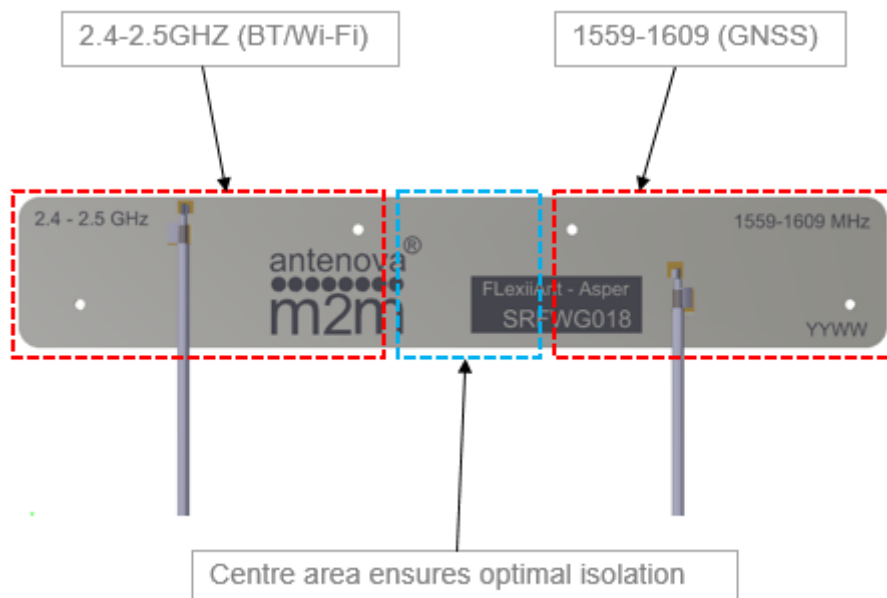

## 9. Electrical Interface

### 9.1 Host Interface

The host PCB requires the mating connector which is IPEX MHF (UFL) receptacle. The location should be close to the chip/modules pin for the RF. Any feed from this receptacle should be maintained at 50Ω impedance.

### 9.2 Transmission Line

All transmission lines should be designed to have a characteristic impedance of 50Ω.


- The length of the transmission lines should be kept to a minimum
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50 Ω

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the feed.

A DC blocking capacitor should be placed in line to protect the RF front end.

### 9.3 Mechanical Fixing

The antenna uses 3M 468MP adhesive on the reverse side of the FPC. The antenna has an easy access split line to peel off to reveal the adhesive side. It is designed for a one time fix to a clean smooth surface.

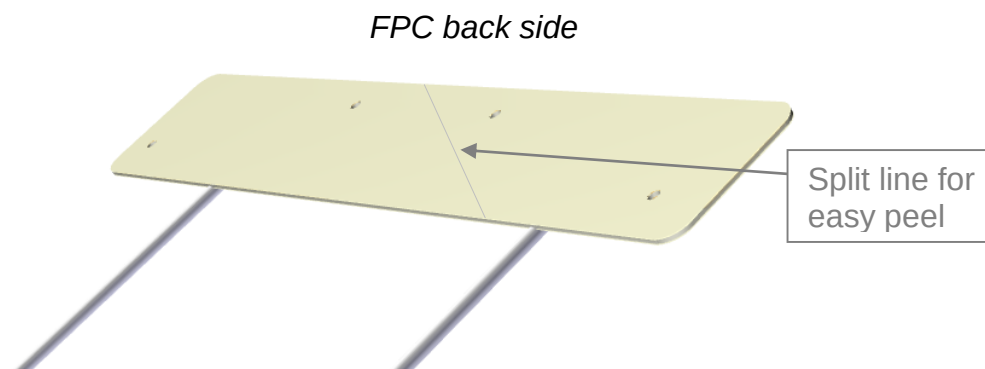


## 10.0 Antenna Integration Guide

### 10.1 Placement

For placing the FPC antenna within a device, the host PCB size is not a factor like PCB mounted antennas. However placement still needs to follow some basic rules, as any antenna is sensitive to its environment.

Using six spatial directions shown below as a guide. The antenna FPC section should try to maintain a minimum of three directions free from obstructions to be able to operate effectively. The other directions will have obstacles in its path, these directions still require a minimum clearance. These minimum clearances are further defined in this section. The plastic case is not included in this, only metal objects/components that will obstruct or come in close proximity to the antenna.




*Six spatial directions relative to FPC*

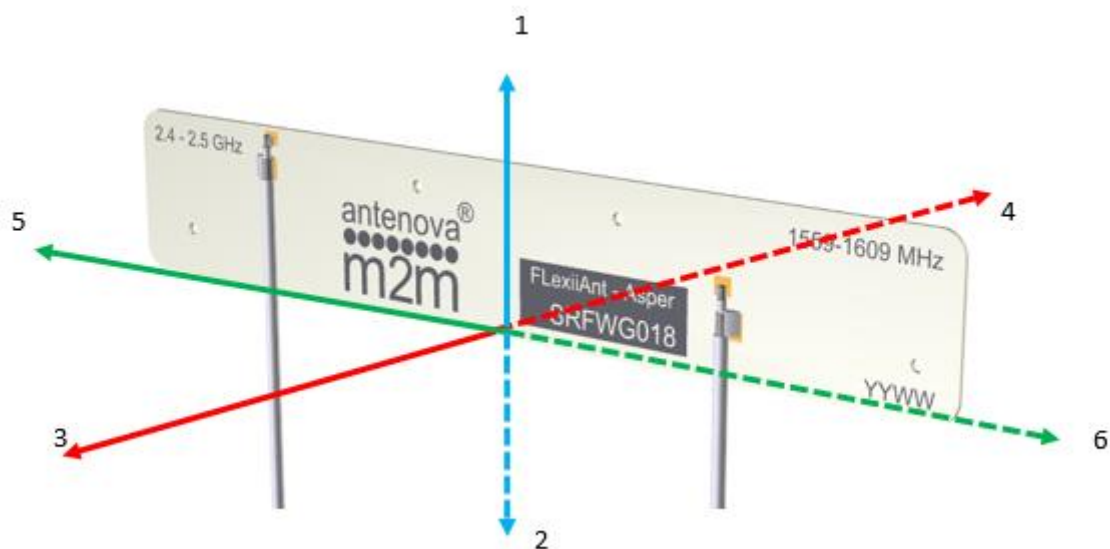

## 10.2 Orientation of FPC

The orientation of the FPC with respect to the host PCB should be defined depending on the unit. The proximity of the GND will have an influence on the antenna so the PCB location relative to the antenna should be considered.



The FPC will normally be placed in one of the three following options for orientation. In each option a distance (d) is the critical dimension to consider. Below shows the minimum value of (d) for each. Other obstructions may increase this dimension.

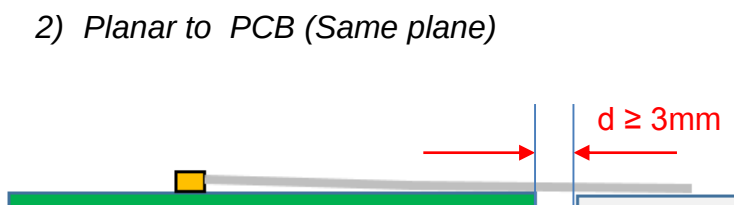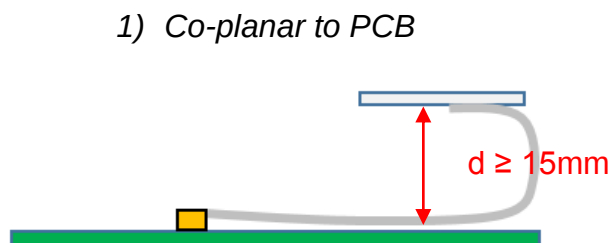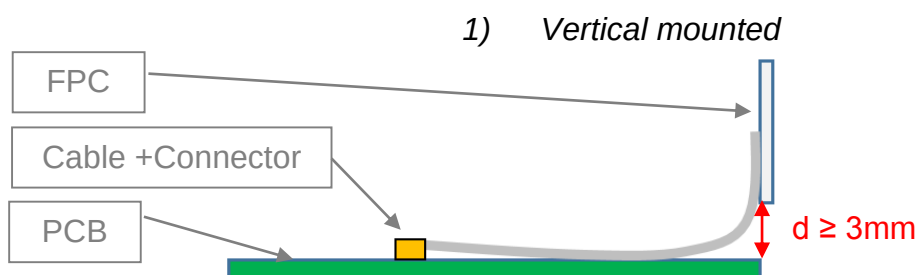

## 10.3 Device Integration example

An example of the placement within a device is shown below using a sports camera. The device contains the major components along with the device outer case. The FPC is shown adhered to the inside of the device's plastic housing. The length of the cable is sufficient to allow ease of assembly when produced (SRFWG018-100).

The FPC was placed in two planes to utilise the available space. The antenna is adhered to the inside both vertically and horizontally. The GNSS section is horizontal for the best orientation, while the BT/Wi-Fi is vertically placed.

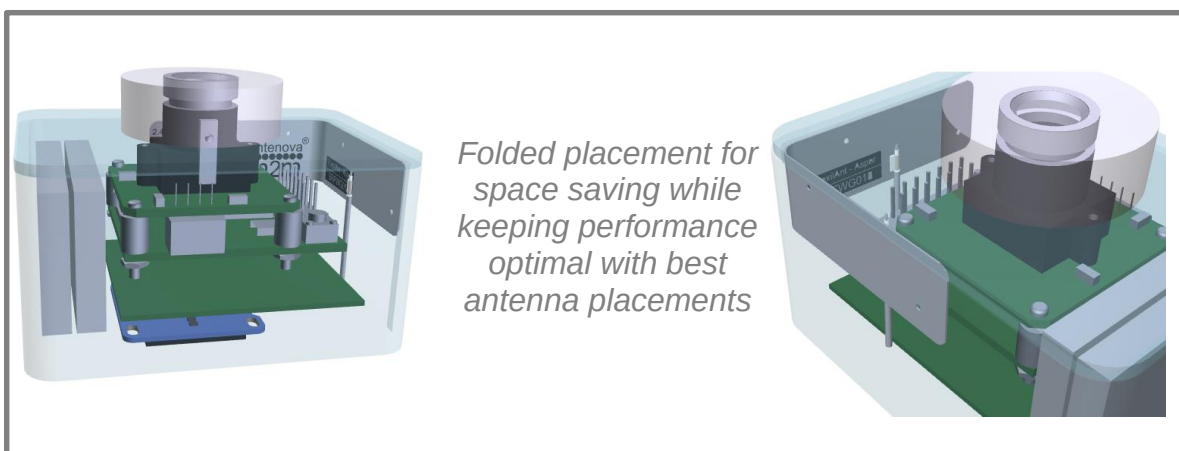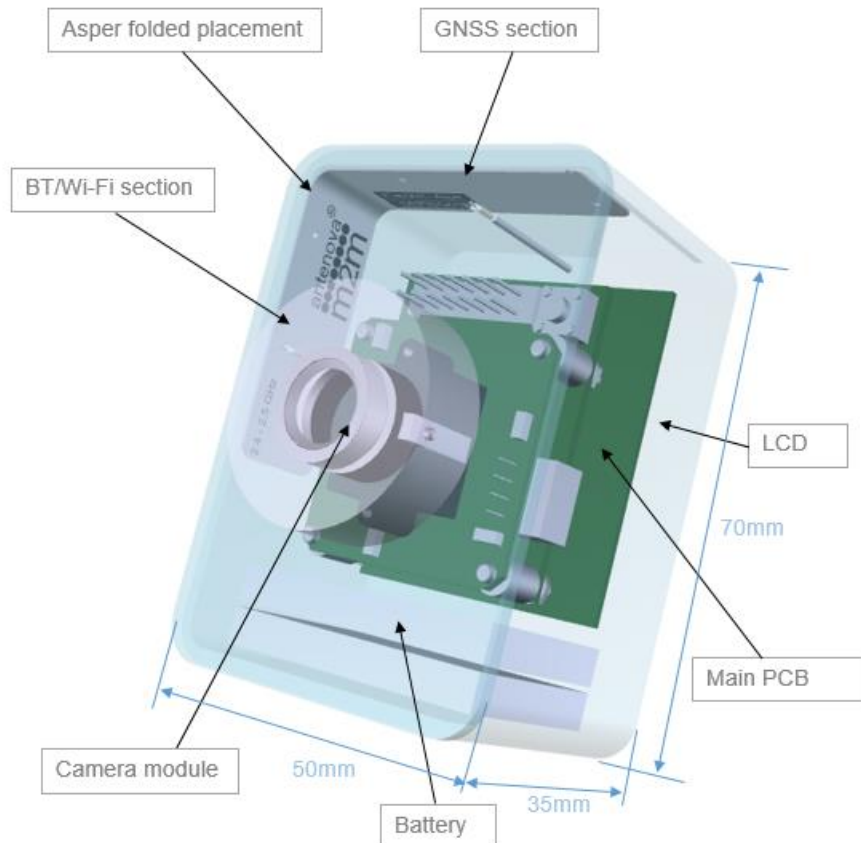

## 11. Hazardous Material Regulation Conformance


The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova M2M's website.

## 12. Packaging

The antennas are stored in individual plastic (PE) bags. Then stored within a second bag of 10pcs.

*Single antenna per bag*

*10 units per second bag (Labelled)*

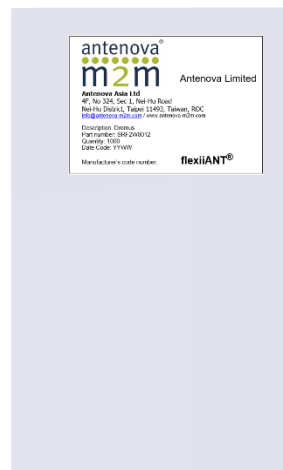

### 12.1 Optimal Storage Conditions

|               |                                                                                |
|---------------|--------------------------------------------------------------------------------|
| Temperature   | -10°C to 40°C                                                                  |
| Humidity      | Less than 75% RH                                                               |
| Shelf life    | 18 Months                                                                      |
| Storage place | Away from corrosive gas and direct sunlight                                    |
| Packaging     | Antennas should be stored in unopened sealed manufacturer's plastic packaging. |

## 12.2 Label Information







[www.antenova-m2m.com](http://www.antenova-m2m.com)

#### Corporate Headquarters

Antenova Limited  
2<sup>nd</sup> Floor Titan Court  
Bishop Square  
Hatfield  
AL10 9NA  
UK

**Tel:** +44 1233 810600

**Email:** [sales@antenova-m2m.com](mailto:sales@antenova-m2m.com)

#### North America Headquarters

Antenova Limited  
100 Brush Creek Road, Suite 103  
Santa Rosa  
California 95404  
USA

**Tel:** +1 707 890 5202

**Email:** [sales@antenova-m2m.com](mailto:sales@antenova-m2m.com)

#### Asia Headquarters

Antenova Asia Limited  
4F, No. 324, Sec. 1, Nei-Hu Road  
Nei-Hu District  
Taipei 11493  
Taiwan, ROC

**Tel:** +886 (0) 2 8797 8630

**Fax:** +886 (0) 2 8797 6890

**Email:** [sales@antenova-m2m.com](mailto:sales@antenova-m2m.com)

**Copyright® Antenova Ltd.** All Rights Reserved. Antenova®, Antenova M2M®, gigaNOVA® the Antenova product family names, and the Antenova and Antenova M2M logos are trademarks and/or registered trademarks of Antenova Ltd. Any other names and/or trademarks belong to their respective companies.

The materials provided herein are believed to be reliable and correct at the time of printing. Antenova does not warrant the accuracy or completeness of the information, text, graphics or other items contained within this information. Antenova further assumes no responsibility for the use of this information, and all such information shall be entirely at the user's risk.



Certificate No: 4598

## Antennas for Wireless M2M Applications



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331