

# TC7W66F, TC7W66FU, TC7W66FK



## DUAL BILATERAL SWITCH

The TC7W66 is a high speed CMOS DUAL BILATERAL SWITCH fabricated with silicon gate CMOS technology. It consists of four independent high speed switches capable of controlling either digital or analog signals while maintaining the CMOS low power dissipation. Control input (C) is provided to control the switch. The switch turns ON while the C input is high, and the switch turns OFF while low. All inputs are equipped with protection circuits against static discharge or transient excess voltage.

### FEATURES

- High Speed .....  $t_{pd} = 7\text{ns}$  (Typ.) at  $V_{CC} = 5\text{V}$
- Low Power Dissipation .....  $I_{CC} = 1\mu\text{A}$  (Max.) at  $T_a = 25^\circ\text{C}$
- High Noise Immunity .....  $V_{NIH} = V_{NIL} = 28\% V_{CC}$  (Min.)
- Low ON Resistance .....  $R_{ON} = 50\Omega$  (Typ.) at  $V_{CC} = 9\text{V}$
- High Degree of Linearity .....  $\text{THD} = 0.05$  (Typ.) at  $V_{CC} = 5\text{V}$
- Pin and Function Compatible with TC4W66


### MARKING

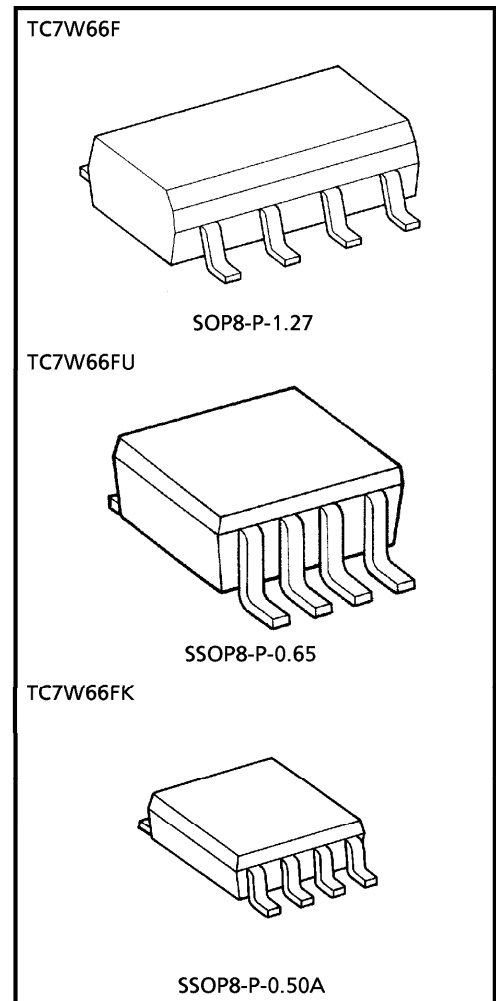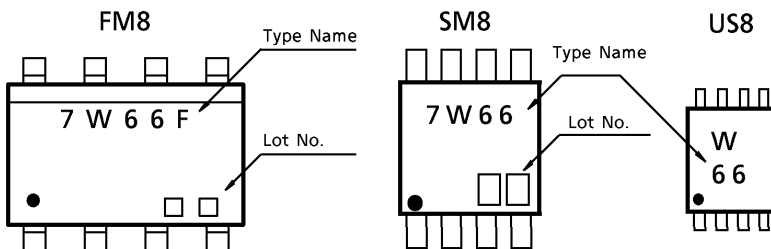

Weight

SOP8-P-1.27	: 0.05g (Typ.)
SSOP8-P-0.65	: 0.02g (Typ.)
SSOP8-P-0.50A	: 0.01g (Typ.)

**PIN ASSIGNMENT (TOP VIEW)**

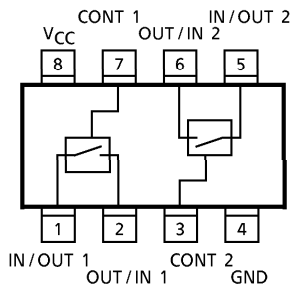


**TRUTH TABLE**

CONTROL	SWITCH FUNCTION
H	ON
L	OFF


**MAXIMUM RATINGS (Ta = 25°C)**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage Range	V <sub>CC</sub>	- 0.5~13	V
Control Input Voltage	V <sub>IN</sub>	- 0.5~V <sub>CC</sub> + 0.5	V
Switch I/O Voltage	V <sub>OUT</sub>	- 0.5~V <sub>CC</sub> + 0.5	V
Control Input Diode Current	I <sub>IK</sub>	± 20	mA
I/O Diode Current	I <sub>OK</sub>	± 20	mA
Switch Through Current	I <sub>OUT</sub>	± 25	mA
DC V <sub>CC</sub> /GND Current	I <sub>CC</sub>	± 25	mA
Power Dissipation	P <sub>D</sub>	300 (FM8, SM8)	mW
		200 (US8)	
Storage Temperature	T <sub>stg</sub>	- 65~150	°C
Lead Temperature (10 s)	T <sub>L</sub>	260	°C

**LOGIC SYMBOL**

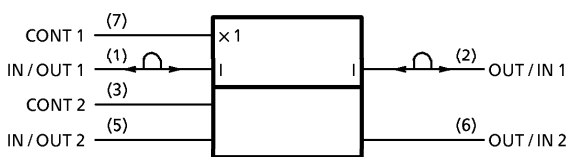

**LOGIC DIAGRAM (1 / 2 TC7W66)**

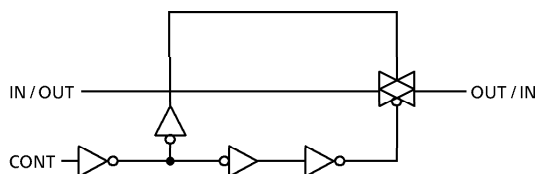

**RECOMMENDED OPERATING CONDITIONS**

CHARACTERISTIC	SYMBOL	RATING	UNIT
Supply Voltage	$V_{CC}$	2~12	V
Control Input Voltage	$V_{IN}$	0~ $V_{CC}$	V
Switch I/O Voltage	$V_{I/O}$	0~ $V_{CC}$	V
Operating Temperature	$T_{opr}$	-40~85	°C
Input Rise and Fall Time	$t_r, t_f$	0~1000 ( $V_{CC} = 2.0V$ )	ns
		0~500 ( $V_{CC} = 4.5V$ )	
		0~400 ( $V_{CC} = 6.0V$ )	
		0~250 ( $V_{CC} = 10.0V$ )	

**DC ELECTRICAL CHARACTERISTICS**

CHARACTERISTIC	SYMBOL	TEST CONDITION	$T_a = 25^\circ C$				$T_a = -40 \sim 85^\circ C$		UNIT
			$V_{CC}$	MIN.	TYP.	MAX.	MIN.	MAX.	
High-Level Control Input Voltage	$V_{IHC}$		2.0	1.5	—	—	1.5	—	V
			4.5	3.15	—	—	3.15	—	
			9.0	6.3	—	—	6.3	—	
			12.0	8.4	—	—	8.4	—	
Low-Level Control Input Voltage	$V_{ILC}$		2.0	—	—	0.5	—	0.5	V
			4.5	—	—	1.35	—	1.35	
			9.0	—	—	2.7	—	2.7	
			12.0	—	—	3.6	—	3.6	
ON Resistance	$R_{ON}$	$V_{IN} = V_{IHC}$ $V_{I/O} = V_{CC}$ to GND $I_{I/O} \leq 1mA$	4.5	—	96	170	—	200	$\Omega$
			9.0	—	55	85	—	100	
			12.0	—	45	80	—	90	
			2.0	—	160	—	—	—	
		$V_{IN} = V_{IHC}$ $V_{I/O} = V_{CC}$ or GND $I_{I/O} \leq 1mA$	4.5	—	70	100	—	130	
			9.0	—	50	75	—	95	
			12.0	—	45	70	—	90	
			Difference of ON Resistance Between Switches	$\Delta R_{ON}$	$V_{IN} = V_{IHC}$ $V_{I/O} = V_{CC}$ to GND $I_{I/O} \leq 1mA$	4.5	—	10	
9.0	—	5				—	—	—	
12.0	—	5				—	—	—	
Input/Output Leakage Current (SWITCH OFF)	$I_{OFF}$	$V_{OS} = V_{CC}$ or GND $V_{IS} = GND$ or $V_{CC}$ $V_{IN} = V_{ILC}$	12.0	—	—	$\pm 100$	—	$\pm 1000$	nA
Switch Input Leakage Current (SWITCH ON OUTPUT OPEN)	$I_{IZ}$	$V_{OS} = V_{CC}$ or GND $V_{INH} = V_{IHC}$	12.0	—	—	$\pm 100$	—	$\pm 1000$	nA
Control Input Current	$I_{IN}$	$V_{IN} = V_{CC}$ or GND	6.0	—	—	$\pm 100$	—	$\pm 1000$	nA
Quiescent Supply Current	$I_{CC}$	$V_{IN} = V_{CC}$ or GND	6.0	—	—	1.0	—	10.0	$\mu A$
			9.0	—	—	4.0	—	40.0	
			12.0	—	—	8.0	—	80.0	

AC ELECTRICAL CHARACTERISTICS ( $C_L = 50\text{pF}$ , Input  $t_r = t_f = 6\text{ns}$ )

CHARACTERISTIC	SYMBOL	TEST CONDITION	Ta = 25°C			Ta = -40~85°C		UNIT	
			V <sub>CC</sub>	MIN.	TYP.	MAX.	MIN.		MAX.
Phase Difference Between Input and Output	$\phi_{I/O}$		2.0	—	10	50	—	65	ns
			4.5	—	4	10	—	13	
			9.0	—	3	8	—	10	
			12.0	—	3	7	—	9	
Output Enable Time	$t_{pZL}$ $t_{pZH}$	$R_L = 1\text{k}\Omega$	2.0	—	18	100	—	125	ns
			4.5	—	8	20	—	25	
			9.0	—	6	12	—	22	
			12.0	—	6	12	—	18	
Output Disable Time	$t_{pLZ}$ $t_{pHZ}$	$R_L = 1\text{k}\Omega$	2.0	—	20	115	—	145	ns
			4.5	—	10	23	—	29	
			9.0	—	8	20	—	25	
			12.0	—	8	18	—	22	
Maximum Control Input Frequency		$R_L = 1\text{k}\Omega$ $C_L = 15\text{pF}$ $V_{OUT} = 1/2V_{CC}$	2.0	—	30	—	—	—	MHz
			4.5	—	30	—	—	—	
			9.0	—	30	—	—	—	
			12.0	—	30	—	—	—	
Control Input Capacitance	$C_{IN}$		—	5	10	—	10	pF	
Switch Terminal Capacitance	$C_{I/O}$		—	6	—	—	—	pF	
Feed Through Capacitance	$C_{IOS}$		—	0.5	—	—	—	pF	
Power Dissipation Capacitance	$C_{PD}$	(Note 1)	—	15	—	—	—	pF	

(Note 1) :  $C_{PD}$  is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation :



$$I_{CC(opr)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC} / 2$$

**ANALOG SWITCH CHARACTERISTICS (GND = 0V, Ta = 25°C)**

CHARACTERISTIC	SYMBOL	TEST CONDITION	V <sub>CC</sub>	TYP.	UNIT
Sine Wave Distortion (T.H.D)		f <sub>IN</sub> = 1kHz, V <sub>IN</sub> = 4.0Vp-p @V <sub>CC</sub> = 4.5V R <sub>L</sub> = 10kΩ, V <sub>IN</sub> = 8.0Vp-p @V <sub>CC</sub> = 9.0V C <sub>L</sub> = 50pF	4.5	0.05	%
			9.0	0.04	
Frequency Response (Switch ON)	f <sub>MAX</sub>	Adjust f <sub>IN</sub> voltage to obtain 0dBm at V <sub>OS</sub> Increase f <sub>IN</sub> Frequency until dB Meter reads - 3dB R <sub>L</sub> = 50Ω, C <sub>L</sub> = 10pF f <sub>IN</sub> = 1MHz, Sine Wave	4.5	200	MHz
			9.0	200	
Feedthrough Attenuation (Switch OFF)		V <sub>in</sub> is centered at V <sub>CC</sub> / 2 Adjust input for 0dBm R <sub>L</sub> = 600Ω, C <sub>L</sub> = 50pF f <sub>IN</sub> = 1MHz, Sine Wave	4.5	- 60	dB
			9.0	- 60	
Crosstalk (Control Input to Signal Output)		R <sub>L</sub> = 600Ω, C <sub>L</sub> = 50pF f <sub>IN</sub> = 1MHz, Square Wave (t <sub>r</sub> = t <sub>f</sub> = 6ns)	4.5	60	mV
			9.0	100	
Crosstalk (Between any switches)		Adjust V <sub>IN</sub> to obtain 0dBm at Input R <sub>L</sub> = 600Ω, C <sub>L</sub> = 50pF f <sub>IN</sub> = 1MHz, Sine Wave	4.5	- 60	dB
			9.0	- 60	


SWITCHING CHARACTERISTICS TEST CIRCUITS

1.  $t_{pLZ}$ ,  $t_{pHZ}$ ,  $t_{pZL}$ ,  $t_{pZH}$

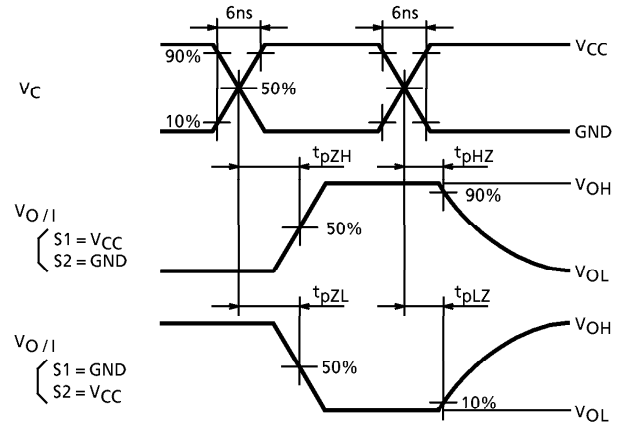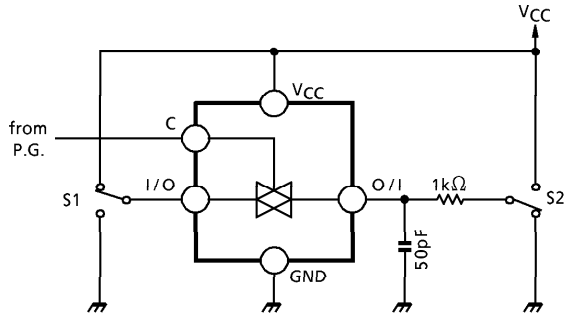


2. CROSS TALK (CONTROL INPUT-SWITCH OUTPUT)


$f_{in} = 1\text{MHz}$ ,  $\text{duty} = 50\%$ ,  $t_r = t_f = 6\text{ns}$

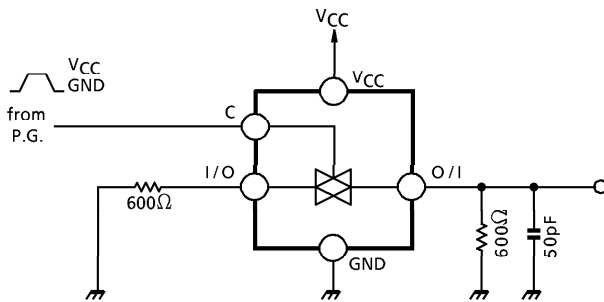


3. FEEDTHROUGH ATTENUATION

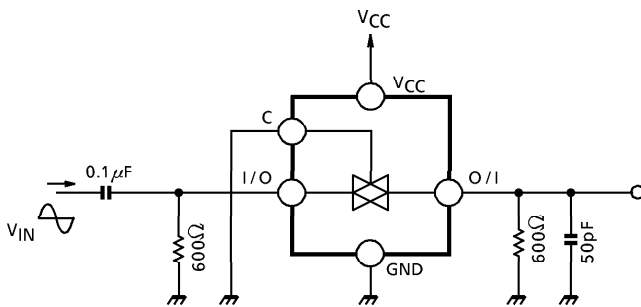


4. Clos,  $C_{I/O}$

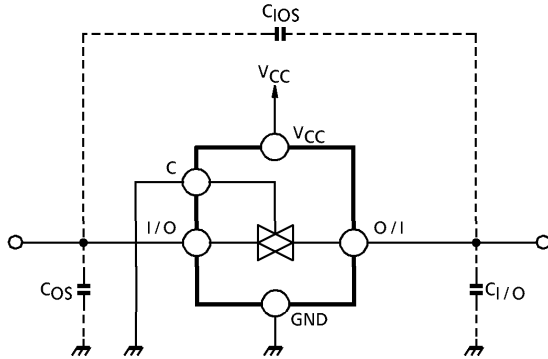

5. CROSS TALK (BETWEEN ANY TWO SWITCHES)


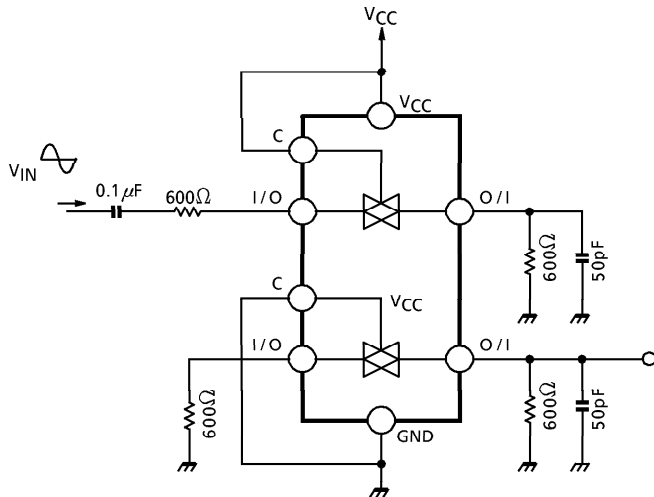


6. FREQUENCY RESPONSE (SWITCH ON)

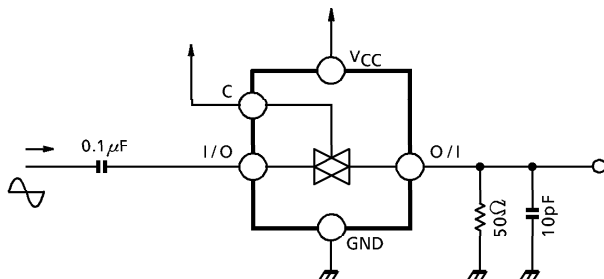

PACKAGE DIMENSIONS  
SOP8-P-1.27

Unit : mm

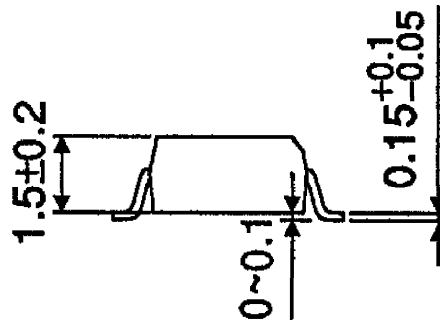
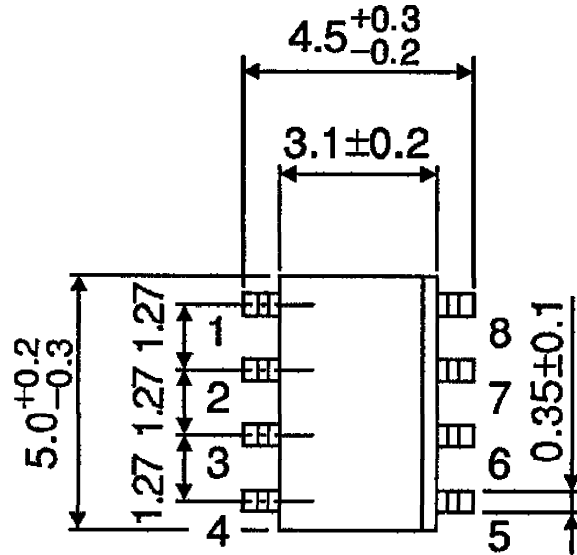


Weight : 0.05g (Typ.)



PACKAGE DIMENSIONS  
SSOP8-P-0.65



Unit : mm

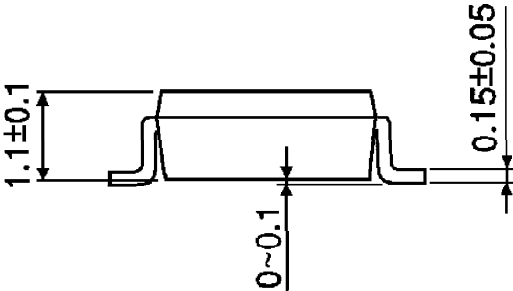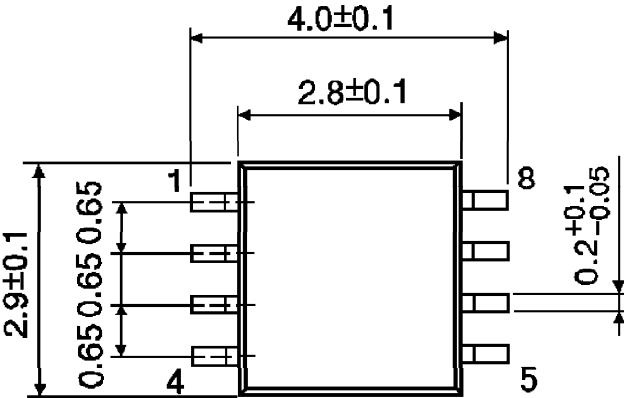

Weight : 0.02g (Typ.)

**PACKAGE DIMENSIONS**  
SSOP8-P-0.50A

Unit : mm

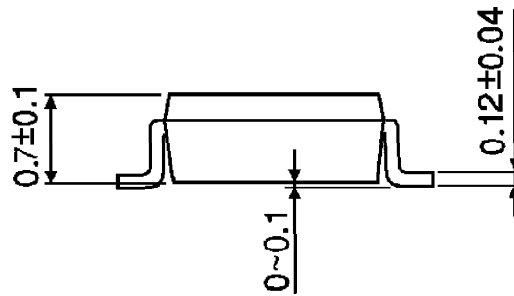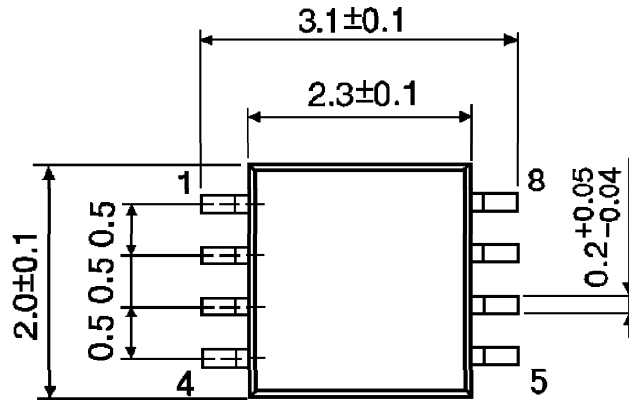

Weight : 0.01g (Typ.)

**RESTRICTIONS ON PRODUCT USE**

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331