


SYSTEM RESET IC


■ GENERAL DESCRIPTION

NJM2103 is supply voltage supervisory IC to detect the abnormal conditions, such as shut down of all supply voltages at once, or sudden voltage down and then generate the reset signal. It supervises both 5V supply voltage and the voltage optionally set up.


■ PACKAGE OUTLINE



NJM2103D



NJM2103M





NJM2103L

■ FEATURES

- Precise Detection of Supply Voltage Down ($V_{SA}=4.2V\pm2.5\%$)
- Possible Detection of Optional Voltage Down ($V_{SB}=1.22V\pm1.5\%$)
- Possible Detection of Optional Over-loading
- Low Operating Current ($I_{CC}\leq 560\mu A@V_{SB}=5V$)
- Reference Voltage can be taken out.
- Low Reset Validated Voltage ($V^+=0.8V$ Typ.)
- Voltage Detection with Hysteresis Feature
- Package Outline DIP8, DMP8, SIP8
- Bipolar Technology

■ PIN CONFIGURATION


NJM2103D
NJM2103M

NJM2103L

PIN FUNCTION

1. C_T
2. V_{SC}
3. OUT_C
4. GND
5. V^+
6. $V_{SB}/\overline{RESIN}$
7. V_{SA}
8. $\overline{RESET}$

■ BLOCK DIAGRAM

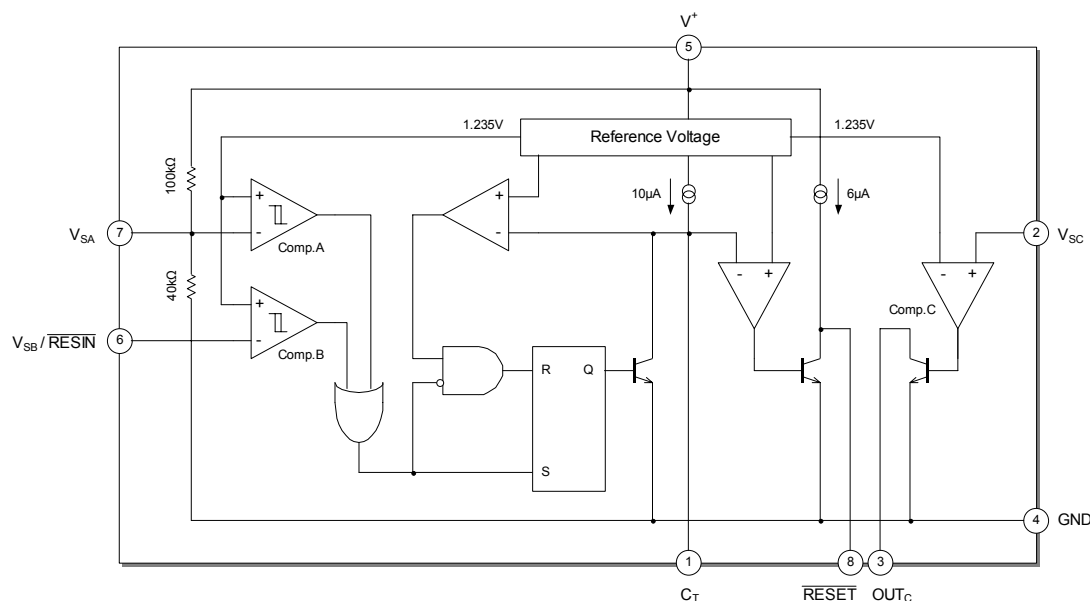

■ ABSOLUTE MAXIMUM RATINGS

(T_a=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	20	V
Power Dissipation	P _D	(DIP8) 500 (DMP8) 300 (SIP8) 800	mW mW mW
Input Voltage A	V _{SA}	V ⁺ +0.3 (<20)	V
Input Voltage B	V _{SB}	20	V
Input Voltage C	V _{SC}	20	V
Operating Temperature Range	T _{opr}	-40 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C

■ ELECTRICAL CHARACTERISTICS

● DC CHARACTERISTICS

(V⁺=5.0V, V_{SB}=0V, V_{SC}=0V, T_a=25°C)




PARAMETER	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current (1)	I _{CC1}	V _{SB} =5V	-	380	560	μA
Operating Current (2)	I _{CC2}		-	460	700	μA
V _{SA} Detecting Voltage (1)	V _{SAL}	V ⁺ fall time V _{SB} =V ⁺	4.10	4.20	4.30	V
V _{SA} Detecting Voltage (2)	V _{SAH}	V ⁺ rise time V _{SB} =V ⁺	4.20	4.30	4.40	V
V _{SA} Hysteresis Width	V _{HRSA}		50	100	150	mV
V _{SB} Detecting Voltage	V _{SBL}	V _{SB} fall time	1.202	1.220	1.238	V
V _{SB} Detecting Supply Voltage Fluctuation	ΔV _{SBL}	V ⁺ =3.5 to 18V	-	3	10	mV
V _{SB} Hysteresis Width	V _{HRSB}		14	28	42	mV
V _{SB} Input Current (1)	I _{IHB}	V _{SB} =5V	-	0	250	nA
V _{SB} Input Current (2)	I _{ILB}		-	20	250	nA
High Level $\overline{\text{RESET}}$ Output Voltage	V _{OHR}	I $\overline{\text{RESET}}$ = -5μA, V _{SB} =5V	4.5	4.9	-	μV
$\overline{\text{RESET}}$ Output Saturating Voltage (1)	V _{OLR1}	I $\overline{\text{RESET}}$ = 2mA	-	0.20	0.40	V
$\overline{\text{RESET}}$ Output Saturating Voltage (2)	V _{OLR2}	I $\overline{\text{RESET}}$ = 10mA	-	0.30	0.50	V
$\overline{\text{RESET}}$ Output Sink Current	I $\overline{\text{RESET}}$	V _{OLR} =1.0V	20	80	-	mA
C _T Charge Current	I _{CT}	V _{SB} =5V, V _{CT} =0.5V	6.0	9.5	13.0	μA
V _{SC} Input Current (1)	I _{IHC}	V _{SC} =5V	-	0	500	nA
V _{SC} Input Current (2)	I _{ILC}		-	50	500	nA
V _{SC} Detecting Voltage	V _{SC}		1.215	1.235	1.255	V
V _{SC} Detecting Supply Voltage Fluctuation	ΔV _{SC}	V ⁺ =3.5 to 13.5V	-	3	10	mV
OUT _C Output Leak Current	I _{OHC}	V _{OHC} =13.5V	-	0	1	μA
OUT _C Output Saturation Voltage	V _{OLC}	I _{OUT} =4mA, V _{SC} =5V	-	0.10	0.40	V
OUT _C Output Sink Current	I _{OUTC}	V _{OLC} =1.0V, V _{SC} =5V	6	20	-	mA
$\overline{\text{RESET}}$ Guarantee Minimum Supply Voltage	V _L ⁺	V _{OLR} =0.4V, I $\overline{\text{RESET}}$ = 200μA	-	0.8	1.2	V

● AC CHARACTERISTICS

(V⁺=5.0V, V_{SB}=5.0V, V_{SC}=0V, C_T=0.01μF, T_a=25°C)




ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
V _{SA} Input Pulse Width	t _{PIA}		-	3.0	-	μs
V _{SB} Input Pulse Width	t _{PIB}		-	1.5	-	μs
$\overline{\text{RESET}}$ Output Pulse Width	t _{PO}	V _{SB} =V ⁺	-	1.5	-	ms
$\overline{\text{RESET}}$ Rise Time	t _r	V _{SB} =V ⁺ , R _L =2.2kΩ, C _L =100pF	-	1.0	-	μs
$\overline{\text{RESET}}$ Fall Time	t _f	V _{SB} =V ⁺ , R _L =2.2kΩ, C _L =100pF	-	0.1	-	μs
Output Delay Time	t _{PD}	V _{SB} fall time	-	2	-	μs
Output Delay Time	t _{PHL}	V _{SC} rise time, R _L =2.2kΩ, C _L =100pF	-	0.5	-	μs
Output Delay Time	t _{PLH}	V _{SC} fall time, R _L =2.2kΩ, C _L =100pF	-	1.0	-	μs

■ TERMINAL FUNCTION

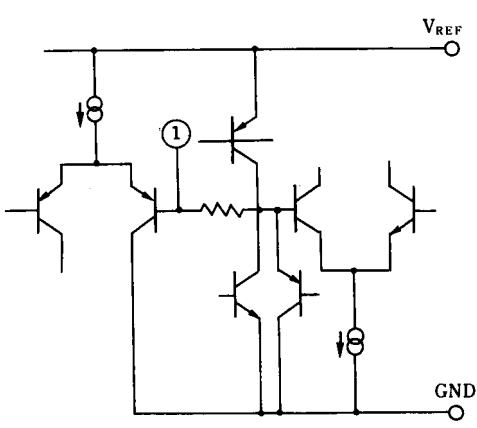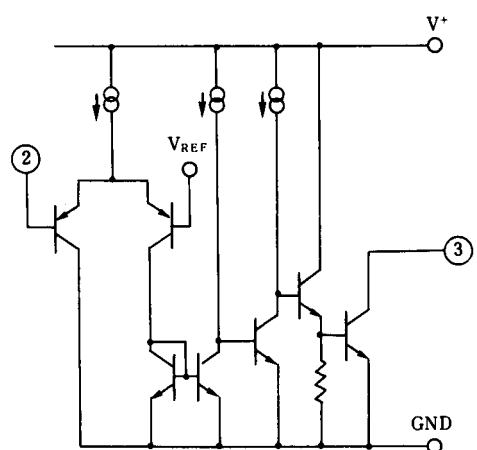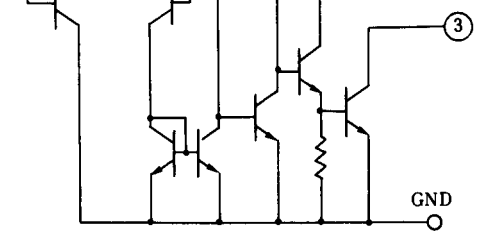PIN NO.	SYMBOL	FUNCTION	INSIDE EQUIVALENT CIRCUIT
1	C_T	Pin Connection to Capacitor, Set the reset holding time.	
2	V_{SC}	Comparator Input	
3	OUT_C	Open Collector Output of Comparator C.	


NJM2103

■ TERMINAL FUNCTION

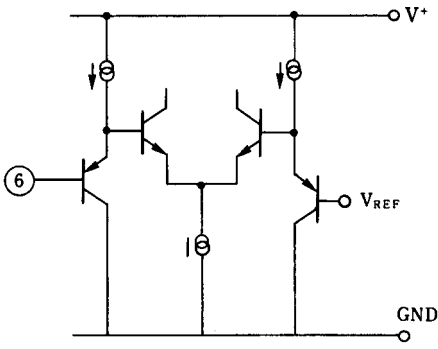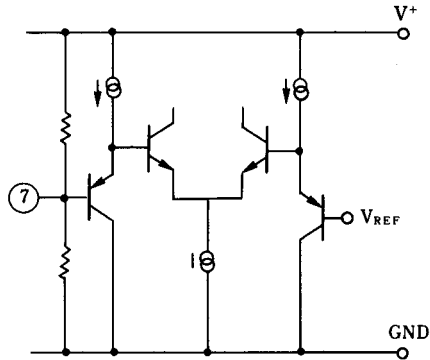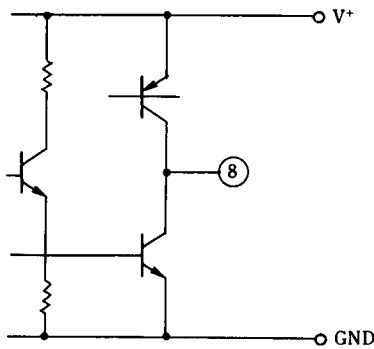
PIN NO.	SYMBOL	FUNCTION	INSIDE EQUIVALENT CIRCUIT
4	GND	Ground	
5	V ⁺	Operating Voltage	
6	V _{SB} /RESIN	Comparator B Input	
7	V _{SA}	Comparator A Input	
8	RESET	Reset Output Internalizing pull up resistor	

■ APPLICATION CIRCUIT

1) 5V Supply Voltage Monitor

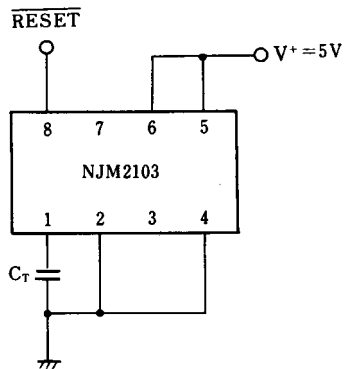

2) Monitoring of Optional Supply Voltage ($V^+ \leq 13.5V$)

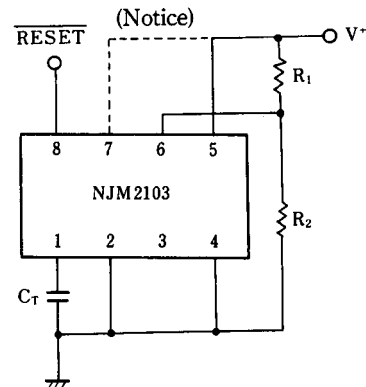


$$\text{Detecting Voltage} \doteq \left(1 + \frac{R_1}{R_2}\right) \times V_{SB}$$

(Notice)

If it were that V^+ indicates under 4.50V, Connect 7 pin to V^+

3) Monitoring of Optional Supply Voltage ($V^+ > 13.5V$)

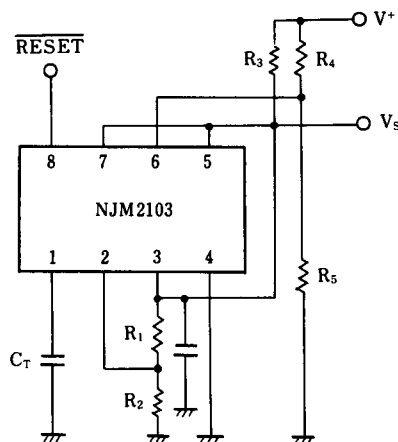


$$\text{Detecting Voltage} \doteq \left(1 + \frac{R_4}{R_5}\right) \times V_{SB}$$

$$\text{Constant Voltage Output } V_S \doteq \left(1 + \frac{R_1}{R_2}\right) \times V_{SC}$$


$$\overline{\text{RESET}} \text{ Output} \doteq \begin{cases} V_S \text{ (High Level)} \\ OV \text{ (Low Level)} \end{cases}$$

4) Compulsory Reset

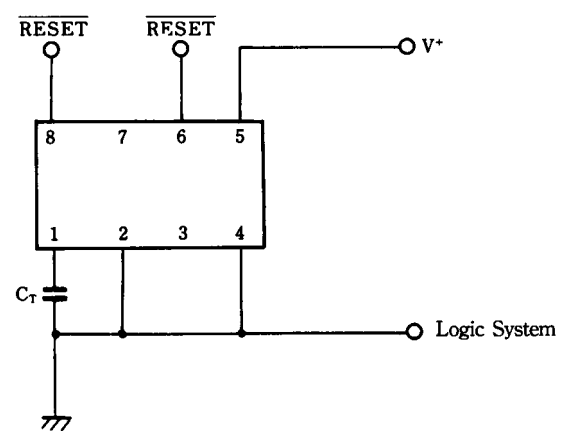


Input Reset signal TTL level to V_{SB} - terminal

5) 5V, $V_{CC} < 12V$ Supply Voltage Monitor

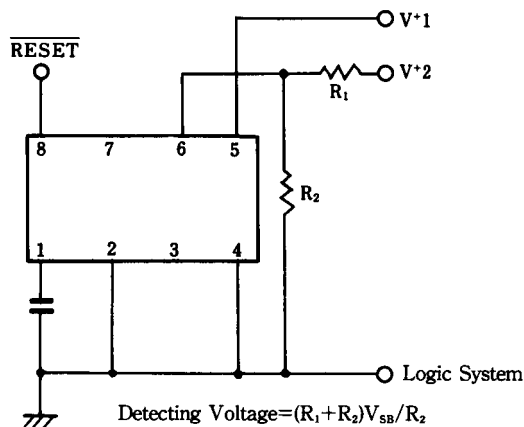


6) Non-Inverting Reset

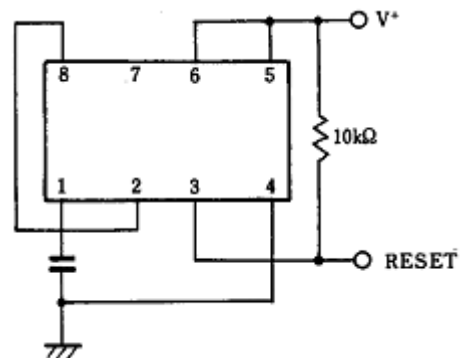


■ TYPICAL CHARACTERISTICS


Operating Current 1 vs. Operating Voltage

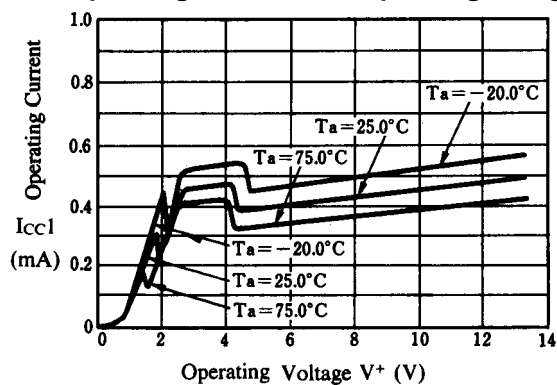


Operating Current 2 vs. Operating Voltage

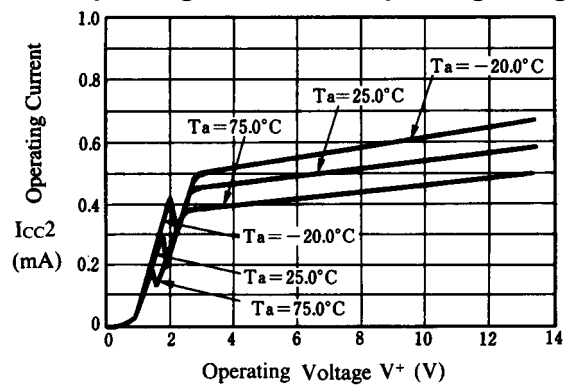

Output Voltage vs. Operating Voltage

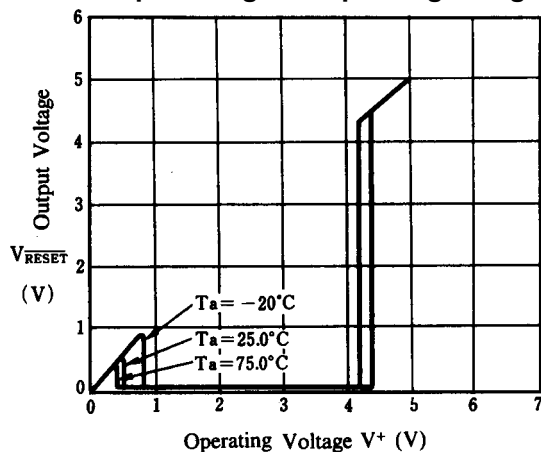


Detect Voltage (V_{SA}) vs. Temperature

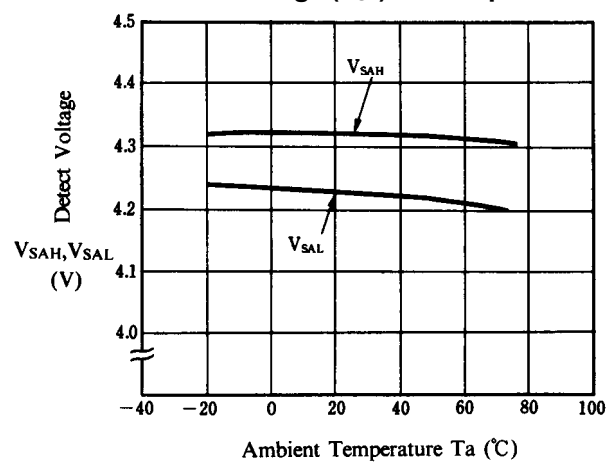


■ TYPICAL CHARACTERISTICS


Detect Voltage (V_{SA}) vs. Temperature

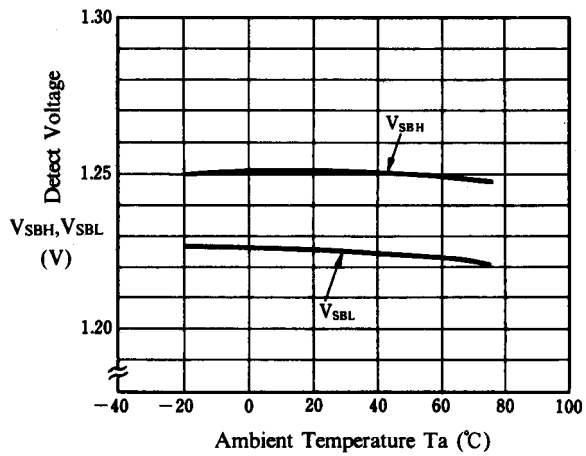


Detect Voltage (V_{SC}) vs. Temperature

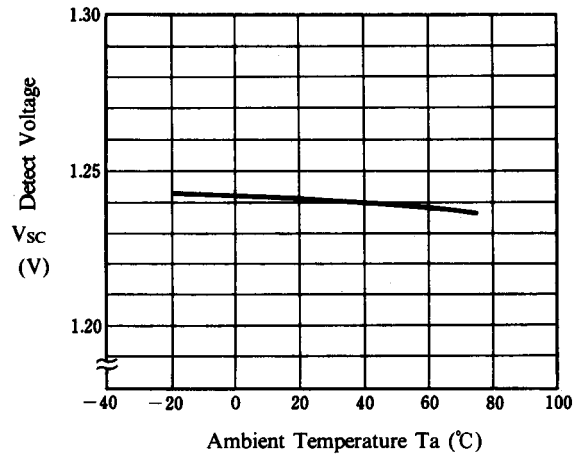


Output Voltage vs. Output Current

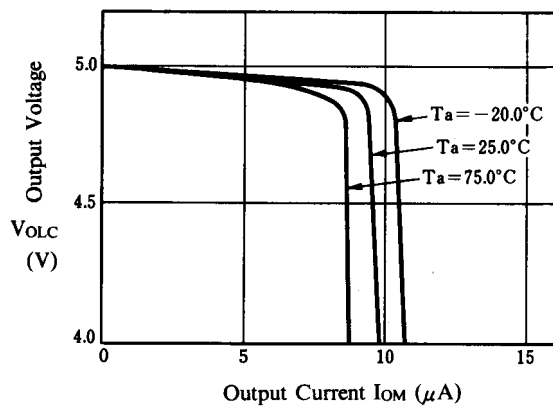


Output Voltage vs. Output Current

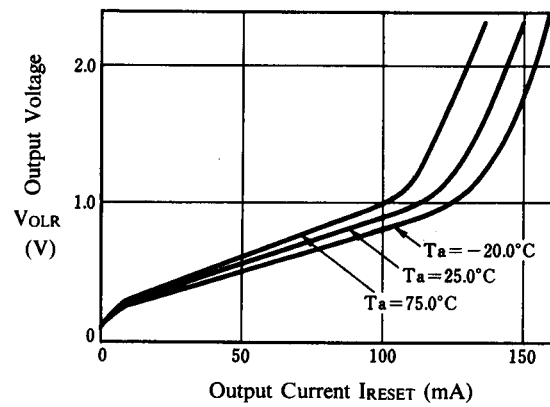



Output Voltage (OUT_C) vs. Output Current (I_{OUTC})

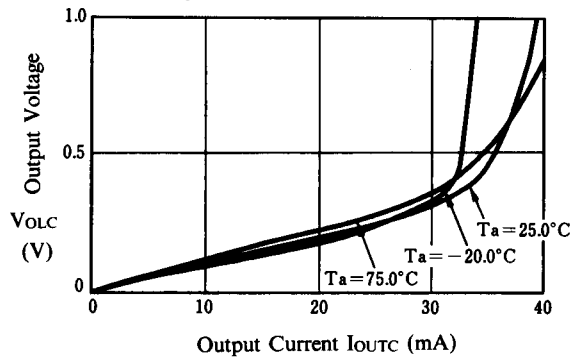

Detect Voltage (V_{SB} , V_{SC}) vs. Supply Voltage

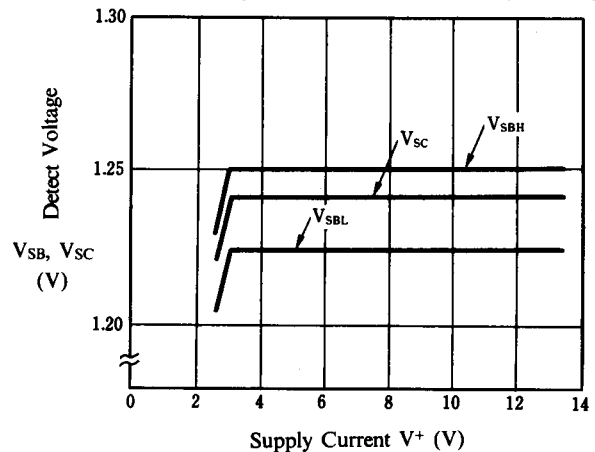

■ TYPICAL CHARACTERISTICS

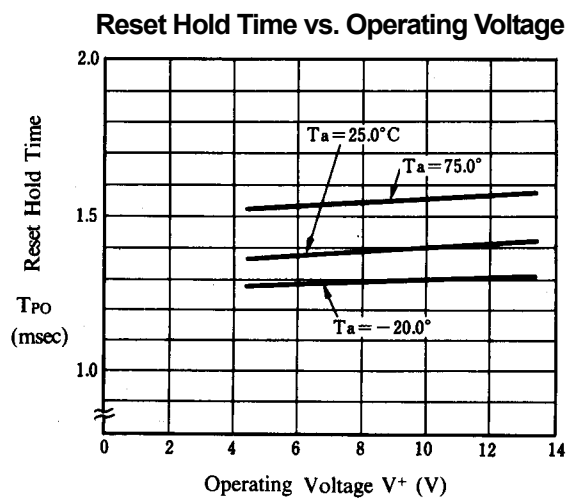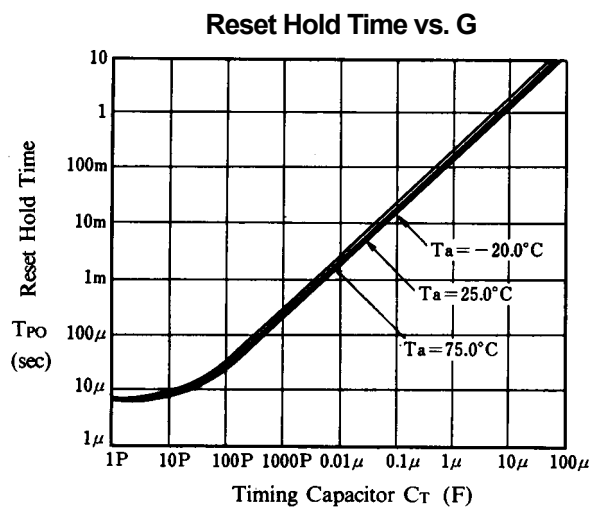

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331