

# Low Power, High Speed Operational Amplifier

## FEATURES

- Gain-Bandwidth Product: 50MHz
- Unity-Gain Stable
- Slew Rate: 165V/ $\mu$ s
- Output Current:  $\pm$ 20mA
- Low Supply Current: 12mA
- High Open-Loop Gain: 7.5V/mV
- Low Cost
- Single Supply 5V Operation
- Industry Standard Pinout
- Output Shutdown

## APPLICATIONS

- Video Cable Drivers
- Video Signal Processing
- Fast Peak Detectors
- Fast Integrators
- Video Cable Drivers
- Pulse Amplifiers

## DESCRIPTION

The LT®1195 is a video operational amplifier optimized for operation on single 5V and  $\pm$ 5V supplies. Unlike many high speed amplifiers, the LT1195 features high open-loop gain, over 75dB, and the ability to drive heavy loads to a full power bandwidth of 8.5 MHz at 6V<sub>P-P</sub>. The LT1195 has a unity-gain stable bandwidth of 50MHz, a 60° phase margin and consumes only 12mA of supply current, making it extremely easy to use.


Because the LT1195 is a true operational amplifier, it is an ideal choice for wideband signal conditioning, fast integrators, peak detectors, active filters, and applications requiring speed, accuracy, and low cost.

The LT1195 is a low power version of the popular LT1190, and is available in 8-pin miniDIPs and SO packages with standard pinouts. The normally unused Pin 5 is used for a shutdown feature that shuts off the output and reduces power dissipation to a mere 15mW.

, LTC and LT are registered trademarks of Linear Technology Corporation


## TYPICAL APPLICATION

Fast Pulse Detector

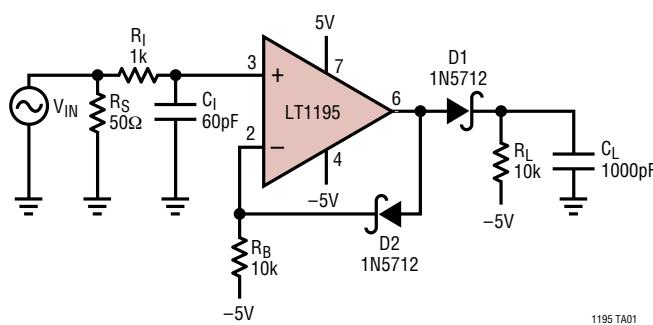

1195 TA01

Pulse Detector Response

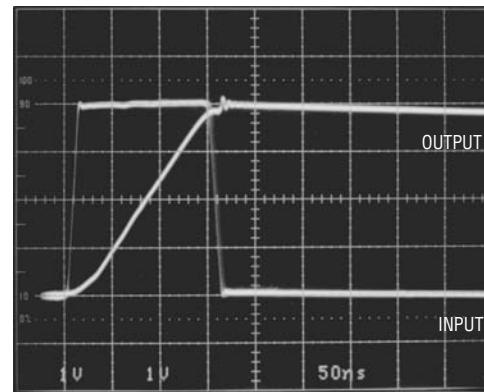

1195TA02

## ABSOLUTE MAXIMUM RATINGS

(Note 1)

Total Supply Voltage ( $V^+$  to  $V^-$ ) ..... 18VDifferential Input Voltage .....  $\pm 6V$ Input Voltage .....  $\pm V_S$ 

Output Short-Circuit Duration (Note 2) ..... Continuous

Operating Temperature Range

LT1195M (OBSOLETE) .....  $-55^\circ C$  to  $125^\circ C$ LT1195C .....  $0^\circ C$  to  $70^\circ C$ 

Junction Temperature (Note 3)

Plastic Package (CN8, CS8) .....  $150^\circ C$ Ceramic Package (CJ8, MJ8) (OBSOLETE) .....  $175^\circ C$ Storage Temperature Range .....  $-65^\circ C$  to  $150^\circ C$ Lead Temperature (Soldering, 10 sec) .....  $300^\circ C$ 

## PACKAGE/ORDER INFORMATION

TOP VIEW	ORDER PART NUMBER
BAL [1] -IN [2] +IN [3] V <sup>-</sup> [4]	LT1195CN8 LT1195CS8
8] BAL 7] V <sup>+</sup> 6] OUT 5] S/D	S8 PART MARKING 1195
N8 PACKAGE 8-LEAD PDIP	ORDER PART NUMBER
S8 PACKAGE 8-LEAD PLASTIC SO T <sub>JMAX</sub> = $150^\circ C$ , $\theta_{JA}$ = $100^\circ C/W$ (N8) T <sub>JMAX</sub> = $150^\circ C$ , $\theta_{JA}$ = $150^\circ C/W$ (S8)	LT1195MJ8 LT1195CJ8
J8 PACKAGE 8-LEAD CERDIP T <sub>JMAX</sub> = $150^\circ C$ , $\theta_{JA}$ = $100^\circ C/W$ (J8)	OBSOLETE PACKAGE

Consider the N8 or S8 Package for Alternate Source

Consult LTC Marketing for parts specified with wider operating temperature ranges.

 $\pm 5V$  ELECTRICAL CHARACTERISTICS $V_S = \pm 5V$ ,  $C_L \leq 10pF$ , Pin 5 open circuit, unless otherwise noted. $T_A = 25^\circ C$ 

SYMBOL	PARAMETER		CONDITIONS	LT1195M/C	MIN	TYP	MAX	UNITS
$V_{OS}$	Input Offset Voltage		J8, N8 Package S8 Package		3.0	8.0		mV
					3.0	10.0		mV
$I_{OS}$	Input Offset Current				0.2	1.0		$\mu A$
$I_B$	Input Bias Current				$\pm 0.5$	$\pm 2.0$		$\mu A$
$e_n$	Input Noise Voltage		$f_0 = 10kHz$		70			nV/ $\sqrt{Hz}$
$i_n$	Input Noise Current		$f_0 = 10kHz$		2			pA/ $\sqrt{Hz}$
$R_{IN}$	Input Resistance	Differential Mode			230			k $\Omega$
		Common Mode			20			M $\Omega$
$C_{IN}$	Input Capacitance		$A_V = 1$		2.2			pF
	Input Voltage Range		(Note 4)		-2.5	3.5		V
CMRR	Common Mode Rejection Ratio		$V_{CM} = -2.5$ to $3.5V$		60	85		dB
PSRR	Power Supply Rejection Ratio		$V_S = \pm 2.375V$ to $\pm 8V$		60	85		dB
$A_{VOL}$	Large-Signal Voltage Gain		$R_L = 1k$ , $V_{OUT} = \pm 3V$		2.0	7.5		V/mV
			$R_L = 150\Omega$ , $V_{OUT} = \pm 3V$		0.5	1.5		V/mV
			$V_S = \pm 8V$ , $R_L = 1k$ , $V_{OUT} = \pm 5V$		11.0			V/mV
$V_{OUT}$	Output Voltage Swing		$V_S = \pm 5V$ , $R_L = 1k$		$\pm 3.8$	$\pm 4.0$		V
			$V_S = \pm 8V$ , $R_L = 1k$		$\pm 6.7$	$\pm 7.0$		V
SR	Slew Rate		$A_V = -1$ , $R_L = 1k$ (Note 5, 10)		110	165		V/ $\mu s$
FPBW	Full Power Bandwidth		$V_{OUT} = 6V_{P-P}$ (Note 6)		8.75			MHz
GBW	Gain-Bandwidth Product				50			MHz
$t_{r1}, t_{f1}$	Rise Time, Fall Time		$A_V = 50$ , $V_{OUT} = \pm 1.5V$ , 20% to 80% (Note 10)		125	170	285	ns
$t_{r2}, t_{f2}$	Rise Time, Fall Time		$A_V = 1$ , $V_{OUT} = \pm 125mV$ , 10% to 90%		3.4			ns
$t_{PD}$	Propagation Delay		$A_V = 1$ , $V_{OUT} = \pm 125mV$ , 50% to 50%		2.5			ns
	Overshoot		$A_V = 1$ , $V_{OUT} = \pm 125mV$		22			%
$t_s$	Settling Time		3V Step, 0.1% (Note 7)		220			ns
Diff $A_V$	Differential Gain		$R_L = 150\Omega$ , $A_V = 2$ (Note 8)		1.25			%
Diff Ph	Differential Phase		$R_L = 150\Omega$ , $A_V = 2$ (Note 8)		0.86			DEG $P-P$

1195fa

**±5V ELECTRICAL CHARACTERISTICS** $T_A = 25^\circ\text{C}$  $V_S = \pm 5\text{V}$ ,  $C_L \leq 10\text{pF}$ , Pin 5 open circuit, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LT1195M/C			UNITS
			MIN	TYP	MAX	
$I_S$	Supply Current			12	16	mA
	Shutdown Supply Current	Pin 5 at $V^-$		0.8	1.5	mA
$I_{S/D}$	Shutdown Pin Current	Pin 5 at $V^-$		5	25	$\mu\text{A}$
	Turn-On Time	Pin 5 from $V^-$ to Ground, $R_L = 1\text{k}\Omega$		160		ns
$t_{OFF}$	Turn-Off Time	Pin 5 from Ground to $V^-$ , $R_L = 1\text{k}\Omega$		700		ns

**5V ELECTRICAL CHARACTERISTICS** $T_A = 25^\circ\text{C}$  $V_S^+ = 5\text{V}$ ,  $V_S^- = 0\text{V}$ ,  $V_{CM} = 2.5\text{V}$ ,  $C_L \leq 10\text{pF}$ , Pin 5 open circuit, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LT1195M/C			UNITS
			MIN	TYP	MAX	
$V_{OS}$	Input Offset Voltage	J8, N8 Package S8 Package		3.0	9.0	mV
				3.0	11.0	mV
$I_{OS}$	Input Offset Current			0.2	1.0	$\mu\text{A}$
$I_B$	Input Bias Current			$\pm 0.5$	$\pm 2.0$	$\mu\text{A}$
	Input Voltage Range	(Note 4)		2.0	3.5	V
CMRR	Common Mode Rejection Ratio	$V_{CM} = 2\text{V to } 3.5\text{V}$		60	85	dB
$A_{VOL}$	Large-Signal Voltage Gain	$R_L = 150\Omega$ to Ground, $V_{OUT} = 1\text{V to } 3\text{V}$		0.5	3.0	V/mV
$V_{OUT}$	Output Voltage Swing	$R_L = 150\Omega$ to Ground	$V_{OUT}$ High	3.5	3.8	V
			$V_{OUT}$ Low	0.25	0.4	V
SR	Slew Rate	$A_V = -1$ , $V_{OUT} = 1\text{V to } 3\text{V}$		140		V/ $\mu\text{s}$
GBW	Gain-Bandwidth Product			45		MHz
$I_S$	Supply Current			11	15	mA
	Shutdown Supply Current	Pin 5 at $V^-$		0.8	1.5	mA
$I_{S/D}$	Shutdown Pin Current	Pin 5 at $V^-$		5	25	$\mu\text{A}$

**±5V ELECTRICAL CHARACTERISTICS** $-55^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$ , (Note 11) $V_S = \pm 5\text{V}$ , Pin 5 open circuit, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LT1195M			UNITS
			MIN	TYP	MAX	
$V_{OS}$	Input Offset Voltage			3.0	15.0	mV
	$\Delta V_{OS}/\Delta T$	Input $V_{OS}$ Drift		17		$\mu\text{V}/^\circ\text{C}$
$I_{OS}$	Input Offset Current			0.2	2.0	$\mu\text{A}$
$I_B$	Input Bias Current			$\pm 0.5$	$\pm 2.5$	$\mu\text{A}$
	CMRR	Common Mode Rejection Ratio	$V_{CM} = -2.5\text{V to } 3.5\text{V}$	55	85	dB
PSRR	Power Supply Rejection Ratio	$V_S = \pm 2.375\text{V to } \pm 8\text{V}$		55	80	dB
$A_{VOL}$	Large-Signal Voltage Gain	$R_L = 1\text{k}\Omega$ , $V_{OUT} = \pm 3\text{V}$		1.50	5.0	V/mV
		$R_L = 150\Omega$ , $V_{OUT} = \pm 3\text{V}$		0.25	0.8	V/mV
$V_{OUT}$	Output Voltage Swing	$R_L = 1\text{k}\Omega$		$\pm 3.7$	$\pm 3.9$	V
$I_S$	Supply Current			12	18	mA
	Shutdown Supply Current	Pin 5 at $V^-$ , (Note 9)		0.8	2.5	mA
$I_{S/D}$	Shutdown Pin Current	Pin 5 at $V^-$		5	25	$\mu\text{A}$

**±5V ELECTRICAL CHARACTERISTICS** 0°C ≤ TA ≤ 70°C

VS = ±5V, Pin 5 open circuit, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LT1195C			UNITS
			MIN	TYP	MAX	
V <sub>OS</sub>	Input Offset Voltage	J8, N8 Package S8 Package		3.0	10.0	mV
				3.0	15.0	mV
ΔV <sub>OS</sub> /ΔT	Input V <sub>OS</sub> Drift		12			μV/°C
I <sub>OS</sub>	Input Offset Current		0.2	1.7		μA
I <sub>B</sub>	Input Bias Current		±0.5	±2.5		μA
CMRR	Common Mode Rejection Ratio	V <sub>CM</sub> = -2.5V to 3.5V	60	85		dB
PSRR	Power Supply Rejection Ratio	V <sub>S</sub> = ±2.375V to ±5V	60	90		dB
A <sub>VOL</sub>	Large-Signal Voltage Gain	R <sub>L</sub> = 1k, V <sub>OUT</sub> = ±3V R <sub>L</sub> = 150Ω, V <sub>OUT</sub> = ±3V	2.0 0.3	7.5 1.5		V/mV V/mV
V <sub>OUT</sub>	Output Voltage Swing	R <sub>L</sub> = 1k	±3.7	±3.9		V
I <sub>S</sub>	Supply Current		12	17		mA
	Shutdown Supply Current	Pin 5 at V <sup>-</sup> (Note 9)	0.9	2.0		mA
I <sub>S/D</sub>	Shutdown Pin Current	Pin 5 at V <sup>-</sup>	5	25		μA

**5V ELECTRICAL CHARACTERISTICS** 0°C ≤ TA ≤ 70°CVS<sup>+</sup> = 5V, VS<sup>-</sup> = 0V, Pin 5 open circuit, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LT1195C			UNITS
			MIN	TYP	MAX	
V <sub>OS</sub>	Input Offset Voltage	J8, N8 Package S8 Package		1.0	10.0	mV
				1.0	15.0	mV
ΔV <sub>OS</sub> /ΔT	Input V <sub>OS</sub> Drift		15			μV/°C
I <sub>OS</sub>	Input Offset Current		0.2	1.7		μA
I <sub>B</sub>	Input Bias Current		±0.5	±2.5		μA
	Input Voltage Range	(Note 4)	2.0	3.5		V
CMRR	Common Mode Rejection Ratio	V <sub>CM</sub> = 2V to 3.5V	60	85		dB
V <sub>OUT</sub>	Output Voltage Swing	R <sub>L</sub> = 150Ω to Ground	V <sub>OUT</sub> High V <sub>OUT</sub> Low	3.5 0.15	3.75 0.4	V
I <sub>S</sub>	Supply Current		12	16		mA
	Shutdown Supply Current	Pin 5 at V <sup>-</sup> (Note 9)	0.9	2.0		mA
I <sub>S/D</sub>	Shutdown Pin Current	Pin 5 at V <sup>-</sup>	5	25		μA

**Note 1:** Absolute Maximum Ratings are those values beyond which the life of a device may be impaired.**Note 2:** A heat sink may be required to keep the junction temperature below absolute maximum when the output is shorted continuously.**Note 3:** T<sub>J</sub> is calculated from the ambient temperature T<sub>A</sub> and power dissipation P<sub>D</sub> according to the following formats:

LT1195MJ8/LT1195CJ8: T<sub>J</sub> = T<sub>A</sub> + (P<sub>D</sub> • 100°C/W)


LT1195N: T<sub>J</sub> = T<sub>A</sub> + (P<sub>D</sub> • 100°C/W)

LT1195CS: T<sub>J</sub> = T<sub>A</sub> + (P<sub>D</sub> • 150°C/W)


**Note 4:** Exceeding the input common mode range may cause the output to invert.**Note 5:** Slew rate is measured between ±1V on the output, with ±3V input step.**Note 6:** Full power bandwidth is calculated from the slew rate measurement: FPBW = SR/2πV<sub>P</sub>.**Note 7:** Settling time measurement techniques are shown in "Take the Guesswork Out of Settling Time Measurements," EDN, September 19, 1985.**Note 8:** NTSC (3.58MHz). For R<sub>L</sub> = 1k, Diff A<sub>V</sub> = 0.3%, Diff Ph = 0.35°.**Note 9:** See Applications Information section for shutdown at elevated temperatures. Do not operate the shutdown above T<sub>J</sub> > 125°C.**Note 10:** AC parameters are 100% tested on the ceramic and plastic DIP packaged parts (J8 and N8 suffix) and are sample tested on every lot of the SO packaged parts (S8 suffix).**Note 11:** Do not operate at A<sub>V</sub> < 2 for T<sub>A</sub> < 0°C.

## TYPICAL PERFORMANCE CHARACTERISTICS


**Input Bias Current vs Common Mode Voltage**

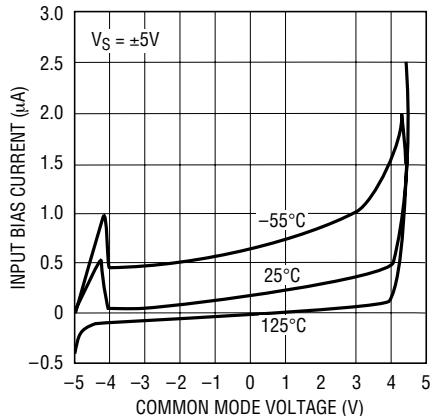


1195 G01  
Equivalent Input Noise Voltage vs Frequency

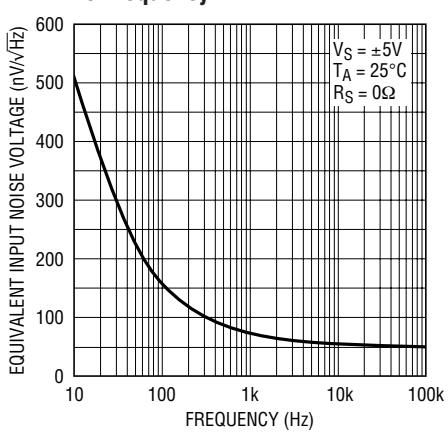


1195 G04  
Shutdown Supply Current vs Temperature

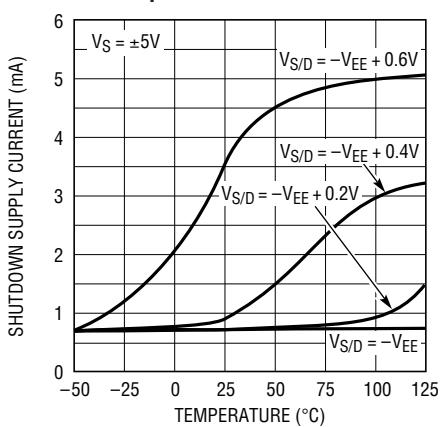


**Input Bias Current vs Temperature**

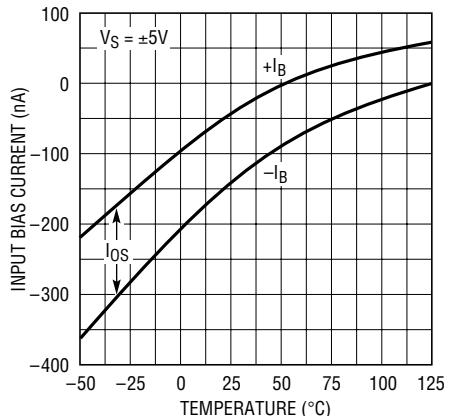


1195 G02  
Equivalent Input Noise Current vs Frequency

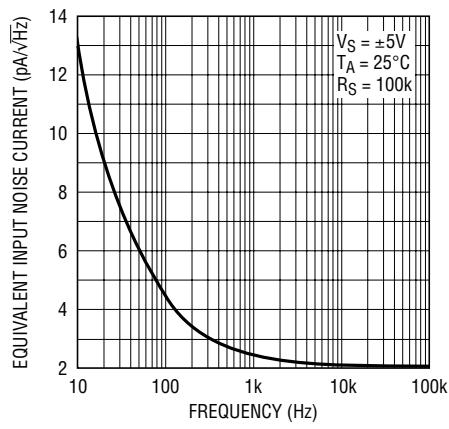

1195 G05  
Output Voltage Swing vs Load Resistance

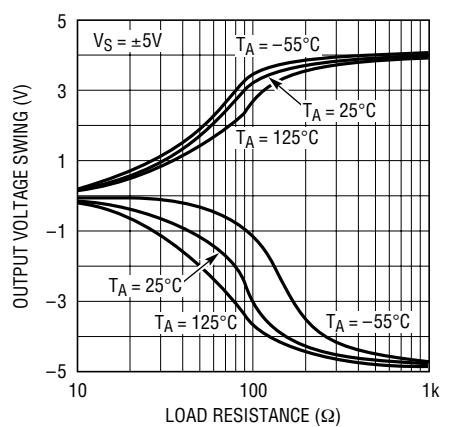


**Common Mode Voltage vs Temperature**

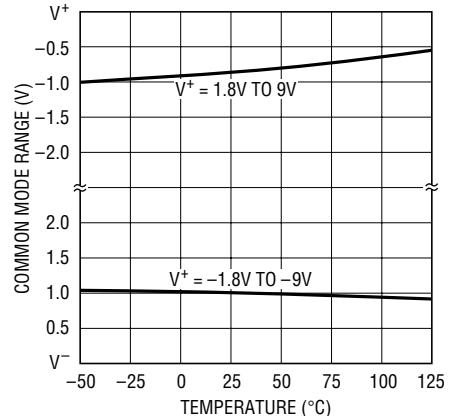


1195 G03

**Supply Current vs Supply Voltage**

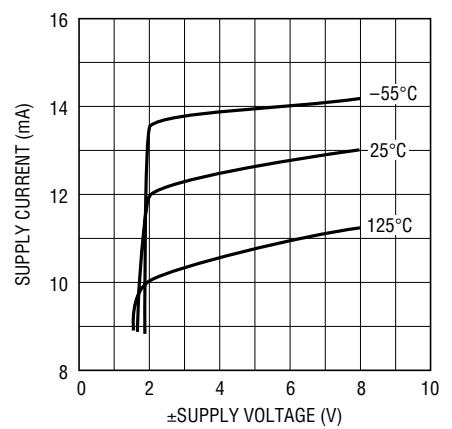

1195 G06


**Open-Loop Gain vs Temperature**

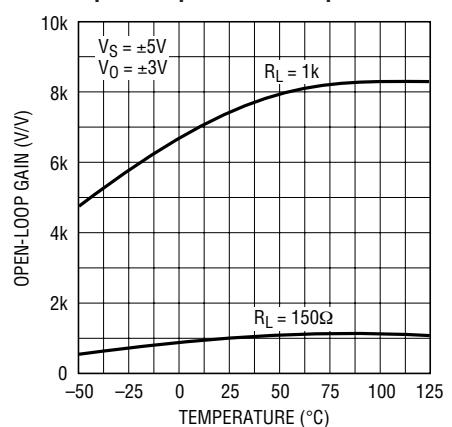


1195 G09

## TYPICAL PERFORMANCE CHARACTERISTICS


**Gain and Phase vs Frequency**

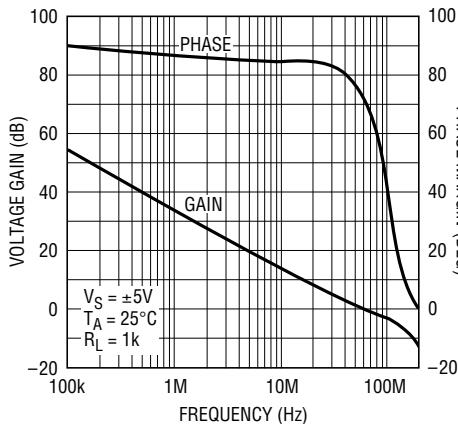


**Open-Loop Voltage Gain vs Load Resistance**

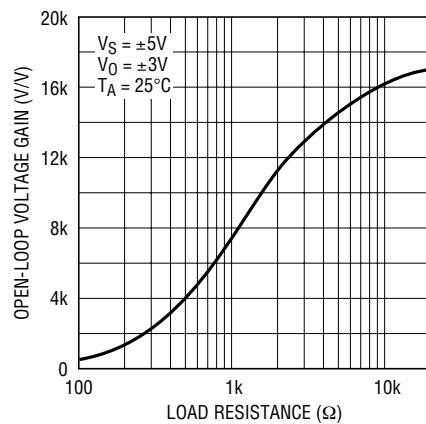


**Gain-Bandwidth Product vs Supply Voltage**

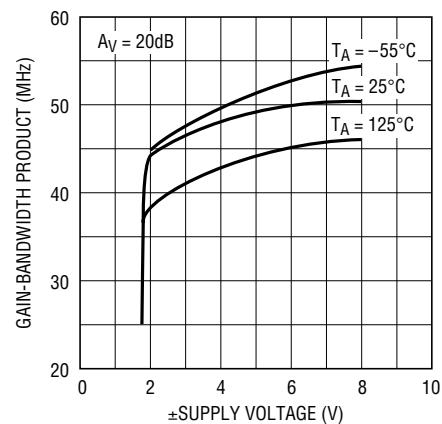


**Unity-Gain Frequency and Phase Margin vs Temperature**

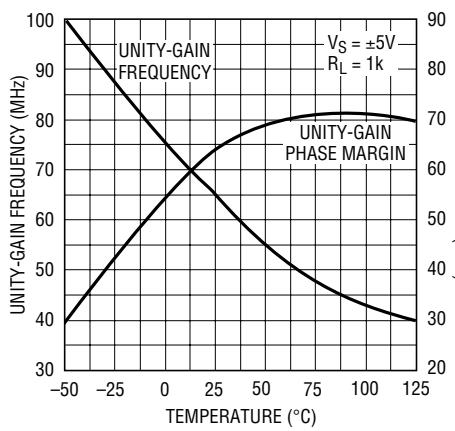


**Output Impedance vs Frequency**

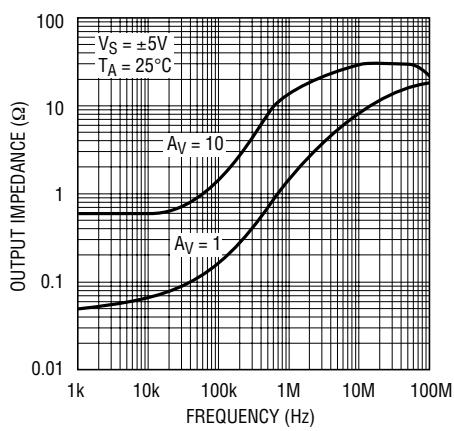



**Common Mode Rejection Ratio vs Frequency**

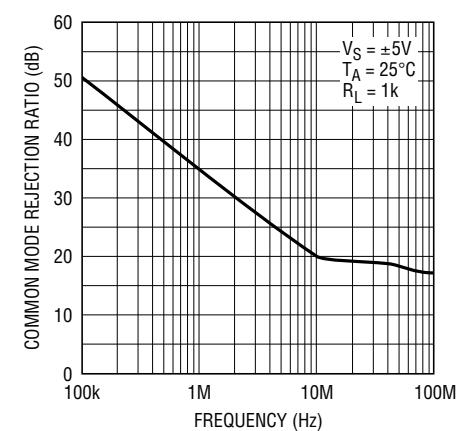


**Power Supply Rejection Ratio vs Frequency**

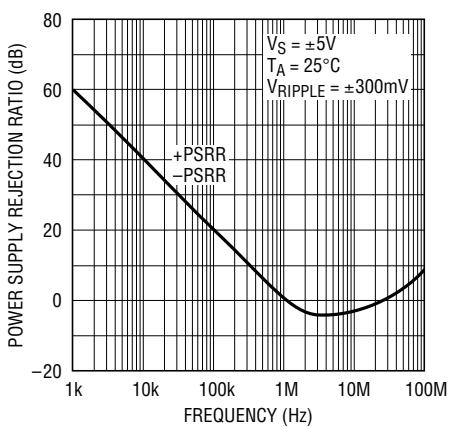


**Output Short-Circuit Current vs Temperature**

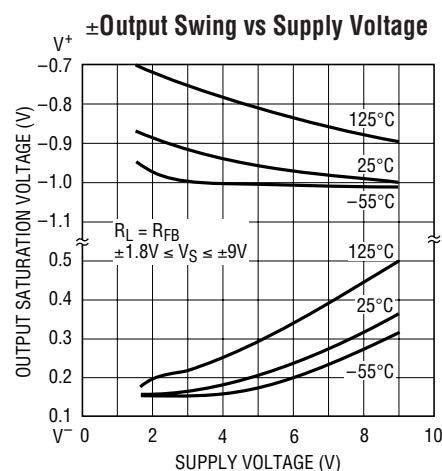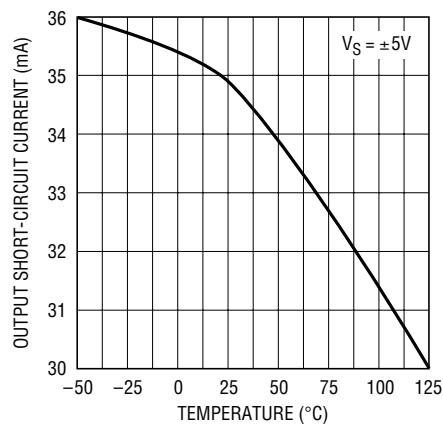


## TYPICAL PERFORMANCE CHARACTERISTICS

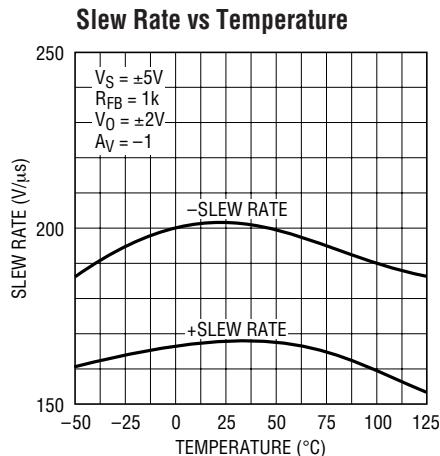

1195 G19

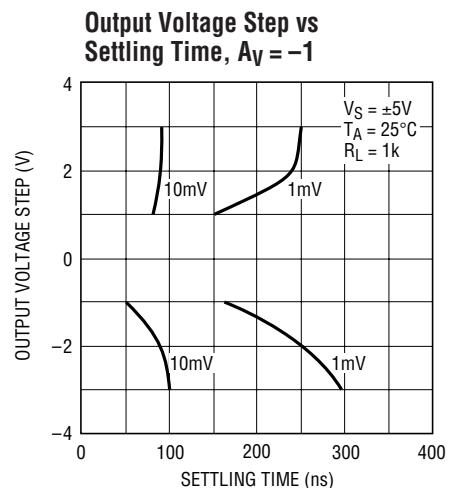


1195 G20

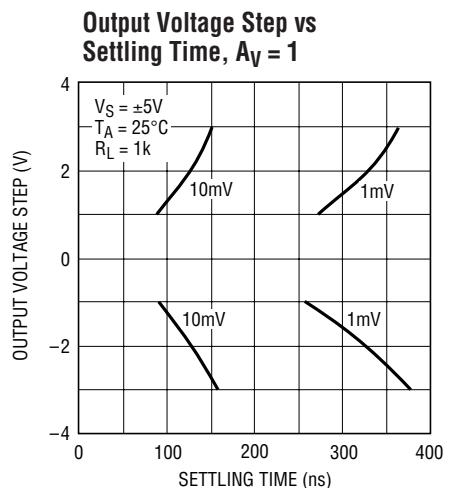


1195 G21

### Large-Signal Transient Response

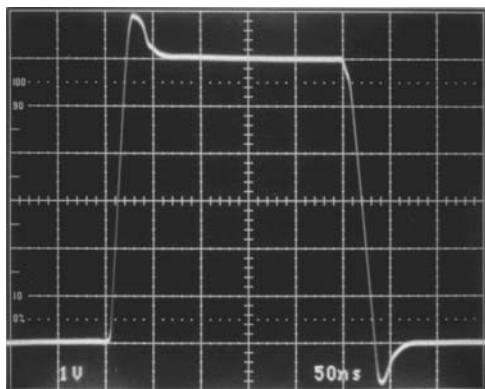


1195 G22

### Large-Signal Transient Response

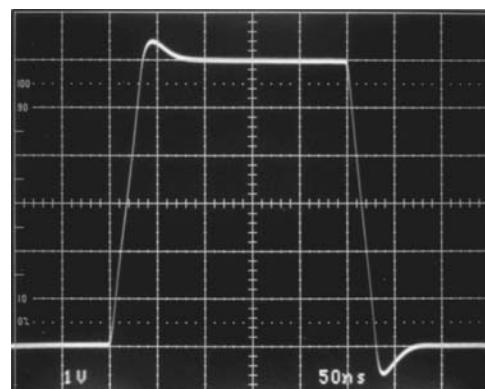


1195 G23

### Overload Recovery

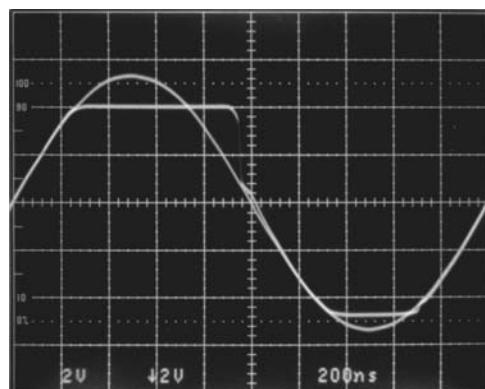

1195 G24



INPUT OFFSET VOLTAGE CAN BE ADJUSTED OVER A  $\pm 150mV$  RANGE WITH A 1k to 10k POTENTIOMETER.

1195 G25


## APPLICATIONS INFORMATION

### Power Supply Bypassing


The LT1195 is quite tolerant of power supply bypassing. In some applications a  $0.1\mu\text{F}$  ceramic disc capacitor placed 0.5 inches from the amplifier is all that is required. In applications requiring good settling time, it is important to use multiple bypass capacitors. A  $0.1\mu\text{F}$  ceramic disc in parallel with a  $4.7\mu\text{F}$  tantalum is recommended.

### Cable Terminations

The LT1195 operational amplifier has been optimized as a low cost video cable driver. The  $\pm 20\text{mA}$  guaranteed output current enables the LT1195 to easily deliver  $6\text{V}_{\text{P-P}}$  into  $150\Omega$ , while operating on  $\pm 5\text{V}$  supplies.

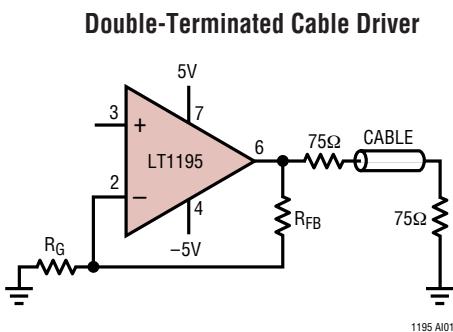

**Cable Driver Voltage Gain vs Frequency**

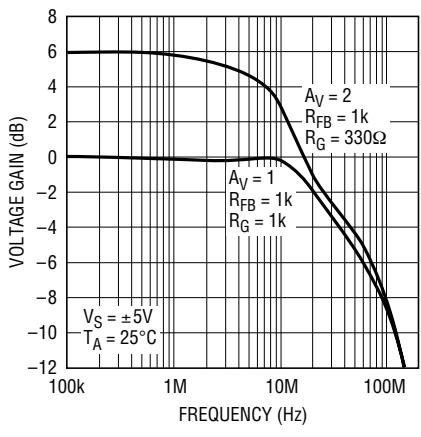


When driving a cable it is important to terminate the cable to avoid unwanted reflections. This can be done in one of two ways: single termination or double termination. With single termination, the cable must be terminated at the

receiving end ( $75\Omega$  to ground) to absorb unwanted energy. The best performance can be obtained by double termination ( $75\Omega$  in series with the output of the amplifier, and  $75\Omega$  to ground at the other end of the cable). This termination is preferred because reflected energy is absorbed at each end of the cable. When using the double termination technique it is important to note that the signal is attenuated by a factor of 2, or 6dB. This can be compensated for by taking a gain of 2, or 6dB in the amplifier.

### Using the Shutdown Feature

The LT1195 has a unique feature that allows the amplifier to be shut down for conserving power, or for multiplexing several amplifiers onto a common cable. The amplifier will shutdown by taking Pin 5 to  $V^-$ . In shutdown, the amplifier dissipates 15mW while maintaining a true high impedance output state of  $15\text{k}$  in parallel with the feedback resistors. The amplifiers must be used in a noninverting configuration for MUX applications. In inverting configurations the input signal is fed to the output through the feedback components. The following scope photos show that with very high  $R_L$ , the output is truly high impedance; the output slowly decays toward ground. Additionally, when the output is loaded with as little as  $1\text{k}$  the amplifier shuts off in 700ns. This shutoff can be under the control of HC CMOS operating between  $0\text{V}$  and  $-5\text{V}$ .

### Output Shutdown

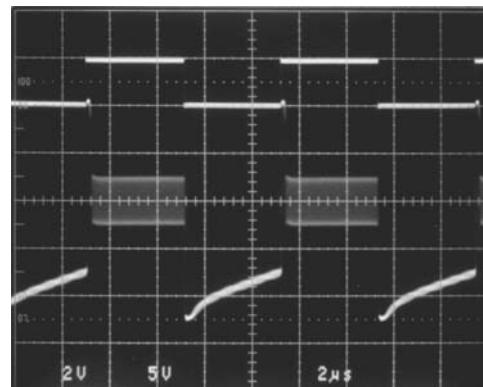


1MHz SINE WAVE GATED OFF WITH SHUTDOWN PIN

$A_V = 1, R_L = \text{SCOPE PROBE}$

1195f0

## APPLICATIONS INFORMATION

### Output Shutdown

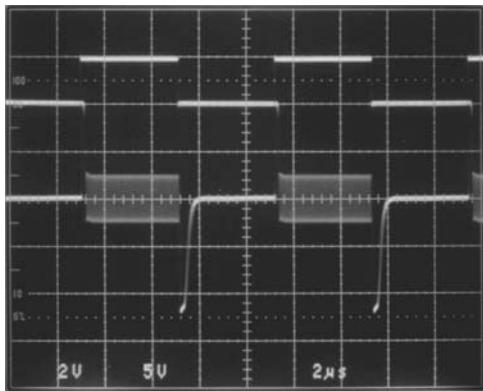


1MHz SINE WAVE GATED OFF WITH SHUTDOWN PIN

 $A_v = 1, R_L = 1\text{k}$ 

1195 A104

### Single 5V Video Amplifier

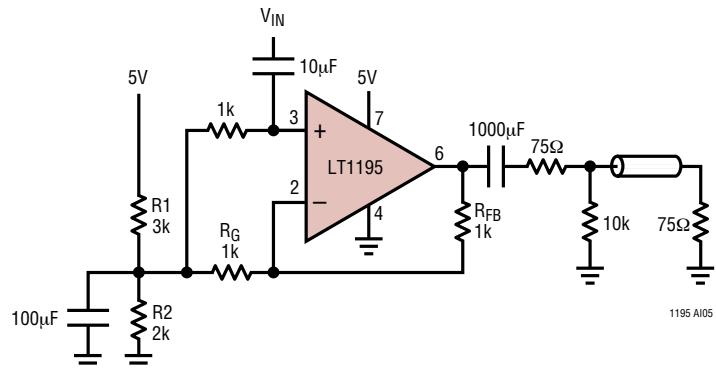

1195 A105


### Detecting Pulses

The front page shows a circuit for detecting very fast pulses. In this open-loop design, the detector diode is D1 and a level shifting or compensating diode is D2. A load resistor  $R_L$  is connected to  $-5\text{V}$ , and an identical bias resistor  $R_B$  is used to bias the compensating diode. Equal value resistors ensure that the diode drops are equal. A very fast pulse will exceed the amplifier slew rate and cause a long overload recovery time. Some amount of  $dV/dt$  limiting on the input can help this overload condition, however too much will delay the response. Also shown is the response to a  $4\text{V}_{\text{P-P}}$  input that is  $150\text{ns}$  wide. The maximum output slew rate in the photo is  $30\text{V}/\mu\text{s}$ . This rate is set by the  $30\text{mA}$  current limit driving  $1000\text{pF}$ .

### Operation on Single 5V Supply


The LT1195 has been optimized for a single  $5\text{V}$  supply. This circuit amplifies standard composite video ( $1\text{V}_{\text{P-P}}$  including sync) by 2 and drives a double-terminated  $75\Omega$  cable. Resistors  $R_1$  and  $R_2$  bias the amplifier at  $2\text{V}$ , allowing the sync pulses to stay within the common mode range of the amplifier. Large coupling capacitors are required to pass the low frequency sidebands of the composite signal. A multiburst response and vector plot standard color burst are shown.

### Video Multiburst at Pin 6 of Amplifier

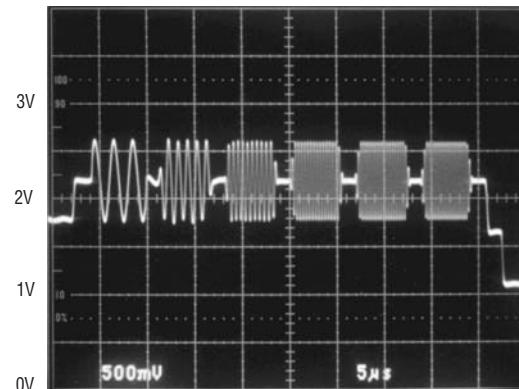

1195 A106

### Vector Plot of Standard Color Burst

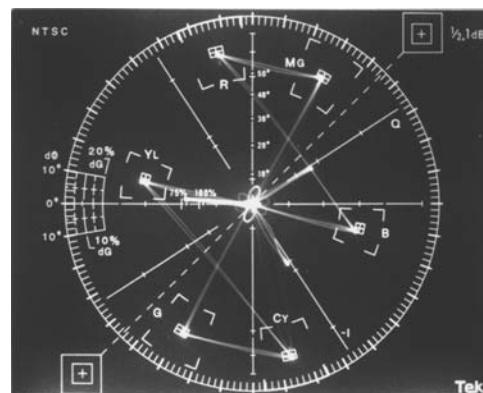


1195 A107

## APPLICATIONS INFORMATION


### Send Color Video Over Twisted-Pair

With an LT1195 it is possible to send and receive color composite video signals more than 1000 feet on a low cost twisted-pair. A bidirectional "video bus" consists of the LT1195 op amp and the LT1187 video difference amplifier. A pair of LT1195s at TRANSMIT 1, is used to generate differential signals to drive the line which is back-terminated in its characteristic impedance. The LT1187 twisted-pair receiver, converts signals from differential to single-ended. Topology of the LT1187 provides for cable compensation at the amplifier's feedback node as shown. In this case, 1000 feet of twisted-pair is compensated with 1000pF and 50Ω to boost the 3dB bandwidth of the system from 750kHz to 4MHz. This bandwidth is adequate to pass a 3.58MHz chrome subcarrier and the 4.5MHz sound subcarrier. Attenuation in the cable can be compensated by lowering the gain set resistor  $R_G$ . At TRANSMIT 2, another pair of LT1195s serve the dual function to provide cable termination via low output impedance and generate differential signals for TRANSMIT 2. Cable termination is made up of 15Ω and 33Ω attenuators to reduce the differential input signal to the LT1187. Maximum input signal for the LT1187 is 760mV<sub>P-P</sub>.


### 1.5MHz Square Wave Input and Unequalized Response Through 1000 Feet of Twisted-Pair

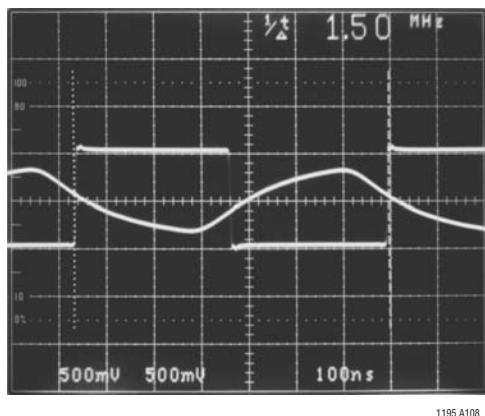


### 1.5MHz Square Wave Input and Equalized Response Through 1000 Feet of Twisted-Pair

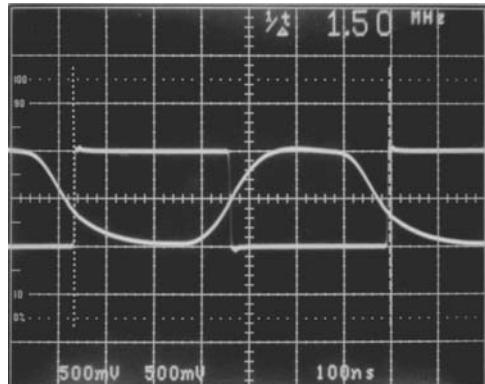

### Multiburst Pattern Passed Through 1000 Feet of Twisted-Pair

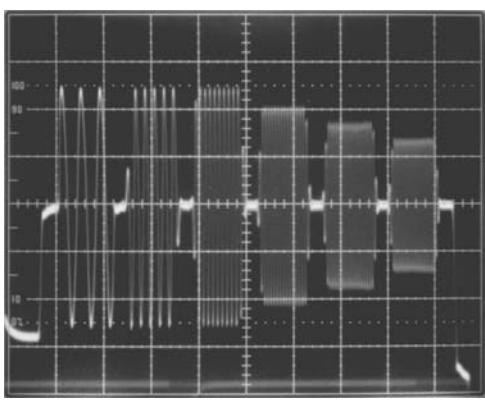


### Vector Plot of Standard Color Burst Through 1000 Feet of Twisted-Pair

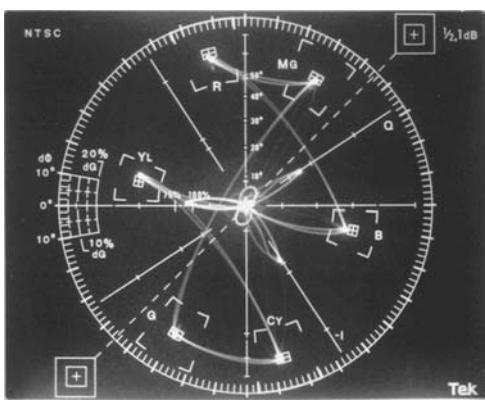


## APPLICATIONS INFORMATION

## Bidirectional Video Bus

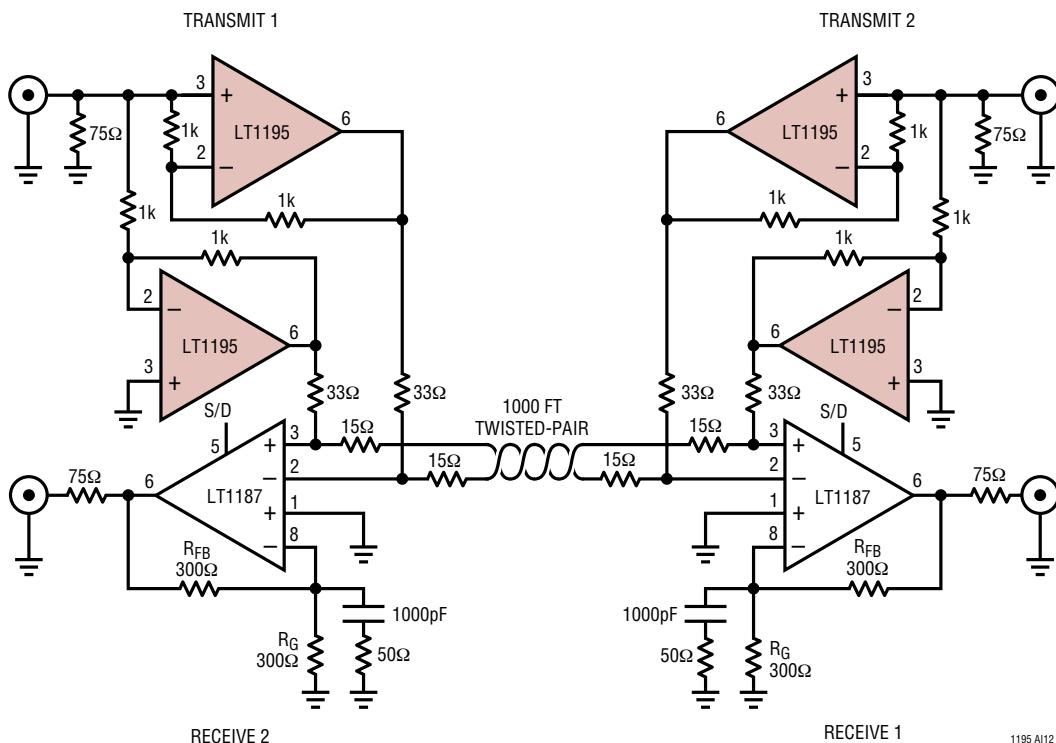

1195 AI12


## SIMPLIFIED SCHEMATIC

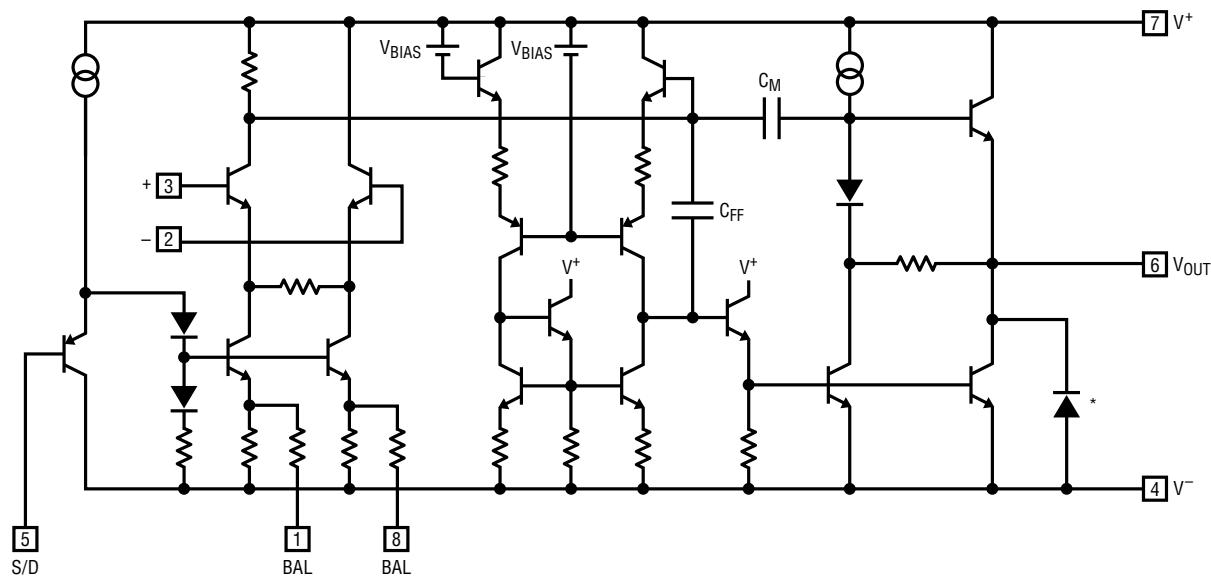


\* SUBSTRATE DIODE, DO NOT FORWARD BIAS

1195 SS

## PACKAGE DESCRIPTION

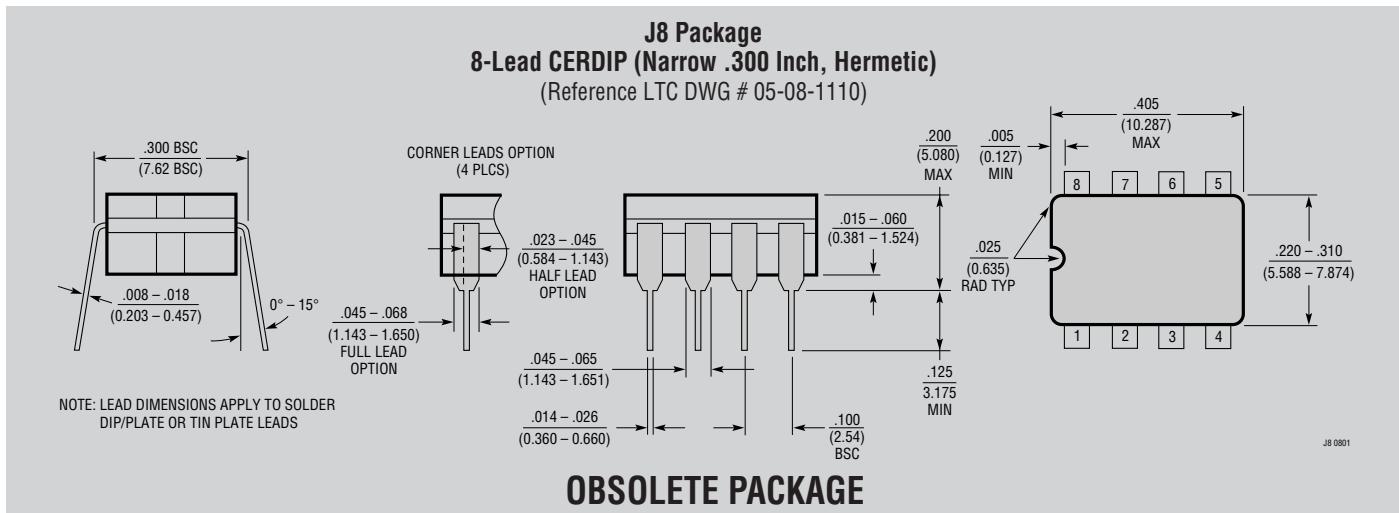


**N8 Package**  
**8-Lead PDIP (Narrow .300 Inch)**  
(Reference LTC DWG # 05-08-1510)

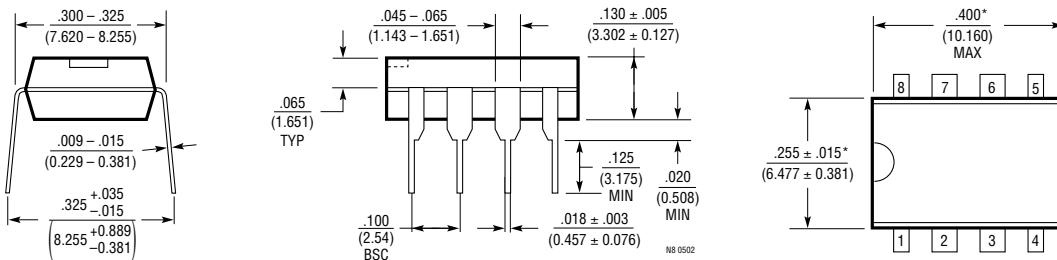

NOTE:  
1. DIMENSIONS ARE INCHES  
MILLIMETERS  
\*THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

**S8 Package**  
**8-Lead Plastic Small Outline (Narrow .150 Inch)**  
(Reference LTC DWG # 05-08-1610)

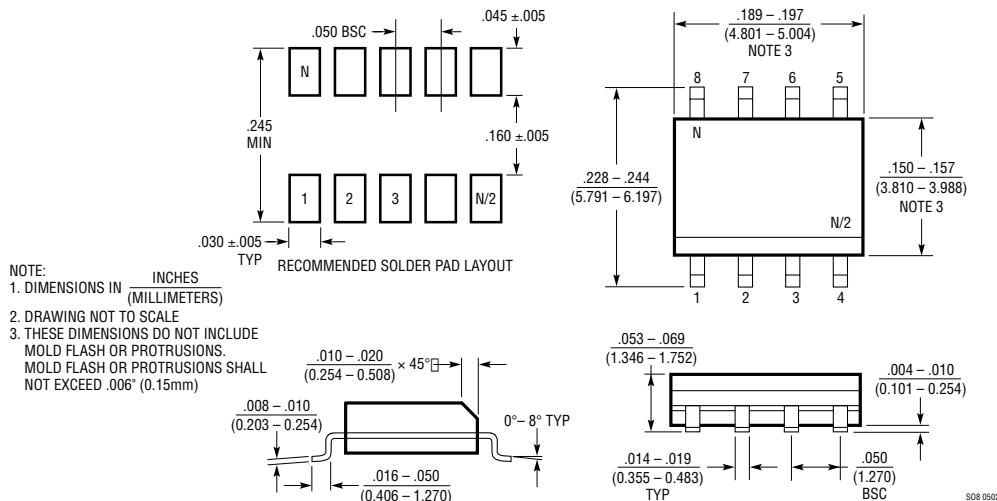



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331