

## PmodDPG1 Reference Manual


Revised August 10, 2016

This manual applies to the PmodDPG1 Rev. A

---

### Overview

The Digilent PmodDPG1 (Revision A) is a differential gauge pressure module. With NXP's [MP3V5010DP](#) piezoresistive transducer and Texas Instrument's [ADCS7476](#) 12-bit Analog-to-Digital Converter, you can detect when a change in pressure between the two ports occurs and send digital information to your system board.

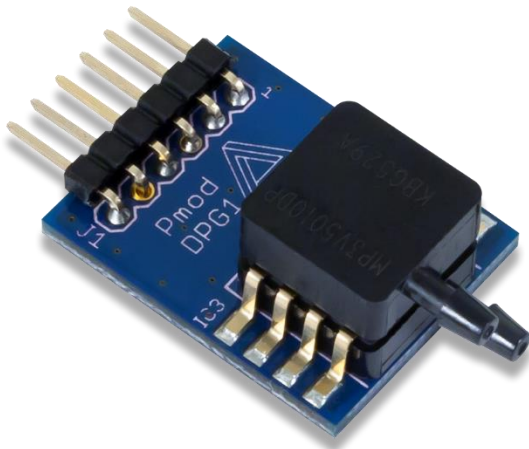

*The PmodDPG1.*

Features include:

- Differential gauge pressure transducer
- 12-bit ADC
- 0 to 10 kPa differential pressure range
- Temperature compensated and calibrated
- 6-pin Pmod connector with SPI interface
- Follows Digilent Pmod Interface Specification Type 2

## 1 Functional Description

The PmodDPG1 is designed to detect a gauge pressure ranging from 0 kPa to 10 kPa with a piezoresistive transducer and use an embedded 12-bit ADC to provide the user with a serial stream of data representative of the measured pressure.

## 2 Specifications

Parameter	Min	Typical <sup>1</sup>	Max	Units
Recommended Operating Voltage	3.125	3.3	3.5	V
Maximum Supply Voltage	-	-	5.5	V
Maximum Pressure <sup>2</sup>	-	-	75	kPa
Minimum Pressure Offset <sup>3</sup>	0.1	0.24	0.38	V
Sensor Accuracy	-0.54	0	0.54	kPa

Parameter	Value	Units
Communication Protocol	SPI Mode 0 <sup>4</sup>	
Power Supply Current draw <sup>5</sup>	10	mA
Sensor Response Time	1	mS
Sensor Bandwidth	500	Hz

Note<sup>1</sup> - Data in the Typical Column uses  $V_{CC}$  at 3.3V unless otherwise noted

Note<sup>2</sup> - Where the pressure at P1 (top nozzle) is greater than the pressure at P2 (bottom nozzle)

Note<sup>3</sup> - Output voltage corresponding to a pressure differential of 0 kPa

Note<sup>4</sup> - CPOL = 0, CHPA = 0

Note<sup>5</sup> - Normal operation with  $V_{CC}$  at 3.3V

## 3 Interfacing with the Pmod

The PmodDPG1 communicates with the host board via the [SPI protocol](#) with SPI Mode 0 (CPOL = 0, CHPA = 0). The 12 bits of digital data are sent to the system board in 16 clock cycles with the most significant bit first. For the embedded ADC7476, each bit is shifted out on each falling edge of the serial clock line after the chip select line is brought low with the first four bits as leading zeroes and the remaining bits representing the 12 bits of data. The datasheet for the [ADC7476](#) recommends that for faster microcontrollers or DSPs that the serial clock line is first brought to a high state before being brought low after the fall of the chip select line to ensure that the first bit is valid.

As a differential pressure module, it should be noted that the Pmod can only accept a certain range of pressure differences without damaging the internal piezoresistive silicon. When the Pmod is laid on a flat surface such that transducer is above the PCB, the top most nozzle is P1 (the receiving nozzle to detect fluctuating pressure) and the bottom most nozzle is P2 (the pressure reference nozzle for P1). The pressure at P1 is recommended to be between 0 and 10 kPa above the pressure present at P2. Pressures outside of this range may cause permanent damage to the device.

To convert the serial data stream back into a corresponding pressure, users may use the following equation:

$$P \text{ (kPa)} = (V_{\text{OUT}}/V_S - 0.08)/0.09$$

or equivalently

$$P \text{ (kPa)} = (\text{measured ADC value}/4096 - 0.08)/0.09$$

### 3.1 What can I Safely Measure with the PmodDPG1?

The recommended pressure differential range for the embedded MP3V5010 on the PmodDPG1 is between 0 kPa and 10 kPa, so it is ideally suited for applications such as measuring small pressure changes inside a venturi meter, as a pressure plate to detect when something touches it, or to determine the air pressure exerted by the normal human lung (presuming you are not a trumpet player or in another field where you need above average lung pressure). Notably, the PmodDPG1 is not able to measure the air pressure inside of a car or bike tire.

The reference article for the human lung pressure, for those of you that are interested, can be found from the National Center for Biotechnology Information website [here](#).

Additionally, the PmodDPG1 is only able to measure dry fluids, such as air, as opposed to being able to measure water pressure.

But what is the lowest pressure that the PmodDPG1 can detect? With an embedded 12-bit ADC that is powered at 3 V, the LSB will have a corresponding voltage of 0.732 mV, but the MP3V5010 has a listed sensitivity of 270 mV per kPa, or equivalently, 0.270 mV per Pascal. This means an LSB change will not occur until an approximate change of 3 Pascals of pressure occurs. Based on Wikipedia's list of [orders of magnitude of pressure](#), a U.S. dollar bill exerts approximately 1 Pascal. Additionally, the lung air pressure difference of a normal breath from a person is approximately 300 Pascals, so the module is very capable of measuring very small changes in pressure.

### 3.2 Pinout Table Diagram

Pin	Signal	Description
1	SS	Chip Select
2	NC	Not Connected
3	MISO	Master-In-Slave-Out
4	SCK	Serial Clock
5	GND	Power Supply Ground
6	VCC	Power Supply (3.3V/5V)

The PmodDPG1 is capable of converting up to 1 MSa per second of 12-bit data, but the transducer response time to a step change of 1 kPa is 1 ms. Smaller changes in pressure will take less time for the transducer to change its output voltage.

Any external power applied to the PmodDPG1 must be within 2.7 V and 3.3 V to ensure that the on-board chips operate correctly; however, it is recommended that Pmod is operated at 3.3 V since an embedded regulator reduces the 3.3 V down to 3 V for the various embedded components.

## 4 Physical Dimensions

The pins on the pin header are spaced 100 mil apart. The PCB is 1.0 inches long on the sides parallel to the pins on the pin header and 0.8 inches long on the sides perpendicular to the pin header. The transducer nozzles extend an additional 0.25 inches and the height of the transducer extends 0.375 inches above the PCB.



## Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

### Наши контакты:

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331