74HC4053-Q100; 74HCT4053-Q100

Triple 2-channel analog multiplexer/demultiplexer

Rev. 3 — 5 March 2020 Product data sheet

1. General description

The 74HC4053-Q100; 74HCT4053-Q100 is a triple single-pole double-throw analog switch (3x SPDT) suitable for use in analog or digital 2:1 multiplexer/demultiplexer applications. Each switch features a digital select input (Sn), two independent inputs/outputs (nY0 and nY1) and a common input/output (nZ). A digital enable input ($\overline{E}$) is common to all switches. When $\overline{E}$ is HIGH, the switches are turned off. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V_{CC}.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

2. Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
  - Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- Wide analog input voltage range from -5 V to +5 V
- Low ON resistance:
  - 80 Ω (typical) at V_{CC} - V_{EE} = 4.5 V
  - 70 Ω (typical) at V_{CC} - V_{EE} = 6.0 V
  - 60 Ω (typical) at V_{CC} - V_{EE} = 9.0 V
- Logic level translation: to enable 5 V logic to communicate with ±5 V analog signals
- Typical ‘break before make’ built-in
- ESD protection:
  - MIL-STD-883, method 3015 exceeds 2000 V
  - HBM JESD22-A114F exceeds 2000 V
  - MM JESD22-A115-A exceeds 200 V (C = 200 pF, R = 0 Ω)
  - CDM AEC-Q100-011 revision B exceeds 1000 V
- Multiple package options
- DHVQFN package with Side-Wettable Flanks enabling Automatic Optical Inspection (AOI) of solder joints

3. Applications

- Analog multiplexing and demultiplexing
- Digital multiplexing and demultiplexing
- Signal gating

nexperia

4. Ordering information

Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74HC4053D-Q100	-40 °C to +125 °C	SO16	plastic small outline package; 16 leads; body width 3.9 mm	SOT109-1
74HCT4053D-Q100				
74HC4053PW-Q100	-40 °C to +125 °C	TSSOP16	plastic thin shrink small outline package; 16 leads; body width 4.4 mm	SOT403-1
74HCT4053PW-Q100				
74HC4053BQ-Q100	-40 °C to +125 °C	DHVQFN16	plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 × 3.5 × 0.85 mm	SOT763-1
74HCT4053BQ-Q100				

5. Functional diagram

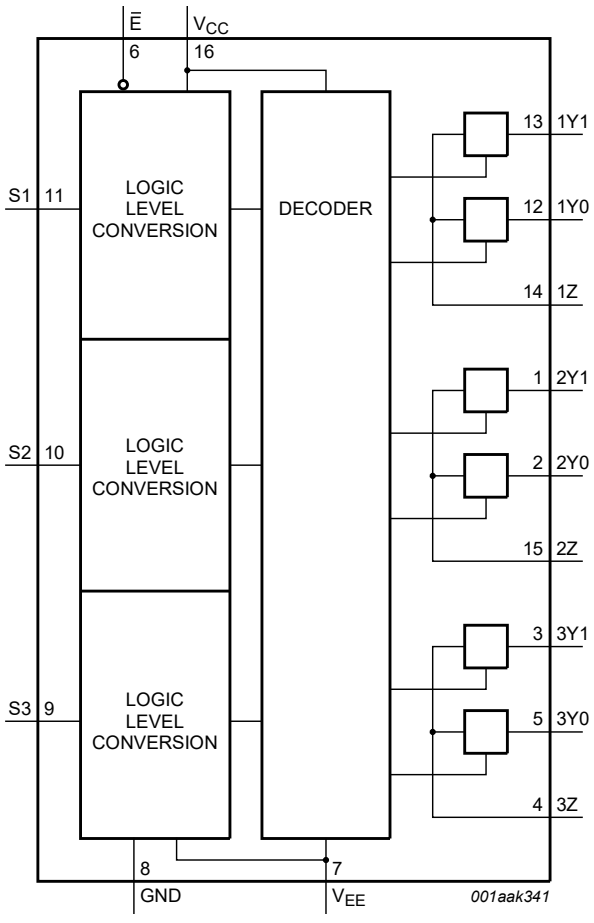

Fig. 1. Functional diagram

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

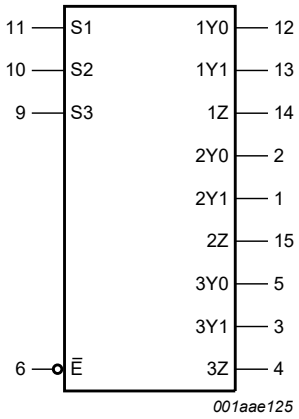

Fig. 2. Logic symbol

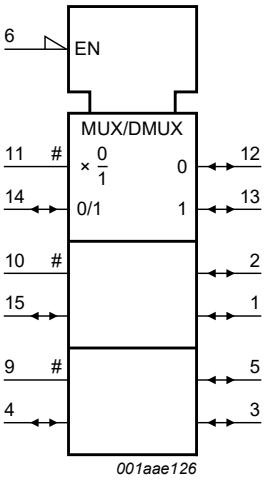

Fig. 3. IEC logic symbol

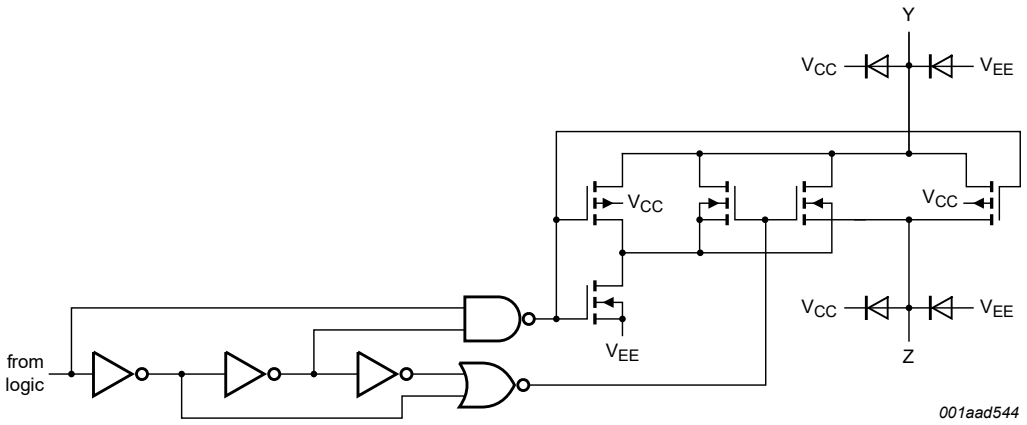

Fig. 4. Schematic diagram (one switch)

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

6. Pinning information

6.1. Pinning

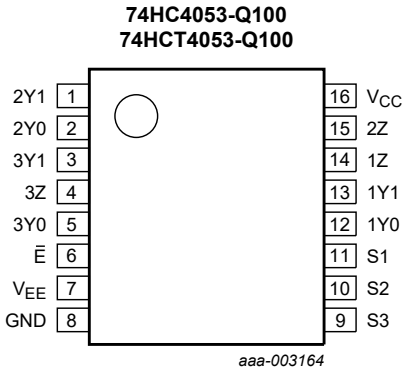

Fig. 5. Pin configuration SOT109-1 (SO16) and SOT403-1 (TSSOP16)

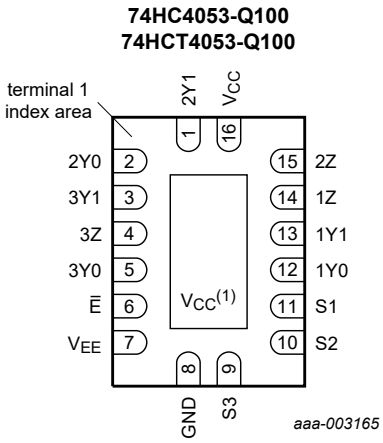

Transparent top view

(1) This is not a supply pin. There is no electrical or mechanical requirement to solder the pad. In case soldered, the solder land should remain floating or connected to V_{CC}.

Fig. 6. Pin configuration SOT763-1 (DHVQFN16)

6.2. Pin description

Table 2. Pin description

Symbol	Pin	Description
$\overline{E}$	6	enable input (active LOW)
V_{EE}	7	supply voltage
GND	8	ground supply voltage
S1, S2, S3	11, 10, 9	select input
1Y0, 2Y0, 3Y0	12, 2, 5	independent input or output
1Y1, 2Y1, 3Y1	13, 1, 3	independent input or output
1Z, 2Z, 3Z	14, 15, 4	common output or input
V_{CC}	16	supply voltage

7. Functional description

Table 3. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care.

Inputs		Channel on
$\overline{E}$	Sn	
L	L	nY0 to nZ
L	H	nY1 to nZ
H	X	switches off

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

8. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to V_{SS} = 0 V (ground).

Symbol	Parameter	Conditions	Min	Max	Unit
V_{CC}	supply voltage	[1]	-0.5	+11.0	V
I_{IK}	input clamping current	V_I < -0.5 V or V_I > V_{CC} + 0.5 V	-	±20	mA
I_{SK}	switch clamping current	V_{SW} < -0.5 V or V_{SW} > V_{CC} + 0.5 V	-	±20	mA
I_{SW}	switch current	-0.5 V < V_{SW} < V_{CC} + 0.5 V	-	±25	mA
I_{EE}	supply current		-	±20	mA
I_{CC}	supply current		-	50	mA
I_{GND}	ground current		-	-50	mA
T_{stg}	storage temperature		-65	+150	°C
P_{tot}	total power dissipation	[2]	-	500	mW
P	power dissipation	per switch	-	100	mW

[1] To avoid drawing V_{CC} current out of terminal nZ, when switch current flows into terminals nYn, the voltage drop across the bidirectional switch must not exceed 0.4 V. If the switch current flows into terminal nZ, no V_{CC} current will flow out of terminals nYn, and in this case there is no limit for the voltage drop across the switch, but the voltages at nYn and nZ may not exceed V_{CC} or V_{EE}.

[2] For SOT109-1 (SO16) package: P_{tot} derates linearly with 12.4 mW/K above 110 °C.
For SOT403-1 (TSSOP16) package: P_{tot} derates linearly with 8.5 mW/K above 91 °C.
For SOT763-1 (DHVQFN16) package: P_{tot} derates linearly with 11.2 mW/K above 106 °C.

9. Recommended operating conditions

Table 5. Recommended operating conditions

Symbol	Parameter	Conditions	74HC4053-Q100			74HCT4053-Q100			Unit
			Min	Typ	Max	Min	Typ	Max	
V_{CC}	supply voltage	see Fig. 7 and Fig. 8							
		V_{CC} - GND	2.0	5.0	10.0	4.5	5.0	5.5	V
		V_{CC} - V_{EE}	2.0	5.0	10.0	2.0	5.0	10.0	V
V_I	input voltage		GND	-	V_{CC}	GND	-	V_{CC}	V
V_{SW}	switch voltage		V_{EE}	-	V_{CC}	V_{EE}	-	V_{CC}	V
T_{amb}	ambient temperature		-40	+25	+125	-40	+25	+125	°C
Δt/ΔV	input transition rise and fall rate	V_{CC} = 2.0 V	-	-	625	-	-	-	ns/V
		V_{CC} = 4.5 V	-	1.67	139	-	1.67	139	ns/V
		V_{CC} = 6.0 V	-	-	83	-	-	-	ns/V
		V_{CC} = 10.0 V	-	-	31	-	-	-	ns/V

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

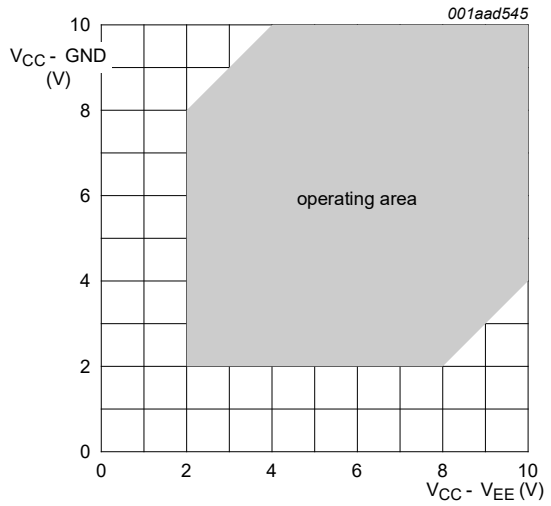

Fig. 7. Guaranteed operating area as a function of the supply voltages for 74HC4053-Q100

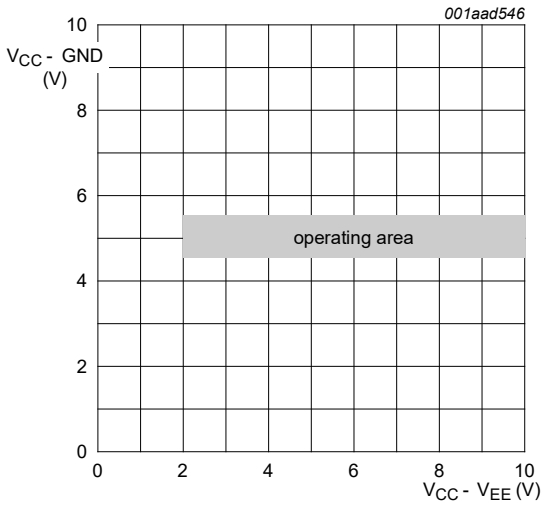

Fig. 8. Guaranteed operating area as a function of the supply voltages for 74HCT4053-Q100

10. Static characteristics

Table 6. R_{ON} resistance per switch for 74HC4053-Q100 and 74HCT4053-Q100

V_I = V_{IH} or V_{IL}; for test circuit see Fig. 9.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.
For 74HC4053-Q100: V_{CC} - GND or V_{CC} - V_{EE} = 2.0 V, 4.5 V, 6.0 V and 9.0 V.
For 74HCT4053-Q100: V_{CC} - GND = 4.5 V and 5.5 V, V_{CC} - V_{EE} = 2.0 V, 4.5 V, 6.0 V and 9.0 V.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
T_{amb} = 25 °C							
$R_{ON(peak)}$	ON resistance (peak)	V_{is} = V_{CC} to V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	100	180	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	90	160	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	70	130	Ω
$R_{ON(rail)}$	ON resistance (rail)	V_{is} = V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	150	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	80	140	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	70	120	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	60	105	Ω
		V_{is} = V_{CC}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	150	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	90	160	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	80	140	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	65	120	Ω
ΔR_{ON}	ON resistance mismatch between channels	V_{is} = V_{CC} to V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	9	-	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V		-	8	-	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	6	-	Ω

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
T_{amb} = -40 °C to +85 °C							
$R_{ON(peak)}$	ON resistance (peak)	V_{is} = V_{CC} to V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	225	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	200	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	-	165	Ω
$R_{ON(rail)}$	ON resistance (rail)	V_{is} = V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	175	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	150	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	-	130	Ω
		V_{is} = V_{CC}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	200	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	175	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	-	150	Ω
T_{amb} = -40 °C to +125 °C							
$R_{ON(peak)}$	ON resistance (peak)	V_{is} = V_{CC} to V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	270	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	240	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	-	195	Ω
$R_{ON(rail)}$	ON resistance (rail)	V_{is} = V_{EE}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	210	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	180	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	-	160	Ω
		V_{is} = V_{CC}					
		V_{CC} = 2.0 V; V_{EE} = 0 V; I_{SW} = 100 µA	[1]	-	-	-	Ω
		V_{CC} = 4.5 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	240	Ω
		V_{CC} = 6.0 V; V_{EE} = 0 V; I_{SW} = 1000 µA		-	-	210	Ω
		V_{CC} = 4.5 V; V_{EE} = -4.5 V; I_{SW} = 1000 µA		-	-	180	Ω

[1] When supply voltages (V_{CC} - V_{EE}) near 2.0 V the analog switch ON resistance becomes extremely non-linear. When using a supply of 2 V, it is recommended to use these devices only for transmitting digital signals.

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

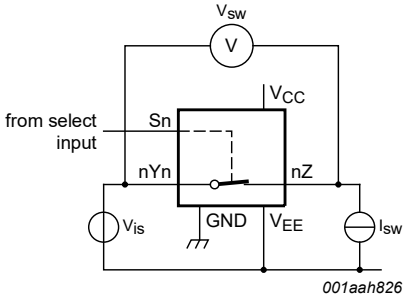

V_{is} = 0 V to (V_{CC} - V_{EE}).

$$R_{ON} = \frac{V_{sw}}{I_{sw}}$$

Fig. 9. Test circuit for measuring R_{ON}

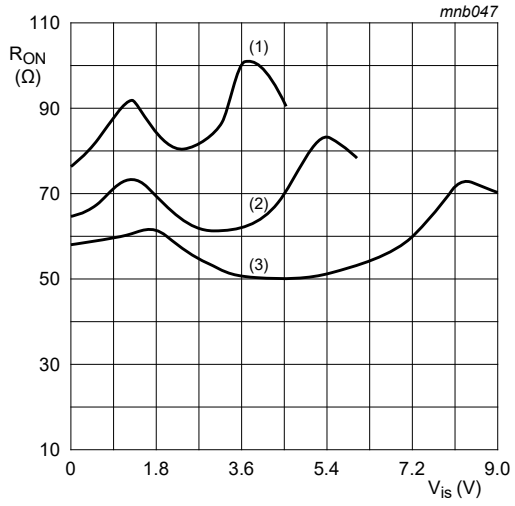

V_{is} = 0 V to (V_{CC} - V_{EE}).

(1) V_{CC} = 4.5 V
(2) V_{CC} = 6 V
(3) V_{CC} = 9 V

Fig. 10. Typical R_{ON} as a function of input voltage V_{is}

Table 7. Static characteristics for 74HC4053-Q100

Voltages are referenced to GND (ground = 0 V).

V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.

V_{os} is the output voltage at pins nZ or nYn, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_{amb} = 25 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 2.0 V	1.5	1.2	-	V
		V_{CC} = 4.5 V	3.15	2.4	-	V
		V_{CC} = 6.0 V	4.2	3.2	-	V
		V_{CC} = 9.0 V	6.3	4.7	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 2.0 V	-	0.8	0.5	V
		V_{CC} = 4.5 V	-	2.1	1.35	V
		V_{CC} = 6.0 V	-	2.8	1.8	V
		V_{CC} = 9.0 V	-	4.3	2.7	V
I_I	input leakage current	V_{EE} = 0 V; V_I = V_{CC} or GND				
		V_{CC} = 6.0 V	-	-	±0.1	µA
		V_{CC} = 10.0 V	-	-	±0.2	µA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 11				
		per channel	-	-	±0.1	µA
		all channels	-	-	±0.1	µA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 12	-	-	±0.1	µA
I_{CC}	supply current	V_{EE} = 0 V; V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 6.0 V	-	-	8.0	µA
		V_{CC} = 10.0 V	-	-	16.0	µA
C_I	input capacitance		-	3.5	-	pF

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
C_{sw}	switch capacitance	independent pins nYn	-	5	-	pF
		common pins nZ	-	8	-	pF
T_{amb} = -40 °C to +85 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 2.0 V	1.5	-	-	V
		V_{CC} = 4.5 V	3.15	-	-	V
		V_{CC} = 6.0 V	4.2	-	-	V
		V_{CC} = 9.0 V	6.3	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 2.0 V	-	-	0.5	V
		V_{CC} = 4.5 V	-	-	1.35	V
		V_{CC} = 6.0 V	-	-	1.8	V
		V_{CC} = 9.0 V	-	-	2.7	V
I_I	input leakage current	V_{EE} = 0 V; V_I = V_{CC} or GND				
		V_{CC} = 6.0 V	-	-	±1.0	µA
		V_{CC} = 10.0 V	-	-	±2.0	µA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; Fig. 11				
		per channel	-	-	±1.0	µA
		all channels	-	-	±1.0	µA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 12	-	-	±1.0	µA
I_{CC}	supply current	V_{EE} = 0 V; V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 6.0 V	-	-	80.0	µA
		V_{CC} = 10.0 V	-	-	160.0	µA
T_{amb} = -40 °C to +125 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 2.0 V	1.5	-	-	V
		V_{CC} = 4.5 V	3.15	-	-	V
		V_{CC} = 6.0 V	4.2	-	-	V
		V_{CC} = 9.0 V	6.3	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 2.0 V	-	-	0.5	V
		V_{CC} = 4.5 V	-	-	1.35	V
		V_{CC} = 6.0 V	-	-	1.8	V
		V_{CC} = 9.0 V	-	-	2.7	V
I_I	input leakage current	V_{EE} = 0 V; V_I = V_{CC} or GND				
		V_{CC} = 6.0 V	-	-	±1.0	µA
		V_{CC} = 10.0 V	-	-	±2.0	µA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 11				
		per channel	-	-	±1.0	µA
		all channels	-	-	±1.0	µA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 12	-	-	±1.0	µA

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_{CC}	supply current	V_{EE} = 0 V; V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC}; V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 6.0 V	-	-	160.0	µA
		V_{CC} = 10.0 V	-	-	320.0	µA

Table 8. Static characteristics for 74HCT4053-Q100

Voltages are referenced to GND (ground = 0 V).

V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.

V_{os} is the output voltage at pins nZ or nYn, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_{amb} = 25 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 4.5 V to 5.5 V	2.0	1.6	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 4.5 V to 5.5 V	-	1.2	0.8	V
I_I	input leakage current	V_I = V_{CC} or GND; V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	±0.1	µA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 11				
		per channel	-	-	±0.1	µA
		all channels	-	-	±0.1	µA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 12	-	-	±0.1	µA
I_{CC}	supply current	V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC};V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	8.0	µA
		V_{CC} = 5.0 V; V_{EE} = -5.0 V	-	-	16.0	µA
ΔI_{CC}	additional supply current	per input; V_I = V_{CC} - 2.1 V; other inputs at V_{CC} or GND; V_{CC} = 4.5 V to 5.5 V; V_{EE} = 0 V	-	50	180	µA
C_I	input capacitance		-	3.5	-	pF
C_{sw}	switch capacitance	independent pins nYn	-	5	-	pF
		common pins nZ	-	8	-	pF
T_{amb} = -40 °C to +85 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 4.5 V to 5.5 V	2.0	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 4.5 V to 5.5 V	-	-	0.8	V
I_I	input leakage current	V_I = V_{CC} or GND; V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	±1.0	µA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 11				
		per channel	-	-	±1.0	µA
		all channels	-	-	±1.0	µA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; V_I = V_{IH} or V_{IL}; $\|V_{SW}\|$ = V_{CC} - V_{EE}; see Fig. 12	-	-	±1.0	µA
I_{CC}	supply current	V_I = V_{CC} or GND; V_{is} = V_{EE} or V_{CC};V_{os} = V_{CC} or V_{EE}				
		V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	80.0	µA
		V_{CC} = 5.0 V; V_{EE} = -5.0 V	-	-	160.0	µA

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
ΔI_{CC}	additional supply current	per input; $V_I = V_{CC}$ - 2.1 V; other inputs at V_{CC} or GND; V_{CC} = 4.5 V to 5.5 V; V_{EE} = 0 V	-	-	225	µA
T_{amb} = -40 °C to +125 °C						
V_{IH}	HIGH-level input voltage	V_{CC} = 4.5 V to 5.5 V	2.0	-	-	V
V_{IL}	LOW-level input voltage	V_{CC} = 4.5 V to 5.5 V	-	-	0.8	V
I_I	input leakage current	$V_I = V_{CC}$ or GND; V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	±1.0	µA
$I_{S(OFF)}$	OFF-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; $V_I = V_{IH}$ or V_{IL}; $\|V_{SW}\| = V_{CC} - V_{EE}$; see Fig. 11				
		per channel	-	-	±1.0	µA
		all channels	-	-	±1.0	µA
$I_{S(ON)}$	ON-state leakage current	V_{CC} = 10.0 V; V_{EE} = 0 V; $V_I = V_{IH}$ or V_{IL}; $\|V_{SW}\| = V_{CC} - V_{EE}$; see Fig. 12	-	-	±1.0	µA
I_{CC}	supply current	$V_I = V_{CC}$ or GND; $V_{is} = V_{EE}$ or V_{CC}; $V_{os} = V_{CC}$ or V_{EE}				
		V_{CC} = 5.5 V; V_{EE} = 0 V	-	-	160.0	µA
		V_{CC} = 5.0 V; V_{EE} = -5.0 V	-	-	320.0	µA
ΔI_{CC}	additional supply current	per input; $V_I = V_{CC}$ - 2.1 V; other inputs at V_{CC} or GND; V_{CC} = 4.5 V to 5.5 V; V_{EE} = 0 V	-	-	245	µA

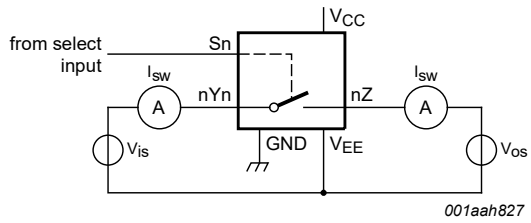

$V_{is} = V_{CC}$ and $V_{os} = V_{EE}$.
$V_{is} = V_{EE}$ and $V_{os} = V_{CC}$.

Fig. 11. Test circuit for measuring OFF-state current

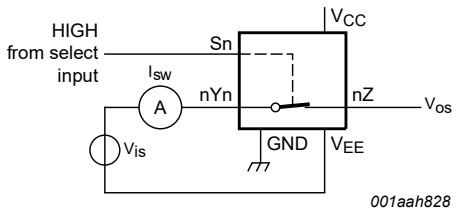

$V_{is} = V_{CC}$ and V_{os} = open-circuit.
$V_{is} = V_{EE}$ and V_{os} = open-circuit.

Fig. 12. Test circuit for measuring ON-state current

11. Dynamic characteristics

Table 9. Dynamic characteristics for 74HC4053-Q100

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF; for test circuit see Fig. 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_{amb} = 25 °C						
t_{pd}	propagation delay	V_{is} to V_{os}; $R_L = \infty$ Ω; see Fig. 13 [1]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	15	60	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	5	12	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	4	10	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	4	8	ns

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = ∞ Ω; see Fig. 14 [2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	60	220	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	20	44	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF	-	17	-	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	16	37	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	15	31	ns
		Sn to V_{os}; R_L = ∞ Ω; see Fig. 14 [2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	75	220	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	25	44	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF	-	21	-	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	20	37	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	15	31	ns
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14 [3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	63	210	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	21	42	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF	-	18	-	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	17	36	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	15	29	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14 [3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	60	210	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	20	42	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF	-	17	-	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	16	36	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	15	29	ns
C_{PD}	power dissipation capacitance	per switch; V_I = GND to V_{CC} [4]	-	36	-	pF
T_{amb} = -40 °C to +85 °C						
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Fig. 13 [1]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	75	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	15	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	13	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	10	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = ∞ Ω; see Fig. 14 [2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	275	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	55	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	47	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	39	ns
		Sn to V_{os}; R_L = ∞ Ω; see Fig. 14 [2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	275	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	55	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	47	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	39	ns

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14 [3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	265	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	53	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	45	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	36	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14 [3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	265	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	53	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	45	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	36	ns
T_{amb} = -40 °C to +125 °C						
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Fig. 13 [1]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	90	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	18	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	15	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	12	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = ∞ Ω; see Fig. 14 [2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	330	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	66	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	56	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	47	ns
		Sn to V_{os}; R_L = ∞ Ω; see Fig. 14 [2]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	330	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	66	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	56	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	47	ns
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14 [3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	315	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	63	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	54	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	44	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14 [3]				
		V_{CC} = 2.0 V; V_{EE} = 0 V	-	-	315	ns
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	-	63	ns
		V_{CC} = 6.0 V; V_{EE} = 0 V	-	-	54	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	-	44	ns

[1] t_{pd} is the same as t_{PHL} and t_{PLH}.
[2] t_{on} is the same as t_{PZH} and t_{PZL}.
[3] t_{off} is the same as t_{PHZ} and t_{PLZ}.
[4] C_{PD} is used to determine the dynamic power dissipation (P_D in µW).
$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ where:
f_i = input frequency in MHz; f_o = output frequency in MHz;
N = number of inputs switching; $\Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ = sum of outputs;
C_L = output load capacitance in pF; C_{sw} = switch capacitance in pF;
V_{CC} = supply voltage in V.

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Table 10. Dynamic characteristics for 74HCT4053-Q100

GND = 0 V; $t_r = t_f$ = 6 ns; C_L = 50 pF; for test circuit see Fig. 15.
V_{is} is the input voltage at a nYn or nZ terminal, whichever is assigned as an input.
V_{os} is the output voltage at a nYn or nZ terminal, whichever is assigned as an output.

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
T_{amb} = 25 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Fig. 13	[1]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	5	12	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	4	8	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	27	48	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	23	-	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	16	34	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	25	48	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	21	-	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	16	34	ns
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	24	44	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	20	-	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	15	31	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	22	44	ns
		V_{CC} = 5.0 V; V_{EE} = 0 V; C_L = 15 pF		-	19	-	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	15	31	ns
C_{PD}	power dissipation capacitance	per switch; V_I = GND to V_{CC} - 1.5 V	[4]	-	36	-	pF
T_{amb} = -40 °C to +85 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Fig. 13	[1]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	15	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	10	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	60	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	43	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	60	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	43	ns
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	55	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	39	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	55	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	39	ns

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
T_{amb} = -40 °C to +125 °C							
t_{pd}	propagation delay	V_{is} to V_{os}; R_L = ∞ Ω; see Fig. 13	[1]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	18	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	12	ns
t_{on}	turn-on time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	72	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	51	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14	[2]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	72	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	51	ns
t_{off}	turn-off time	$\overline{E}$ to V_{os}; R_L = 1 kΩ; see Fig. 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	66	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	47	ns
		Sn to V_{os}; R_L = 1 kΩ; see Fig. 14	[3]				
		V_{CC} = 4.5 V; V_{EE} = 0 V		-	-	66	ns
		V_{CC} = 4.5 V; V_{EE} = -4.5 V		-	-	47	ns

[1] t_{pd} is the same as t_{PHL} and t_{PLH}.
[2] t_{on} is the same as t_{PZH} and t_{PZL}.
[3] t_{off} is the same as t_{PHZ} and t_{PLZ}.
[4] C_{PD} is used to determine the dynamic power dissipation (P_D in µW).
$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ where:
f_i = input frequency in MHz; f_o = output frequency in MHz;
N = number of inputs switching; $\Sigma\{(C_L + C_{sw}) \times V_{CC}^2 \times f_o\}$ = sum of outputs;
C_L = output load capacitance in pF; C_{sw} = switch capacitance in pF;
V_{CC} = supply voltage in V.

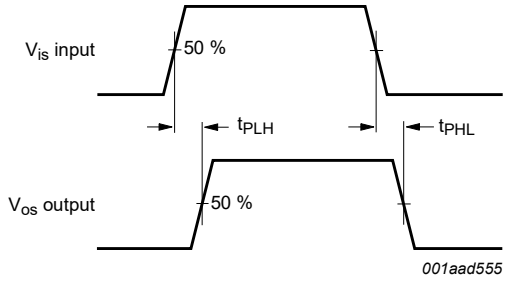

Fig. 13. Input (V_{is}) to output (V_{os}) propagation delays

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

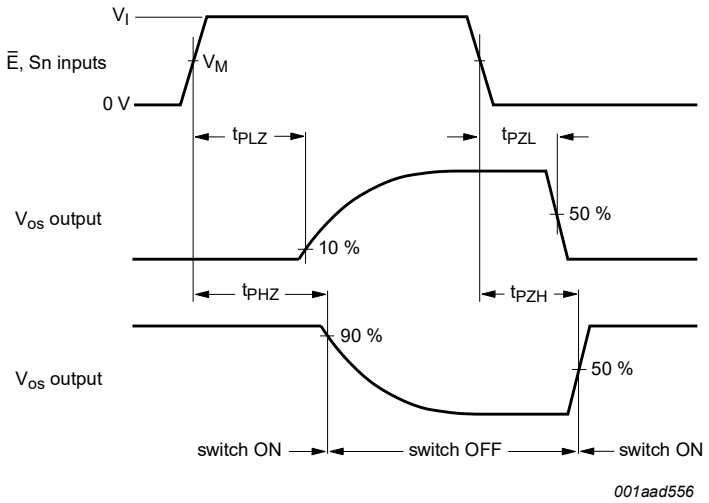

For 74HC4053-Q100: $V_M = 0.5 \times V_{CC}$.
For 74HCT4053-Q100: $V_M = 1.3$ V.

Fig. 14. Turn-on and turn-off times

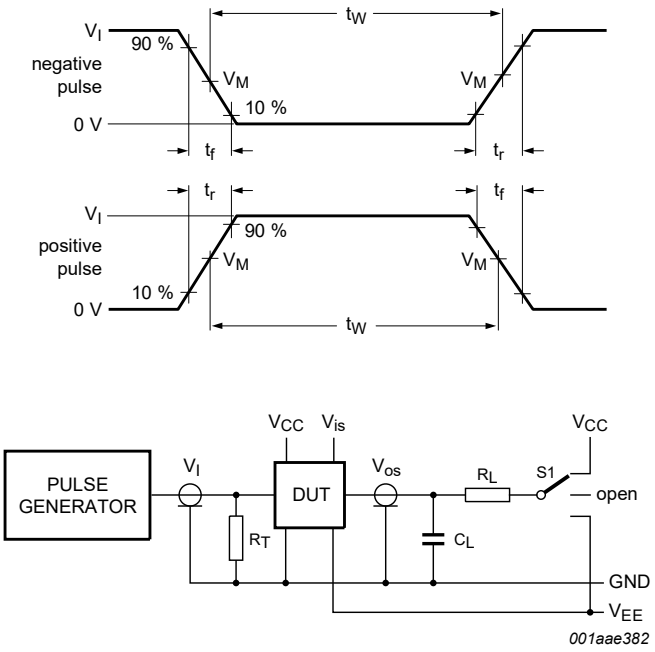

Definitions for test circuit; see Table 11:
R_T = termination resistance should be equal to the output impedance Z_o of the pulse generator.
C_L = load capacitance including jig and probe capacitance.
R_L = load resistance.
S1 = Test selection switch.

Fig. 15. Test circuit for measuring AC performance

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Table 11. Test data

Test	Input				Load		S1 position
	V_I [1]	V_{is}	t_r, t_f		C_L	R_L	
			at f_{max}	other [2]			
t_{PHL}, t_{PLH}	V_{CC}	pulse	< 2 ns	6 ns	50 pF	1 kΩ	open
t_{PZH}, t_{PHZ}	V_{CC}	V_{CC}	< 2 ns	6 ns	50 pF	1 kΩ	V_{EE}
t_{PZL}, t_{PLZ}	V_{CC}	V_{EE}	< 2 ns	6 ns	50 pF	1 kΩ	V_{CC}

[1] For 74HCT4053-Q100: V_I = 3 V
[2] $t_r = t_f$ = 6 ns; when measuring f_{max}, there is no constraint to t_r and t_f with 50 % duty factor.

11.1. Additional dynamic characteristics

Table 12. Additional dynamic characteristics

Recommended conditions and typical values; GND = 0 V; T_{amb} = 25 °C; C_L = 50 pF.
V_{is} is the input voltage at pins nYn or nZ, whichever is assigned as an input.
V_{os} is the output voltage at pins nYn or nZ, whichever is assigned as an output.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
d_{sin}	sine-wave distortion	f_i = 1 kHz; R_L = 10 kΩ; see Fig. 16				
		V_{is} = 4.0 V (p-p); V_{CC} = 2.25 V; V_{EE} = -2.25 V	-	0.04	-	%
		V_{is} = 8.0 V (p-p); V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	0.02	-	%
		f_i = 10 kHz; R_L = 10 kΩ; see Fig. 16				
		V_{is} = 4.0 V (p-p); V_{CC} = 2.25 V; V_{EE} = -2.25 V	-	0.12	-	%
		V_{is} = 8.0 V (p-p); V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	0.06	-	%
α_{iso}	isolation (OFF-state)	R_L = 600 Ω; f_i = 1 MHz; see Fig. 17				
		V_{CC} = 2.25 V; V_{EE} = -2.25 V [1]	-	-50	-	dB
		V_{CC} = 4.5 V; V_{EE} = -4.5 V [1]	-	-50	-	dB
Xtalk	crosstalk	between two switches/multiplexers; R_L = 600 Ω; f_i = 1 MHz; see Fig. 18				
		V_{CC} = 2.25 V; V_{EE} = -2.25 V [1]	-	-60	-	dB
		V_{CC} = 4.5 V; V_{EE} = -4.5 V [1]	-	-60	-	dB
V_{ct}	crosstalk voltage	peak-to-peak value; between control and any switch; R_L = 600 Ω; f_i = 1 MHz; $\overline{E}$ or Sn square wave between V_{CC} and GND; $t_r = t_f$ = 6 ns; see Fig. 19				
		V_{CC} = 4.5 V; V_{EE} = 0 V	-	110	-	mV
		V_{CC} = 4.5 V; V_{EE} = -4.5 V	-	220	-	mV
$f_{(-3dB)}$	-3 dB frequency response	R_L = 50 Ω; see Fig. 20				
		V_{CC} = 2.25 V; V_{EE} = -2.25 V [2]	-	160	-	MHz
		V_{CC} = 4.5 V; V_{EE} = -4.5 V [2]	-	170	-	MHz

[1] Adjust input voltage V_{is} to 0 dBm level (0 dBm = 1 mW into 600 Ω).
[2] Adjust input voltage V_{is} to 0 dBm level at V_{os} for 1 MHz (0 dBm = 1 mW into 50 Ω).

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

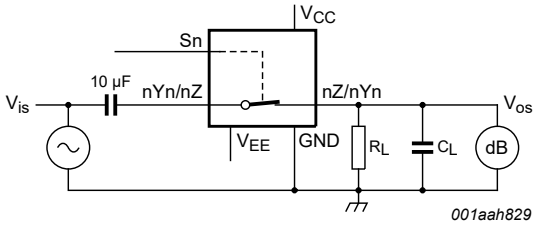

Fig. 16. Test circuit for measuring sine-wave distortion

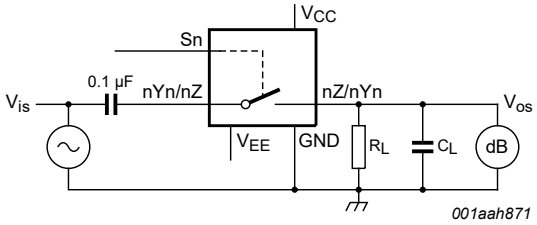

V_{CC} = 4.5 V; GND = 0 V; V_{EE} = -4.5 V; R_L = 600 Ω; R_S = 1 kΩ.

a.Test circuit

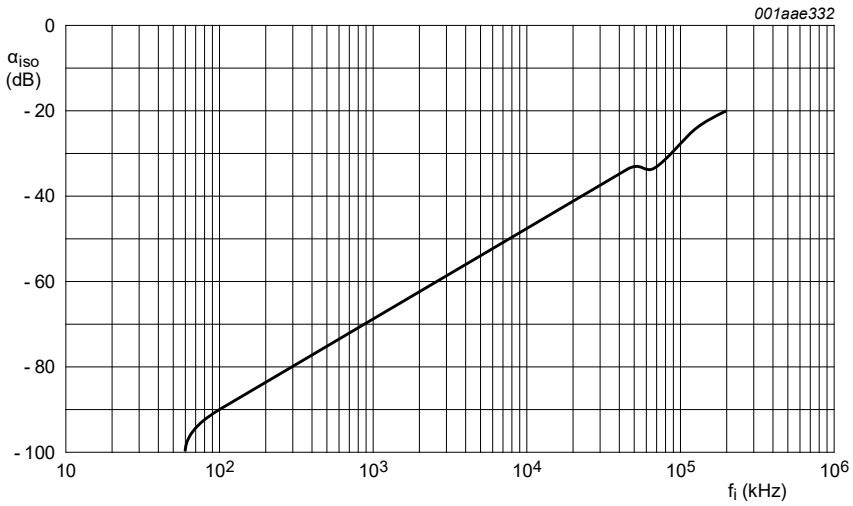

b.Isolation (OFF-state) as a function of frequency

Fig. 17. Test circuit for measuring isolation (OFF-state)

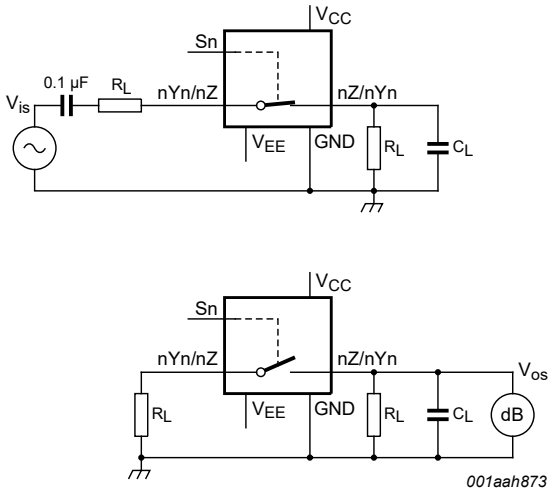

Fig. 18. Test circuits for measuring crosstalk between any two switches/multiplexers

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

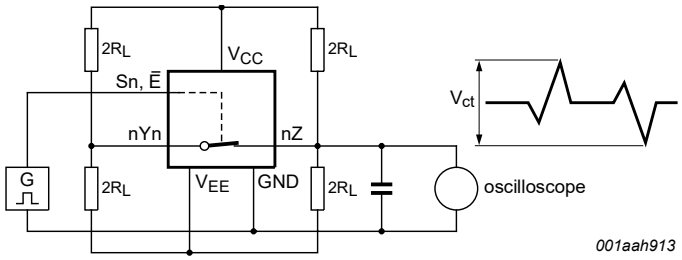

Fig. 19. Test circuit for measuring crosstalk between control input and any switch

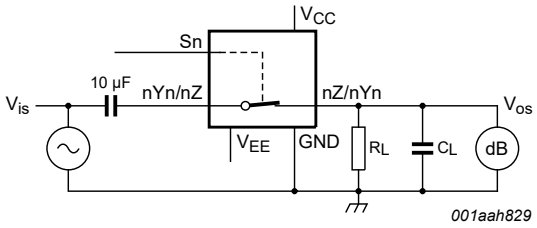

V_{CC} = 4.5 V; GND = 0 V; V_{EE} = -4.5 V; R_L = 50 Ω; R_S = 1 kΩ.

a.Test circuit

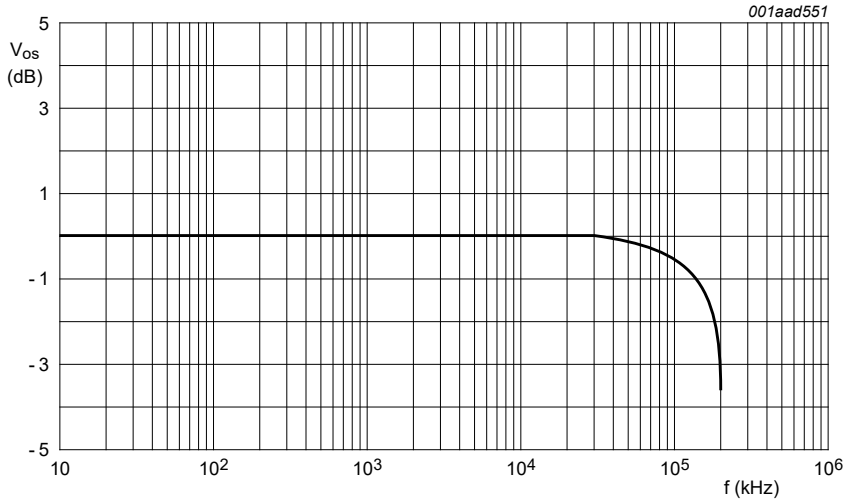

b.Typical frequency response

Fig. 20. Test circuit for frequency response

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

12. Package outline

SO16: plastic small outline package; 16 leads; body width 3.9 mm **SOT109-1**

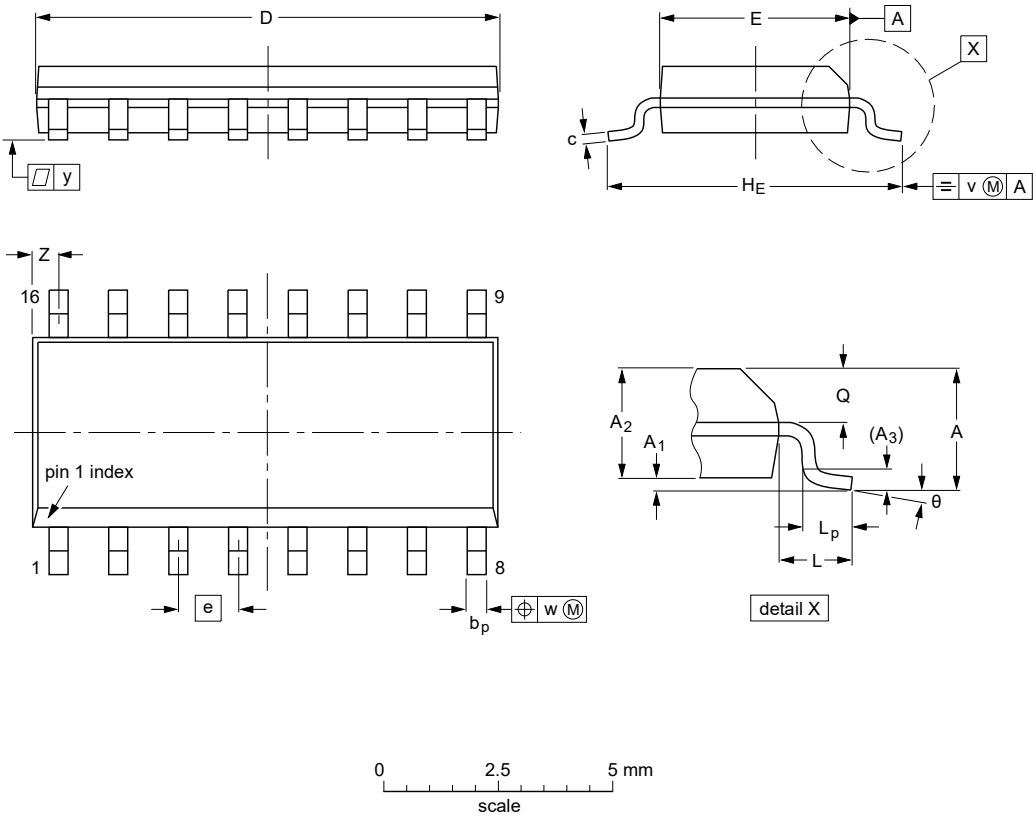

DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	$D^{(1)}$	$E^{(1)}$	e	H_E	L	L_p	Q	v	w	y	$Z^{(1)}$	θ
mm	1.75	0.25 0.10	1.45 1.25	0.25	0.49 0.36	0.25 0.19	10.0 9.8	4.0 3.8	1.27	6.2 5.8	1.05	1.0 0.4	0.7 0.6	0.25	0.25	0.1	0.7 0.3	8° 0°
inches	0.069	0.010 0.004	0.057 0.049	0.01	0.019 0.014	0.0100 0.0075	0.39 0.38	0.16 0.15	0.05	0.244 0.228	0.041	0.039 0.016	0.028 0.020	0.01	0.01	0.004	0.028 0.012	

Note

1. Plastic or metal protrusions of 0.15 mm (0.006 inch) maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT109-1	076E07	MS-012				~~99-12-27~~ 03-02-19

Fig. 21. Package outline SOT109-1 (SO16)

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

TSSOP16: plastic thin shrink small outline package; 16 leads; body width 4.4 mm **SOT403-1**

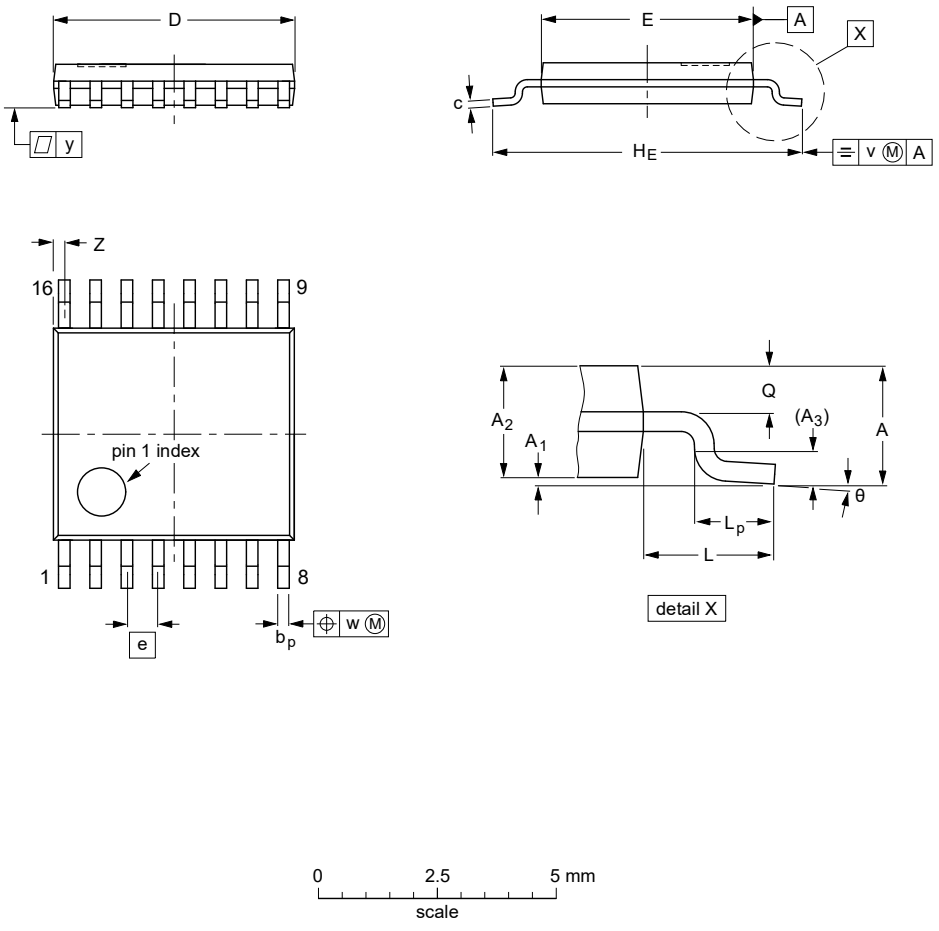

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	D (1)	E (2)	e	H_E	L	L_p	Q	v	w	y	Z (1)	θ
mm	1.1	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	5.1 4.9	4.5 4.3	0.65	6.6 6.2	1	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.40 0.06	8° 0°

Notes

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT403-1		MO-153				~~99-12-27~~ 03-02-18

Fig. 22. Package outline SOT403-1 (TSSOP16)

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

DHVQFN16: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 16 terminals; body 2.5 x 3.5 x 0.85 mm **SOT763-1**

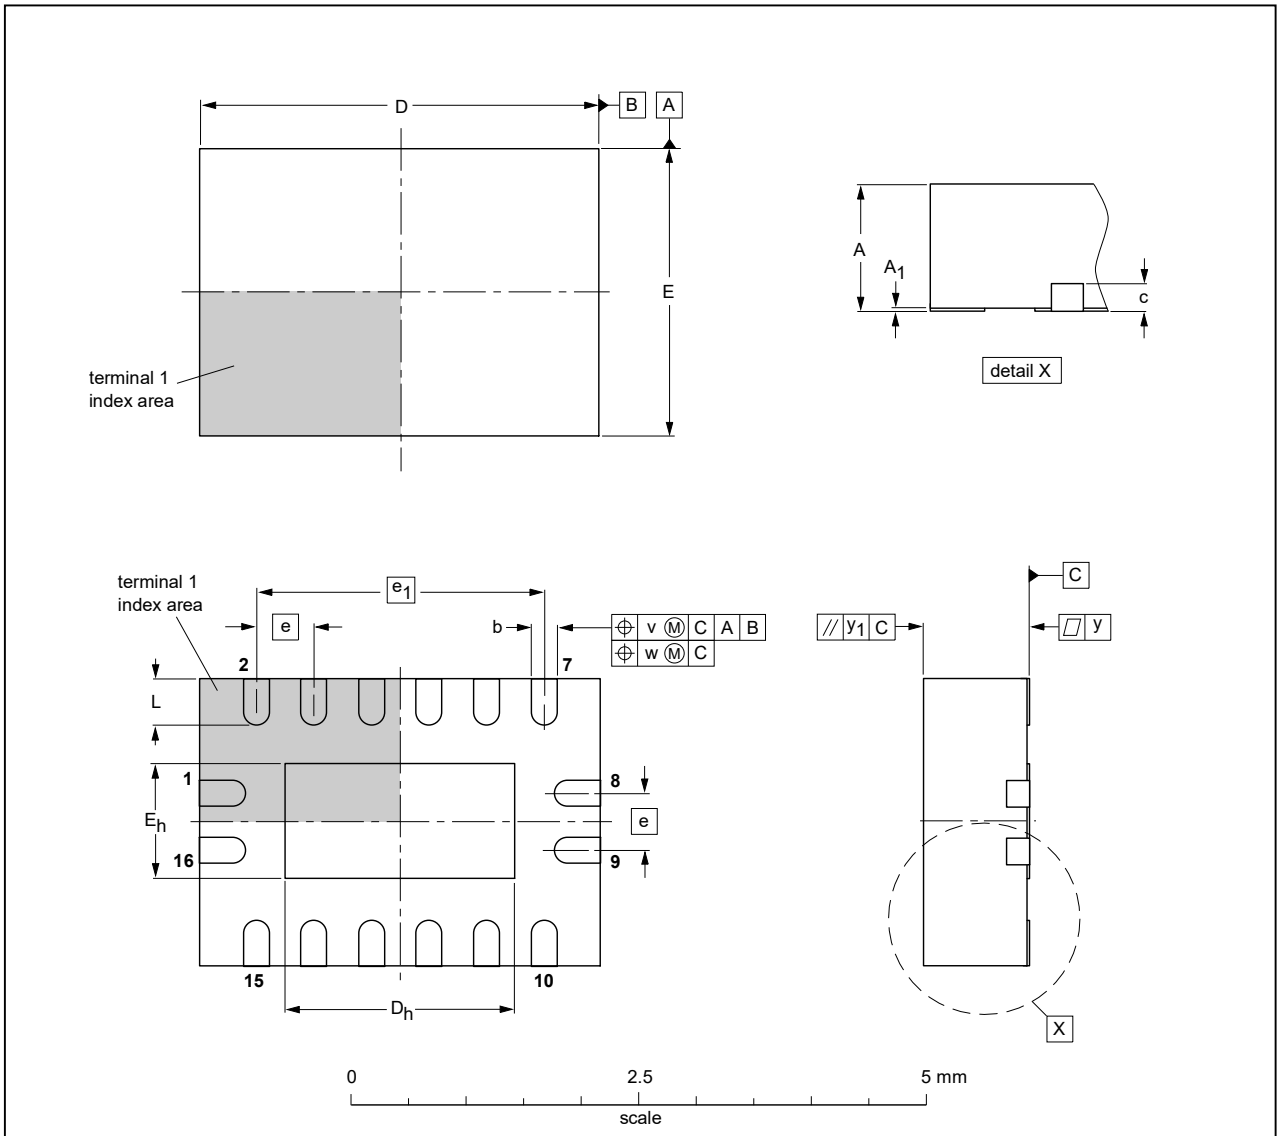

DIMENSIONS (mm are the original dimensions)

UNIT	$A^{(1)}$ max.	A_1	b	c	$D^{(1)}$	D_h	$E^{(1)}$	E_h	e	e_1	L	v	w	y	y_1
mm	1	0.05 0.00	0.30 0.18	0.2	3.6 3.4	2.15 1.85	2.6 2.4	1.15 0.85	0.5	2.5	0.5 0.3	0.1	0.05	0.05	0.1

Note

1. Plastic or metal protrusions of 0.075 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT763-1	- - -	MO-241	- - -			~~02-10-17~~ 03-01-27

Fig. 23. Package outline SOT763-1 (DHVQFN16)

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

13. Abbreviations

Table 13. Abbreviations

Acronym	Description
CDM	Charged Device Model
ESD	ElectroStatic Discharge
HBM	Human Body Model
MIL	Military
MM	Machine Model

14. Revision history

Table 14. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC_HCT4053_Q100 v.3	20200305	Product data sheet	-	74HC_HCT4053_Q100 v.2
Modifications:	• The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia. • Legal texts have been adapted to the new company name where appropriate. • Section 1 updated. • Section 2 updated. • Table 4: Derating values for P_{tot} total power dissipation updated.			
74HC_HCT4053_Q100 v.2	20121122	Product data sheet	-	74HC_HCT4053_Q100 v.1
Modifications:	• CDM added to features.			
74HC_HCT4053_Q100 v.1	20120720	Product data sheet	-	-

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

15. Legal information

Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.
[2] The term 'short data sheet' is explained in section "Definitions".
[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at https://www.nexperia.com.

Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

All information provided in this document is subject to legal disclaimers.
© Nexperia B.V. 2020. All rights reserved

Contents

1. General description....1
2. Features and benefits....1
3. Applications....1
4. Ordering information....2
5. Functional diagram....2
6. Pinning information....4
6.1. Pinning....4
6.2. Pin description....4
7. Functional description....4
8. Limiting values....5
9. Recommended operating conditions....5
10. Static characteristics....6
11. Dynamic characteristics....11
11.1. Additional dynamic characteristics....17
12. Package outline....20
13. Abbreviations....23
14. Revision history....23
15. Legal information....24

© **Nexperia B.V. 2020. All rights reserved**

For more information, please visit: http://www.nexperia.com
For sales office addresses, please send an email to: salesaddresses@nexperia.com
Date of release: 5 March 2020

Стандарт Электрон Связь

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331