

NCP2823 Series

High Efficiency 3W Filterless Class D Audio Amplifier

The NCP2823A/B are cost effective mono audio power amplifiers designed for portable electronic devices. NCP2823A is optimized for 8 Ω operation and NCP2823B can operate with speaker impedance down to 4.0 Ω . For Instance, NCP2823B is capable of delivering 3 W of continuous average power to a 4.0 Ω from a 5.0 V supply in a Bridge Tied Load (BTL) configuration. Under the same conditions, NCP2823A can provide 1.5 W to an 8.0 Ω BTL load with less than 10% THD+N. For cellular handsets or PDAs it offers space and cost savings because no output filter is required when using inductive transducers. With more than 90% efficiency and very low shutdown current, it increases the lifetime of your battery and drastically lowers the junction temperature.

NCP2823 processes analog inputs with a pulse width modulation technique that lowers output noise and THD. The device allows independent gain while summing signals from various audio sources. Thus, in cellular handsets, the earpiece, the loudspeaker and even melody ringer can be driven with a single NCP2823. Due to its low 26 μ V noise floor, A-weighted, clean listening is guaranteed no matter the load sensitivity.

Features

- Optimized PWM Output Stage: Filterless Capability
- Externally gain setting
- Low consumption: 1.8 mA for NCP2823A
- High efficiency: up to 92%
- Large Output Power Capability:
 - 3 W @ $V_P = 5.0$ V, $R_L = 4$ Ω , THD+N < 10%
 - 3 W @ $V_P = 5.5$ V, $R_L = 4$ Ω , THD+N < 1%
- High PSRR: up to -77 dB
- Fully Differential Capability: RF immunity
- Thermal and Auto recovery Short-Circuit Protection
- CMRR (-80 dB) Eliminates Two Input Coupling Capacitors
- Pin to Pin compatible with NCP2820 Flip-Chip
- These Devices are Pb-Free and are RoHS Compliant

Typical Applications

- Audio Amplifier for
 - ♦ Cellular Phones
 - ♦ Digital Cameras
 - ♦ Personal Digital Assistant and Portable Media Player
 - ♦ GPS




ON Semiconductor®

<http://onsemi.com>

MARKING DIAGRAM





9-PIN FLIP-CHIP CSP
FC SUFFIX
CASE 499AL



XXX = QTA for NCP2823A
= PMA for NCP2823B
= TPG for NCP2823A
with backside laminate
A = Assembly Location
Y = Year
WW = Work Week
▪ = Pb-Free Package

ORDERING INFORMATION

See detailed ordering and shipping information on page 10 of this data sheet.

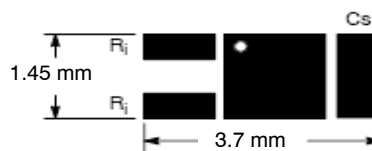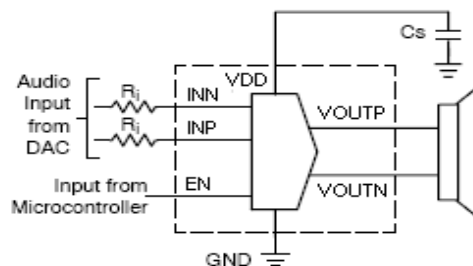

NCP2823 Series

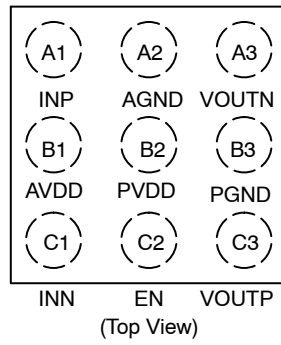


Figure 1. Pin Description

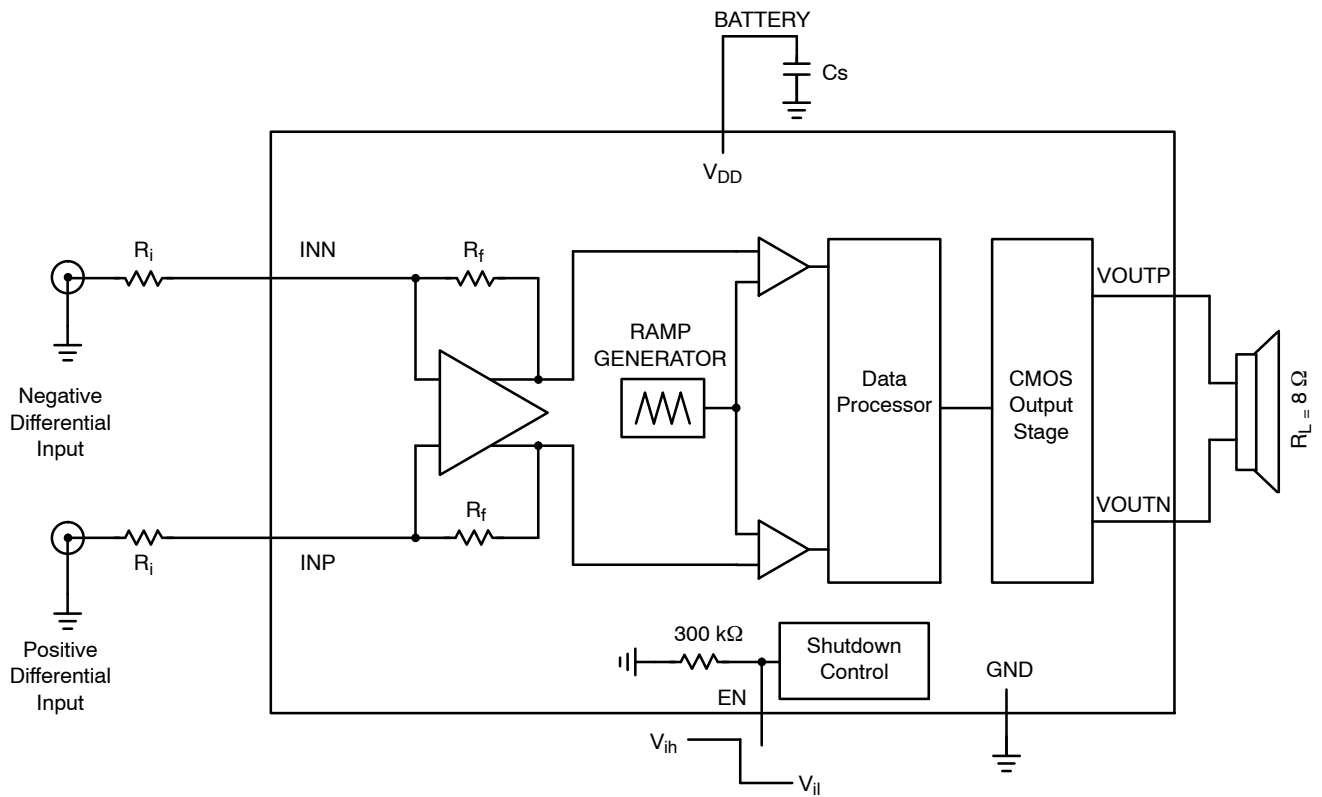


Figure 2. Simplified Block Diagram

NCP2823 Series

PIN FUNCTION DESCRIPTION

| Pin | Pin Name | Type | Description |
|-----|----------|--------|---|
| A1 | INP | INPUT | Positive Differential Input |
| C1 | INN | INPUT | Negative Differential Input |
| B2 | PVDD | POWER | Power Supply: This pin is the power supply of the device. A 4.7 μ F ceramic capacitor or larger must bypass this input to the ground. This capacitor should be placed as close as possible to this input. |
| B1 | AVDD | POWER | Analog Power Supply: This pin must be connected to PVDD. |
| C3 | VOUTP | OUTPUT | Positive output Special care must be observed at layout level. See the Layout recommendations. |
| A3 | VOUTN | OUTPUT | Negative output: Special care must be observed at layout level. See the Layout recommendations. |
| C2 | EN | INPUT | Enable: When a High logic is applied to this pin, the device is activated |
| B3 | PGND | POWER | Power Ground: This pin is the power ground and carries the high switching current. A high quality ground must be provided to avoid any noise spikes/uncontrolled operation. Care must be observed to avoid high-density current flow in a limited PCB copper track. |
| A2 | AGND | POWER | Analog Ground: This pin is the analog ground of the device and must be connected to GND plane. |

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|--|----------------------|-----------------------------|----------------------|
| AVDD, PVDD Pins: Power Supply Voltage (Note 2) | V_P | -0.3 to +6.0 | V |
| INP/N ,Pins: Input (Note 2) | $V_{INP/N}$ | -0.3 to V_{DD} | V |
| Digital Input/Output: EN Pin: Input Voltage Input Current | V_{DG} I_{DG} | -0.3 to $V_{DD} + 0.3$ 1 | V mA |
| Human Body Model (HBM) ESD Rating are (Note 3) | ESD HBM | 2000 | V |
| Machine Model (MM) ESD Rating are (Note 3) | ESD MM | 200 | V |
| WCSP 1.5 x 1.5 mm package (Notes 6 and 7) Thermal Resistance Junction-to-Case | $R_{\theta JC}$ | 90 | $^{\circ}\text{C/W}$ |
| Operating Ambient Temperature Range | T_A | -40 to +85 | $^{\circ}\text{C}$ |
| Operating Junction Temperature Range | T_J | -40 to +125 | $^{\circ}\text{C}$ |
| Maximum Junction Temperature (Note 6) | T_{JMAX} | +150 | $^{\circ}\text{C}$ |
| Storage Temperature Range | T_{STG} | -65 to +150 | $^{\circ}\text{C}$ |
| Moisture Sensitivity (Note 5) | MSL | Level 1 | |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- Maximum electrical ratings are defined as those values beyond which damage to the device may occur at $T_A = 25^{\circ}\text{C}$.
- According to JEDEC standard JESD22-A108B.
- This device series contains ESD protection and passes the following tests:
Human Body Model (HBM) +/-2.0 kV per JEDEC standard: JESD22-A114 for all pins.
Machine Model (MM) +/-200 V per JEDEC standard: JESD22-A115 for all pins.
- Latch up Current Maximum Rating: ± 100 mA per JEDEC standard: JESD78 class II.
- Moisture Sensitivity Level (MSL): 1 per IPC/JEDEC standard: J-STD-020A.
- The thermal shutdown set to 150°C (typical) avoids irreversible damage on the device due to power dissipation.
- The $R_{\theta CA}$ is dependent on the PCB heat dissipation. The maximum power dissipation (PD) is dependent on the min input voltage, the max output current and external components selected.

$$R_{\theta CA} = \frac{125 - T_A}{P_D} - R_{\theta JC}$$

NCP2823 Series

ELECTRICAL CHARACTERISTICS Min and Max Limits apply for T_A between -40°C to $+85^{\circ}\text{C}$ and for V_{DD} between 2.5 V to 5.5 V (Unless otherwise noted). Typical values are referenced to $T_A = +25^{\circ}\text{C}$ and $V_{DD} = 3.6\text{ V}$. (see Note 8)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

GENERAL PERFORMANCES

| | | | | | | |
|--------------|--|---|----------------------------------|----------------------------------|----------------------------------|--------------------|
| V_P | Operational Power Supply | | 2.5 | | 5.5 | V |
| F_{OSC} | Oscillator Frequency | | 250 | 300 | 350 | kHz |
| I_{DD} | Supply current | NCP2823A $V_P = 3.6\text{ V}$, No Load NCP2823B $V_P = 3.6\text{ V}$, No Load | | 1.8 2.6 | 2.4 4.6 | mA |
| I_{sd} | Shutdown current | $V_{ENL} = V_{ENR} = 0\text{ V}$ | | 0.01 | 1 | μA |
| T_{ON} | Turn ON Time | EN rising edge | | 7.4 | | ms |
| T_{OFF} | Turn Off Time | EN falling edge | | 4 | | ms |
| Z_{sd} | Class D Output impedance in shutdown mode | $V_{ENL} = 0\text{ V}$ | | 20 | | $\text{k}\Omega$ |
| $R_{DS(ON)}$ | Static drain-source on-state resistance of power Mosfets | | | 300 | | $\text{m}\Omega$ |
| η | Efficiency | NCP2823A, $V_P = 3.6\text{ V}$, $P_o = 600\text{ mW}$, $R_L = 8\text{ }\Omega$, $F = 1\text{ kHz}$ NCP2823B, $V_P = 3.6\text{ V}$, $P_o = 1\text{ W}$, $R_L = 4\text{ }\Omega$, $F = 1\text{ kHz}$ | | 92 90 | | % |
| A_v | Voltage gain | | $\frac{285\text{ k}\Omega}{R_i}$ | $\frac{300\text{ k}\Omega}{R_i}$ | $\frac{315\text{ k}\Omega}{R_i}$ | V/V |
| F_{LP} | -3 dB Cut off Frequency of the Built in Low Pass Filter | | | 30 | | kHz |
| T_{SD} | Thermal Shut Down Protection | | | 150 | | $^{\circ}\text{C}$ |
| T_{SDH} | Thermal Shut Down Hysteresis | | | 10 | | $^{\circ}\text{C}$ |
| V_{IH} | Rising Voltage Input Logic High | | 1.2 | - | V_{DD} | V |
| V_{IL} | Falling Voltage Input Logic Low | | | - | 0.4 | V |
| R_{PLD} | Pull Down Resistor | | | 250 | | $\text{k}\Omega$ |

AUDIO PERFORMANCES

| | | | | | | |
|----------|------------------------------|--|--------------|-----|--|---------------|
| v_{oo} | Output offset | | | 0.3 | | mV |
| PSRR | Power supply rejection ratio | $F = 217\text{ Hz}$, Input ac grounded | | -77 | | dB |
| | | $F = 1\text{ kHz}$, Input ac grounded | | -63 | | |
| SNR | Signal to noise ratio | $V_P = 5\text{ V}$, $P_{out} = 600\text{ mW}$ (A. Weighted) | | 97 | | dB |
| CMRR | Common mode rejection ratio | Input shorted together $V_{IC} = 1\text{ V}_{pp}$, $f = 217\text{ Hz}$ | | -80 | | dB |
| V_n | Output Voltage noise | Input ac grounded, $A_v = 0\text{ dB}$ | No weighting | 35 | | μV |
| | | | A. Weighted | 26 | | |

8. Performances guaranteed over the indicated operating temperature range by design and/or characterization, production tested at $T_J = T_A = 25^{\circ}\text{C}$.

NCP2823 Series

ELECTRICAL CHARACTERISTICS Min and Max Limits apply for T_A between -40°C to $+85^{\circ}\text{C}$ and for V_{DD} between 2.5 V to 5.5 V (Unless otherwise noted). Typical values are referenced to $T_A = +25^{\circ}\text{C}$ and $V_{DD} = 3.6\text{ V}$. (see Note 8)

| Symbol | Parameter | Conditions | | | Min | Typ | Max | Unit |
|--------------------|--------------------------------------|-----------------------------------|----------------|------------|-----|------|-----|------|
| AUDIO PERFORMANCES | | | | | | | | |
| Po | Output Power | NCP2823A RL = 8 Ω F = 1 kHz | THD+N < 1% | Vp = 5 V | | 1.5 | | W |
| | | | | Vp = 3.6 V | | 0.7 | | |
| | | | | Vp = 2.5 V | | 0.22 | | |
| | | | THD+N < 10% | Vp = 5 V | | 1.8 | | |
| | | | | Vp = 3.6 V | | 0.87 | | |
| | | | | Vp = 2.5 V | | 0.4 | | |
| | | NCP2823B RL = 4 Ω F = 1 kHz | THD+N < 1% | Vp = 5 V | | 1.72 | | |
| | | | | Vp = 3.6 V | | 1.2 | | |
| | | | | Vp = 2.5 V | | 0.58 | | |
| | | | THD+N < 10% | Vp = 5 V | | 3 | | |
| | | | | Vp = 3.6 V | | 1.57 | | |
| | | | | Vp = 2.5 V | | 0.71 | | |
| THD+N | Total harmonic distortion plus noise | Vp = 3.6 V, Av = 6 dB, Po = 0.5 W | | | | 0.1 | | % |
| | | Vp = 5 V, Av = 6 dB, Po = 1 W | | | | 0.08 | | |

8. Performances guaranteed over the indicated operating temperature range by design and/or characterization, production tested at $T_J = T_A = 25^{\circ}\text{C}$.

NCP2823 Series

TYPICAL OPERATING CHARACTERISTICS

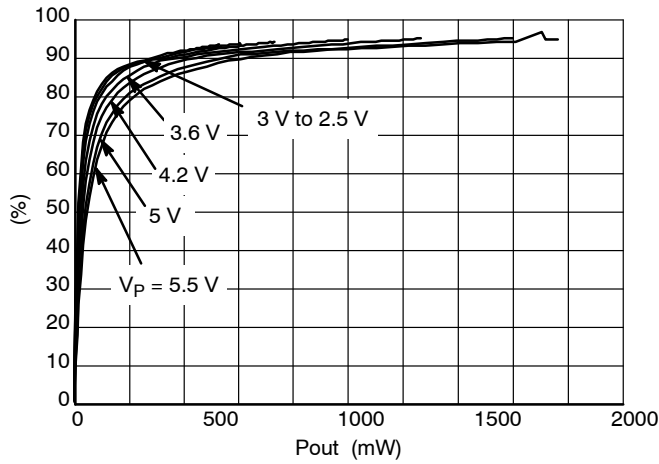


Figure 3. Efficiency vs P_{out}

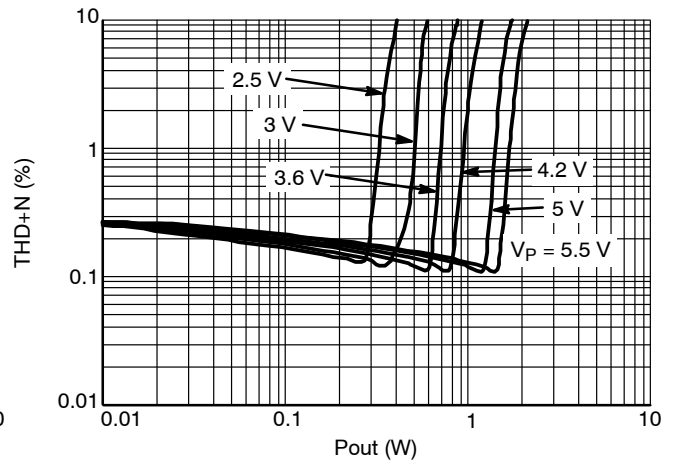


Figure 4. NCP2823A/B, THD+N vs P_{out} ,
 $R_L = 8 \Omega$

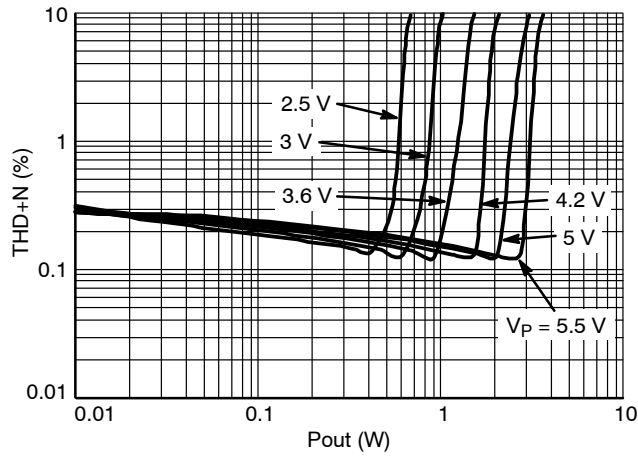


Figure 5. NCP2823B, THD+N vs P_{out} , $R_L = 4 \Omega$

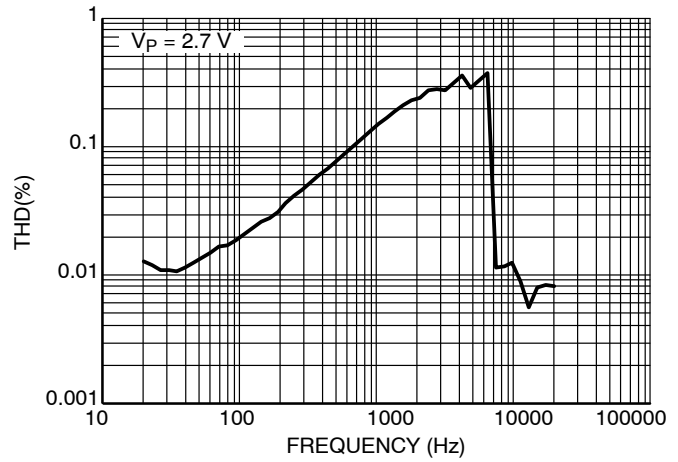


Figure 6. THD+N vs Frequency $P_{out} = 150 \text{ mW}$,
 $R_L = 8 \Omega$

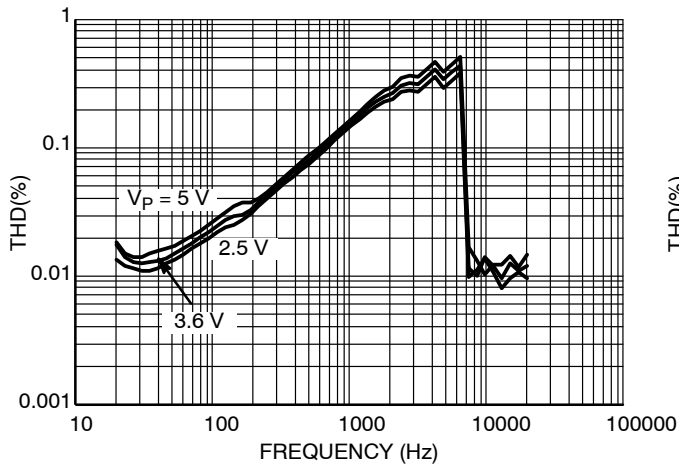


Figure 7. THD+N vs Frequency $P_{out} = 250 \text{ mW}$,
 $R_L = 8 \Omega$

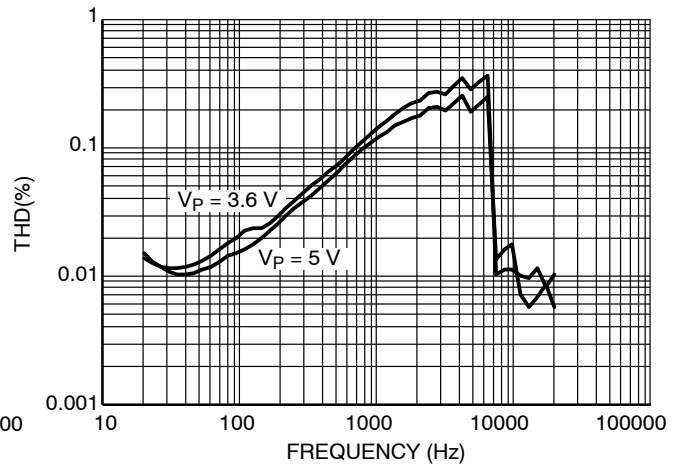


Figure 8. THD+N vs Frequency $P_{out} = 500 \text{ mW}$,
 $R_L = 8 \Omega$

TYPICAL OPERATING CHARACTERISTICS

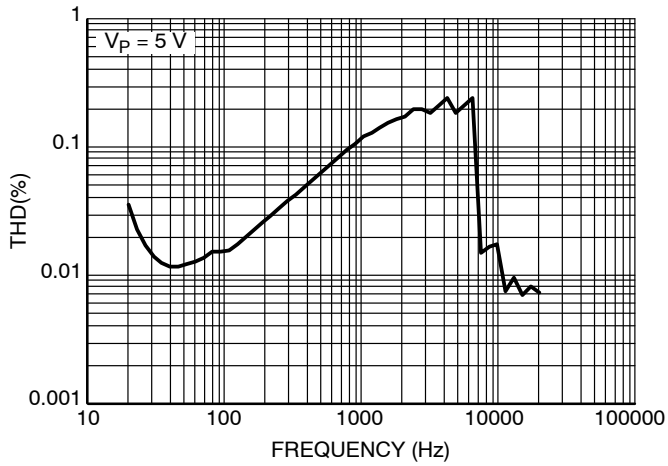


Figure 9. THD+N vs Frequency $P_{out} = 1\text{ W}$, $R_L = 8\ \Omega$

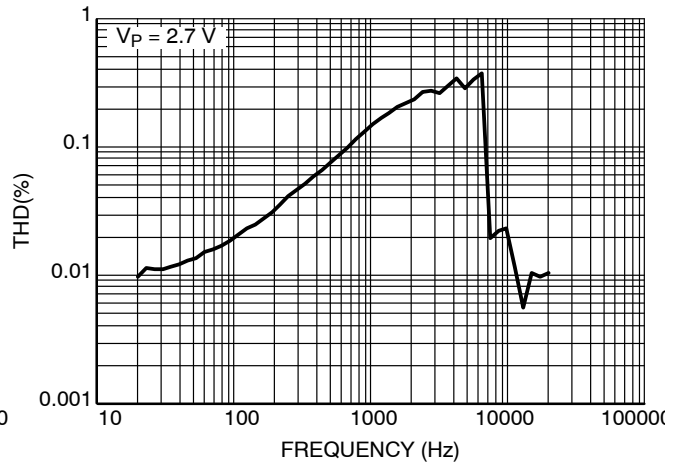


Figure 10. THD+N vs Frequency $P_{out} = 300\text{ mW}$, $R_L = 4\ \Omega$

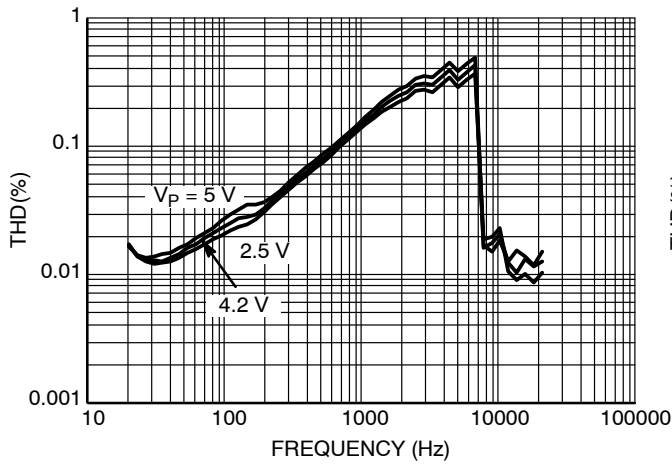


Figure 11. THD+N vs Frequency $P_{out} = 500\text{ mW}$, $R_L = 4\ \Omega$

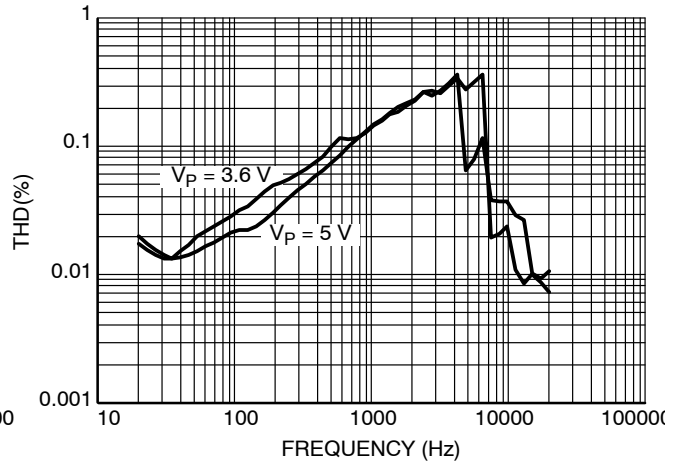


Figure 12. THD+N vs Frequency $P_{out} = 1\text{ W}$, $R_L = 4\ \Omega$

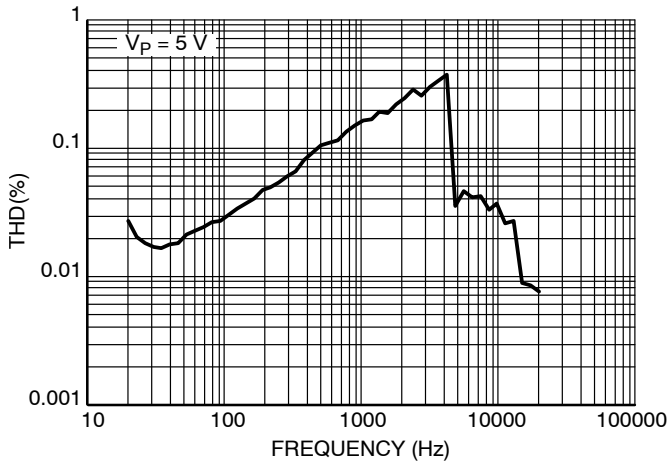


Figure 13. THD+N vs Frequency $P_{out} = 2\text{ W}$, $R_L = 4\ \Omega$

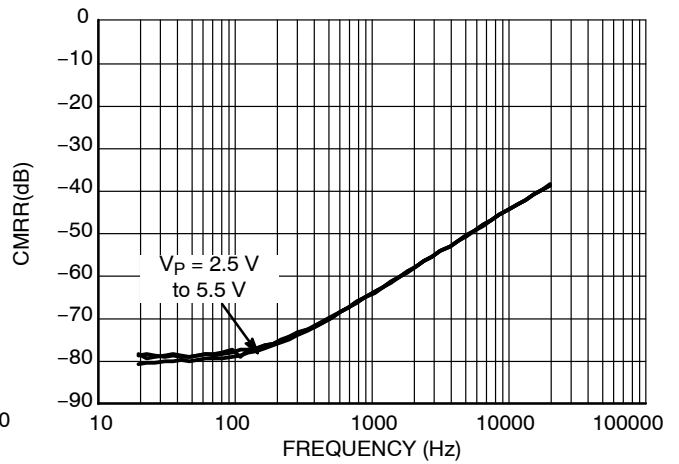


Figure 14. CMRR vs Frequency, $V_{ipp} = 1\text{ V}_{pp}$, $R_L = 8\ \Omega$

NCP2823 Series

TYPICAL OPERATING CHARACTERISTICS

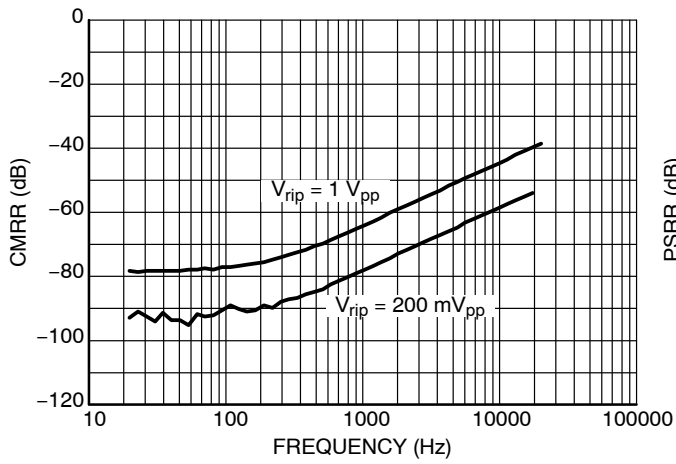


Figure 15. CMRR vs Frequency vs V_p

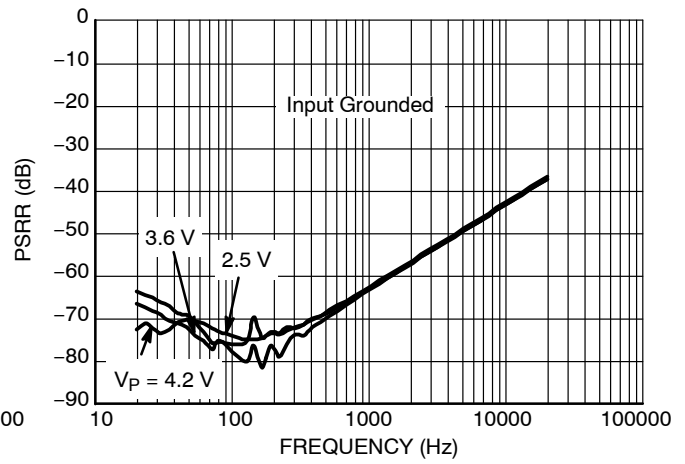


Figure 16. PSRR vs Frequency

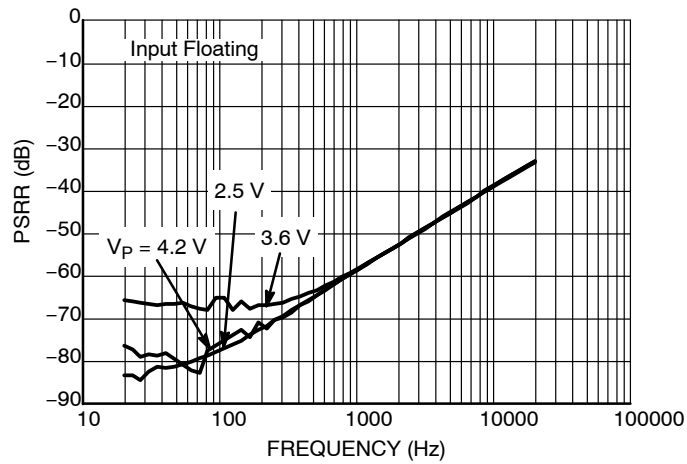


Figure 17. PSRR vs Frequency

DETAIL OPERATING DESCRIPTION

General Description

The basic structure of the NCP2823A/B is composed of one analog pre-amplifier, a pulse width modulator and an H-bridge CMOS power stage. The first stage is externally configurable with gain-setting resistor R_i and the internal fixed feedback resistor R_f (the closed-loop gain is fixed by the ratios of these resistors). The load is driven differentially through two output stages. The differential PWM output signal is a digital image of the analog audio input signal. The human ear is a band pass filter regarding acoustic waveforms, which the typical cut off values are 20 Hz and 20 kHz. Thus, the user will hear only the amplified audio input signal within the frequency range. The switching frequency and its harmonics are fully filtered. The inductive parasitic element of the loudspeaker helps to guarantee a superior distortion value.

Power Amplifier

The output PMOS and NMOS transistors of the amplifier have been designed to deliver a maximum output power before clipping. The channel resistance (R_{on}) of the NMOS and PMOS transistors is typically 0.3Ω .

Gain Selection

The preamplifier stage amplifies the input signal. The gain is fully configurable by external resistors.

The gain setting is given by the following equation:

$$A_v = \frac{300 \text{ k}\Omega}{R_i} \quad (\text{eq. 1})$$

Turn On and Turn Off Transitions

In order to reduce “pop and click” noises during transition, the output power in the load must not be established or cutoff suddenly. When logic high is applied to the Enable pin, the internal biasing voltage rises quickly and, 4 ms later, once the output DC level is around the common mode voltage, the gain is established slowly (5.0 ms). Thus, the total turn on time to get full power to the load is 7.4 ms (typical). The device has the same behavior when it is turned-off by a logic low on the Enable pin. No power is delivered to the load 4 ms after a falling edge on the shutdown pin. Due to the fast turn on and off times, the shutdown signal can be used as a mute signal as well.

Shutdown Function

The device enters shutdown mode when the Enable signal is low. During the shutdown mode, the DC Shutdown current of the circuit does not exceed $1 \mu\text{A}$.

The NCP2823A/B has an internal resistor ($R_{PLD} = 250 \text{ k}\Omega$) connected between GND and Enable. The purpose

of this resistor is to eliminate any unwanted state changes when the Enable pin is floating.

30 kHz Built-in Low Pass Filter

This filter allows connecting directly a DAC or a CODEC to the NCP2823 input without increasing the output noise by mixing frequency with the DAC/CODEC output frequency. Consequently, optimized operation with DACs or CODECs is guaranteed without additional external components.

Power Supply Bypassing

The NCP2823 requires a correct decoupling of the power supply in order to guarantee the best operation in terms of audio performances. To achieve these performances, it is necessary to place a $4.7 \mu\text{F}$ low ESR ceramic capacitor as close as possible to the PVDD pin in order to reduce high frequency transient spikes due to parasitic inductance (see Layout considerations).

Input Capacitors C_{in}

Thanks to its fully differential architecture the NCP2823 does not require input capacitors. However, it is possible to use input capacitors when the differential source is not biased or in single ended configuration. In this case it is necessary to take into account the corner frequency which can influence the low frequency response of the NCP2823. The following equation will help choose the adequate input capacitor.

$$f_c = \frac{1}{2 \cdot \pi \cdot R_i \cdot C_{in}} \quad (\text{eq. 2})$$

Over Current Protection

This protection allows detecting an over current in the H-Bridge. When the current is higher than 2A for the NCP2823B or 1A for the NCP2823A, the H-Bridge is positioned in high impedance. When the short circuit is removed or the current is lower, the NCP2823 goes back to normal operation. This protection avoids over current due to a bad assembly (Output shorted together, to V_{DD} or to ground).

Layout Recommendations

For Efficiency and EMI standpoints, it is strongly recommended to use Power and ground plane in order to reduce parasitic resistance and inductance.

For the same reason, it is recommended to keep the output traces short and well shielded in order to avoid them to act as antenna.

NCP2823 Series

The EMI Level is strongly dependent upon the application. However, ferrite beads placed close to the NCP2823 will reduce EMI radiation when it is needed.

Ferrite value is strongly dependent upon the application.

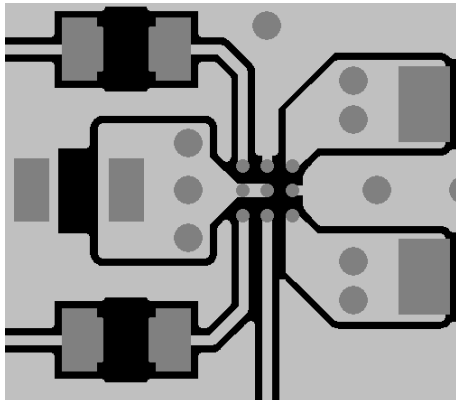


Figure 18. PCB Layout example

ORDERING INFORMATION

| Device | Package | Shipping† |
|----------------|--|--------------------|
| NCP2823AFCT2G | WLCSP9 (Pb-Free) | 3000 / Tape & Reel |
| NCP2823AFCCT2G | WLCSP9 (Backside Laminate Coating) (Pb-Free) | 3000 / Tape & Reel |
| NCP2823BFCT1G | WLCSP9 (Pb-Free) | 3000 / Tape & Reel |
| NCP2823BFCT2G | WLCSP9 (Pb-Free) | 3000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.


Demo Board Available:

NCP2823AGEVB/D and NCP2823BGEVB/D evaluation board configure the device in typical application.

NCP2823 Series

PACKAGE DIMENSIONS


9-PIN FLIP-CHIP CSP FC SUFFIX CASE 499AL-01 ISSUE O

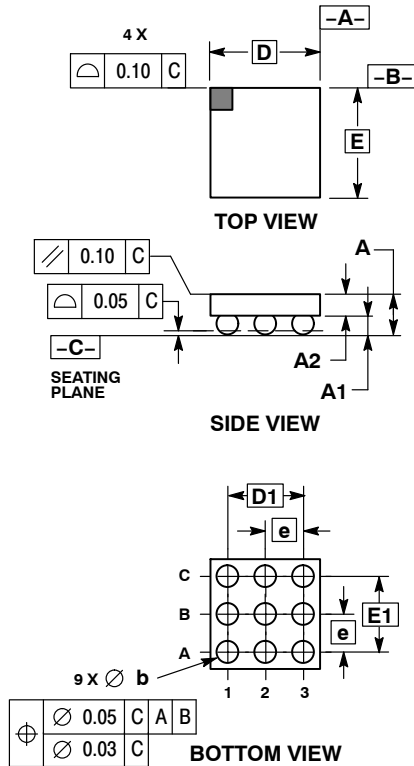

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. COPLANARITY APPLIES TO SPHERICAL CROWNS OF SOLDER BALLS.

| DIM | MILLIMETERS | |
|-----|-------------|-------|
| | MIN | MAX |
| A | 0.540 | 0.660 |
| A1 | 0.210 | 0.270 |
| A2 | 0.330 | 0.390 |
| D | 1.450 BSC | |
| E | 1.450 BSC | |
| b | 0.290 | 0.340 |
| e | 0.500 BSC | |
| D1 | 1.000 BSC | |
| E1 | 1.000 BSC | |

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5773-3850

ON Semiconductor Website: www.onsemi.com

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331