


50 A - 1200 V automotive grade SCR Thyristor

Datasheet - production data

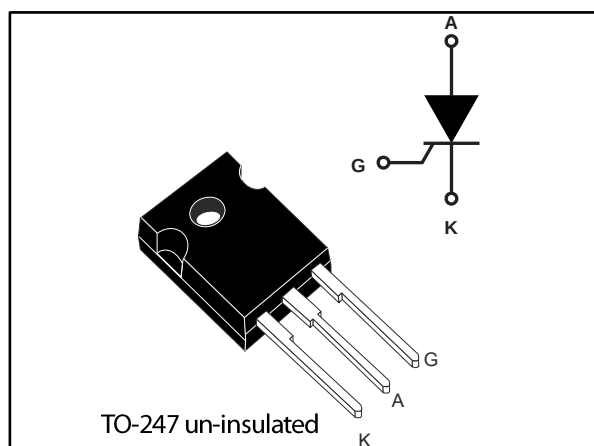

Description

Available in TO-247 high power package, the TN5050H-12WY autograde is suitable in applications such as automotive / stationary battery charger, renewable energy generator, interruptible power supply, solid state relay, welding equipment and motor drive applications.

Its power switching, voltage robustness and power dissipation performances are the key features for functions such as a 80 A AC switch, an AC phasing inverter and an AC-DC controlled rectifier bridge.

The TN5050H-12WY is an automotive grade product and offers a superior performance in surge current handling, thermal cooling capabilities and overvoltage robustness.

Features

- AEC-Q101 qualified
- On-state current: 50 A_{RMS}
- Blocking voltage: +/- 1200 V
- High static and dynamic commutation:
 - $di/dt = 200 \text{ A}/\mu\text{s}$
 - $dV/dt = 1000 \text{ V}/\mu\text{s}$
- $I_{GT} = 50 \text{ mA}$
- ECOPACK®2 compliant component



Applications

- Automotive
 - On board, off board battery charger
- Solar, wind renewable energy inverters
- Solid state relays
- UPS
 - Bypass
 - ICL (inrush current limiter)
 - Battery charger
- Industrial welding systems
- Voltage control rectifier

Table 1: Device summary

Symbol	Value
$I_{T(RMS)}$	50 A
V_{DRM}/V_{RRM}	1200 V
V_{DSM}/V_{RSM}	1300 V
I_{GT}	50 mA
T_j	150 °C

1 Characteristics

Table 2: Absolute ratings (limiting values, $T_j = 25\text{ °C}$ unless otherwise stated)

Symbol	Parameter			Value	Unit
V _{DRM} / V _{RRM}	Repetitive off-state voltage (50-60 Hz)		T _j = 150 °C	1200	V
I _{T(RMS)}	RMS on-state current (180 ° conduction angle)		T _C = 137 °C	50	A
I _{T(AV)}	Average on-state current (180 ° conduction angle)			32	
I _{T(RMS)}	RMS on-state current (180 ° conduction angle)		T _C = 125 °C	80	A
I _{T(AV)}	Average on-state current (180 ° conduction angle)			51	
I _{TSM} ⁽¹⁾	Non repetitive surge peak on-state current, T _j initial = 25 °C		t _p = 8.3 ms	633	A
			t _p = 10 ms	580	
di/dt	Critical rate of rise of on-state current I _G = 2 x I _{GT} , tr ≤ 100 ns	f = 50 Hz	T _j = 150 °C	200	A/μs
I _{GM}	Peak forward gate current	T _j = 150 °C	t _p = 20 μs	8	A
P _{G(AV)}	Average gate power dissipation		T _j = 150 °C	1	W
T _{stg}	Storage junction temperature range			-40 to +150	°C
T _j	Operating junction temperature			-40 to +150	°C

Notes:

⁽¹⁾ST recommend I^2t value for fusing = 1680 A²s for $T_j = 25\text{ °C}$ and $t_p = 10\text{ ms}$

Table 3: Electrical characteristics ($T_j = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Symbol	Test Conditions			Value	Unit
I _{GT}	V _D = 12 V, R _L = 33 Ω		Min.	10	mA
			Max.	50	
V _{GT}	V _D = 12 V, R _L = 33 Ω		Max.	1	V
V _{GD}	V _D = 2/3 x V _{DRM} , R _L = 3.3 kΩ	T _j = 150 °C	Min.	0.15	V
I _H	I _T = 500 mA, gate open		Max.	100	mA
I _L	I _G = 1.2 x I _{GT}		Max.	125	mA
t _{gt}	I _T = 50 A , V _D = V _{DRM} , I _G = 200 mA, dI _G /dt = 0.2 A/μs		Typ.	3	μs
dV/dt	V _D = 2/3 x V _{DRM} , gate open	T _j = 150 °C	Min.	1000	V/μs
t _q	I _T = 33 A, V _D = 800 V, V _R = 75 V, t _p = 100 μs, dI _T /dt = 10 A/μs, dV _D /dt = 20 V/μs,	T _j = 150 °C	Typ.	150	μs
V _{TM}	I _{TM} = 100 A, t _p = 380 μs		Max.	1.55	V
V _{TO}	Threshold voltage	T _j = 150 °C	Max.	0.88	V
R _D	Dynamic resistance	T _j = 150 °C	Max.	6	mΩ
I _{DRM} /I _{RRM}	V _D = V _{DRM} , V _R = V _{RRM}	T _j = 25 °C	Max.	5	μA
		T _j = 125 °C	Max.	3	mA
		T _j = 150 °C	Max.	7.5	mA
I _{DSM} /I _{RSM}	V _D = V _{DSM} , V _R = V _{RSM}	T _j = 25 °C	Max.	10	μA

Table 4: Thermal parameters

Symbol	Parameter	Value	Unit
$R_{th(j-c)}$	Junction to case (DC, max.)	0.3	$^{\circ}\text{C}/\text{W}$
$R_{th(j-a)}$	Junction to ambient	50	$^{\circ}\text{C}/\text{W}$

1.1 Characteristics (curves)

Figure 1: Maximum average power dissipation versus average on-state current

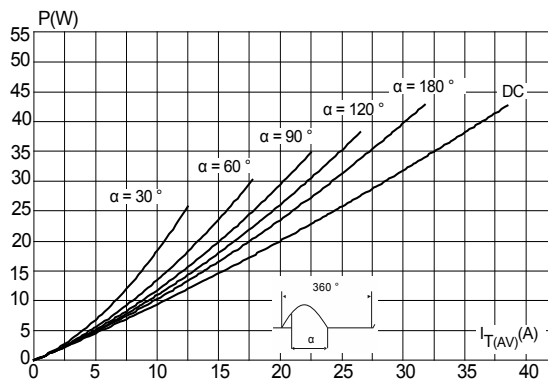


Figure 2: Correlation between maximum average power dissipation and maximum allowable temperatures (T_{amb} and T_{case})

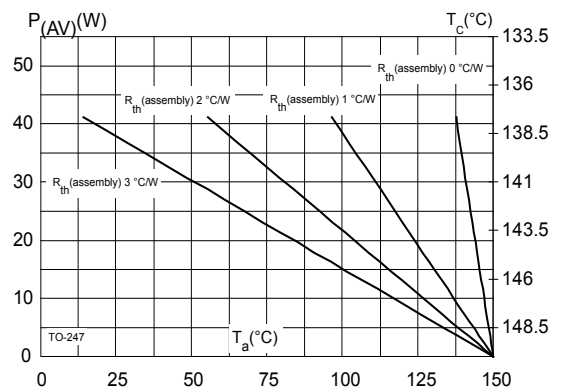


Figure 3: Average and D.C. on-state current versus case temperature

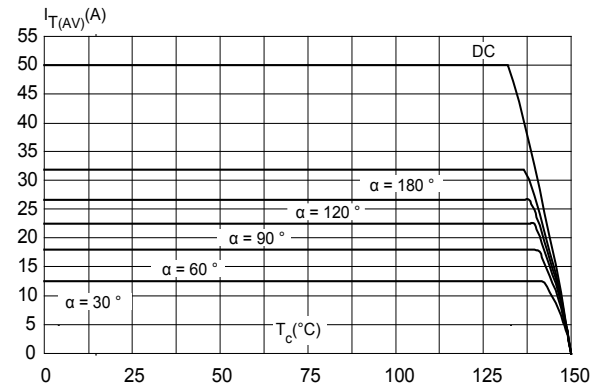


Figure 4: Average and D.C. on-state current versus ambient temperature

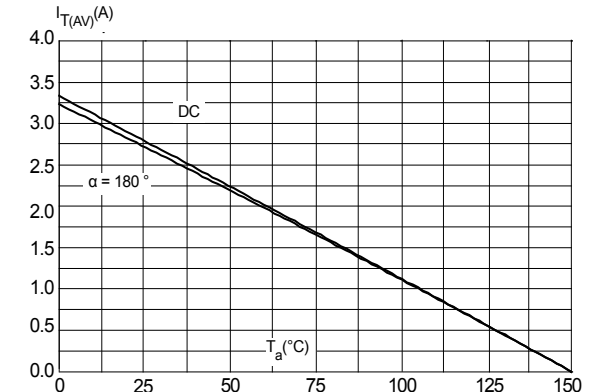


Figure 5: Relative variation of thermal impedance junction to case and junction to ambient versus pulse duration

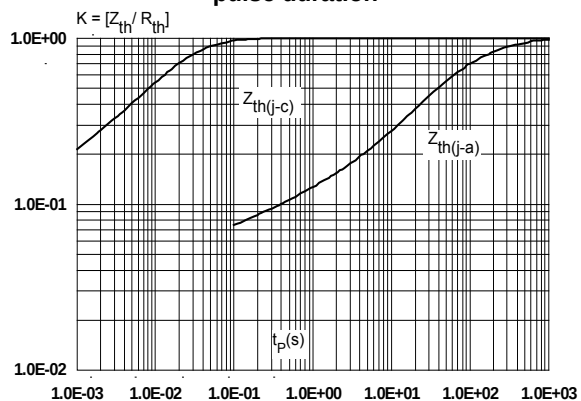


Figure 6: Relative variation of gate trigger current and gate voltage versus junction temperature (typical values)

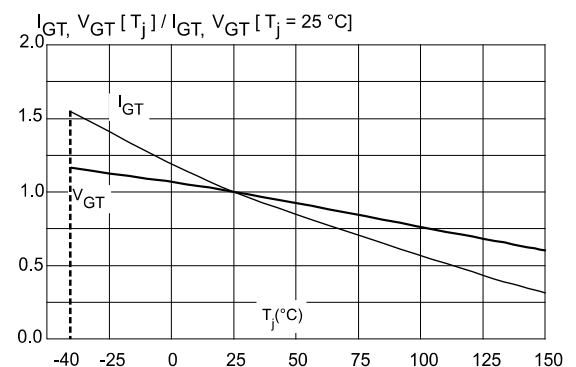


Figure 7: Relative variation of holding and latching current versus junction temperature (typical values)

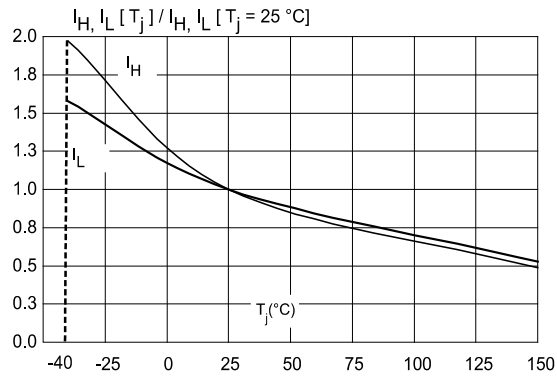


Figure 8: Surge peak on-state current versus number of cycles

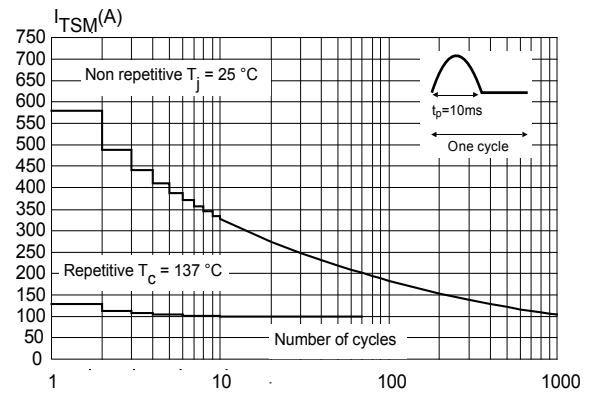


Figure 9: Non repetitive surge peak on-state current for a sinusoidal pulse ($t_p < 10\text{ ms}$)

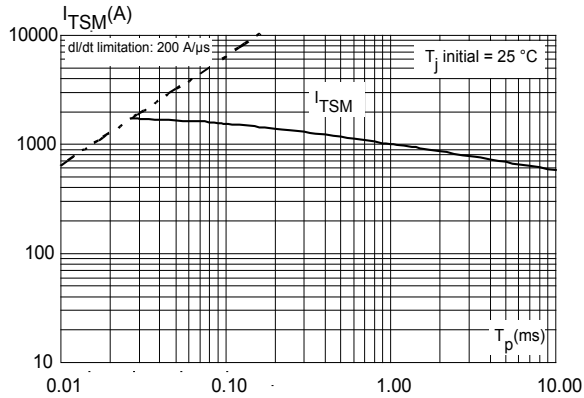


Figure 10: On-state characteristics (maximum values)


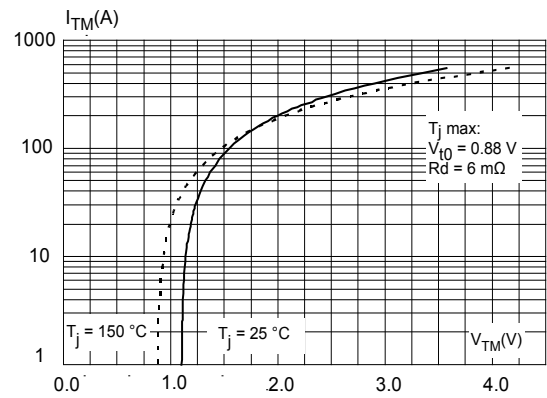


Figure 11: Relative variation of leakage current versus junction temperature for different values of blocking voltage (typical values)

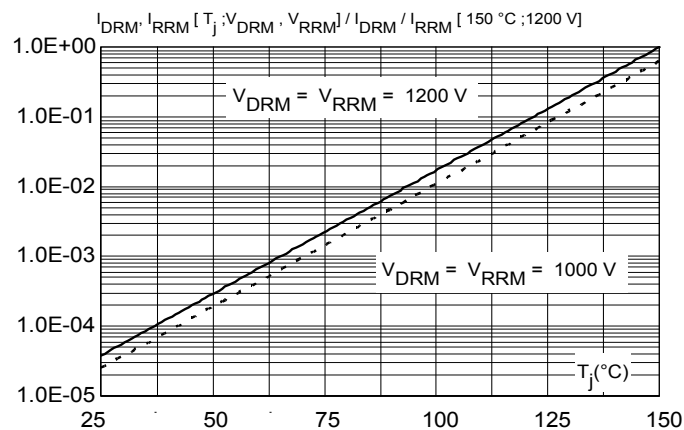

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

- Epoxy meets UL94, V0
- Lead-free package

2.1 TO-247 package information

Figure 12: TO-247 package outline

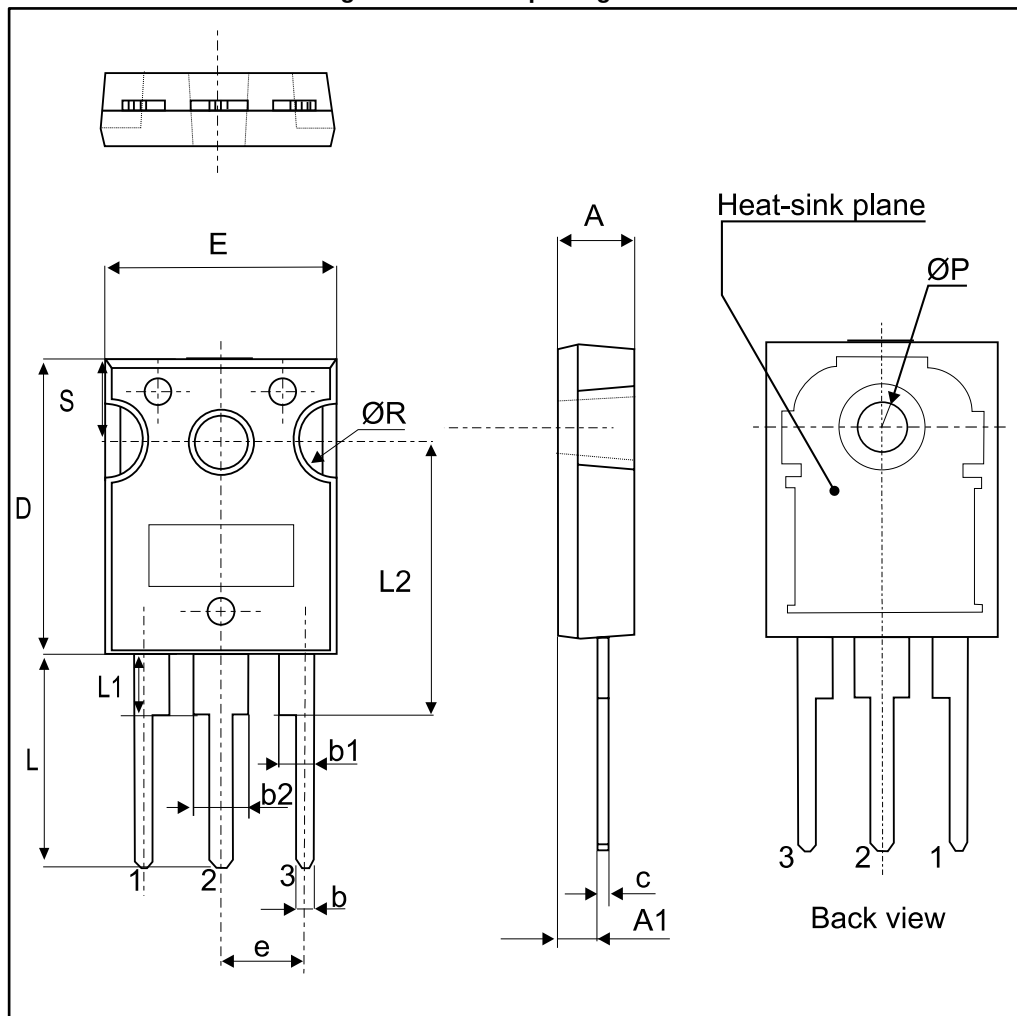


Table 5: TO-247 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.		Max.	Min.		Max.
A	4.85		5.15	0.1909		0.2028
A1	2.20		2.60	0.0866		0.1024
b	1.00		1.40	0.0394		0.0551
b1	2.00		2.40	0.0787		0.0945
b2	3.00		3.40	0.1181		0.1339
c	0.40		0.80	0.0157		0.0315
D ⁽²⁾	19.85		20.15	0.7815		0.7933
E	15.45		15.75	0.6083		0.6201
e	5.30	5.45	5.60	0.2087	0.2146	0.2205
L	14.20		14.80	0.5591		0.5827
L1	3.70		4.30	0.1457		0.1693
L2	18.50 typ.			0.7283 typ.		
ØP ⁽³⁾	3.55		3.65	0.1398		0.1437
ØR	4.50		5.50	0.1772		0.2165
S	5.30	5.50	5.70	0.2087	0.2165	0.2244

Notes:

⁽¹⁾Inches dimensions given for reference only

⁽²⁾Dimension D plus gate protrusion does not exceed 20.5 mm

⁽³⁾Resin thickness around the mounting hole is not less than 0.9 mm.

3 Ordering information

Table 6: Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
TN5050H-12WY	TN5050H12Y	TO-247	4.43 g	30	Tube

4 Revision history

Table 7: Document revision history

Date	Revision	Changes
07-Jan-2015	1	Initial release.
17-Oct-2017	2	Updated TO-247 package information.
20-Dec-2017	3	Updated Table 5: "TO-247 package mechanical data" .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331