

### 42 V System Power Supply with Ultra-low Power Window-type Watchdog Timer for Industrial Application

No. EY-409-190711

#### OVERVIEW

The R5115x is a system power supply IC with an ultra-low power window-type watchdog timer (VR + VD + WDT) that has an input voltage range of 3.5 V to 42 V. This is a high-reliability semiconductor device for industrial application (-Y) that has passed both the screening at high temperature and the reliability test with extended hours.

#### KEY BENEFITS

- Consists of a voltage regulator, a voltage detector and a watchdog timer that provides a system power supply, a power supply voltage monitoring and a system malfunction monitoring.
- Equipped with an auto monitoring stop <sup>(1)</sup> to cease the watchdog timer monitoring at light load.
- Outputs a reset signal from watchdog timer when a pulse signal period is too short or too long.

#### KEY SPECIFICATIONS

- Input Voltage Range (Absolute Maximum Rating): 3.5 V to 42.0 V (50.0 V)
- Supply Current: Typ. 8.5  $\mu$ A
- Protections: Thermal Shutdown, Output Current Limiting, Short-circuit Current Limiting

##### Voltage Regulator (VR) Section

- Output Voltage Range: 3.3 V to 5.0 V
- Output Voltage Accuracy:  $\pm 1.6\%$  ( $-40^{\circ}\text{C} \leq T_a \leq 125^{\circ}\text{C}$ )
- Output Current: 250 mA


##### Voltage Detector (VD) Section

- Detection Voltage Threshold Range: 2.5 V to 4.8 V
- Detection Voltage Accuracy:  $\pm 1.6\%$  ( $-40^{\circ}\text{C} \leq T_a \leq 125^{\circ}\text{C}$ )

##### Watchdog Timer (WDT) Section


- Watchdog Timer Accuracy (tow):  $-17.8\%$  to  $21.7\%$  ( $-40^{\circ}\text{C} \leq T_a \leq 125^{\circ}\text{C}$ )

#### PACKAGES



**HSOP-8E**

5.2 x 6.2 x 1.6\* mm  
\*maximum dimension




**HSOP-18**

5.2 x 6.2 x 1.6\* mm  
\*maximum dimension

#### APPLICATIONS

- Factory Automation Equipment, Smart meters
- Surveillance Camera, Vending Machines

#### TYPICAL APPLICATION

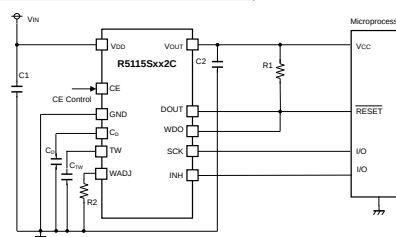

$C_{IN}$ ,  $C_{OUT}$ : 0.1  $\mu$ F, Ceramic capacitor  
 $C_{TW}$ : Capacitor for setting watchdog timer  
 $C_D$ : Capacitor for setting reset delay time

#### SELECTION GUIDE

| Product Name     | Package | Quantity per Reel |
|------------------|---------|-------------------|
| R5115Sxx1*-E2-YE | HSOP-8E | 1,000 pcs         |
| R5115Sxx2*-E2-YE | HSOP-18 | 1,000 pcs         |

xx: Set output voltage ( $V_{SET}$ ) and set detection voltage ( $-V_{DSET}$ ) options.  
Assign a code starting from 01 to designate a desired combination of  $V_{SET}$  and  $-V_{DSET}$ .

\*: Other functional options

| * | Package | WADJ                      | WDO Pin | RESETB/DOUT Pin |
|---|---------|---------------------------|---------|-----------------|
| A | HSOP-8E | Fixed <sup>(2)</sup>      | No      | RESETB          |
| B | HSOP-8E | No                        | No      | RESETB          |
| C | HSOP-18 | Adjustable <sup>(3)</sup> | Yes     | DOUT            |

<sup>(1)</sup> R5115Sxx1A, R5115Sxx2C only

<sup>(2)</sup> Internally fixed

<sup>(3)</sup> Adjustable using the WADJ pin

---

## R5115x-Y

---

No. EY-409-190711

### SELECTION GUIDE

A set detection voltage, a package type, a WADJ function, a WDO pin and a RESETB/DOUT pin are user-selectable options.

#### Selection Guide

| Product Name     | Package | Quantity per Reel | Pb Free | Halogen Free |
|------------------|---------|-------------------|---------|--------------|
| R5115Sxx1*-E2-YE | HSOP-8E | 1,000 pcs         | Yes     | Yes          |
| R5115Sxx2*-E2-YE | HSOP-18 | 1,000 pcs         | Yes     | Yes          |

xx: Set output voltage ( $V_{SET}$ ) and set detection voltage ( $-V_{DSET}$ ) options

Assign a code starting from 01 to designate a desired combination of  $V_{SET}$  and  $-V_{DSET}$ .


\*: Other functional options

| * | Package | WDT Type | WADJ Function             | WDO Pin | RESETB/DOUT Pin |
|---|---------|----------|---------------------------|---------|-----------------|
| A | HSOP-8E | Window   | Fixed <sup>(1)</sup>      | No      | RESETB          |
| B | HSOP-8E | Window   | No                        | No      | RESETB          |
| C | HSOP-18 | Window   | Adjustable <sup>(2)</sup> | Yes     | DOUT            |


<sup>(1)</sup> internally fixed


<sup>(2)</sup> adjustable using the WADJ pin

## BLOCK DIAGRAMS

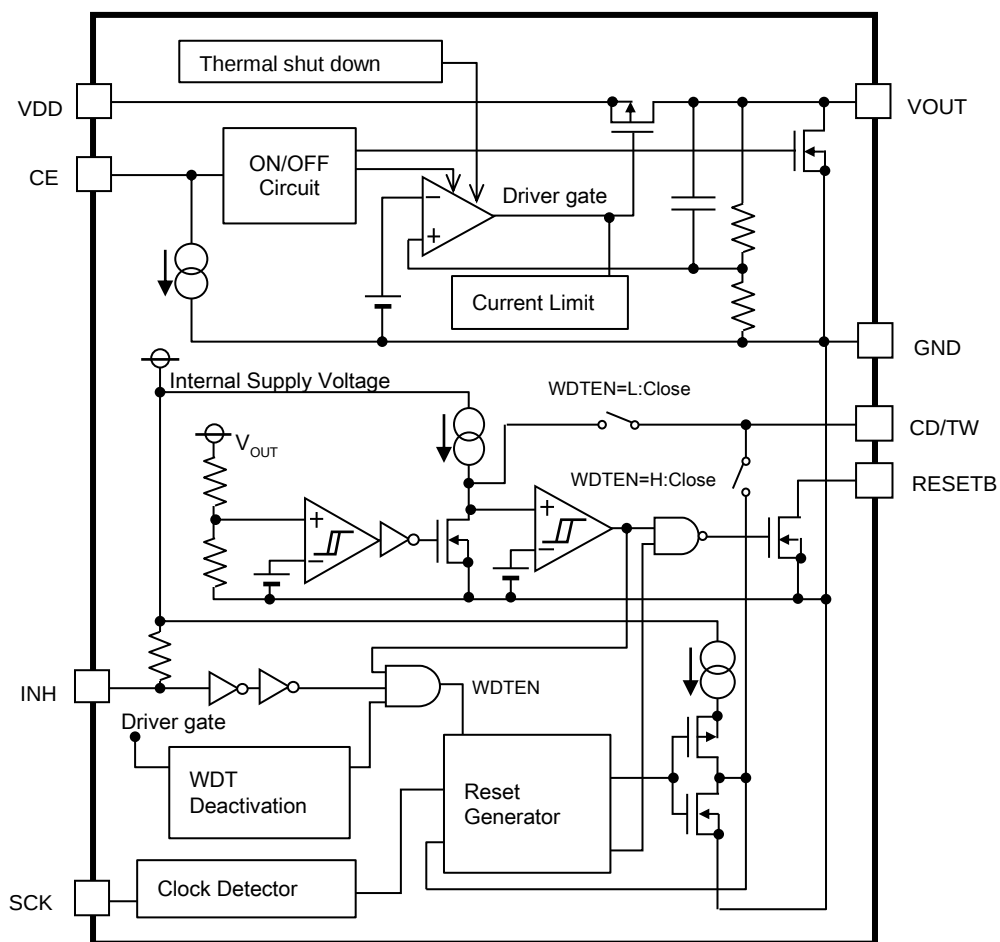


R5115Sxx1A Block Diagram

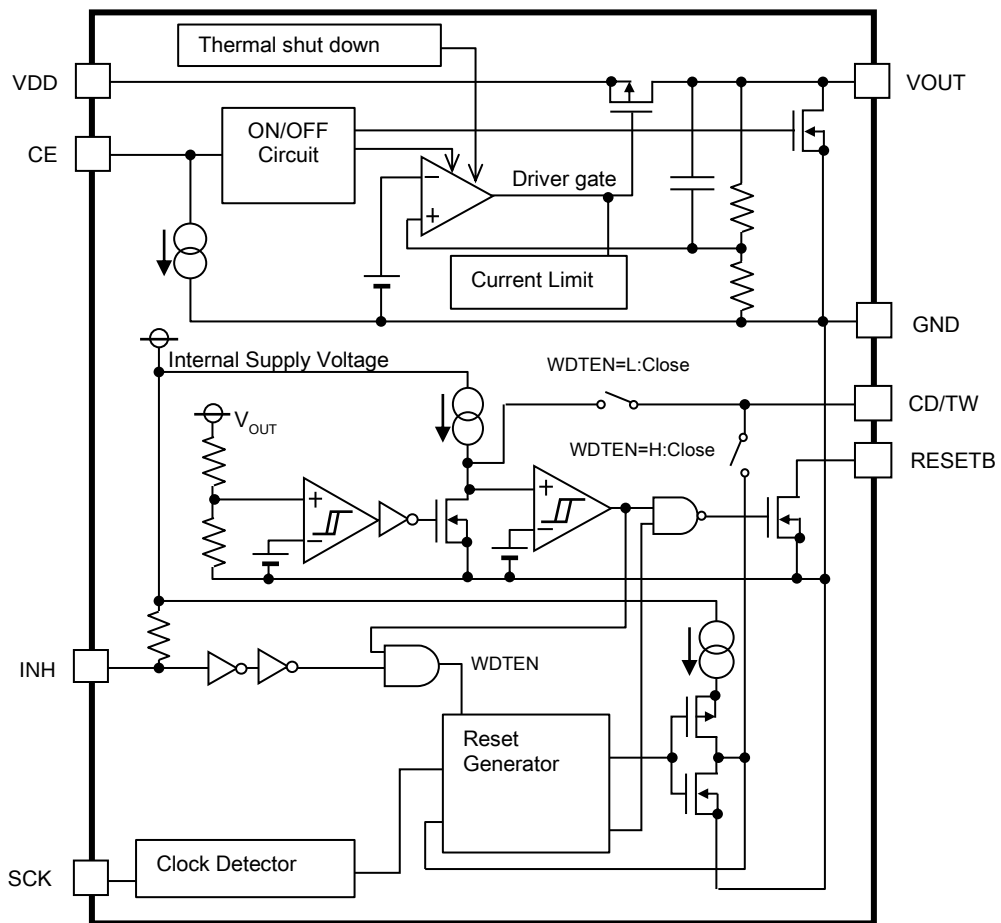**R5115Sxx1B Block Diagram**

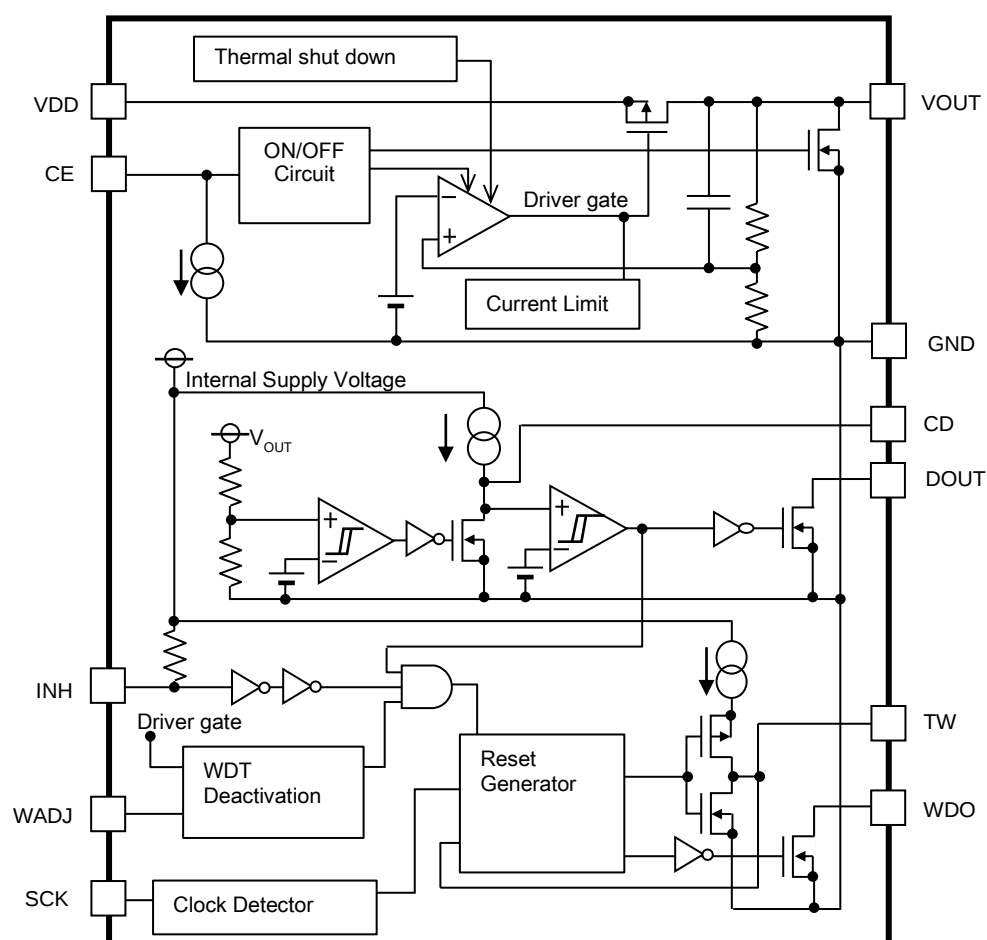

R5115Sxx2C Block Diagram

PIN DESCRIPTION

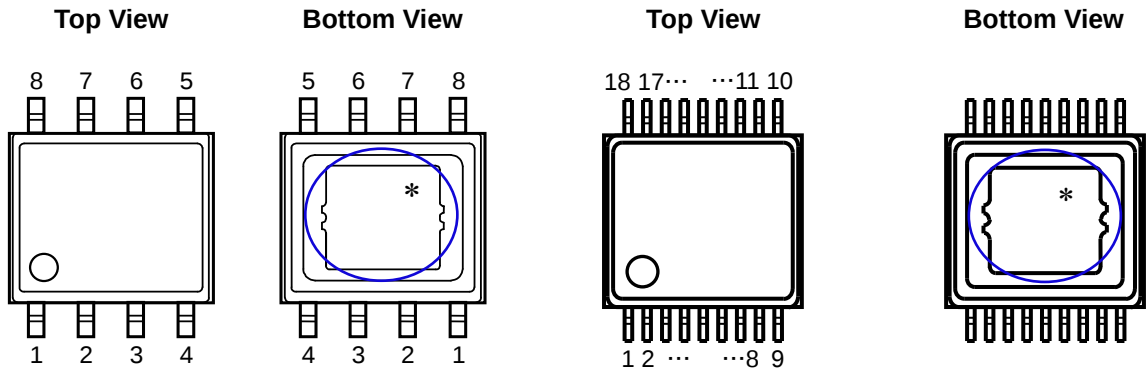

HSOP-8E Pin Configuration

HSOP-18 Pin Configuration

\* The tab on the bottom of the package shown by blue circle is a substrate potential (GND). It is recommended that this tab be connected to the ground plane on the board but it is possible to leave the tab floating.

HSOP-8E Pin Description, R5115Sxx1A/R5115Sxx1B

| Pin No. | Pin Name              | Description                                                                                                        |
|---------|-----------------------|--------------------------------------------------------------------------------------------------------------------|
| 1       | VDD                   | Power Supply Pin                                                                                                   |
| 2       | CD/TW                 | Watchdog Timer Monitoring Time Setting Pin/<br>Voltage Detector Reset Delay Time (Power-on Reset Time) Setting Pin |
| 3       | CE                    | Chip Enable Pin, Active-high                                                                                       |
| 4       | GND                   | Ground Pin                                                                                                         |
| 5       | INH                   | Inhibit Pin, Active-low                                                                                            |
| 6       | SCK                   | Watchdog Timer Pulse Inputting Pin                                                                                 |
| 7       | RESETB <sup>(1)</sup> | Reset Output Pin, Active-low, Nch Open Drain Output                                                                |
| 8       | VOUT                  | Voltage Regulator Output Pin                                                                                       |

<sup>(1)</sup> The RESET pin voltage should be pulled up to the appropriate level using an external resistor.

**HSOP-18 Pin Description, R5115Sxx2C**


| Pin No. | Pin Name            | Description                                                         |
|---------|---------------------|---------------------------------------------------------------------|
| 1       | VDD                 | Power Supply Pin                                                    |
| 2       | NC                  | No Connection                                                       |
| 3       | CD                  | Voltage Detector Reset Delay Time (Power-on Reset Time) Setting Pin |
| 4       | NC                  | No Connection                                                       |
| 5       | TW                  | Watchdog Timer Monitoring Time Setting Pin                          |
| 6       | NC                  | No Connection                                                       |
| 7       | CE                  | Chip Enable Pin, Active-high                                        |
| 8       | NC                  | No Connection                                                       |
| 9       | GND                 | Ground Pin                                                          |
| 10      | WADJ                | Watchdog Timer Operating Threshold Pin                              |
| 11      | INH                 | Inhibit Pin, Active-low                                             |
| 12      | NC                  | No Connection                                                       |
| 13      | SCK                 | Watchdog Timer Pulse Input Pin                                      |
| 14      | NC                  | No Connection                                                       |
| 15      | WDO <sup>(1)</sup>  | Watchdog Timer Output Pin, Nch Open Drain Output                    |
| 16      | DOUT <sup>(2)</sup> | RESET Output Pin, Active-low, Nch Open Drain Output                 |
| 17      | NC                  | No Connection                                                       |
| 18      | VOUT                | Voltage Regulator Output Pin                                        |

---


<sup>(1)</sup> The WDO pin voltage should be pulled up to the appropriate level using an external resistor.

<sup>(2)</sup> The DOUT pin voltage should be pulled up to the appropriate level using an external resistor.


## Equivalent Circuits of Individual Pins




Equivalent Circuit for VOUT Pin




Equivalent Circuit for CE Pin




Equivalent Circuit for CD Pin




Equivalent Circuit for RESETB Pin (R5115Sxx1x)/  
Equivalent Circuit for DOUT Pin (R5115Sxx2C)




Equivalent Circuit for SCK Pin

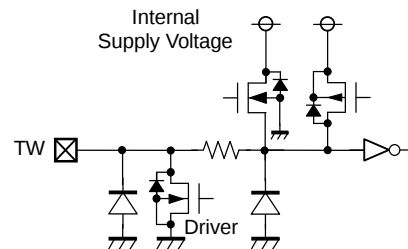


Equivalent Circuit for TW Pin



Equivalent Circuit for INH Pin



Equivalent Circuit for WDO Pin (R5115Sxx2C)

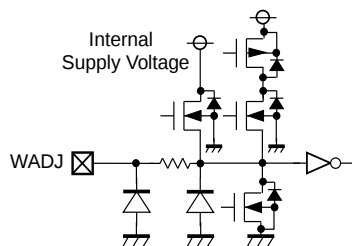

Equivalent Circuit for WADJ Pin (R5115Sxx2C)

## ABSOLUTE MAXIMUM RATINGS

### Absolute Maximum Ratings

| Symbol       | Parameter                           |         |                 | Rating                         | Unit |
|--------------|-------------------------------------|---------|-----------------|--------------------------------|------|
| $V_{IN}$     | Input Voltage                       |         |                 | -0.3 to 50                     | V    |
|              | Peak Voltage <sup>(1)</sup>         |         |                 | 60                             | V    |
| $V_{CE}$     | CE Pin Input Voltage                |         |                 | -0.3 to 50                     | V    |
| $V_{OUT}$    | VOUT Pin Output Voltage             |         |                 | -0.3 to $V_{IN} + 0.3 \leq 50$ | V    |
| $V_{CD}$     | CD Pin Output Voltage               |         |                 | -0.3 to 7.0                    | V    |
| $V_{TW}$     | TW Pin Output Voltage               |         |                 | -0.3 to 7.0                    | V    |
| $V_{RESETB}$ | RESETB Pin Output Voltage           |         |                 | -0.3 to 7.0                    | V    |
| $V_{DOUT}$   | DOUT Pin Output Voltage             |         |                 | -0.3 to 7.0                    | V    |
| $V_{WDO}$    | WDO Pin Output Voltage              |         |                 | -0.3 to 7.0                    | V    |
| $V_{SCK}$    | SCK Pin Input Voltage               |         |                 | -0.3 to 7.0                    | V    |
| $V_{INH}$    | INH Pin Input Voltage               |         |                 | -0.3 to 7.0                    | V    |
| $V_{WADJ}$   | WADJ Pin Output Voltage             |         |                 | -0.3 to 7.0                    | V    |
| $I_{RESETB}$ | RESETB Pin Current                  |         |                 | 16                             | mA   |
| $I_{DOUT}$   | DOUT Pin Current                    |         |                 | 16                             | mA   |
| $I_{WDO}$    | WDO Pin Current                     |         |                 | 16                             | mA   |
| $P_D$        | Power <sup>(2)</sup><br>Dissipation | HSOP-8E | JEDEC STD. 51-7 | 3600                           | mW   |
|              |                                     | HSOP-18 | JEDEC STD. 51-7 | 3900                           |      |
| $T_j$        | Junction Temperature Range          |         |                 | -40 to 150                     | °C   |
| $T_{stg}$    | Storage Temperature Range           |         |                 | -55 to 150                     | °C   |

#### ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause permanent damage and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings are not assured.

<sup>(1)</sup> Application time is 200 ms or less.

<sup>(2)</sup> Refer to *POWER DISSIPATION* for detailed information

---

**R5115x-Y**

---

No. EY-409-190711

**RECOMMENDED OPERATING CONDITIONS****Recommended Operating Conditions**

| Symbol           | Parameter                   | Rating      | Unit |
|------------------|-----------------------------|-------------|------|
| V <sub>IN</sub>  | Input Voltage               | 3.5 to 42.0 | V    |
| V <sub>CE</sub>  | CE Pin Input Voltage        | 0 to 42.0   | V    |
| V <sub>SCK</sub> | SCK Pin Input Voltage       | 0 to 5.5    | V    |
| V <sub>INH</sub> | INH Pin Input Voltage       | 0 to 5.5    | V    |
| Ta               | Operating Temperature Range | −40 to 125  | °C   |

**RECOMMENDED OPERATING CONDITIONS**

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

## ELECTRICAL CHARACTERISTICS

$C_{IN} = C_{OUT} = 0.1\mu F$ ,  $V_{IN} = 14 V$ , unless othrewise noted.

The specifications surrounded by   are guaranteed by design engineering at  $-40^{\circ}C \leq T_a \leq 125^{\circ}C$ .

### R5115Sxxxx-YE Electrical Characteristics

( $T_a = 25^{\circ}C$ )

| Symbol        | Parameter                     | Test Conditions/Comments                   | Min.                                                              | Typ. | Max.                                                              | Unit    |
|---------------|-------------------------------|--------------------------------------------|-------------------------------------------------------------------|------|-------------------------------------------------------------------|---------|
| $I_{SS}$      | Supply Current                | $I_{OUT} = 0 mA$<br>R5115Sxx1A/ R5115Sxx2C |                                                                   | 8.5  | <span style="border: 1px solid black; padding: 0 2px;">18</span>  | $\mu A$ |
|               |                               | $I_{OUT} = 0 mA$<br>R5115Sxx1B             |                                                                   | 13.5 | <span style="border: 1px solid black; padding: 0 2px;">23</span>  | $\mu A$ |
| $I_{standby}$ | Standby Current               | $V_{IN} = 42 V$ , $V_{CE} = 0 V$           |                                                                   | 0.2  | 1.0                                                               | $\mu A$ |
| $I_{PD}$      | CE Pull-down Constant Current | $V_{CE} = 42 V$                            |                                                                   | 0.2  | <span style="border: 1px solid black; padding: 0 2px;">0.6</span> | $\mu A$ |
| $V_{CEH}$     | CE Input Voltage, High        |                                            | <span style="border: 1px solid black; padding: 0 2px;">2.2</span> |      | <span style="border: 1px solid black; padding: 0 2px;">42</span>  | V       |
| $V_{CEL}$     | CE Input Voltage, Low         |                                            |                                                                   |      | <span style="border: 1px solid black; padding: 0 2px;">1.0</span> | V       |

### VR Section

( $T_a = 25^{\circ}C$ )

| Symbol                          | Parameter                                       | Test Conditions/Comments                                               | Min.                                                                 | Typ. | Max.                                                                 | Unit        |
|---------------------------------|-------------------------------------------------|------------------------------------------------------------------------|----------------------------------------------------------------------|------|----------------------------------------------------------------------|-------------|
| $V_{OUT}$                       | Output Voltage                                  | $I_{OUT} = 1 mA$<br>$T_a = 25^{\circ}C$                                | <span style="border: 1px solid black; padding: 0 2px;">×0.994</span> |      | <span style="border: 1px solid black; padding: 0 2px;">×1.006</span> | V           |
|                                 |                                                 |                                                                        | <span style="border: 1px solid black; padding: 0 2px;">×0.984</span> |      | <span style="border: 1px solid black; padding: 0 2px;">×1.016</span> | V           |
| $\Delta V_{OUT}/\Delta I_{OUT}$ | Load Regulation                                 | $V_{IN} = V_{SET} + 3.0 V$<br>$1 mA \leq I_{OUT} \leq 250 mA$          | <span style="border: 1px solid black; padding: 0 2px;">-20</span>    | 0    | <span style="border: 1px solid black; padding: 0 2px;">50</span>     | mV          |
| $V_{DIF}$                       | Dropout Voltage                                 | $I_{OUT} = 250 mA$                                                     | $V_{SET} = 3.3$                                                      | 1.0  | <span style="border: 1px solid black; padding: 0 2px;">2.0</span>    | V           |
|                                 |                                                 |                                                                        | $V_{SET} = 5.0$                                                      | 0.80 | <span style="border: 1px solid black; padding: 0 2px;">1.5</span>    | V           |
| $\Delta V_{OUT}/\Delta V_{IN}$  | Line Regulation                                 | $3.5 V \leq V_{SET} + 0.5 V \leq V_{IN} \leq 42 V$<br>$I_{OUT} = 1 mA$ |                                                                      | 0.01 | <span style="border: 1px solid black; padding: 0 2px;">0.02</span>   | %/V         |
| $I_{LIM}$                       | Output Current Limit                            | $V_{IN} = V_{SET} + 3.0 V$                                             | <span style="border: 1px solid black; padding: 0 2px;">320</span>    | 440  | <span style="border: 1px solid black; padding: 0 2px;">530</span>    | mA          |
| $I_{SC}$                        | Short-circuit Current Limit                     | $V_{IN} = 5 V$ , $V_{OUT} = 0 V$                                       | <span style="border: 1px solid black; padding: 0 2px;">70</span>     | 95   | <span style="border: 1px solid black; padding: 0 2px;">135</span>    | mA          |
| $T_{TSD}$                       | Thermal Shutdown Temperature Threshold, rising  | Junction Temperature                                                   | <span style="border: 1px solid black; padding: 0 2px;">150</span>    | 170  |                                                                      | $^{\circ}C$ |
| $T_{TSR}$                       | Thermal Shutdown Temperature Threshold, falling | Junction Temperature                                                   | <span style="border: 1px solid black; padding: 0 2px;">125</span>    | 140  |                                                                      | $^{\circ}C$ |

## R5115x-Y

No. EY-409-190711

$C_{IN} = C_{OUT} = 0.1\mu F$ ,  $V_{IN} = 14 V$ , unless otherwise noted.

The specifications surrounded by   are guaranteed by design engineering at  $-40^{\circ}C \leq T_a \leq 125^{\circ}C$ .

### R5115Sxxxx-YE Electrical Characteristics (Continued)

#### VD Section

( $T_a = 25^{\circ}C$ )

| Symbol         | Parameter                                      | Test Conditions/Comments                                           |                                           | Min.                                                                 | Typ.                    | Max.                                                                 | Unit       |
|----------------|------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------|----------------------------------------------------------------------|-------------------------|----------------------------------------------------------------------|------------|
| $-V_{DET}$     | Detection Voltage                              | $V_{DD} = V_{OUT}$<br>( $V_{OUT}$ Detection)                       | $T_a = 25^{\circ}C$                       | x0.994                                                               |                         | x1.006                                                               | V          |
|                |                                                |                                                                    | $-40^{\circ}C \leq T_a \leq 125^{\circ}C$ | <span style="border: 1px solid black; padding: 0 2px;">x0.984</span> |                         | <span style="border: 1px solid black; padding: 0 2px;">x1.016</span> |            |
| $V_{HYS}$      | Detection Threshold Hysteresis                 |                                                                    |                                           | $\frac{-V_{DSET}}{x0.015}$                                           | $-V_{DSET} \times 0.02$ | $\frac{-V_{DSET}}{x0.025}$                                           | V          |
| $t_{RESET}$    | Reset Delay Time (Power-on Reset)              | $C_D = 0.22 \mu F$                                                 |                                           | <span style="border: 1px solid black; padding: 0 2px;">184</span>    | 220                     | <span style="border: 1px solid black; padding: 0 2px;">253</span>    | ms         |
| $V_{RESETB}$   | RESETB Pull-up Voltage                         | R5115Sxx1A / R5115Sxx1B                                            |                                           |                                                                      |                         | <span style="border: 1px solid black; padding: 0 2px;">5.5</span>    | V          |
| $V_{DOUT}$     | DOUT Pull-up Voltage                           | R5115Sxx2C                                                         |                                           |                                                                      |                         | <span style="border: 1px solid black; padding: 0 2px;">5.5</span>    | V          |
| $I_{OUTRSTB}$  | Nch Driver Output Current (RESETB Output Pin)  | R5115Sxx1A / R5115Sxx1B<br>$V_{IN} = 3.5 V$ , $V_{RESETB} = 0.1 V$ |                                           | <span style="border: 1px solid black; padding: 0 2px;">0.3</span>    | 0.6                     |                                                                      | mA         |
| $I_{LEAKRSTB}$ | Nch Driver Leakage Current (RESETB Output Pin) | R5115Sxx1A / R5115Sxx1B<br>$V_{RESETB} = 5.5 V$                    |                                           |                                                                      |                         | <span style="border: 1px solid black; padding: 0 2px;">0.3</span>    | $\mu A$    |
| $I_{OUTDOUT}$  | Nch Driver Output Current (DOUT Output Pin)    | R5115Sxx2C<br>$V_{IN} = 3.5 V$ , $V_{DOUT} = 0.1 V$                |                                           | <span style="border: 1px solid black; padding: 0 2px;">0.3</span>    | 0.6                     |                                                                      | mA         |
| $I_{LEAKDOUT}$ | Nch Driver Leakage Current (DOUT Output Pin)   | R5115Sxx2C<br>$V_{DOUT} = 5.5 V$                                   |                                           |                                                                      |                         | <span style="border: 1px solid black; padding: 0 2px;">0.3</span>    | $\mu A$    |
| $R_{LCD}$      | CD Auto-discharge (Nch Tr. On-resistance)      | $V_{CE} = 0 V$ , $V_{CD} = 0.1 V$                                  |                                           |                                                                      | 7.5                     | <span style="border: 1px solid black; padding: 0 2px;">20</span>     | k $\Omega$ |

$C_{IN} = C_{OUT} = 0.1\mu F$ ,  $V_{IN} = 14 V$ , unless othrewise noted.

The specifications surrounded by   are guaranteed by design engineering at  $-40^{\circ}C \leq T_a \leq 125^{\circ}C$ .

### R5115Sxxxx-YE Electrical Characteristics (Continued)

#### WDT Section

( $T_a = 25^{\circ}C$ )

| Symbol                         | Parameter                                       | Test Conditions/Comments                                     | Min.                                                               | Typ. | Max.                                                               | Unit       |
|--------------------------------|-------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------|------|--------------------------------------------------------------------|------------|
| $t_{OW}$                       | Open Window Time                                | $C_{TW} = 10 \text{ nF}$                                     | <span style="border: 1px solid black; padding: 0 2px;">14.8</span> | 18.0 | <span style="border: 1px solid black; padding: 0 2px;">21.9</span> | ms         |
| $t_{CW}$                       | Closed Window Time                              | $C_{TW} = 10 \text{ nF}$                                     | <span style="border: 1px solid black; padding: 0 2px;">3.8</span>  | 4.5  | <span style="border: 1px solid black; padding: 0 2px;">5.3</span>  | ms         |
| $t_{OWL}$                      | Long Open Window Time                           | $C_{TW} = 10 \text{ nF}$                                     | <span style="border: 1px solid black; padding: 0 2px;">37</span>   | 80   | <span style="border: 1px solid black; padding: 0 2px;">150</span>  | ms         |
| $t_{IGN}$                      | Pulse Ignoring Time                             | $C_{TW} = 10 \text{ nF}$                                     | <span style="border: 1px solid black; padding: 0 2px;">14.0</span> | 18.0 | <span style="border: 1px solid black; padding: 0 2px;">22.9</span> | ms         |
| $t_{WR}$                       | Reset Time                                      | $C_{TW} = 10 \text{ nF}$                                     | <span style="border: 1px solid black; padding: 0 2px;">7.2</span>  | 9.0  | <span style="border: 1px solid black; padding: 0 2px;">10.7</span> | ms         |
| $V_{SCKH}$                     | SCK Input, High                                 |                                                              | <span style="border: 1px solid black; padding: 0 2px;">1.5</span>  |      | <span style="border: 1px solid black; padding: 0 2px;">5.5</span>  | V          |
| $V_{SCKL}$                     | SCK Input, Low                                  |                                                              | <span style="border: 1px solid black; padding: 0 2px;">0</span>    |      | <span style="border: 1px solid black; padding: 0 2px;">0.65</span> | V          |
| $V_{INHH}$                     | INH Input, High                                 |                                                              | <span style="border: 1px solid black; padding: 0 2px;">1.5</span>  |      | <span style="border: 1px solid black; padding: 0 2px;">5.5</span>  | V          |
| $V_{INHL}$                     | INH Input, Low                                  |                                                              | <span style="border: 1px solid black; padding: 0 2px;">0</span>    |      | <span style="border: 1px solid black; padding: 0 2px;">0.5</span>  | V          |
| $I_{INH}$                      | INH Pull-up Current                             | $V_{INH} = 0 V$                                              | <span style="border: 1px solid black; padding: 0 2px;">4.0</span>  | 8.0  | <span style="border: 1px solid black; padding: 0 2px;">11.5</span> | $\mu A$    |
| $I_{OWDTACT}$                  | WDT Activating Threshold Current                | R5115Sxx1A                                                   |                                                                    | 1.2  | <span style="border: 1px solid black; padding: 0 2px;">2.2</span>  | mA         |
| $I_{OWDTDEACT}$                | WDT Deactivating Threshold Current              | R5115Sxx1A                                                   | <span style="border: 1px solid black; padding: 0 2px;">0.6</span>  | 1.0  |                                                                    | mA         |
| $\frac{I_{OUT}}{I_{WADJ}}$ (1) | WADJ Pin Current Ratio (WDT is not active.)     | R5115Sxx2C<br>$V_{WADJ} = 0 V$ , $I_{OUT} = 10 \text{ mA}$   | <span style="border: 1px solid black; padding: 0 2px;">1000</span> | 1600 | <span style="border: 1px solid black; padding: 0 2px;">3200</span> | -          |
| $\frac{I_{OUT}}{I_{WADJ}}$ (2) | WADJ Pin Current Ratio (WDT is active.)         | R5115Sxx2C<br>$V_{WADJ} = 1.0 V$ , $I_{OUT} = 10 \text{ mA}$ | <span style="border: 1px solid black; padding: 0 2px;">800</span>  | 1200 | <span style="border: 1px solid black; padding: 0 2px;">2400</span> | -          |
| $V_{WADJ\_TH}$                 | WADJ Pin Threshold Voltage                      | R5115Sxx2C                                                   | <span style="border: 1px solid black; padding: 0 2px;">0.6</span>  | 0.7  | <span style="border: 1px solid black; padding: 0 2px;">0.8</span>  | V          |
| $t_{SCKWH}$                    | SCK Minimum Input Pulse Width, High             | $V_{SCKL} = 0.5$ , $V_{SCKH} = 1.6$                          | <span style="border: 1px solid black; padding: 0 2px;">500</span>  |      |                                                                    | ns         |
| $t_{SCKWL}$                    | SCK Minimum Input Pulse Width, Low              | $V_{SCKL} = 0.5$ , $V_{SCKH} = 1.6$                          | <span style="border: 1px solid black; padding: 0 2px;">1500</span> |      |                                                                    | ns         |
| $V_{WDO}$                      | WDO Pull-up Voltage                             |                                                              |                                                                    |      | <span style="border: 1px solid black; padding: 0 2px;">5.5</span>  | V          |
| $I_{OUTWDO}$                   | Nch Driver Output Current (WDO Output Pin)      | R5115Sxx2C<br>$V_{IN} = 3.5 V$ , $V_{WDO} = 0.1 V$           | <span style="border: 1px solid black; padding: 0 2px;">0.7</span>  | 1.5  |                                                                    | mA         |
| $I_{LEAKWDO}$                  | Nch Driver Leakage Current (WDO Output Pin)     | R5115Sxx2C<br>$V_{WDO} = 5.5 V$                              |                                                                    |      | <span style="border: 1px solid black; padding: 0 2px;">0.3</span>  | $\mu A$    |
| $R_{LTW}$                      | $C_{TW}$ Auto-discharge (Nch Tr. On-resistance) | $V_{CE} = 0 V$ , $V_{TW} = 0.1 V$                            |                                                                    | 7.5  | <span style="border: 1px solid black; padding: 0 2px;">20</span>   | k $\Omega$ |

---

**R5115x-Y**

---

No. EY-409-190711


**Product-specific Electrical Characteristics: Voltage Regulator Section**

| Product Name | VR Section       |       |        |                  |       |        |
|--------------|------------------|-------|--------|------------------|-------|--------|
|              | V <sub>OUT</sub> |       |        |                  |       |        |
|              | Ta = 25°C        |       |        | -40 ≤ Ta ≤ 125°C |       |        |
|              | Min              | Typ.  | Max.   | Min.             | Typ.  | Max.   |
| R5115S01xx   | 4.9700           | 5.000 | 5.0300 | 4.9200           | 5.000 | 5.0800 |
| R5115S02xx   | 4.9700           | 5.000 | 5.0300 | 4.9200           | 5.000 | 5.0800 |
| R5115S03xx   | 4.9700           | 5.000 | 5.0300 | 4.9200           | 5.000 | 5.0800 |
| R5115S04xx   | 4.9700           | 5.000 | 5.0300 | 4.9200           | 5.000 | 5.0800 |
| R5115S05xx   | 3.2802           | 3.300 | 3.3198 | 3.2472           | 3.300 | 3.3528 |
| R5115S06xx   | 3.2802           | 3.300 | 3.3198 | 3.2472           | 3.300 | 3.3528 |
| R5115S07xx   | 3.2802           | 3.300 | 3.3198 | 3.2472           | 3.300 | 3.3528 |
| R5115S08xx   | 4.9700           | 5.000 | 5.0300 | 4.9200           | 5.000 | 5.0800 |
| R5115S09xx   | 4.9700           | 5.000 | 5.0300 | 4.9200           | 5.000 | 5.0800 |
| R5115S10xx   | 4.9700           | 5.000 | 5.0300 | 4.9200           | 5.000 | 5.0800 |
| R5115S11xx   | 4.9700           | 5.000 | 5.0300 | 4.9200           | 5.000 | 5.0800 |

**Product-specific Electrical Characteristics: Voltage Detector Section**


| Product Name | VD Section        |       |        |                  |       |        |                  |        |        |
|--------------|-------------------|-------|--------|------------------|-------|--------|------------------|--------|--------|
|              | -V <sub>DET</sub> |       |        |                  |       |        | V <sub>HYS</sub> |        |        |
|              | Ta = 25°C         |       |        | -40 ≤ Ta ≤ 125°C |       |        |                  |        |        |
|              | Min.              | Typ.  | Max.   | Min.             | Typ.  | Max.   | Min.             | Typ.   | Max.   |
| R5115S01xx   | 4.5724            | 4.600 | 4.6276 | 4.5264           | 4.600 | 4.6736 | 0.0690           | 0.0920 | 0.1150 |
| R5115S02xx   | 3.2802            | 3.300 | 3.3198 | 3.2472           | 3.300 | 3.3528 | 0.0495           | 0.0660 | 0.0825 |
| R5115S03xx   | 3.9760            | 4.000 | 4.0240 | 3.9360           | 4.000 | 4.0640 | 0.0600           | 0.0800 | 0.1000 |
| R5115S04xx   | 4.4730            | 4.500 | 4.5270 | 4.4280           | 4.500 | 4.5720 | 0.0675           | 0.0900 | 0.1125 |
| R5115S05xx   | 2.9820            | 3.000 | 3.0180 | 2.9520           | 3.000 | 3.0480 | 0.0450           | 0.0600 | 0.0750 |
| R5115S06xx   | 2.8826            | 2.900 | 2.9174 | 2.8536           | 2.900 | 2.9464 | 0.0435           | 0.0580 | 0.0725 |
| R5115S07xx   | 2.6838            | 2.700 | 2.7162 | 2.6568           | 2.700 | 2.7432 | 0.0405           | 0.0540 | 0.0675 |
| R5115S08xx   | 4.3736            | 4.400 | 4.4264 | 4.3296           | 4.400 | 4.4704 | 0.0660           | 0.0880 | 0.1100 |
| R5115S09xx   | 4.0754            | 4.100 | 4.1246 | 4.0344           | 4.100 | 4.1656 | 0.0615           | 0.0820 | 0.1025 |
| R5115S10xx   | 4.1748            | 4.200 | 4.2252 | 4.1328           | 4.200 | 4.2672 | 0.0630           | 0.0840 | 0.1050 |
| R5115S11xx   | 2.4850            | 2.500 | 2.5150 | 2.4600           | 2.500 | 2.5400 | 0.0375           | 0.0500 | 0.0625 |

## THEORY OF OPERATION

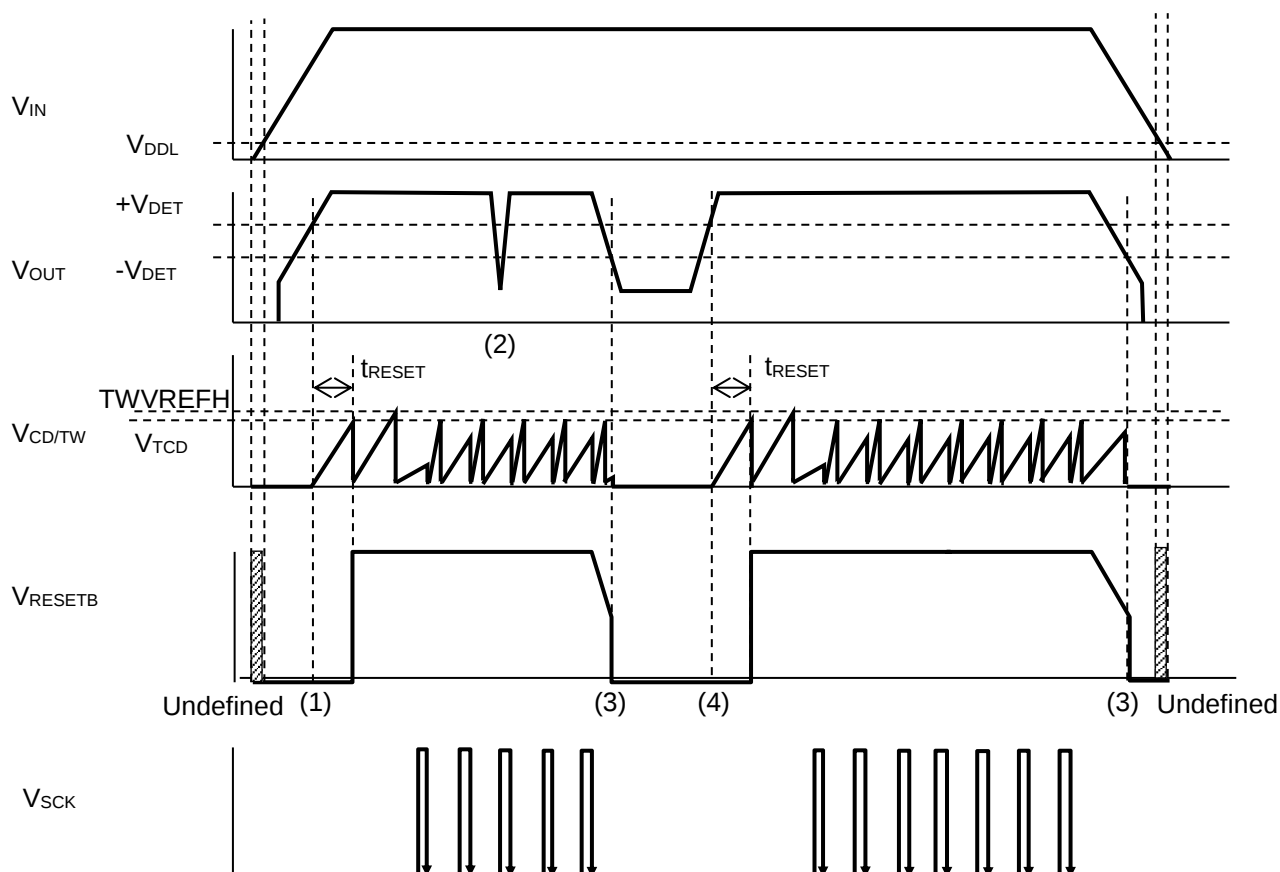


**R5115Sxx1A/ R5115Sxx1B VD Timing Chart**

- (1) When the output voltage ( $V_{OUT}$ ) of a voltage regulator (VR) becomes more than the reset voltage ( $+V_{DET}$ ), the RESETB pin voltage ( $V_{RESETB}$ ) becomes high after the reset delay time ( $t_{RESET}$ ). During  $t_{RESET}$ , the CD/TW pin serves as a rest delay time setting pin. When  $V_{RESETB}$  becomes high, the CD/TW pin serves as a watchdog timer setting pin.
- (2) When  $V_{OUT}$  becomes lower than the detection voltage ( $-V_{DET}$ ) and when that period is shorter than the delay time ( $t_{DELAY}$ ), Typ. 30  $\mu$ s or lower,  $V_{RESETB}$  remains high and does not go into the detecting state.
- (3) When  $V_{OUT}$  becomes lower than  $-V_{DET}$ ,  $V_{RESETB}$  becomes low after a 30- $\mu$ s (Typ.)  $t_{DELAY}$ , and the voltage detector (VD) goes into the detecting state.
- (4) When  $V_{OUT}$  becomes higher than  $+V_{DET}$ ,  $V_{RESETB}$  becomes high after  $t_{RESET}$ . ( $V_{TCD}$  = Typ.1 V)

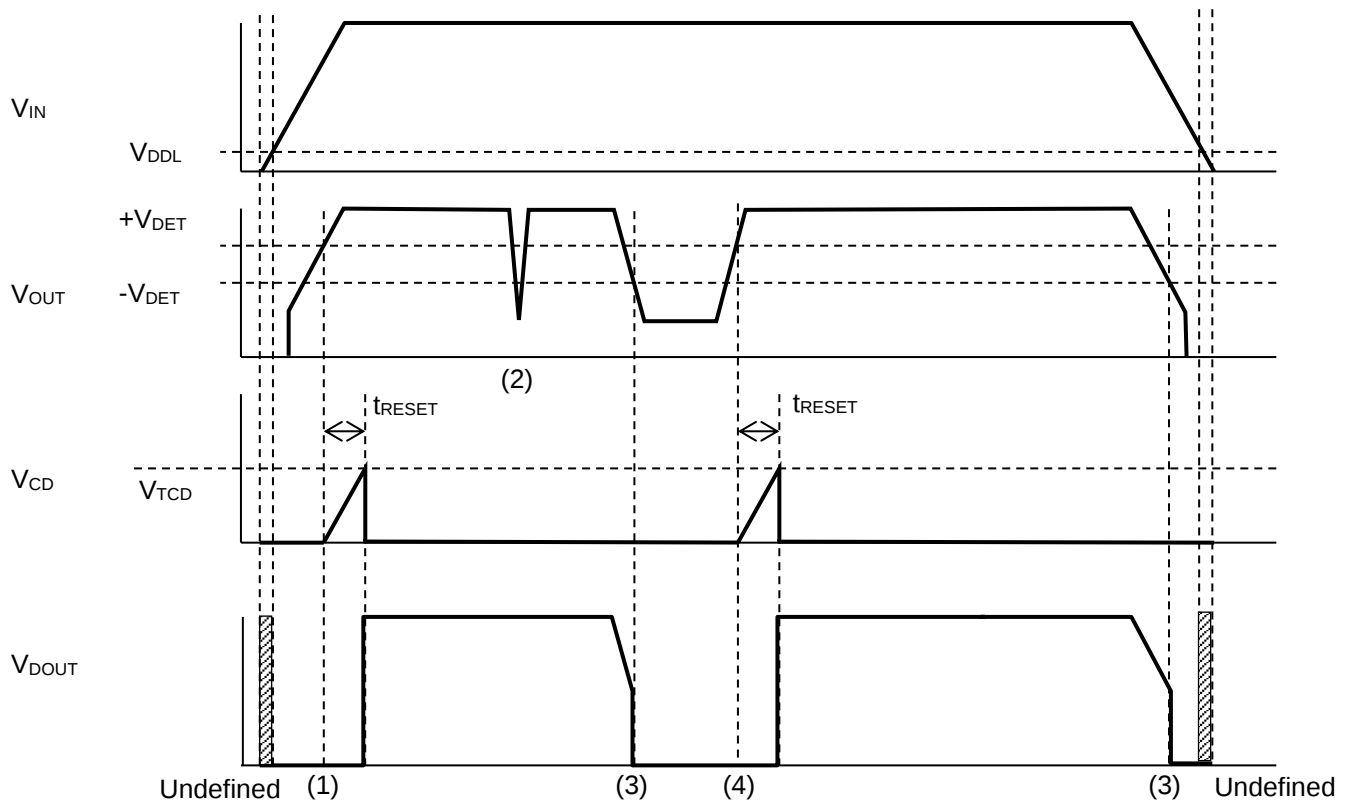

**R5115Sxx2C VD Timing Chart**

- (1) When the output voltage (V<sub>OUT</sub>) of a voltage regulator (VR) becomes higher than the reset voltage (+V<sub>DET</sub>), the DOUT pin voltage (V<sub>DOUT</sub>) becomes high after the reset delay time (t<sub>RESET</sub>).
- (2) When V<sub>OUT</sub> becomes lower than the detection voltage (-V<sub>DET</sub>) and when that period is shorter than the delay time (t<sub>DELAY</sub>), Typ. 30 μs or lower, V<sub>DOUT</sub> remains high and does not go into the detecting state.
- (3) When V<sub>OUT</sub> becomes lower than -V<sub>DET</sub>, V<sub>DOUT</sub> becomes low after a 30-μs (Typ.) t<sub>DELAY</sub>, and the voltage detector (VD) goes into the detecting state.
- (4) When V<sub>OUT</sub> becomes higher than +V<sub>DET</sub>, V<sub>DOUT</sub> becomes high after t<sub>RESET</sub>. (V<sub>TCD</sub> = Typ.1 V)

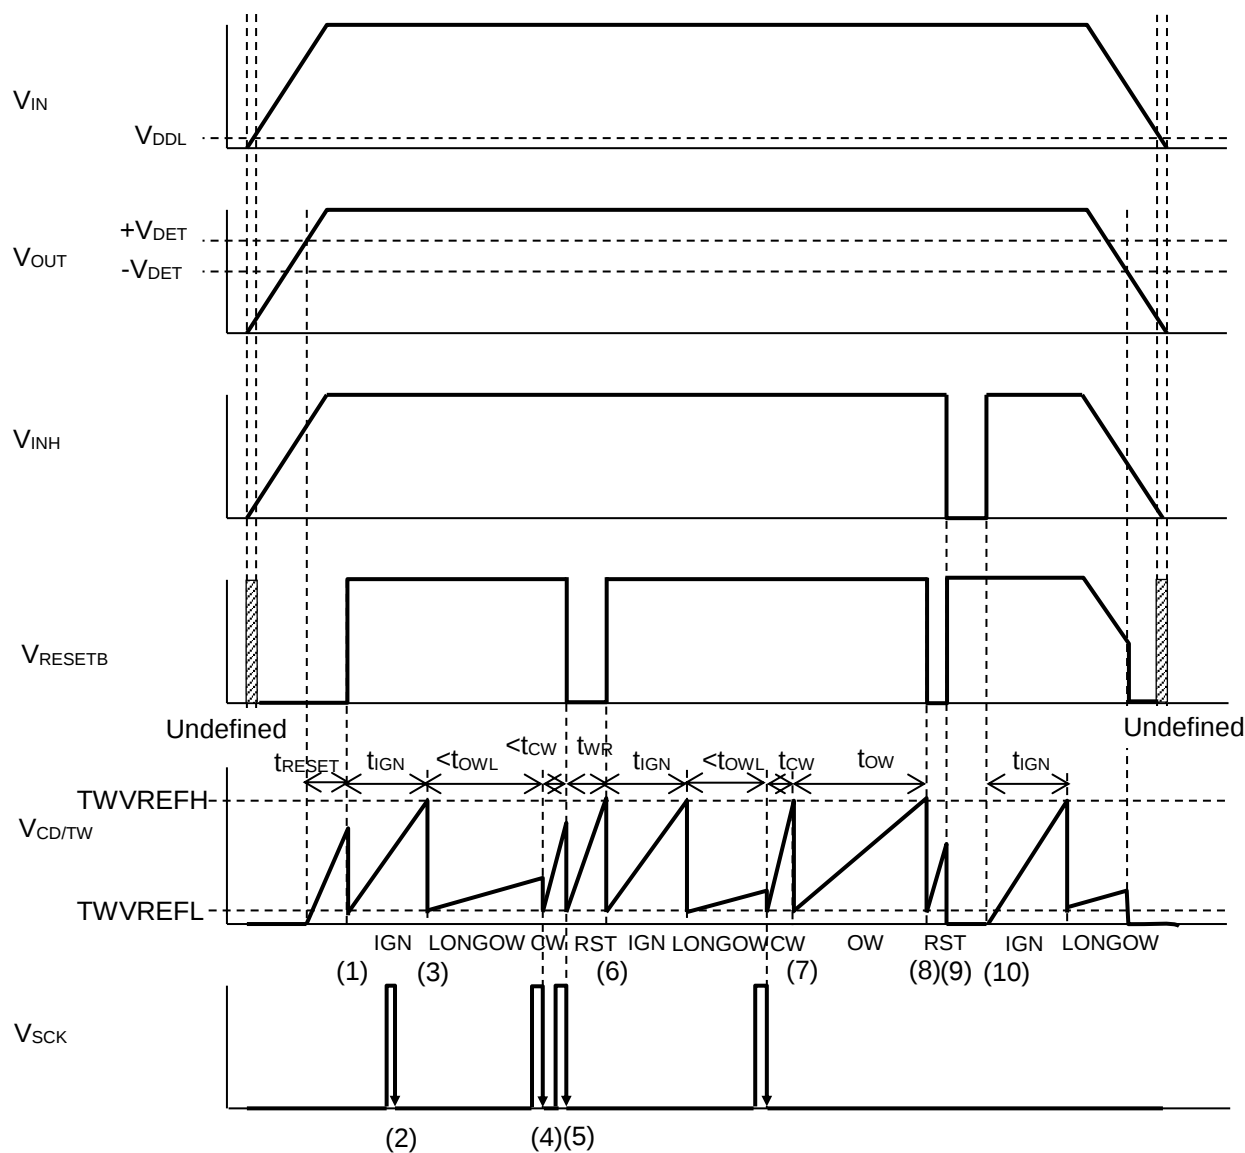

R5115Sxx1A/R5115Sxx1B WDT Timing Chart, Window Type


- (1) When the output voltage ( $V_{OUT}$ ) of a voltage regulator (VR) becomes higher than the reset voltage ( $+V_{DET}$ ), the RESETB pin voltage ( $V_{RESETB}$ ) becomes high after the reset delay time ( $t_{RESET}$ ), and the watchdog timer (WDT) starts monitoring a pulse. After that, the CD/TW pin voltage ( $V_{CD/TW}$ ) repeats charge and discharge. As a result, a sawtooth wave is generated. The WDT has four states: Ignoring, Reset, Open Window and Closed Window. In each state, the CD/TW pin is charged from 0 V or  $TWVREFL$  (Typ. 0.08 V).
- (2) After WDT starts, WDT is in an ignoring state until  $V_{CD/TW}$  is charged up to  $TWVREFH$  (Typ. 2V). So, a pulse to the SCK pin is ignored during the ignoring state.
- (3) When  $V_{CD/TW}$  is charged up to  $TWVREFH$  during the ignoring state, the CD/TW pin starts discharging and WDT goes into a long open window state. While this long open window state works as an open window state, it is four times longer than the normal open window state.
- (4) When a pulse is sent to the SCK pin before  $V_{CD/TW}$  reaches  $TWVREFH$  during the open window state, the CD/TW pin starts discharging and WDT goes into a closed window state.
- (5) When a pulse is sent to the SCK pin before  $V_{CD/TW}$  reaches  $TWVREFH$  during the closed window state, the CD/TW pin starts discharging and WDT goes into a reset state. During the reset state,  $V_{RESETB}$  becomes low.
- (6) When  $V_{CD/TW}$  reaches  $TWVREFH$  during the reset state, the CD/TW pin starts discharging and WDT goes into an ignoring state.
- (7) When a pulse is not sent to the SCK pin before  $V_{CD/TW}$  reaches  $TWVREFH$  during a closed window state, the CD/TW pin starts discharging and WDT goes into an open window state.
- (8) When a pulse is not sent to the SCK pin before  $V_{CD/TW}$  reaches  $TWVREFH$  during the open window state, the CD/TW pin starts discharging and WDT goes into a reset state.
- (9) When the INH pin voltage ( $V_{INH}$ ) is set to low, WDT stops monitoring. So, the voltage detector (VD) determines whether  $V_{RESETB}$  is set to high/low, or  $V_{CD/TW}$  is charged/discharged.
- (10) When  $V_{INH}$  is changed from low to high, WDT goes into the ignoring state and restarts monitoring a pulse.

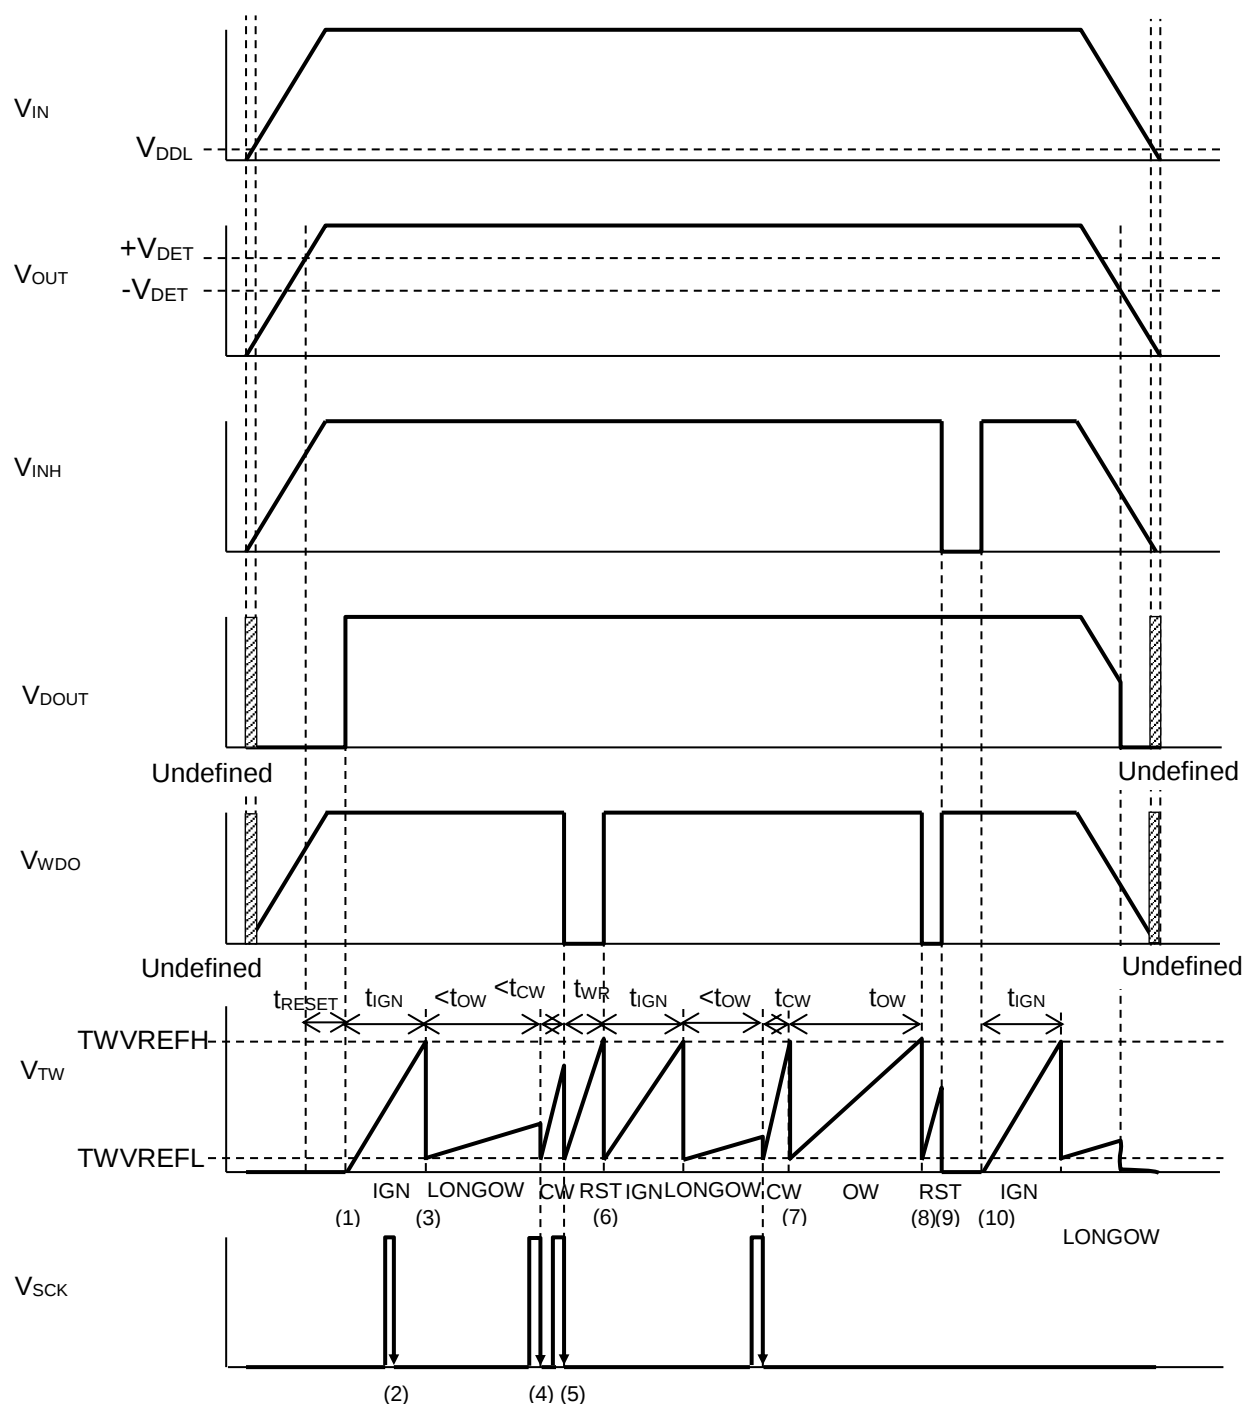

R5115Sxx2C WDT Timing Chart, Window Type

- (1) When the output voltage ( $V_{OUT}$ ) of a voltage regulator (VR) becomes higher than the reset voltage ( $+V_{DET}$ ), the DOUT pin voltage ( $V_{DOUT}$ ) becomes high after the reset delay time ( $t_{RESET}$ ), and the watchdog timer (WDT) starts monitoring a pulse. After that, the TW pin voltage ( $V_{TW}$ ) repeats charge and discharge. As a result, a sawtooth wave is generated. WDT has four states: Ignoring, Reset, Open Window and Closed Window. In each state, the TW pin is charged from 0 V or  $TWVREFL$  (Typ.0.08 V).
- (2) After WDT starts, WDT is in an ignoring state until  $V_{TW}$  is charged up to  $TWVREFH$ . So, a pulse to the SCK pin is ignored during the ignoring state.
- (3) When  $V_{TW}$  is charged up to  $TWVREFH$  during the ignoring state, the TW pin starts discharging and WDT goes into a long open window state. While this long open window state works as an open window state, it is four times longer than the normal open window state.
- (4) When a pulse is sent to the SCK pin before  $V_{TW}$  reaches  $TWVREFH$  during the open window state, the TW pin starts discharging and WDT goes into a closed window state.
- (5) When a pulse is sent to the SCK pin before  $V_{TW}$  reaches  $TWVREFH$  during the close window state, the TW pin starts discharging and WDT goes into a reset state. During the reset state,  $V_{DOUT}$  becomes low.
- (6) When  $V_{TW}$  reaches  $TWVREFH$  during the reset state, the TW pin starts discharging and WDT goes into an ignoring state.
- (7) When a pulse is not sent to the SCK pin before  $V_{TW}$  reaches  $TWVREFH$  during a closed window state, the TW pin starts discharging and WDT goes into an open window state
- (8) When a pulse is not sent to the SCK pin before  $V_{TW}$  reaches  $TWVREFH$  during the open window state, the TW pin starts discharging and WDT goes into a reset state
- (9) When the INH pin voltage ( $V_{INH}$ ) is set to low, WDT stops monitoring. Then, the WDO pin voltage ( $V_{WDO}$ ) is fixed to high and  $V_{TW}$  is fixed to low.
- (10) When  $V_{INH}$  is changed from low to high, WDT goes into the ignoring state and restarts monitoring a pulse.

## Delay Operation and Reset Delay Time

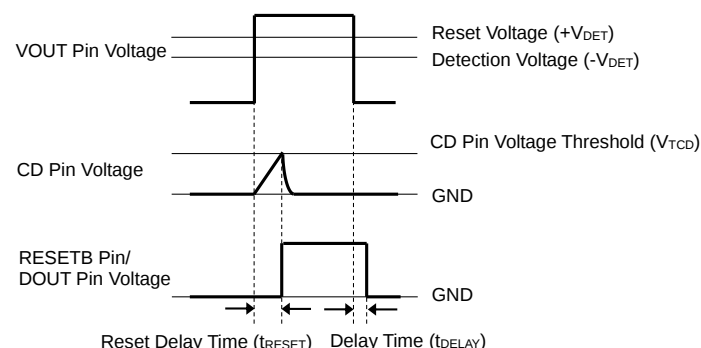

RESETB Pin: R5115Sxx1A/ R5115Sxx1B  
DOOUT Pin: R5115Sxx2C

## Delay Time Operation Timing Chart

When the VOUT pin voltage ( $V_{\text{OUT}}$ ) becomes higher than the reset voltage ( $+V_{\text{DET}}$ ), the CD pin voltage ( $V_{\text{CD}}$ ) increases as the external capacitor starts charging. The RESETB pin voltage ( $V_{\text{RESETB}}$ )/ the DOOUT pin voltage ( $V_{\text{DOOUT}}$ ) remains low until  $V_{\text{CD}}$  reaches the CD pin voltage threshold ( $V_{\text{TCD}}$ ). When  $V_{\text{CD}}$  becomes higher than  $V_{\text{TCD}}$ ,  $V_{\text{RESETB}}$  or  $V_{\text{DOOUT}}$  changes from low to high. The reset delay time ( $t_{\text{RESET}}$ ) starts when the  $V_{\text{OUT}}$  becomes higher than  $+V_{\text{DET}}$  and ends when  $V_{\text{DOOUT}}/V_{\text{RESETB}}$  changes from low to high. When  $V_{\text{DOOUT}}/V_{\text{RESETB}}$  changes from low to high, the electrical charge charged in the external capacitor starts discharging. The delay time ( $t_{\text{DELAY}}$ ) starts when  $V_{\text{OUT}}$  becomes lower than the detection voltage ( $-V_{\text{DET}}$ ) and ends when  $V_{\text{DOOUT}}/V_{\text{RESETB}}$  changes from high to low. It is not dependent on the capacitance of the external capacitor.


## Method of Calculating the Reset Delay Time


The reset delay time ( $t_{\text{RESET}}$ ) can be calculated by the following equation using an external capacitance ( $C_D$ ):

$$t_{\text{RESET}} (\text{s}) = 1.0 \times C_D (\text{F}) / (1.0 \times 10^{-6})$$

To make the VOUT/ SENSE pin voltage rises slower than 0.1 V/s, place a 100-pF or more capacitor ( $C_D$ ).

$t_{\text{RESET}}$  starts when the RESETB/DOOUT pin is pulled up to 5 V using a 100-k $\Omega$  resistor, and a 1.5-V to ( $-V_{\text{DET}}$ ) + 2.0-V pulse voltage is applied to the VOUT pin. It ends when  $V_{\text{OUT}}$  reaches 2.5 V.

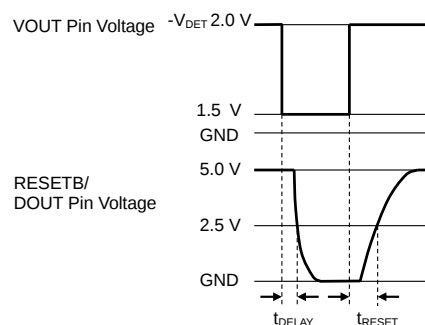

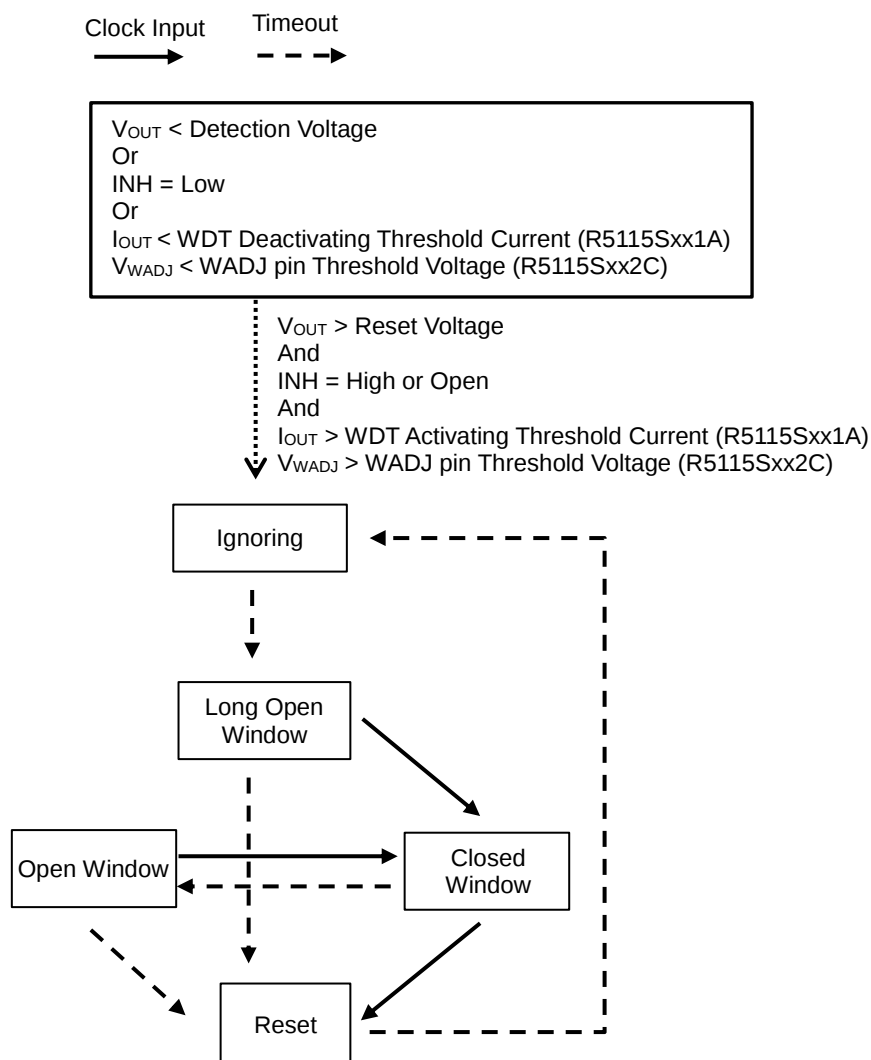**Watchdog Timer State Transition Diagram****Watchdog Timer Setting**

A watchdog timer ( $t_{OW}$ ,  $t_{CW}$ ,  $t_{OWL}$ ,  $t_{IGN}$ ,  $t_{WR}$ ) can be set by using a capacitor connected to the TW pin. The relationship between capacitance and time are described as below:

$$t_{OW} \text{ (s)} = 1.8 \times C(F) / (1.0 \times 10^{-6})$$

$$t_{CW} \text{ (s)} = 1.8 \times C(F) / (4.0 \times 10^{-6})$$

$$t_{OWL} \text{ (s)} = 1.8 \times C(F) / (0.225 \times 10^{-6})$$

$$t_{IGN} \text{ (s)} = 1.8 \times C(F) / (1.0 \times 10^{-6})$$

$$t_{WR} \text{ (s)} = 1.8 \times C(F) / (2.0 \times 10^{-6})$$

**Allowable SCK Pulse Period**

To prevent WDT of the R5115x from going into a reset state, the pulse period inputted to the SCK pin has to meet the following condition.


$$t_{cw} \text{ max} < \text{SCK Pulse Period} < (t_{cw} + t_{ow}) \text{ min}$$

The closed window time ( $t_{cw}$ ) and the open window time ( $t_{ow}$ ) in Electrical Characteristics may vary, and also the capacitor connected to the TW pin ( $C_{TW}$ ) or the CD/TW pin ( $C_D/C_{TW}$ ) may cause variations in  $t_{cw}$  or  $t_{ow}$ . Those variations are considered in the calculations below.

$$\text{Min. SCK Pulse Period (s)} = 0.53 \times \text{Max. } C_{TW} \text{ (F)} \times 10^6$$

$$\text{Max. SCK Pulse Period (s)} = 1.86 \times \text{Min. } C_{TW} \text{ (F)} \times 10^6$$

The graph below shows the relationship between the SCK pulse period and the external capacitance of  $C_{TW}$ . The pulse period inputted to the SCK pin has to be fit within the grayed-out area according to the capacitance of  $C_{TW}$ .

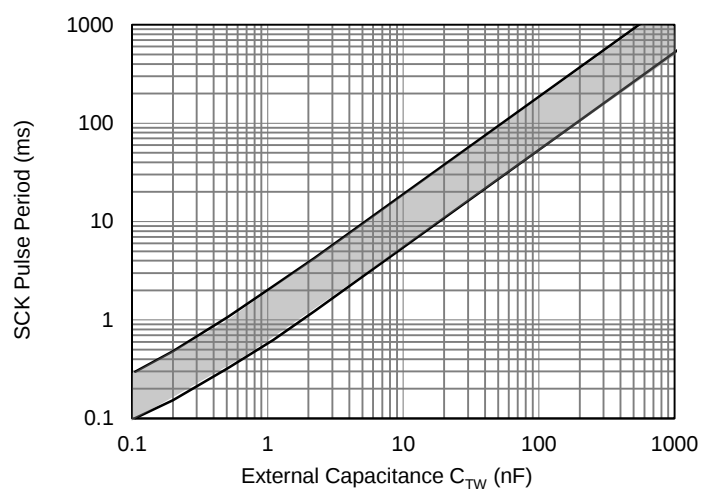

---

## R5115x-Y

---

No. EY-409-190711

### Standby Function


When the CE pin voltage ( $V_{CE}$ ) is low, the R5115S goes into the standby mode. During the standby mode, the voltage regulator (VR) stops the output, the watchdog timer (WDT) stops the pulse monitoring and the voltage detector (VD) stops the voltage monitoring.

When  $V_{CE}$  is low, the outputs of WDT and VD will be as follows regardless of the output voltage ( $V_{OUT}$ ).

R5115Sxx1A/ R5115Sxx1B: The RESETB pin voltage ( $V_{RESETB}$ ) is fixed to low.

R5115Sxx2C: The DOUT pin voltage ( $V_{DOUT}$ ) is low and the WDO pin voltage ( $V_{WDO}$ ) is fixed to the pull-up voltage.

When the input voltage ( $V_{IN}$ ) is less than 1.52 V with 5-V pull-up voltage and 100-k $\Omega$  pull-up resistance,  $V_{RESETB}/V_{DOUT}$  becomes indefinite, which means 0.1 V or more.

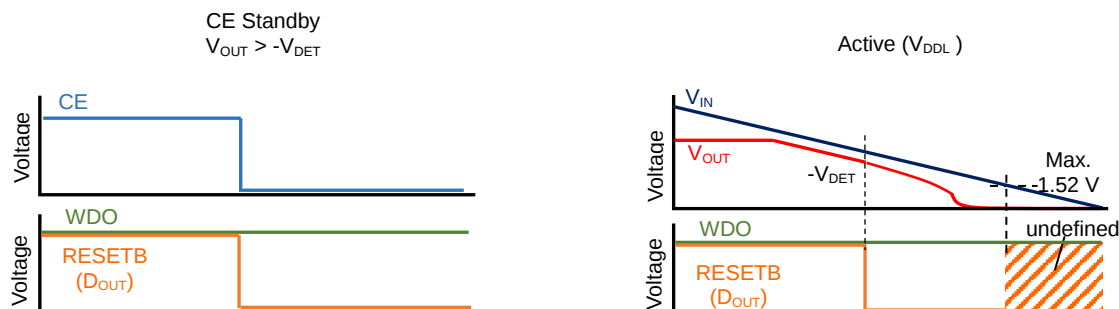

### Voltage Regulator Voltage Setting

The voltage detector (VD) detects the output voltage drop of the voltage regulator (VR). If the VD reset voltage ( $+V_{DET}$ ) is set to higher than the VR output voltage ( $V_{OUT}$ ), VD continuously sends a reset signal even if VR output voltage ( $V_{OUT}$ ) returns to the normal after detecting the output voltage drop of VR. To prevent this, the following conditions have to be met.

$$(\text{VR Set Output Voltage}) \times 0.985 - 30 \text{ mV} > (\text{VD Set Detection Voltage}) \times 1.018 \times 1.030$$

When using a device that is not meeting the above conditions, careful consideration must be given to the system operation before use.

### Inhibit Function

When the INH pin voltage ( $V_{INH}$ ) is low, the watchdog timer (WDT) stops monitoring a pulse. The WDO pin voltage ( $V_{WDO}$ ) is fixed to high. The INH pin voltage ( $V_{INH}$ ) is internally pulled up with a 400-k $\Omega$  (Typ.) resistor.

### WADJ Function



The R5115Sxx1A/ R5115Sxx2C stops monitoring a pulse when the VR load current, which is a current flowing from the VOUT pin, is small.  $V_{WDO}$  is fixed to high. With the R5115Sxx1A, WDT stops monitoring a pulse when the load current is 1.0 mA (Typ.). With the R5115Sxx2C, the load current can be set by using a resistor (R2) connected to the WADJ pin. The relationships between the resistance (R2) and the load current for deactivating the pulse monitoring of WDT ( $I_{OWDTDEACT}$ ), and the resistance (R2) and the load current for activating the pulse monitoring of WDT ( $I_{OWDTACT}$ ) are described as below.

$$I_{OWDTACT} = V_{WADJ\_TH} * \frac{I_{OUT}}{I_{WADJ}} (1) / R2$$


$$I_{OWDTDEACT} = V_{WADJ\_TH} * \frac{I_{OUT}}{I_{WADJ}} (2) / R2$$

With the R5115Sxx1B, WDT monitors a pulse even when VR is in no-load state.


It is noted that WDT stops its operation regardless of load current of VR in the range of  $V_{IN}$  where the stable operation is not ensured owing to low  $V_{OUT}$ ; Dropout Voltage ( $V_{DIF}$ ):  $V_{IN} - V_{OUT}$  is  $< 1.2$  V ( $V_{SET} = 3.3$  V,  $I_{OUT} = 100$  mA). The output voltage from RESETB pin of R5115Sxx1A depends on only VD and WDO pin is hold as "High."

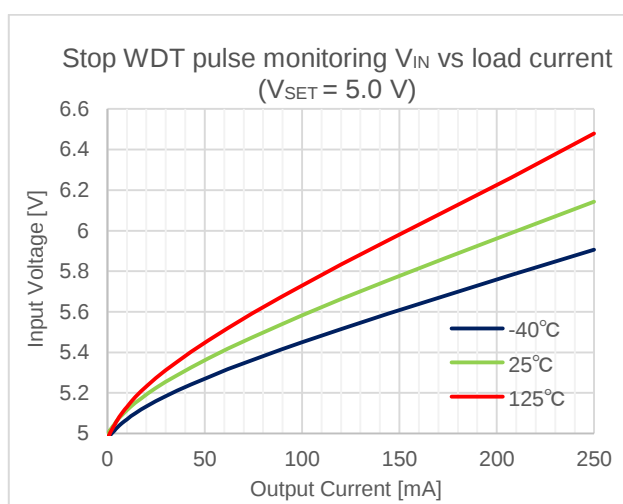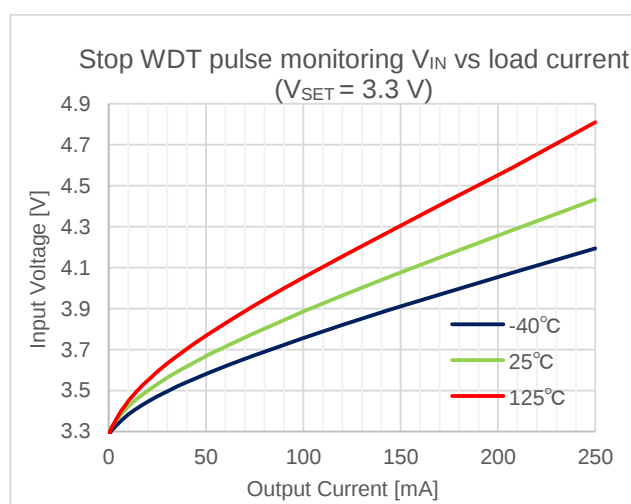

## APPLICATION INFORMATION

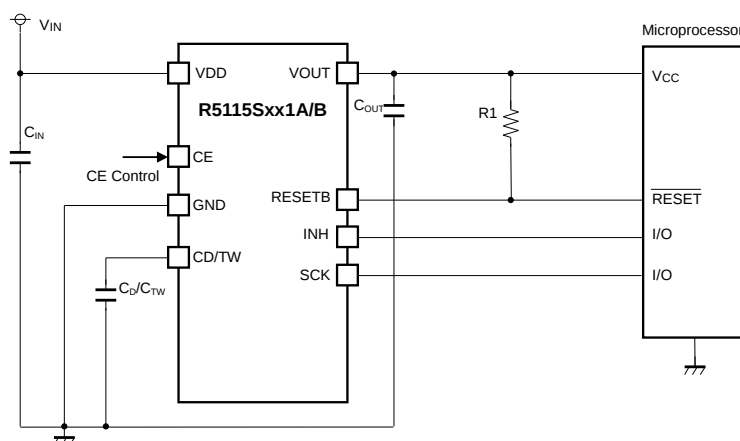

**R5115Sxx1A/B Typical Application Circuit**

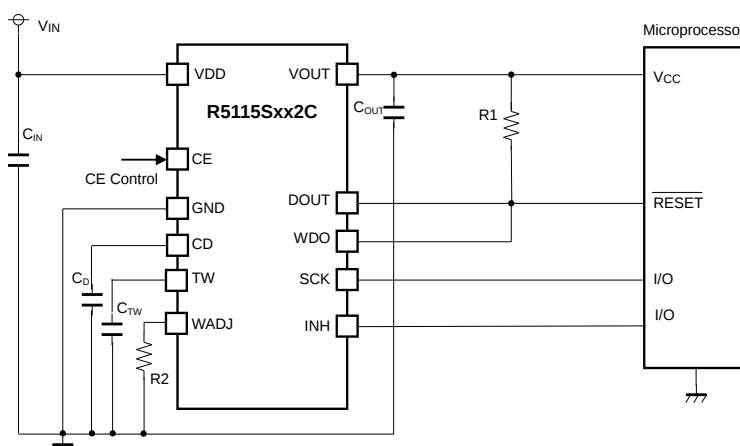

**R5115Sxx2C Typical Application Circuit**

### External Components

| Symbol    | Description                                                                                                                                                     |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $C_{IN}$  | 0.1 $\mu$ F, Ceramic Capacitor                                                                                                                                  |
| $C_{OUT}$ | 0.1 $\mu$ F, Ceramic Capacitor                                                                                                                                  |
| $C_{TW}$  | Capacitor for setting a WDT<br>Refer to WDT Setting at Theory of Operation.                                                                                     |
| $C_D$     | Capacitor for setting reset delay time<br>Refer to Delay Operation and Reset Delay Time at <i>THEORY OF OPERATION</i> .                                         |
| R1        | Set the value for R1 considering the output current when the Nch is on and the leakage current when the Nch is off described in the Electrical Characteristics. |
| R2        | Set the value for R2 considering the WADJ pin current ration and the WADJ pin threshold voltage described in the Electrical Characteristics.                    |

## TECHNICAL NOTES

The performance of a power source circuit using this device is highly dependent on a peripheral circuit. A peripheral component or the device mounted on PCB should not exceed its rated voltage, rated current or rated power. When designing a peripheral circuit, please be fully aware of the following points.

### Phase Compensation





A phase compensation is provided to secure stable operation even when the load current is varied. For this purpose, use a 0.1- $\mu$ F or more output capacitor ( $C_{OUT}$ ) with good frequency characteristics and proper ESR (Equivalent Series Resistance). In case of using a tantalum type capacitor with a large ESR, the output might become unstable. Evaluate your circuit including consideration of frequency characteristics. Connect a 0.1- $\mu$ F or more input capacitor ( $C_{IN}$ ) between the VDD and GND pins with shortest-distance wiring.

### PCB Layout


Ensure that the VDD and GND lines are sufficiently robust. If their impedances are too high, noise pickup or unstable operation may result. Connect a 1.0  $\mu$ F or more input capacitor ( $C_{IN}$ ) between the VDD and GND pins with shortest-distance wiring. Also, connect an output capacitor ( $C_{OUT}$ ) between the VOUT and GND pins with shortest-distance wiring.

**Input Voltage Fluctuation Prohibited Area**

The input voltage fluctuation in the following area may cause false detection or false detection release, so should not be allowed.

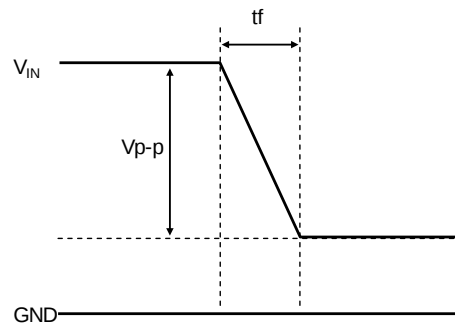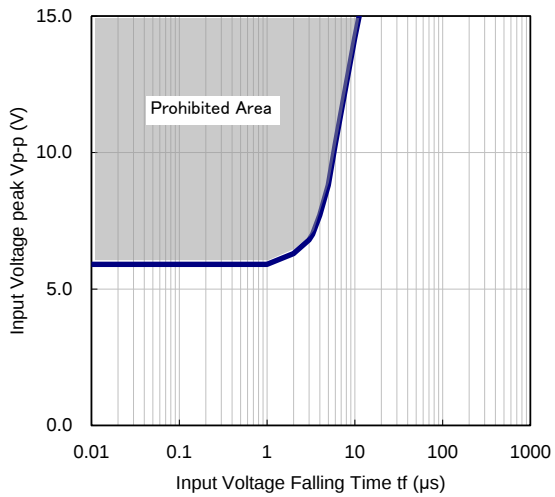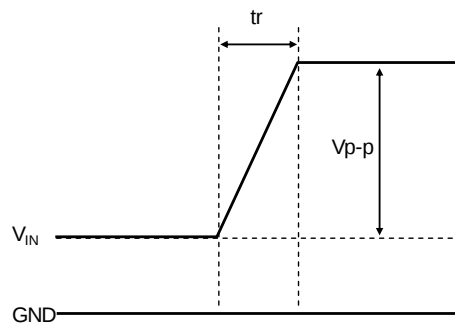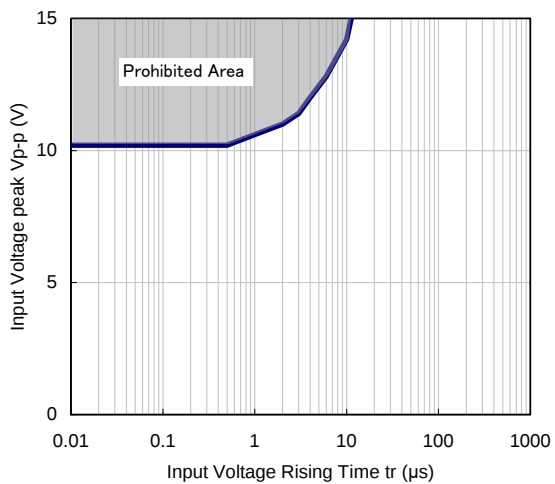**Input Voltage Falling Fluctuation Prohibited Area****Input Voltage Rising Fluctuation Prohibited Area**

### Typical Application Circuit with IC Chip Breakdown Prevention

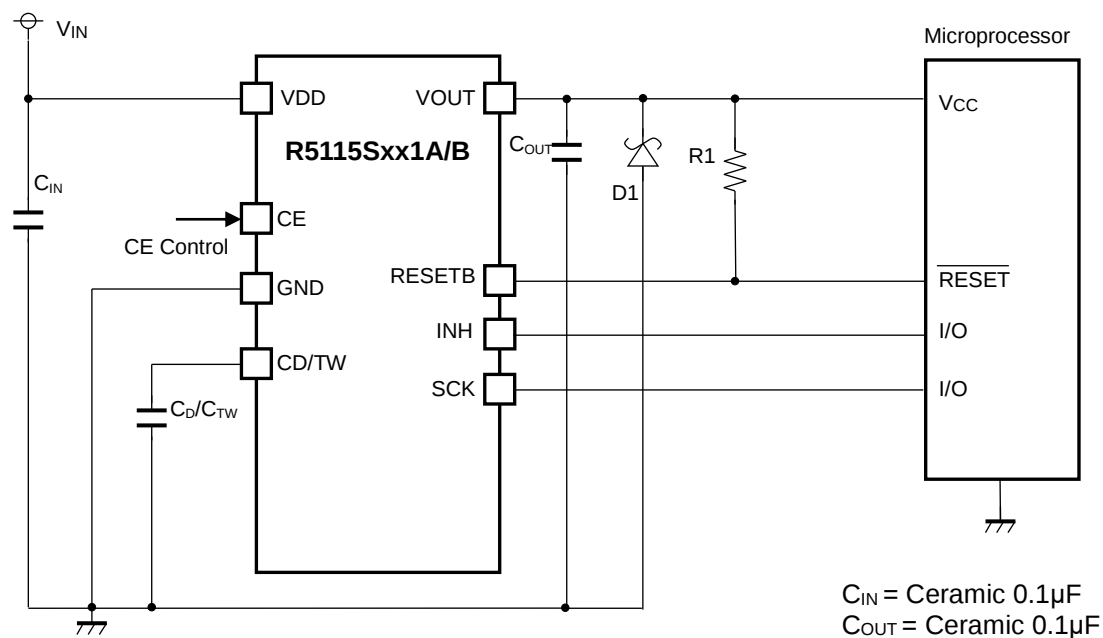



**R5115Sxx1A/B Typical Application Circuit with IC Chip Breakdown Prevention**

When a sudden surge of electrical current travels along the VOUT pin and GND due to a short-circuit, electrical resonance of a circuit involving an output capacitor ( $C_{OUT}$ ) and a short circuit inductor generates a negative voltage and may damage the device or the load devices. Connecting a schottky diode (D1) between the VOUT pin and GND has the effect of preventing damage to them.



## TYPICAL CHARACTERISTICS

Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.



### 1) Supply Current vs. Input Voltage

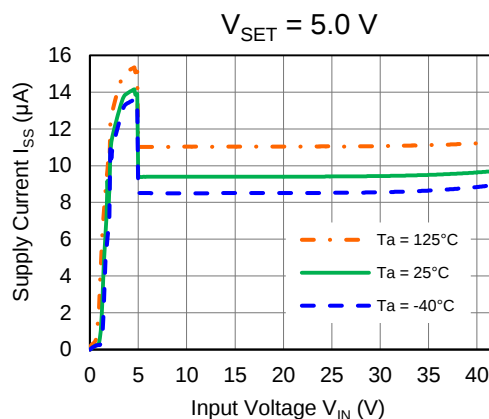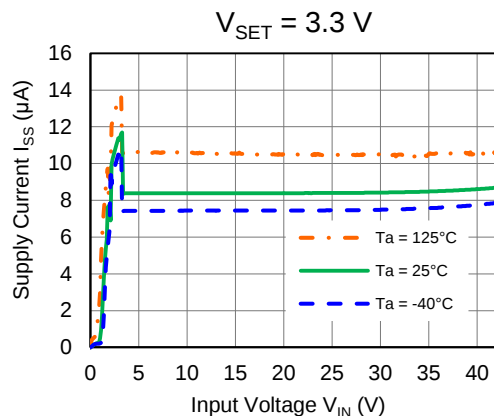



### 2) GND Pin Current vs. Output Current (Ta = 25°C)

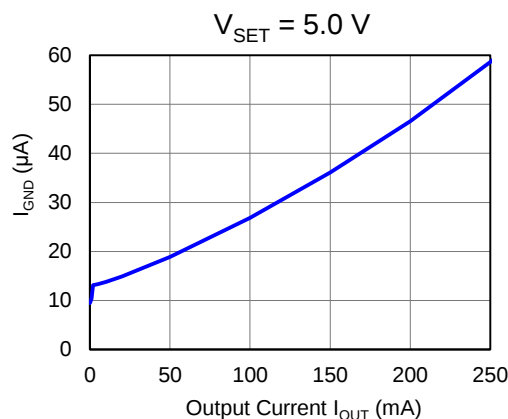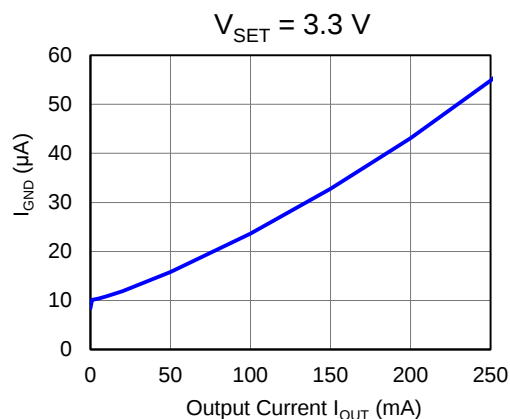



### 3) Output Voltage vs. Output Current (Ta = 25°C)

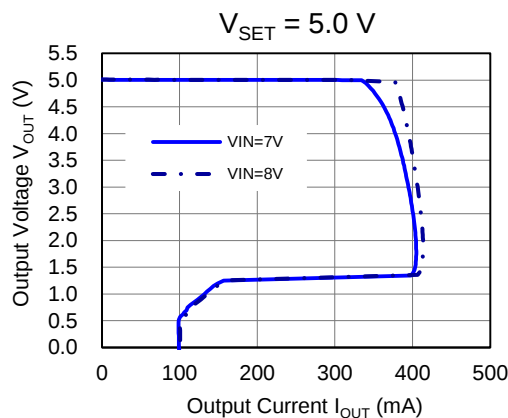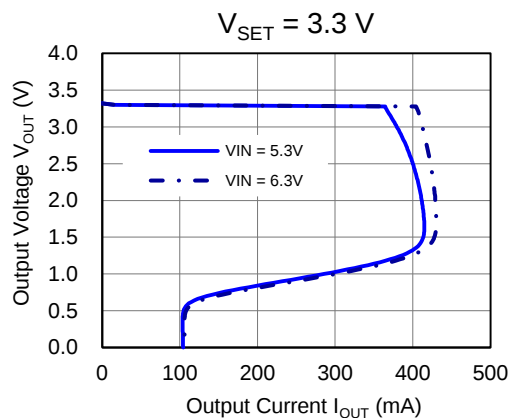



#### 4) Output Voltage vs. Input Voltage ( $T_a = 25^\circ\text{C}$ )

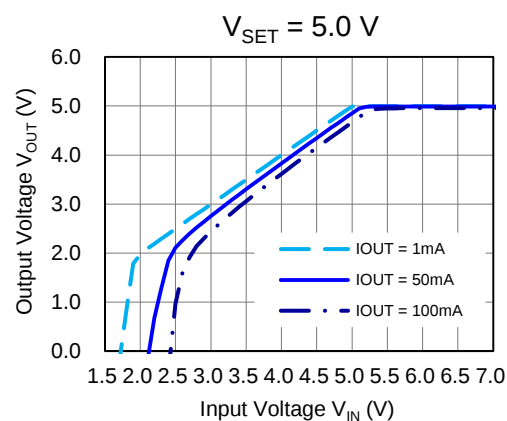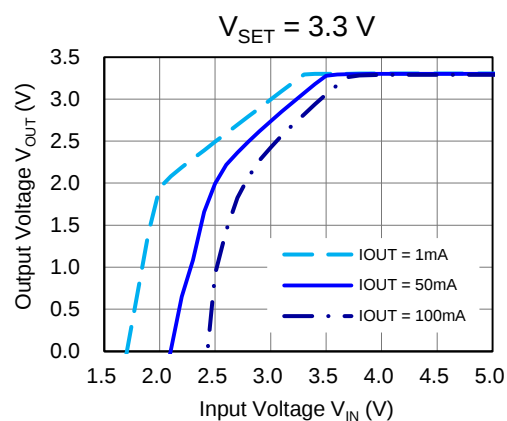



#### 5) Output Voltage vs. Ambient Temperature ( $V_{\text{IN}} = 14 \text{ V}$ , $I_{\text{OUT}} = 1 \text{ mA}$ )

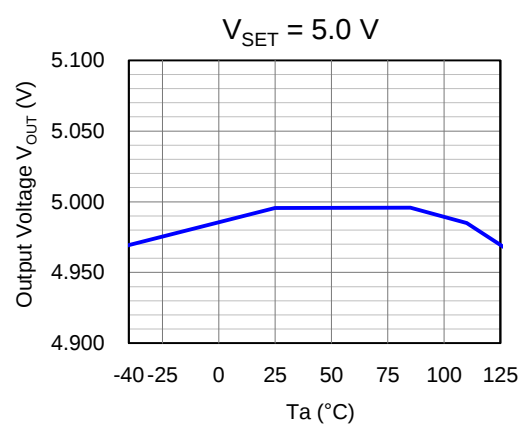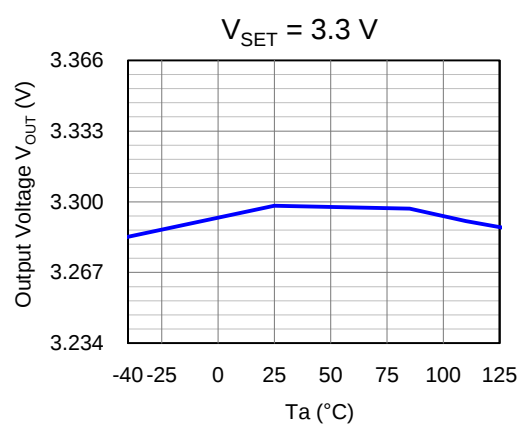





#### 6) Dropout Voltage vs. Output Current

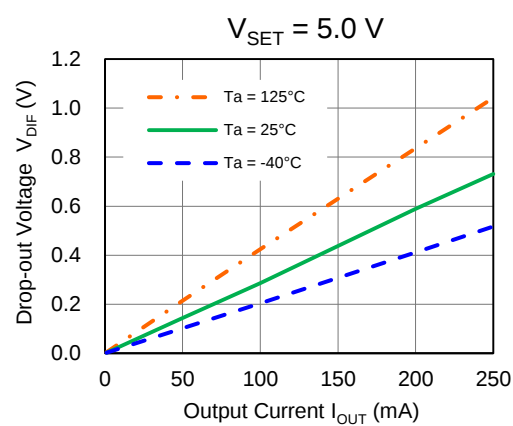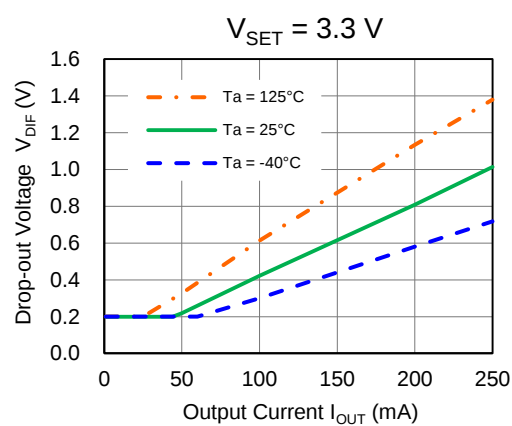





**7) Ripple Rejection vs. Frequency ( $T_a = 25^\circ\text{C}$ , Ripple = 0.2 Vpp)**

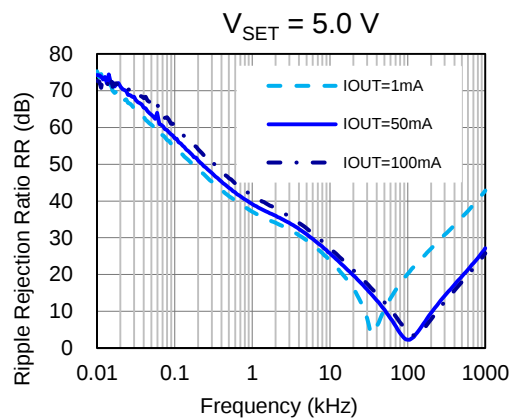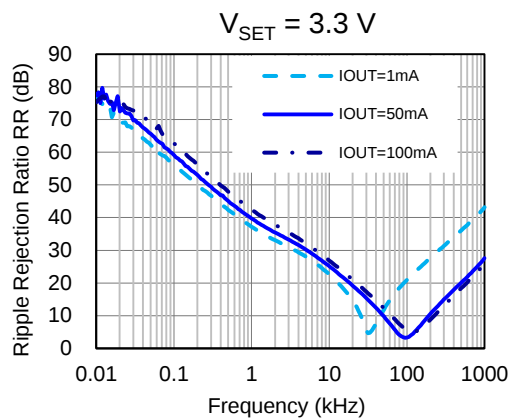



**8) Input Transient Response ( $T_a = 25^\circ\text{C}$ )**

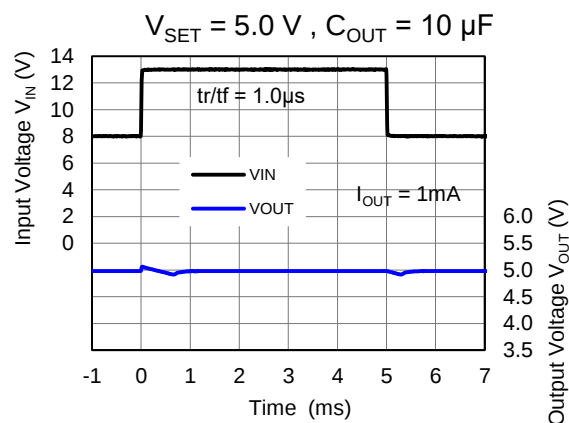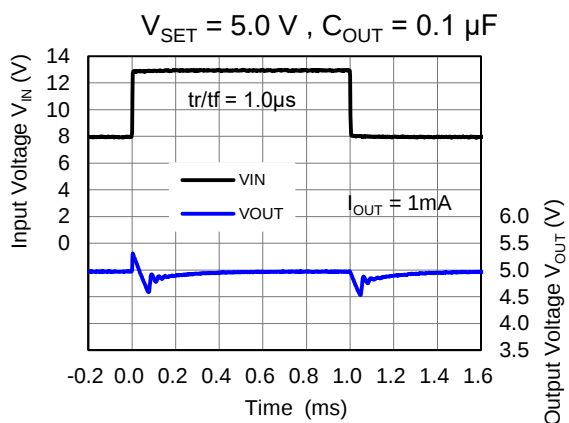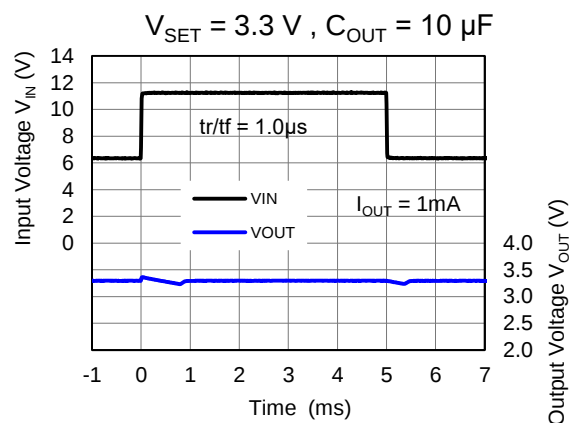
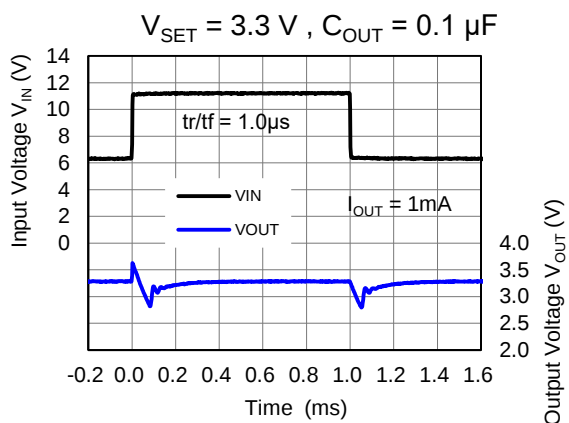


### 9) Load Transient Response ( $T_a = 25^\circ\text{C}$ )

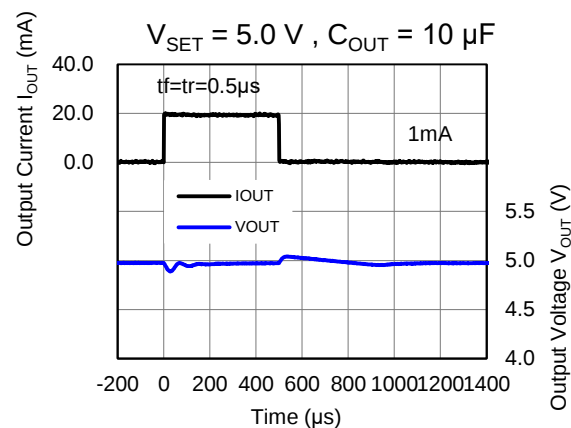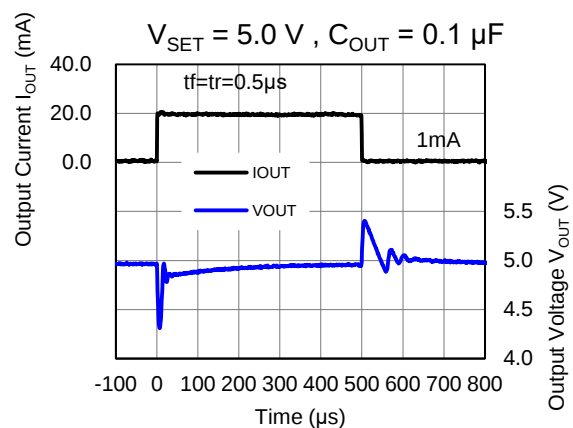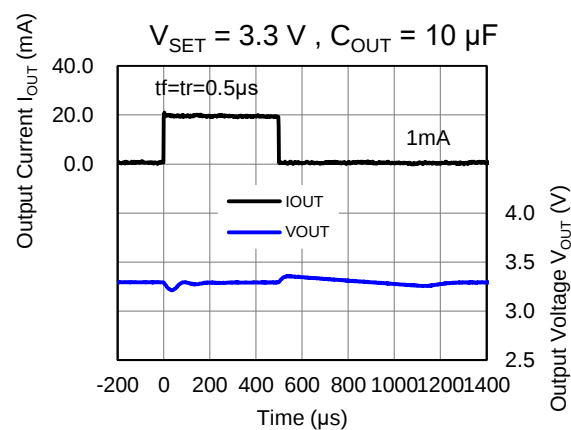
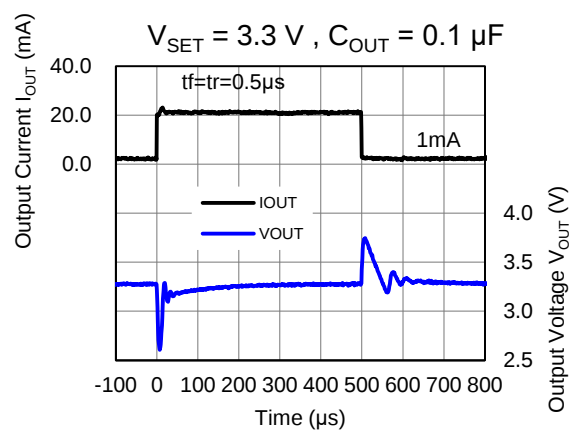


### 10) CE Transient Response ( $T_a = 25^\circ\text{C}$ , $V_{\text{IN}} = 14\text{ V}$ , $I_{\text{OUT}} = 1\text{ mA}$ , $C_{\text{OUT}} = 0.1\text{ }\mu\text{F}/10\text{ }\mu\text{F}$ )

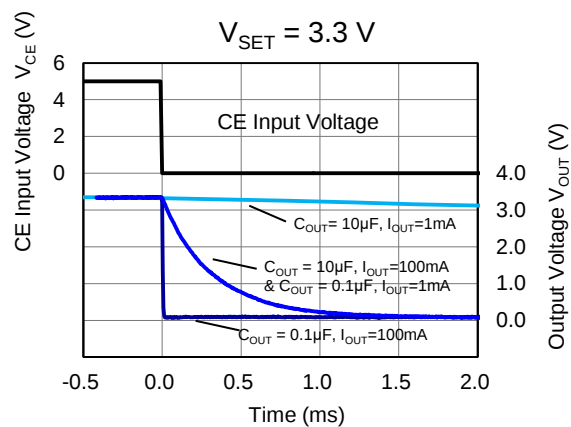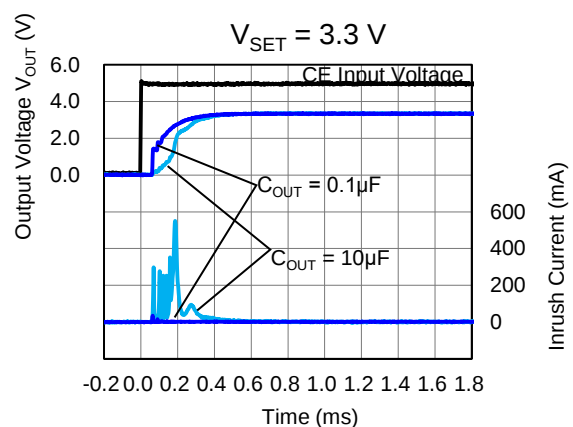





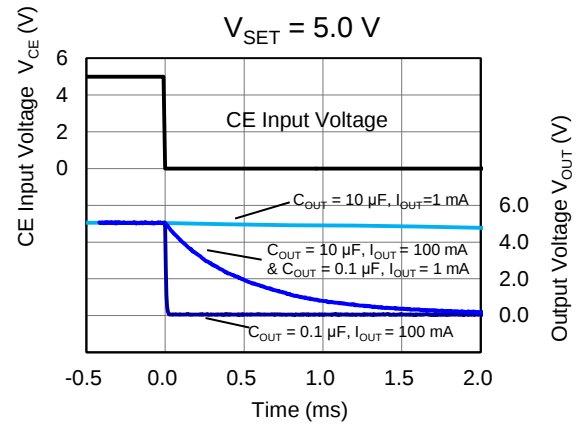
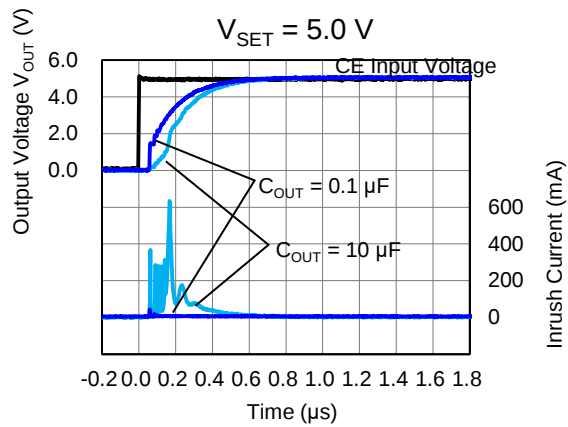








### 11) Load Dump ( $T_a = 25^\circ\text{C}$ )

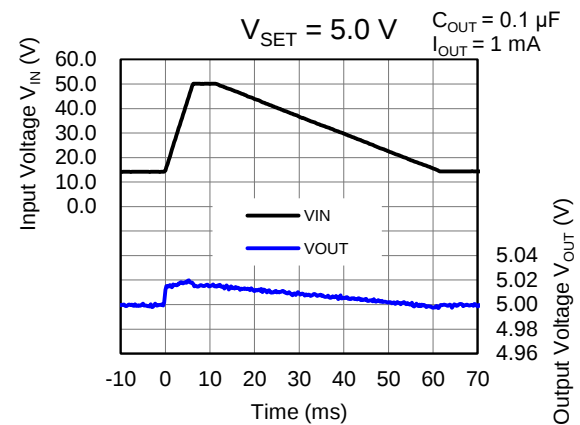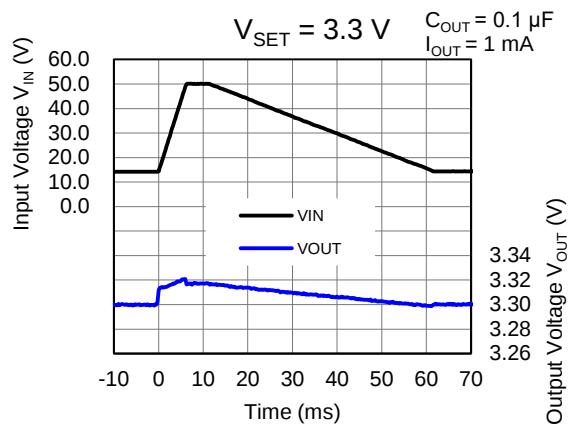


### 12) Cranking ( $T_a = 25^\circ\text{C}$ )

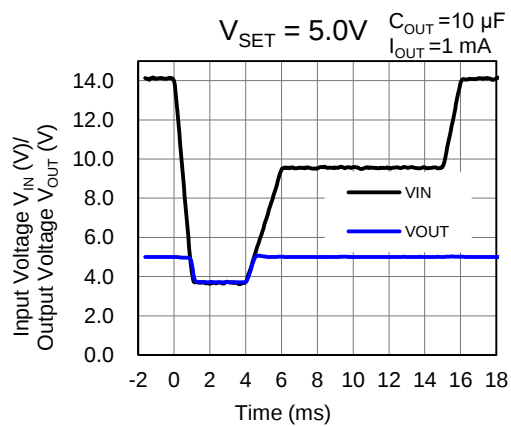

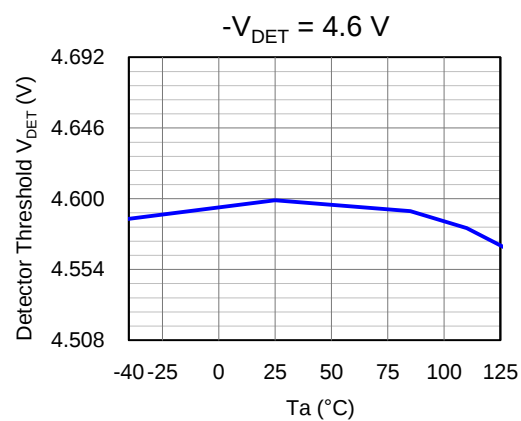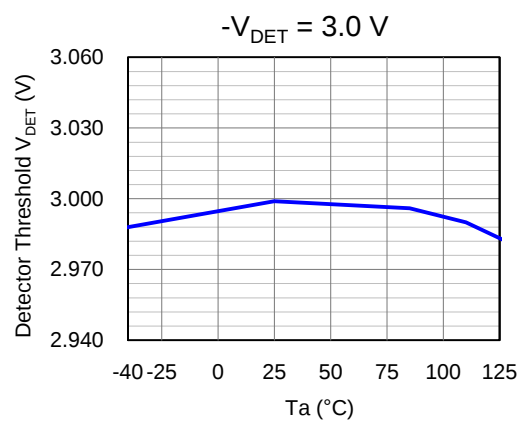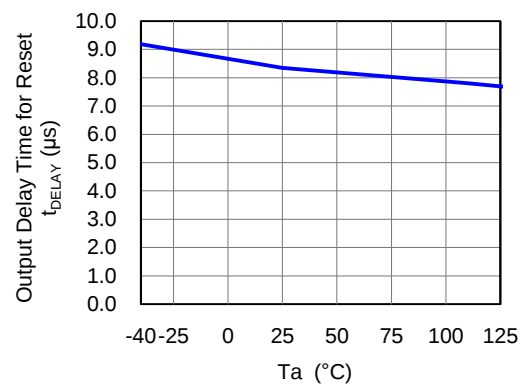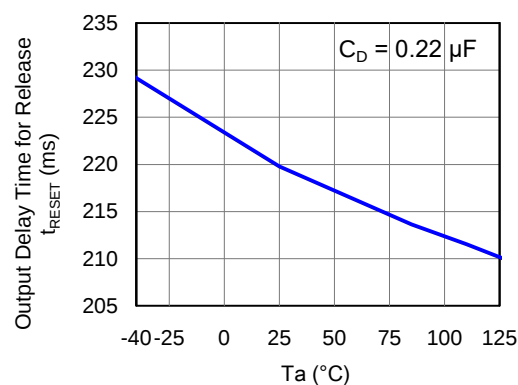
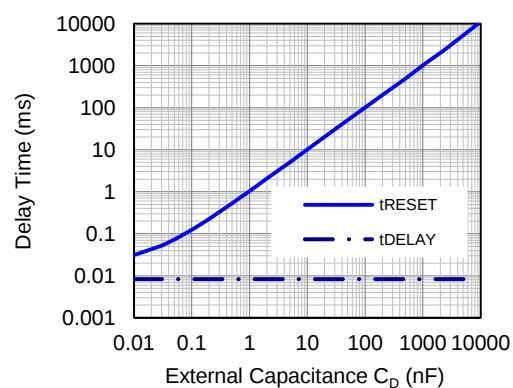
**13) Detection Voltage vs. Ambient Temperature****14) Release Delay Time vs. Ambient Temperature    15) Detection Delay Time vs. Ambient Temperature****16) Release Delay and Detection Delay Time vs. CD Pin External Capacitance**

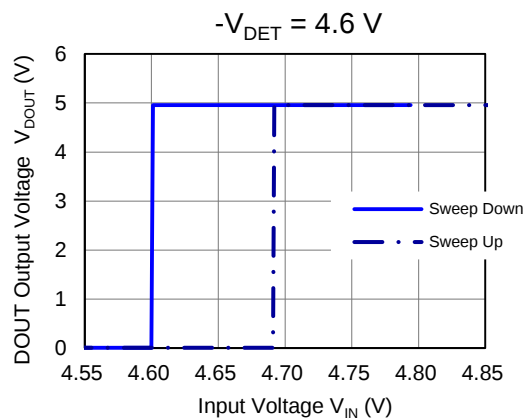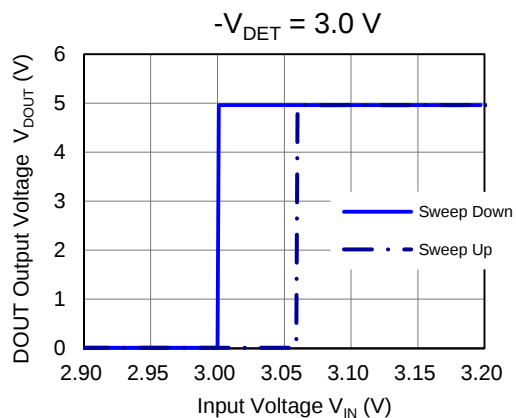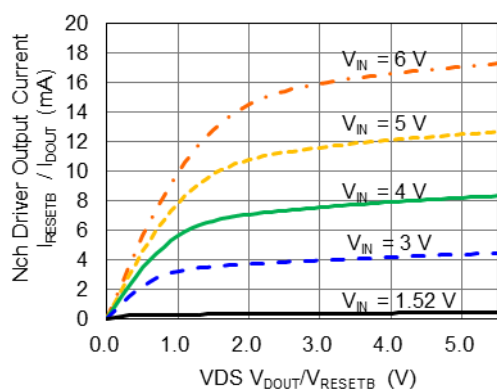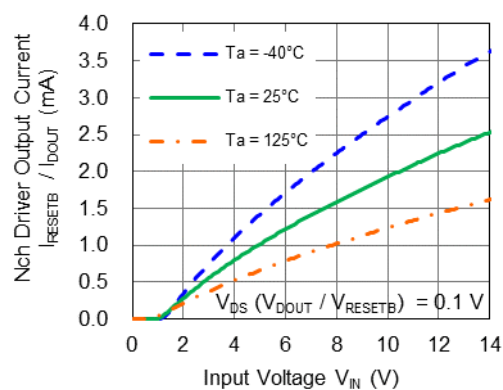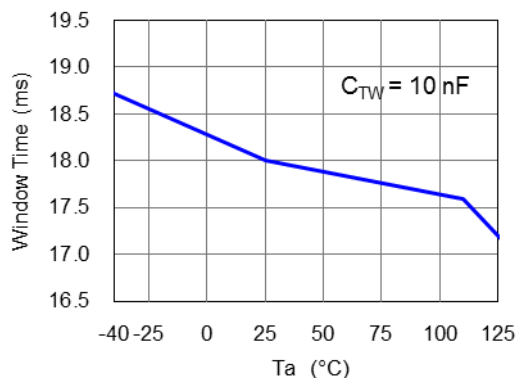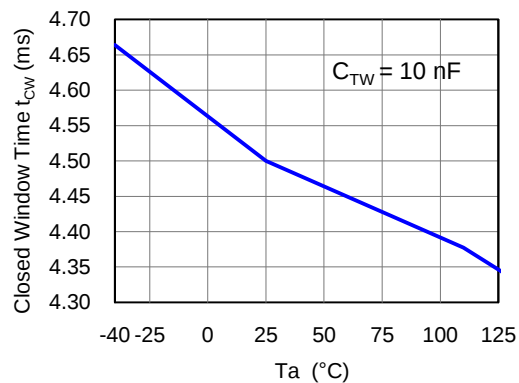**17) DOUT Pin Voltage vs. Input Voltage (DOUT pulled-up to 5 V with 100 kΩ)**

**18) RESETB/DOUT Driver Output Current vs.  $V_{DS}$** 

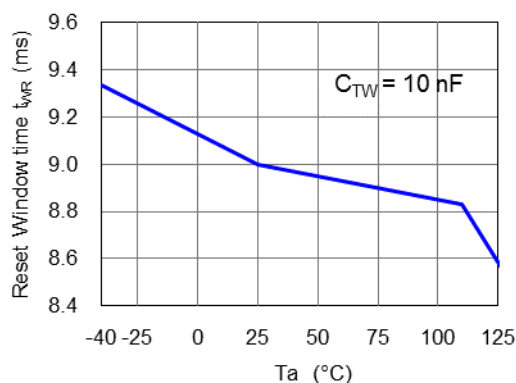**19) RESETB/DOUT Driver Output Current vs. Input Voltage**

**20) Open Window Time/Pulse Ignoring Time vs. Ambient Temperature**

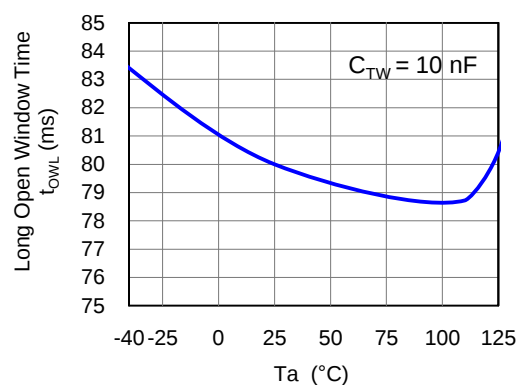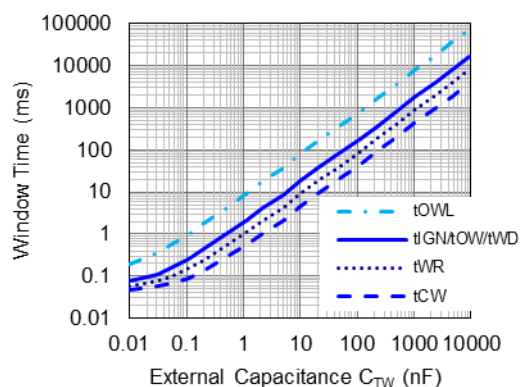**21) Closed Window Time vs. Ambient Temperature**


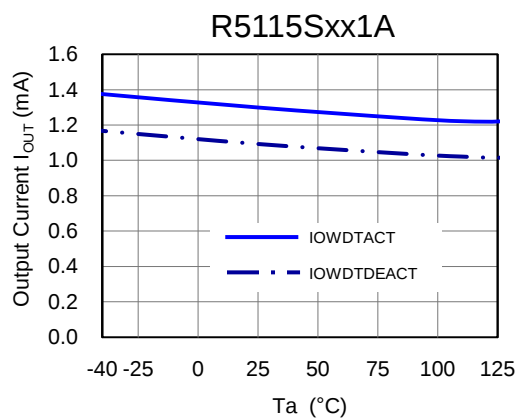
## 22) Reset Time vs. Ambient Temperature




## 23) Long Open Window Time vs. Ambient Temperature

24) WDT  $t_{WD}$  /  $t_{OW}$  /  $t_{CW}$  /  $t_{IGN}$  /  $t_{OWL}$  /  $t_{RST}$  vs. TW Pin External Capacitance


## 25) WDT Monitoring Threshold Load Current vs. Ambient Temperature




## 26) WADJ Pin Current Ratio vs. Ambient Temperature

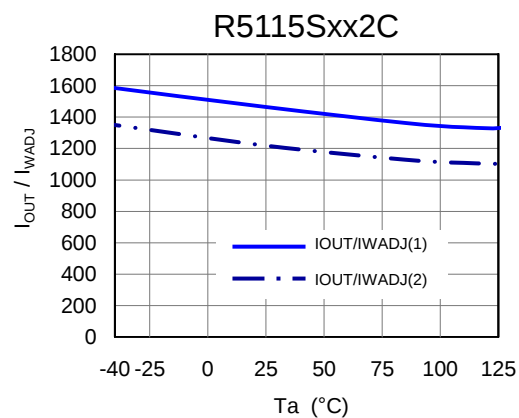

27) WDO Driver Output Current vs.  $V_{DS}$

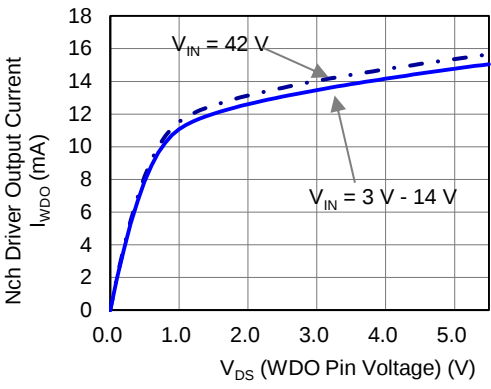

28) WDO Driver Output Current vs. Input Voltage

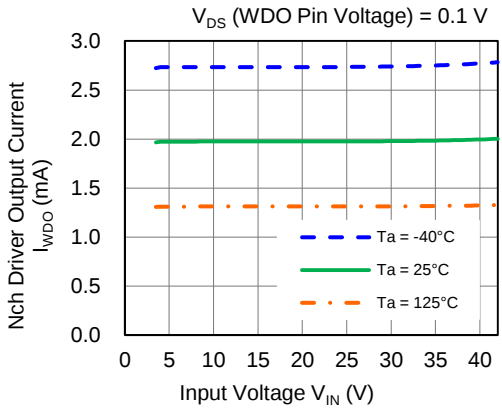

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following measurement conditions are based on JEDEC STD. 51-7.

Measurement Conditions

| Item             | Measurement Conditions                                                                                                                                                                       |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment      | Mounting on Board (Wind Velocity = 0 m/s)                                                                                                                                                    |
| Board Material   | Glass Cloth Epoxy Plastic (Four-Layer Board)                                                                                                                                                 |
| Board Dimensions | 76.2 mm × 114.3 mm × 0.8 mm                                                                                                                                                                  |
| Copper Ratio     | Outer Layer (First Layer): Less than 95% of 50 mm Square<br>Inner Layers (Second and Third Layers): Approx. 100% of 50 mm Square<br>Outer Layer (Fourth Layer): Approx. 100% of 50 mm Square |
| Through-holes    | φ 0.3 mm × 21 pcs                                                                                                                                                                            |


Measurement Result

(Ta = 25°C, Tjmax = 150°C)


| Item                                     | Measurement Result |
|------------------------------------------|--------------------|
| Power Dissipation                        | 3600 mW            |
| Thermal Resistance (θja)                 | θja = 34.5°C/W     |
| Thermal Characterization Parameter (ψjt) | ψjt = 10°C/W       |

θja: Junction-to-Ambient Thermal Resistance


ψjt: Junction-to-Top Thermal Characterization Parameter

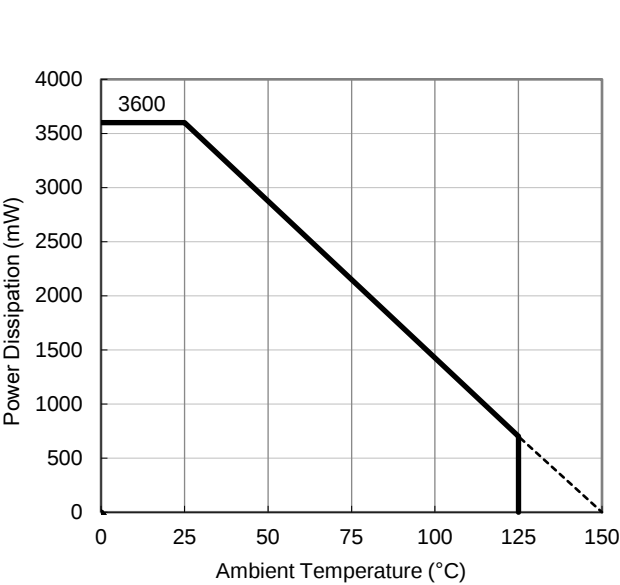

Power Dissipation vs. Ambient Temperature

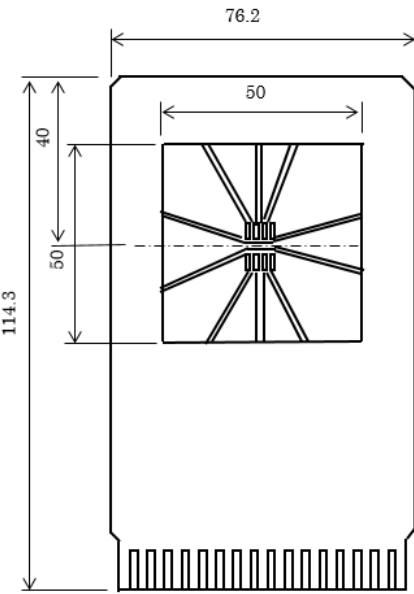

Measurement Board Pattern

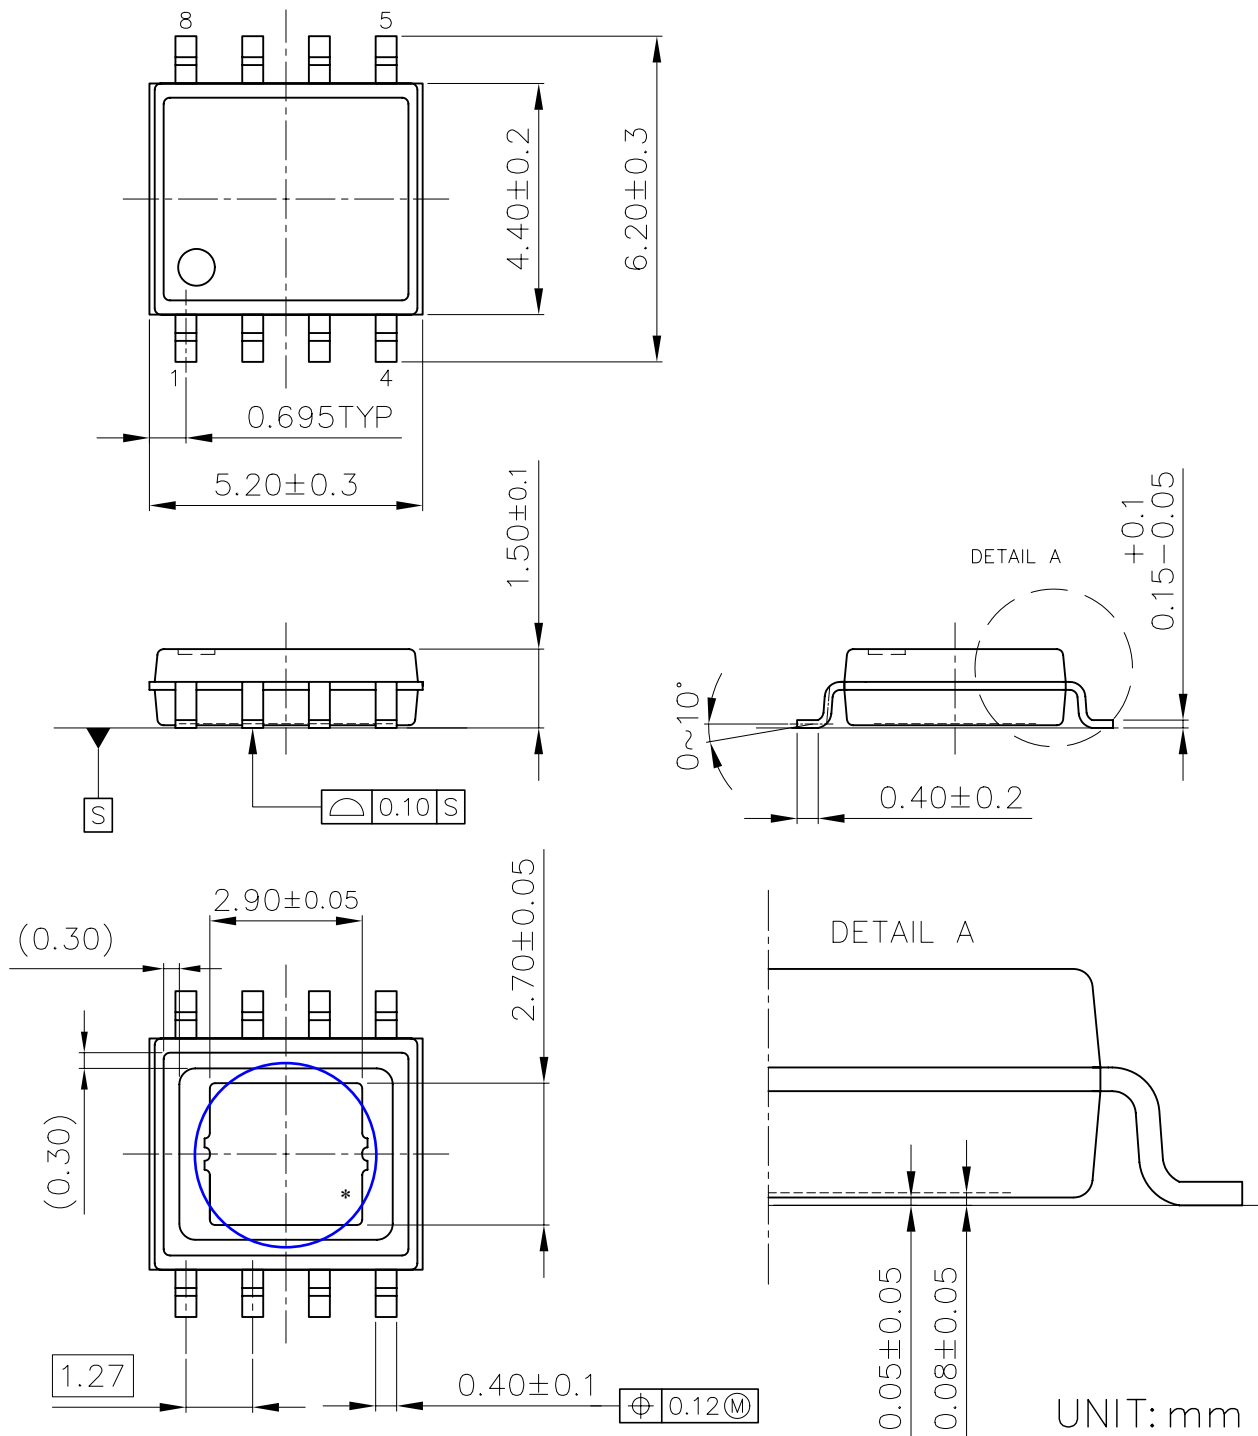

HSOP-8E Package Dimensions

\* The tab on the bottom of the package shown by blue circle is substrate potential (GND). It is recommended that this tab be connected to the ground plane on the board but it is possible to leave the tab floating.

The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following measurement conditions are based on JEDEC STD. 51-7.

Measurement Conditions

| Item             | Measurement Conditions                                                                                                                                                                       |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Environment      | Mounting on Board (Wind Velocity = 0 m/s)                                                                                                                                                    |
| Board Material   | Glass Cloth Epoxy Plastic (Four-Layer Board)                                                                                                                                                 |
| Board Dimensions | 76.2 mm × 114.3 mm × 0.8 mm                                                                                                                                                                  |
| Copper Ratio     | Outer Layer (First Layer): Less than 95% of 50 mm Square<br>Inner Layers (Second and Third Layers): Approx. 100% of 50 mm Square<br>Outer Layer (Fourth Layer): Approx. 100% of 50 mm Square |
| Through-holes    | φ 0.3 mm × 21 pcs                                                                                                                                                                            |


Measurement Result

(Ta = 25°C, Tjmax = 150°C)


| Item                                     | Measurement Result |
|------------------------------------------|--------------------|
| Power Dissipation                        | 3900 mW            |
| Thermal Resistance (θja)                 | θja = 32°C/W       |
| Thermal Characterization Parameter (ψjt) | ψjt = 8°C/W        |

θja: Junction-to-Ambient Thermal Resistance


ψjt: Junction-to-Top Thermal Characterization Parameter

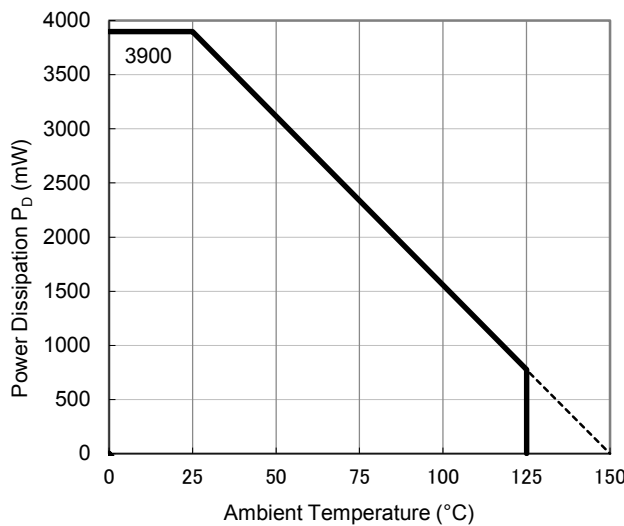

Power Dissipation vs. Ambient Temperature

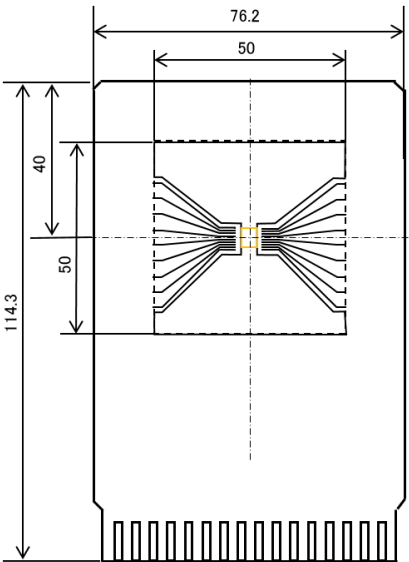

Measurement Board Pattern

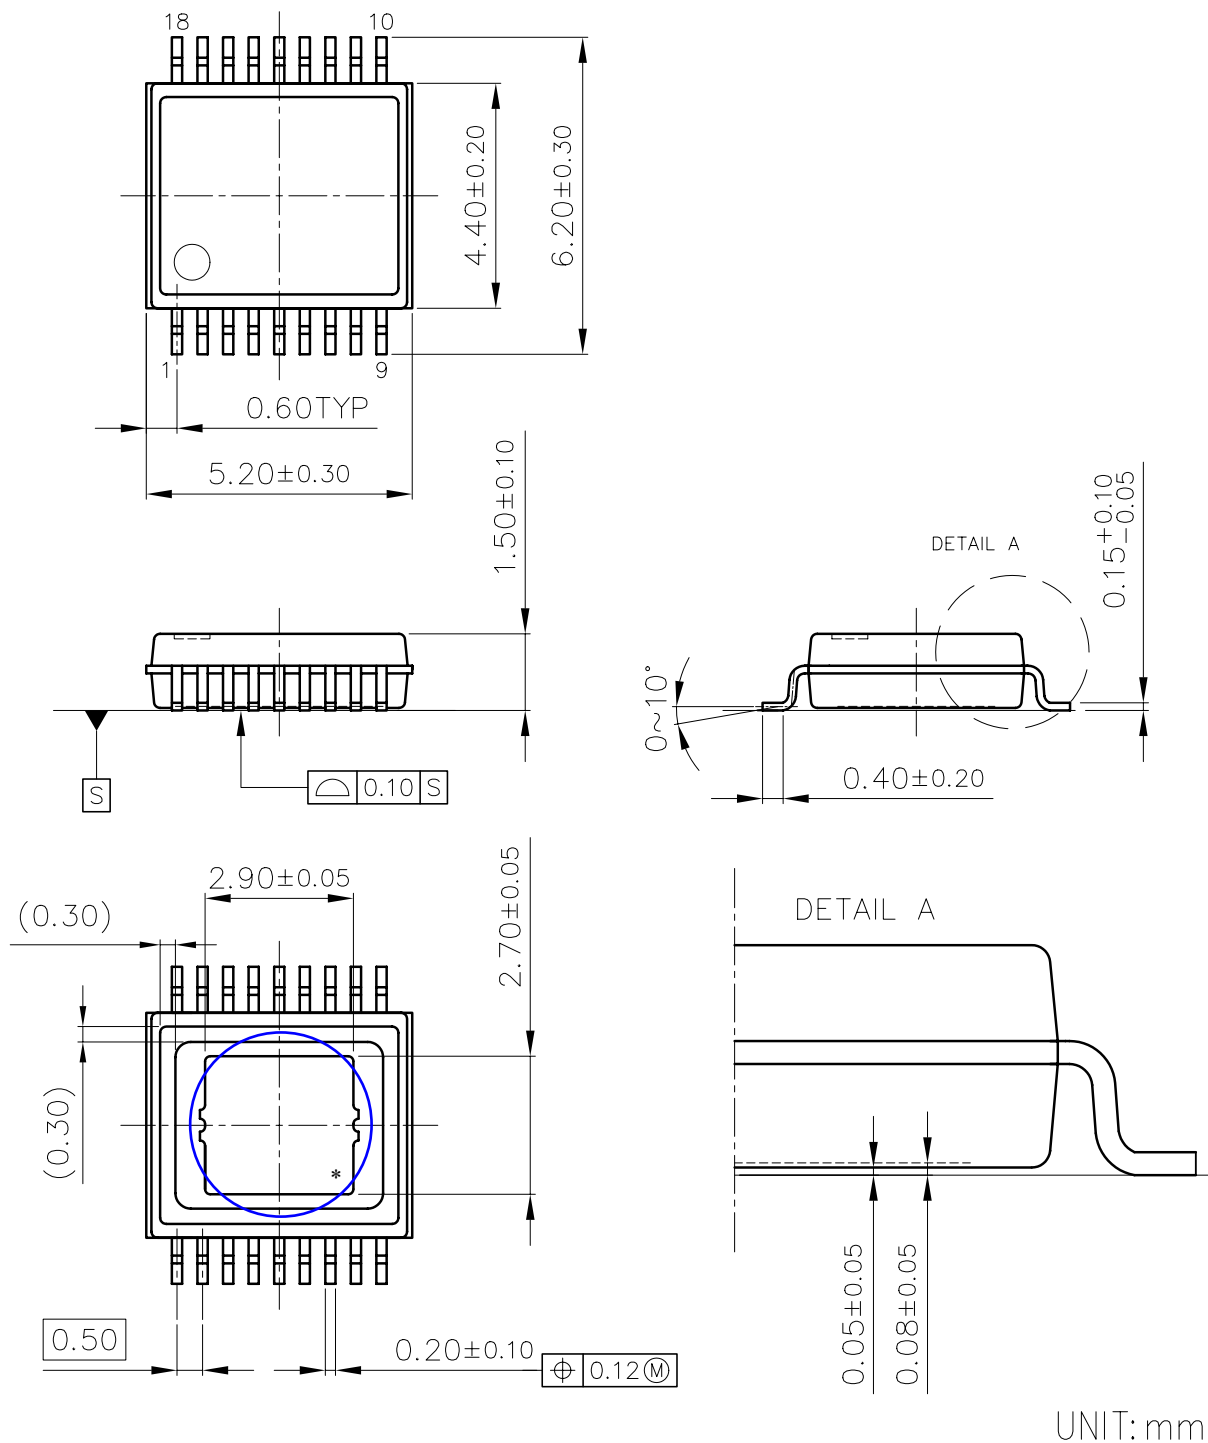

HSOP-18 Package Dimensions

\* The tab on the bottom of the package shown by blue circle is substrate potential (GND). It is recommended that this tab be connected to the ground plane on the board but it is possible to leave the tab floating.



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. The X-ray exposure can influence functions and characteristics of the products. Confirm the product functions and characteristics in the evaluation stage.
9. WLCSP products should be used in light shielded environments. The light exposure can influence functions and characteristics of the products under operation or storage.
10. There can be variation in the marking when different AOI (Automated Optical Inspection) equipment is used. In the case of recognizing the marking characteristic with AOI, please contact Ricoh sales or our distributor before attempting to use AOI.
11. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



**Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.**

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

**RICOH** RICOH ELECTRONIC DEVICES CO., LTD.

<https://www.e-devices.ricoh.co.jp/en/>

#### Sales & Support Offices

##### **Ricoh Electronic Devices Co., Ltd.**

##### **Shin-Yokohama Office (International Sales)**

2-3, Shin-Yokohama 3-chome, Kohoku-ku, Yokohama-shi, Kanagawa, 222-8530, Japan  
Phone: +81-50-3814-7687 Fax: +81-45-474-0074

##### **Ricoh Americas Holdings, Inc.**

675 Campbell Technology Parkway, Suite 200 Campbell, CA 95008, U.S.A.  
Phone: +1-408-610-3105

##### **Ricoh Europe (Netherlands) B.V.**

##### **Semiconductor Support Centre**

Prof. W.H. Keesomlean 1, 1183 DJ Amstelveen, The Netherlands  
Phone: +31-20-5474-309

##### **Ricoh International B.V. - German Branch**

##### **Semiconductor Sales and Support Centre**

Oberrather Strasse 6, 40472 Düsseldorf, Germany  
Phone: +49-211-6546-0

##### **Ricoh Electronic Devices Korea Co., Ltd.**

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

##### **Ricoh Electronic Devices Shanghai Co., Ltd.**

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203,  
People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

##### **Ricoh Electronic Devices Shanghai Co., Ltd.**

##### **Shenzhen Branch**

1205, Block D(Jinlong Building), Kingkey 100, Hongbao Road, Luohu District,  
Shenzhen, China  
Phone: +86-755-8348-7600 Ext 225

##### **Ricoh Electronic Devices Co., Ltd.**

##### **Taipei office**

Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ricoch Electronics:](#)

[R5115S012C-E2-YE](#) [R5115S011A-E2-YE](#) [R5115S111A-E2-YE](#)



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литера Н,  
помещение 100-Н Офис 331