

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


5009130702

Status:

Active

Description:

0.40mm (.016") Pitch SlimStack™ Board-to-Board PCB Receptacle, Surface Mount, Dual Row, Vertical Stacking, Mated Height of 1.80mm (071"), with Solder Tabs, 70 Circuits

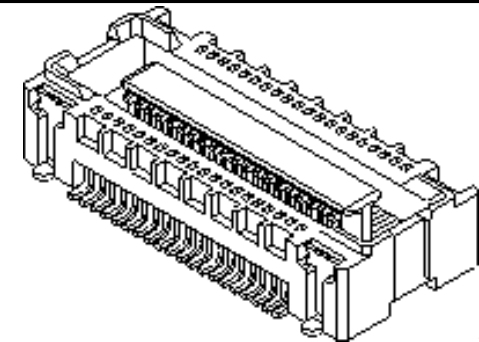

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-500913-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	PCB Receptacles
Series	500913
Application	Board-to-Board
Comments	Solder Tab Plating: Lead-Free, Tin
Product Name	SlimStack™

Physical

Circuits (Loaded)	70
Circuits (maximum)	70
Color - Resin	Black
Durability (mating cycles max)	30
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Mated Height (in)	0.071 In
Mated Height (mm)	1.80 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PC Tail Length (in)	0.000 In
PC Tail Length (mm)	0.00 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.000 In
PCB Thickness Recommended (mm)	0.00 mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.016 In
Pitch - Mating Interface (mm)	0.40 mm
Pitch - Term. Interface (in)	0.016 In
Pitch - Term. Interface (mm)	0.40 mm
Plating min: Mating (µin)	10
Plating min: Mating (µm)	0.25
Plating min: Termination (µin)	2
Plating min: Termination (µm)	0.05
Polarized to Mating Part	No
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-25°C to +85°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	0.3A
-------------------------------	------

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
500913Series

Mates With
55909 PCB Header

Voltage - Maximum

50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Packaging Specification

SPK-500913-001

Product Specification

PS-500913-001, RPS-500913-001, RPS-500913-003,
RPS-500913-005

Sales Drawing

SD-500913-001, SD-500913-002

This document was generated on 05/21/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

注記 NOTES:

1. 使用材料 MATERIAL
ハウジング：液晶ポリマー（LCP） ガラス充填 UL94V-0（黒）
HOUSING: LIQUID CRYSTAL POLYMER(GLASS FILLED)
UL94V-0 (COLOR:BLACK)
ターミナル：リン青銅（t=0.15）
TERMINAL: PHOSPHOR BRONZE (t=0.15)
金具：リン青銅（t=0.15）
FITTING NAIL: PHOSPHOR BRONZE (t=0.15)

2. メッキ仕様 PLATING
ターミナル TERMINAL
金メッキ 0.2マイクロメートル以上（コンタクト部）
GOLD 0.2MICROMETER MINIMUM (CONTACT AREA)
金メッキ 0.4マイクロメートル以下（テール部）
GOLD 0.4MICROMETER MAXIMUM (TAIL AREA)
下地メッキ：ニッケルメッキ 1.5マイクロメートル以上
UNDER PLATING : NICKEL 1.5MICROMETER MINIMUM
*コンタクト部とテール部はニッケルメッキによって分断されている金メッキです。
DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.

金具 FITTING NAIL
錫メッキ 1.0マイクロメートル以上
TIN PLATING 1.0MICROMETER MINIMUM
下地メッキ：ニッケルメッキ 1.0マイクロメートル以上
UNDER PLATING : NICKEL 1.0MICROMETER MINIMUM


△3 (全極数/2) = 偶数の場合に適用。
APPLY FOR (CIRCUIT/2)=EVEN.

4. 嵌合相手：55909シリーズ
MATE WITH : 55909 SERIES.

5. テール及び金具の平坦度は、0.1以下
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1MAXIMUM

21.5	19.6	23.1	500913-1008	100
19.5	17.6	21.1	500913-0908	90
15.5	13.6	17.1	500913-0708	70
13.5	11.6	15.1	500913-0608	60
11.5	9.6	13.1	500913-0508	50
9.5	7.6	11.1	500913-0408	40
7.5	5.6	9.1	500913-0308	30
6.3	4.4	7.9	500913-0248	24
C	B	A	MATERIAL NO.	CIRCUIT

500913-***8		MODEL NO.	
N STYLE ONLY	SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
DATE 2004/04/19	TITLE 0.4 B-TO-B CONN REC HSG ASSY (HGT=1.8MM) -LEAD FREE-		
DATE 2004/04/19			
DATE 2004/04/19	MOLEX INCORPORATED		
CHART	DOCUMENT NO. SD-500913-001		SHEET NO. 1 OF 2
DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

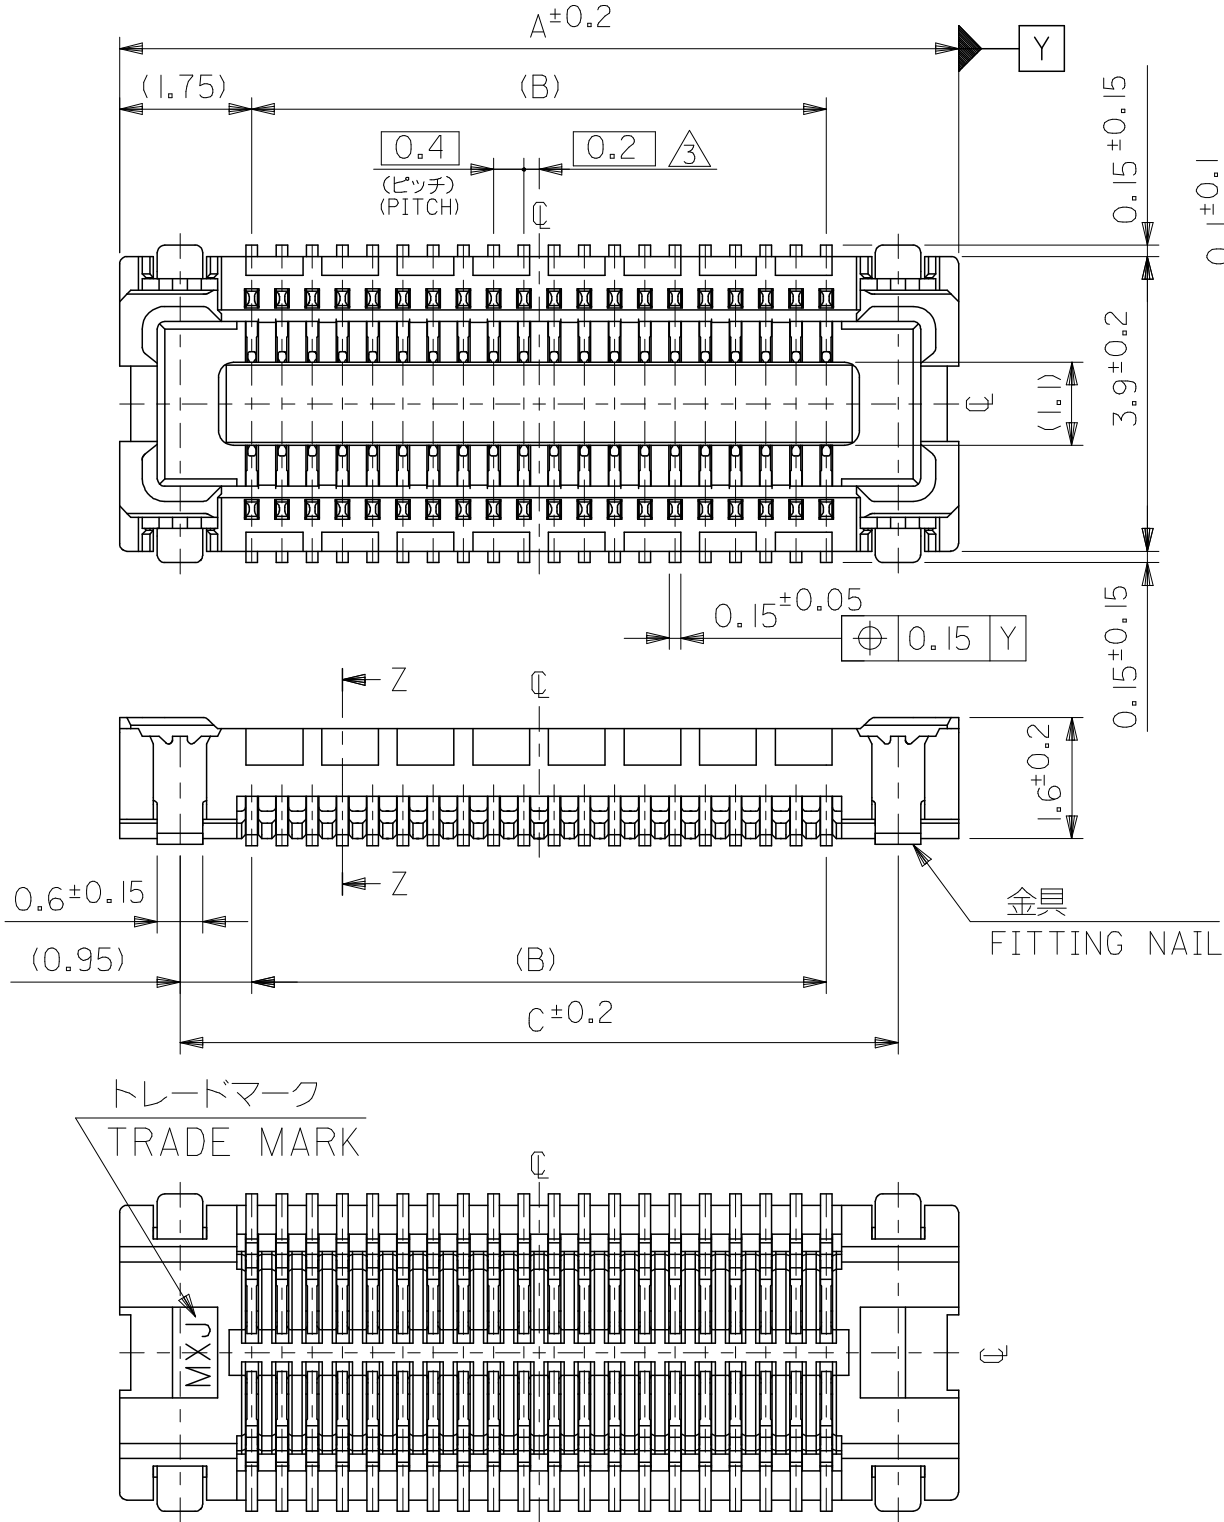

REVISED		EC NO: J2007-1419		2006/11/16	
□		DRWN:WABEI		2006/11/20	
		CHKD:KTOYODA			
		APPR:NUKITA		2006/11/21	
REV	DESCRIPTION			GENERAL TOLERANCES (UNLESS SPECIFIED)	
				10 ^{UNDER}	± ---
				10 ^{OVER} 30 ^{UNDER}	± ---
				30 ^{OVER}	± ---
				ANGULAR ± --- °	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

F


E

D


C

B

A

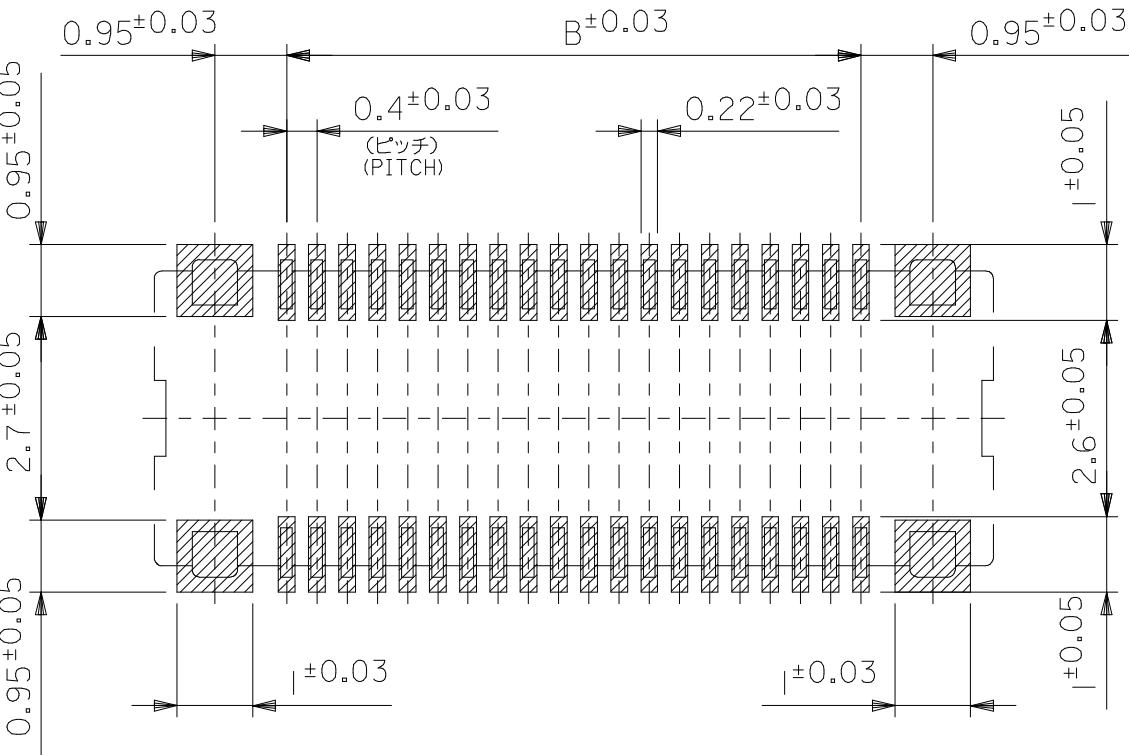

参考基板レイアウト (マウント面)
P.C.BOARD PATTERN DIMENSION. (REFERENCE)
(MOUNTING AREA)

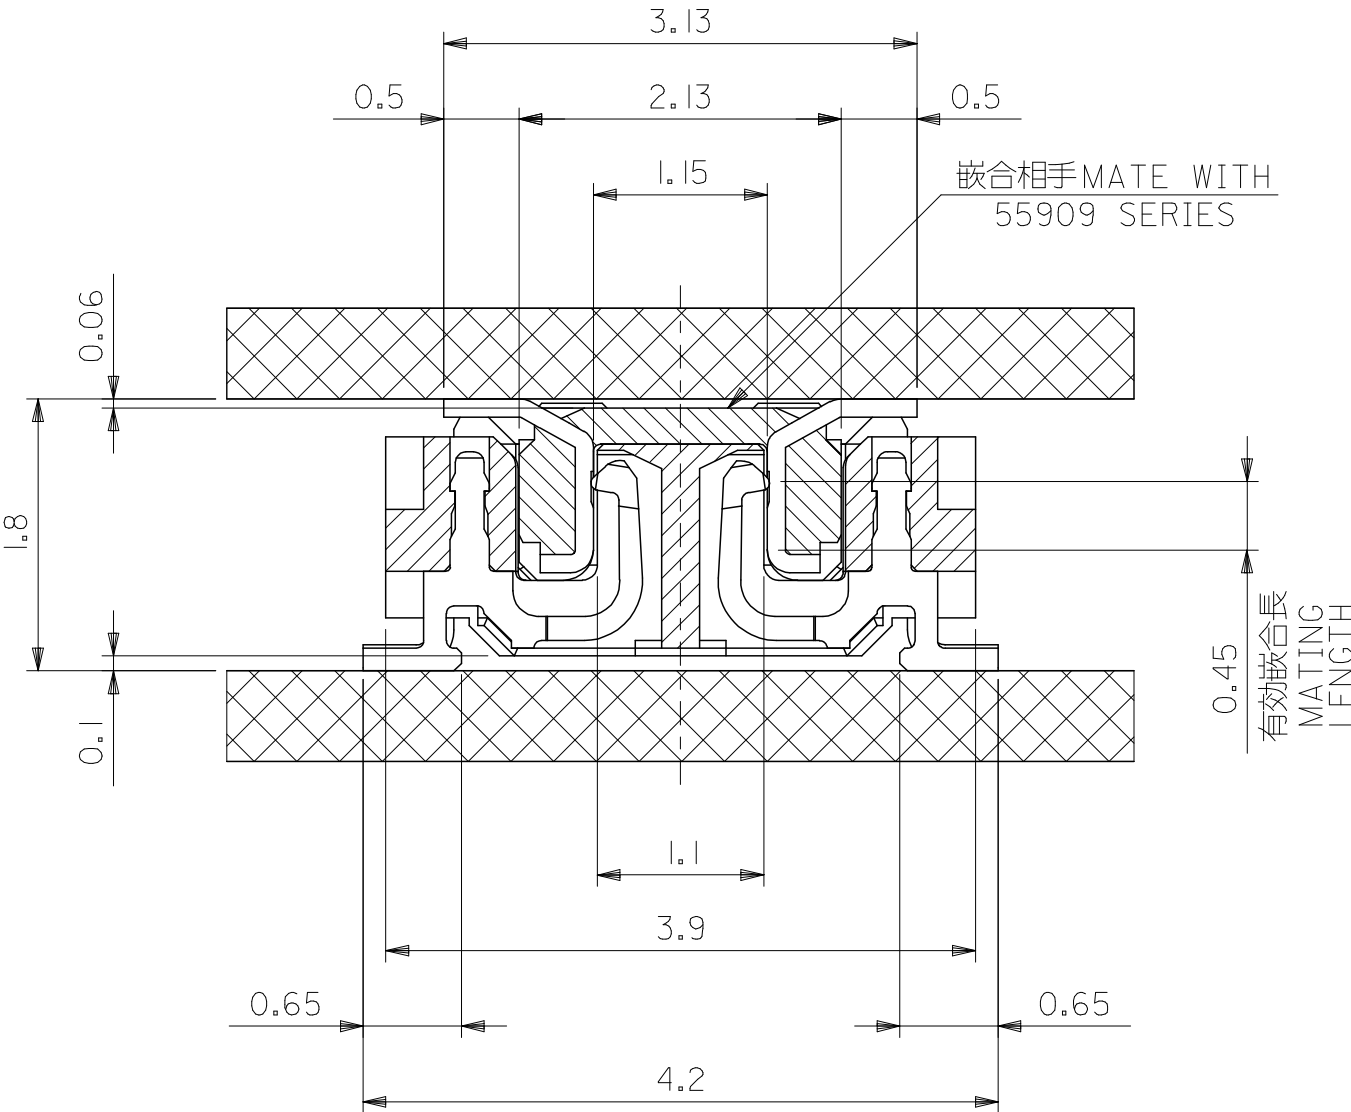

嵌合断面図 (参考)
MATED DRAWING (REFERENCE)

REVISED	EC NO: J2007-1419	2006/11/16	2006/11/20	2006/11/21
	DRWN:MNABEI	2006/11/16	2006/11/20	2006/11/21
	CHKD:KTOYODA	2006/11/16	2006/11/20	2006/11/21
	APPR:NUKITA	2006/11/16	2006/11/20	2006/11/21
	REV	DESCRIPTION	DATE	DATE

GENERAL TOLERANCES (UNLESS SPECIFIED)	
10 UNDER	± ---
10 OVER 30 UNDER	± ---
30 OVER	± ---
ANGULAR	± --- °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	
DRAWN BY	DATE
R. SUMIYA	2004/04/19
CHECKED BY	DATE
M. SASAO	2004/04/19
APPROVED BY	DATE
M. SASAO	2004/04/19
MATERIAL NO.	SEE CHART
SIZE	A3

500913-***8		MODEL NO.	
SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
TITLE		0.4 B-TO-B CONN REC HSG ASSY (HGT=1.8MM) -LEAD FREE-	
molex MOLEX INCORPORATED		DOCUMENT NO. SD-500913-001	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SHEET NO. 2 OF 2	

F

E

D


C

B



A

NOTES

- 製品詳細寸法については製品単体図面SD-500913-001を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING NO. SD-500913-001.
- 梱包数量：1500個／リール
NUMBER OF CONNECTORS：1500PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

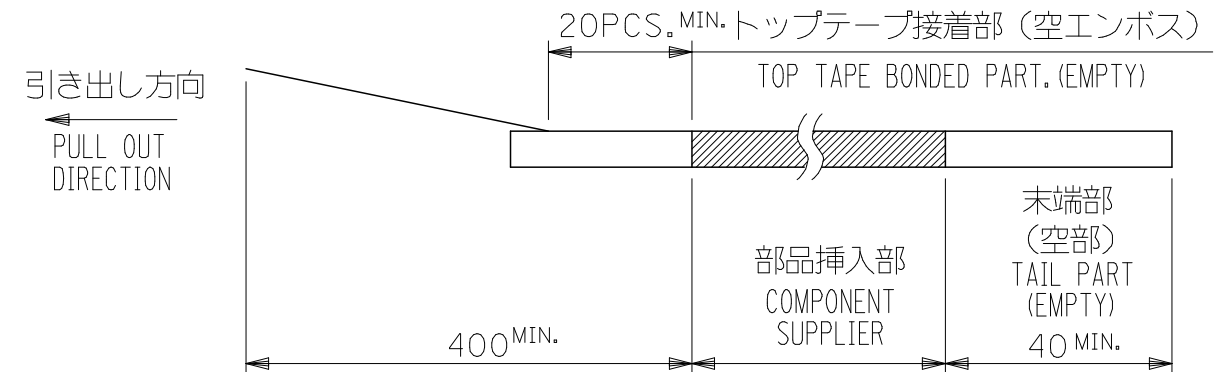

- 材料 MATERIAL
キャリアテープ (CARRIER TAPE)：ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE)：PET , PE , PEF
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

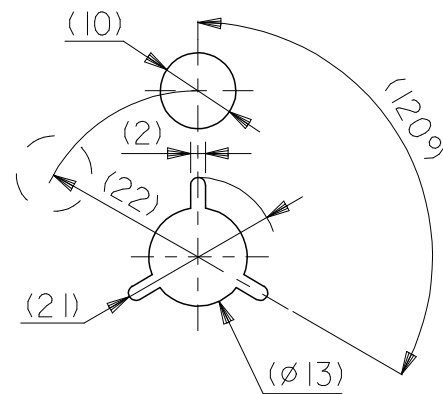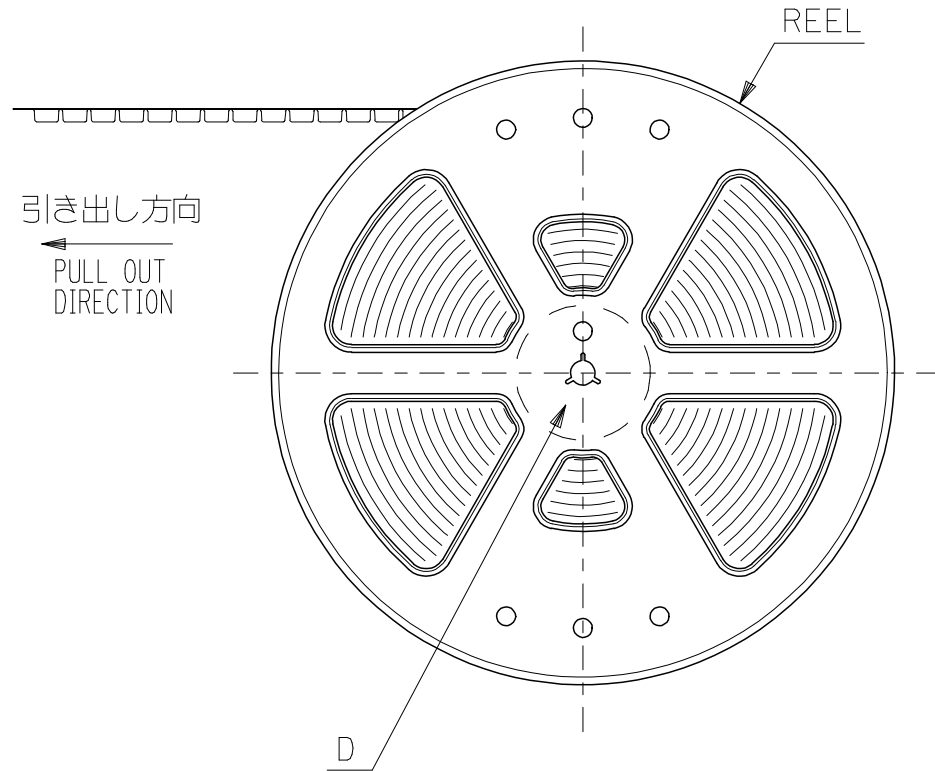

DETAIL D

REVISED
EC NO: J2007-1419
DRAWN: MNABEI 2006/11/16
CHKD: KTOYODA 2006/11/20
APPR: NUKITA 2006/11/21

DESCRIPTION
REV

GENERAL TOLERANCES
(UNLESS SPECIFIED)

10 UNDER ± ---

10 OVER 30 UNDER ± ---

30 OVER ± ---

ANGULAR ± --- °

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY DATE

R. SUMIYA 2004/04/19

CHECKED BY DATE

M. SASAO 2004/04/19

APPROVED BY DATE

M. SASAO 2004/04/19

MATERIAL NO.

SEE CHART

SIZE
A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

500913-***2

SCALE

DESIGN UNITS
METRIC

MODEL NO.

THIRD ANGLE
PROJECTION

TITLE
0.4 B-TO-B REC HSG ASSY
(HGT=1.8) EMBSTP PKG
-LEAD FREE-

MOLEX MOLEX INCORPORATED

DOCUMENT NO.

SD-500913-002

SHEET NO.

1 OF 4

F

E

D

C

B

A

F


E

D

C

B

A

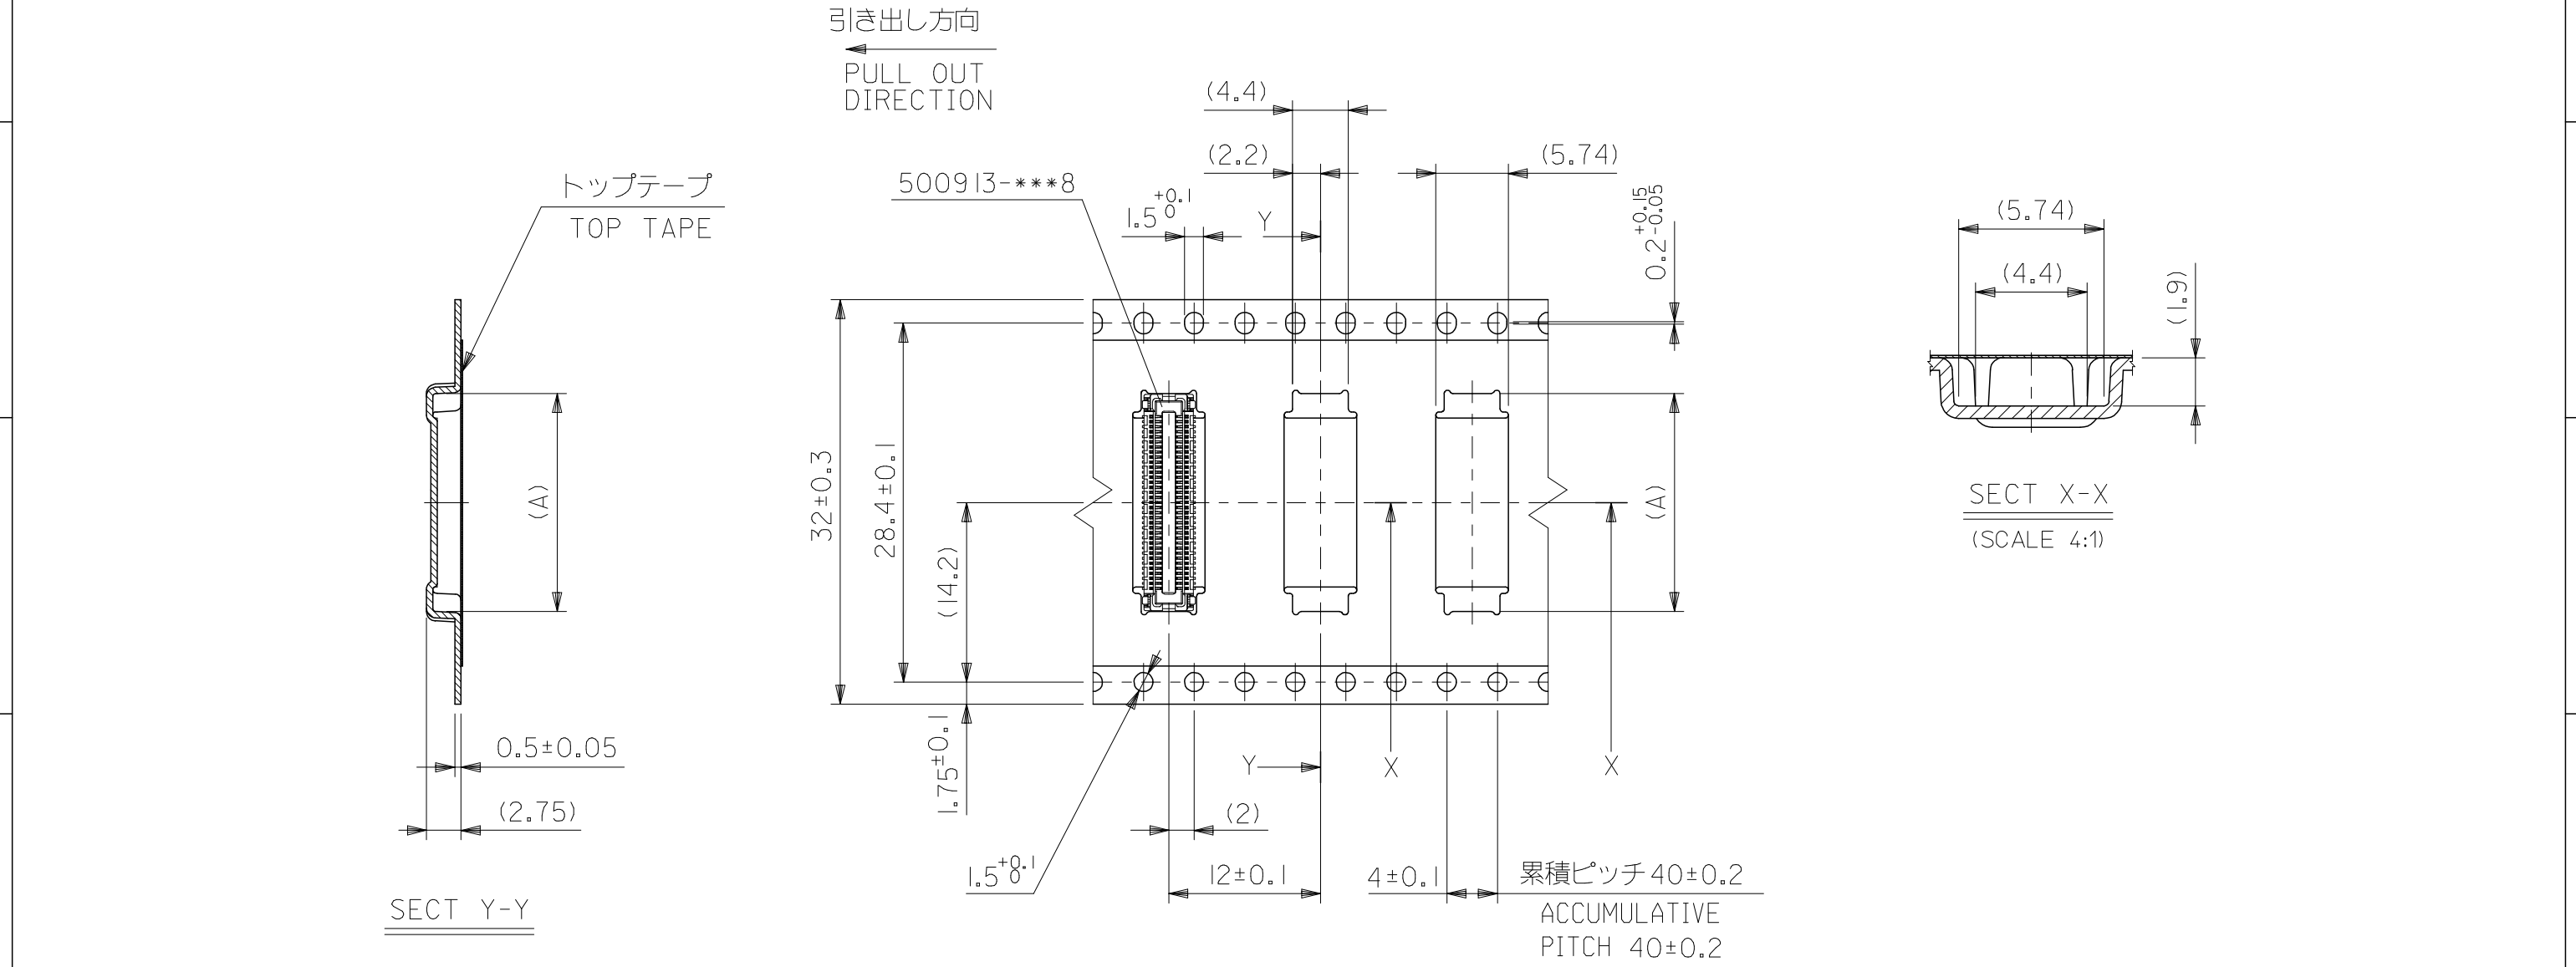

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

32	41.4	37.4	21.26	500913-0902	90
	37.4	33.4	17.26	500913-0702	70
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL NO.	CIRCUIT

REVISED EC NO: J2007-1419 DRWN:MNABEI CHKD:KTOYODA APPR:NUKITA		DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		500913-***2		MODEL NO.	
					MM ONLY		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	
			10 UNDER		± ---	DRAWN BY		DATE		
			10 OVER 30 UNDER		± ---	CHECKED BY		DATE		
			30 OVER		± ---	APPROVED BY		DATE	 MOLEX INCORPORATED	
			ANGULAR ± --- °		M. SASAO		2004/04/19			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.			SHEET NO.
		SEE CHART		SD-500913-002			3 OF 4			
		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

F

E

D

C

B

A

F


E

D

C

B

A

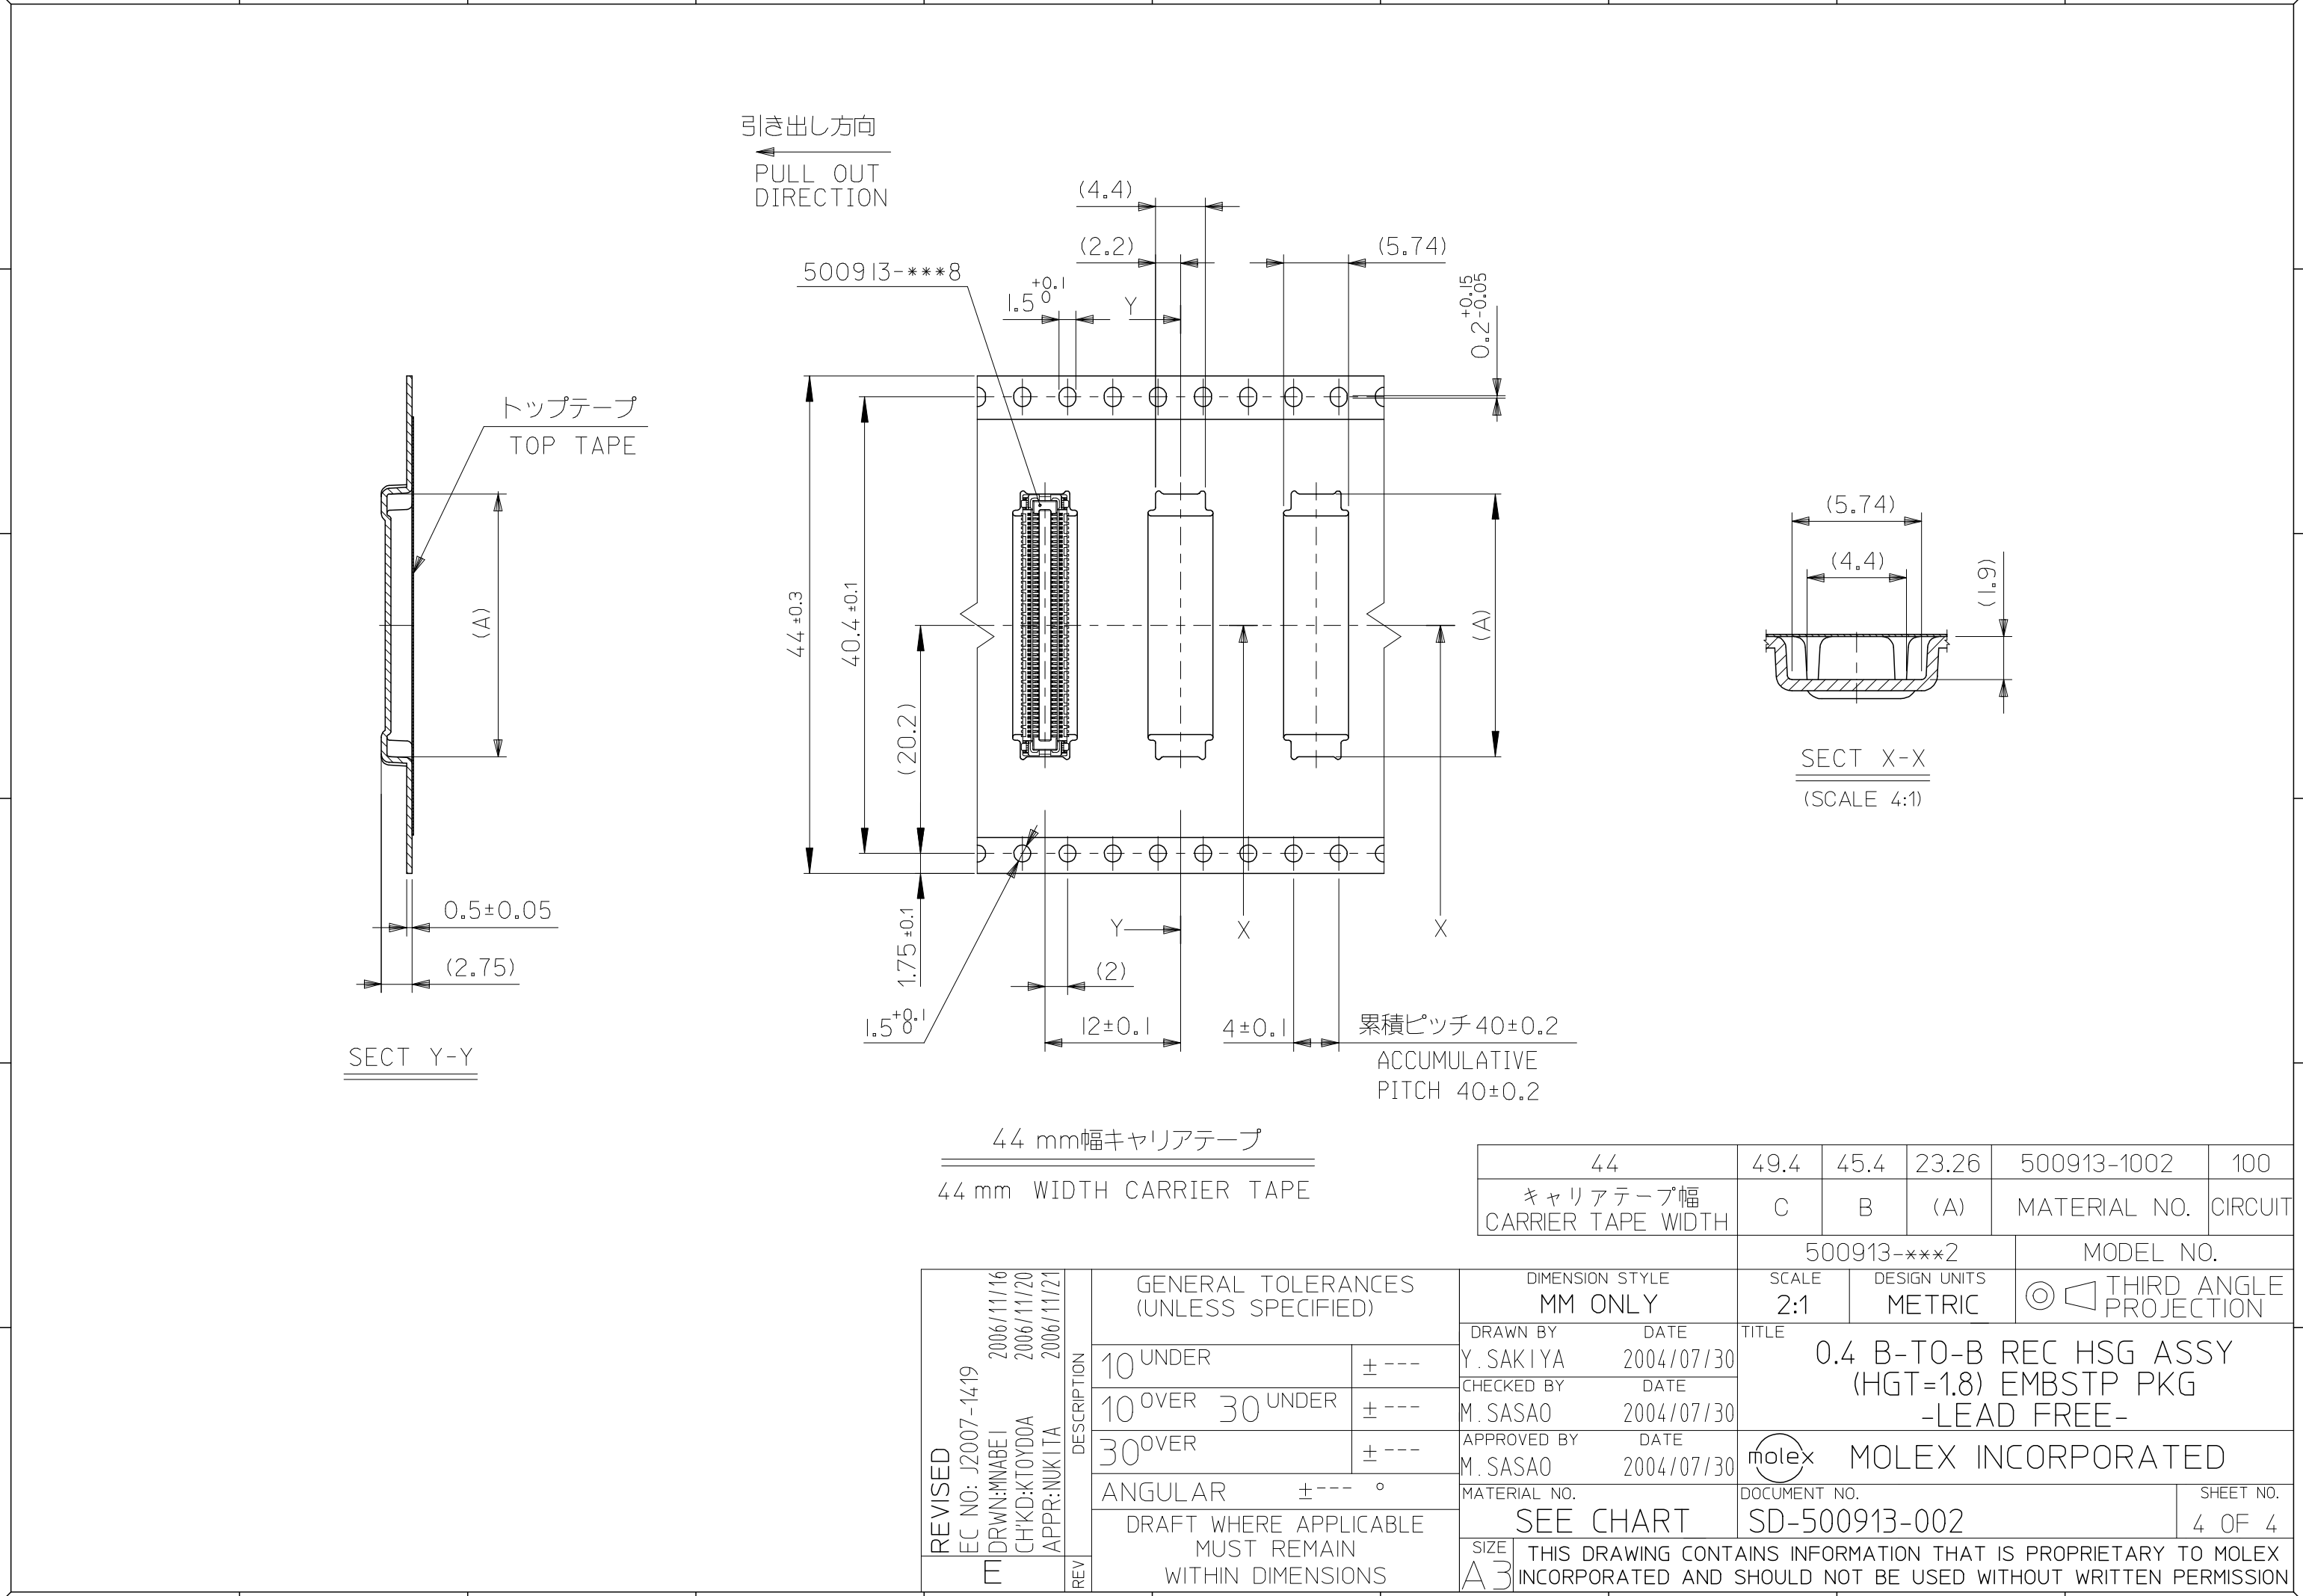



**Стандарт
Электрон
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

Наши контакты:

Телефон: +7 812 627 14 35

Электронная почта: sales@st-electron.ru

Адрес: 198099, Санкт-Петербург,
Промышленная ул, дом № 19, литера Н,
помещение 100-Н Офис 331