

## Full-Swing Input and Output type Quad Operational Amplifier


### ■ GENERAL DESCRIPTION

**NJM2734** is single supply quad operational amplifier with full swing input and output, operates from 1.8V.

Input and Output Full Swing provides wide dynamic range, is from ground to power supply level. In addition to ground sensing applications, **NJM2734** enable to be applied to Hi-side sensing applications.

The features are low noise and low operating voltage for battery management, portable audio applications, and others.


### ■ PACKAGE OUTLINE



NJM2734D



NJM2734M



NJM2734E




NJM2734V

### ■ FEATURES

- Operating Voltage : 1.8 to 6.0V
- Input Full-Swing :  $V_{ICM} = 0$  to 5.0V, at  $V^+ = 5V$
- Output Full-Swing :  $V_{OH} \geq 4.9V / V_{OL} \leq 0.1V$ , at  $V^+ = 5V, R_L = 20k\Omega$
- Load Drivability :  $V_{OH} \geq 4.75V / V_{OL} \leq 0.25V$ , at  $V^+ = 5V, R_L = 2k\Omega$
- Offset Voltage : 5mV max.
- Slew Rate : 0.4V/ $\mu$ s typ.
- Low Input Voltage Noise : 10nV/ $\sqrt{Hz}$  typ.
- Adequate phase margin :  $\Phi_M = 75deg$ . typ., at  $R_L = 2k\Omega$
- Bipolar Technology
- Package Outline : DIP14, DMP14, EMP14, SSOP14

### ■ PIN CONFIGURATION

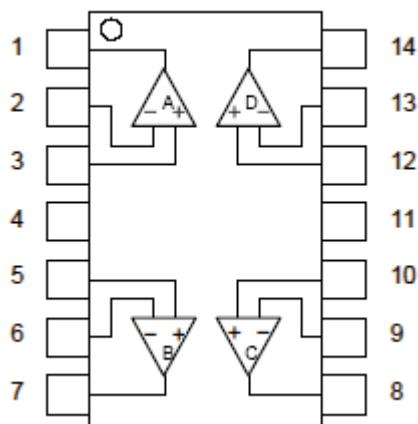

#### PIN FUNCTION

1. A OUTPUT	8. C OUTPUT
2. A -INPUT	9. C -INPUT
3. A +INPUT	10. A +INPUT
4. V <sup>+</sup>	11. GND
5. B +INPUT	12. D +INPUT
6. B -INPUT	13. D -INPUT
7. B OUTPUT	14. D OUTPUT

NJM2734D

NJM2734M

NJM2734E

NJM2734V

# NJM2734

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)			
PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	7.0	V
Differential Input Voltage Range	V <sub>ID</sub>	±1.0 (Note1)	V
Common Mode Input Voltage Range	V <sub>IC</sub>	0 ~ 7.0 (Note1)	V
Power Dissipation	P <sub>D</sub>	(DIP14) 700 (DMP14) 520 (Note2) (EMP14) 720 (Note2) (SSOP14) 450 (Note2)	mW
Operating Temperature Range	T <sub>opr</sub>	-40~+85	°C
Storage Temperature Range	T <sub>stg</sub>	-40~+125	°C

(Note1) For supply voltage less than 7V, the absolute maximum input voltage is equal to the supply voltage.

(Note2) On the PCB " EIA/JEDEC (76.2×114.3×1.6mm, two layers, FR-4)"

## ■ RECOMMENDED OPERATING CONDITION

(Ta=25°C)			
PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V <sup>+</sup>	1.8 to 6.0	V

## ■ ELECTRICAL CHARACTERISTICS (V<sup>+</sup>=5V, Ta=25°C)

### •DC CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I <sub>CC</sub>	No signal applied	-	1.2	1.8	mA
Input Offset Voltage	V <sub>IO</sub>		-	1	5	mV
Input Bias Current	I <sub>B</sub>		-	50	250	nA
Input Offset Current	I <sub>IO</sub>		-	5	100	nA
Large Signal Voltage Gain	A <sub>V</sub>	R <sub>L</sub> =2kΩ to 2.5V	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 2.5V≤V <sub>CM</sub> ≤5V (Note3) CMR -: 0V≤V <sub>CM</sub> ≤2.5V (Note3)	55	70	-	dB
Supply Voltage Rejection Ratio	SVR	V <sup>+</sup> /V <sup>-</sup> =±2.0V ~ ±3.0V	70	85	-	dB
Maximum Output Voltage 1	V <sub>OH1</sub>	R <sub>L</sub> =20kΩ to 2.5V	4.9	4.95	-	V
Maximum Output Voltage 2	V <sub>OL1</sub>	R <sub>L</sub> =20kΩ to 2.5V	-	0.05	0.1	V
Input Common Mode Voltage Range	V <sub>ICM</sub>	R <sub>L</sub> =2kΩ to 2.5V	4.75	4.85	-	V
	V <sub>OL2</sub>	R <sub>L</sub> =2kΩ to 2.5V	-	0.15	0.25	V
(Note3)	CMR is represented by either CMR+ or CMR- has lower value.		0	-	5	V

CMR+ is measured with 2.5V≤V<sub>CM</sub>≤5.0 and CMR- is measured with 0V≤V<sub>CM</sub>≤2.5V.

### •AC CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	R <sub>L</sub> =2kΩ to 2.5V	-	1	-	MHz
Phase Margin	Φ <sub>M</sub>	R <sub>L</sub> =2kΩ to 2.5V	-	75	-	Deg
Equivalent Input Noise Voltage	V <sub>NI</sub>	f=1kHz	-	10	-	nV/√Hz
Amp to Amp Separation	CS	f=1kHz R <sub>L</sub> =2kΩ to 2.5V, V <sub>O</sub> =1.2Vrms	-	133	-	dB

### •TRANSIENT CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R <sub>L</sub> =2kΩ to 2.5V	-	0.4	-	V/μs

■ ELECTRICAL CHARACTERISTICS ( $V^+=3V$ ,  $T_a=25^\circ C$ )

## ● DC CHARACTERISTICS

(V<sup>+</sup>=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	I <sub>CC</sub>	No signal applied	-	1	1.8	mA
Input Offset Voltage	V <sub>IO</sub>		-	1	5	mV
Input Bias Current	I <sub>B</sub>		-	50	250	nA
Input Offset Current	I <sub>IO</sub>		-	5	100	nA
Large Signal Voltage Gain	A <sub>V</sub>	R <sub>L</sub> =2kΩ to 1.5V	60	84	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 1.5V≤V <sub>CM</sub> ≤3V (Note4) CMR-: 0V≤V <sub>CM</sub> ≤1.5V (Note4)	48	63	-	dB
Supply Voltage Rejection Ratio	SVR	V <sup>+</sup> /V <sup>-</sup> =±1.2V ~ ±2.0V	68	83	-	dB
Maximum Output Voltage 1	V <sub>OH1</sub>	R <sub>L</sub> =20kΩ to 1.5V	2.9	2.95	-	V
	V <sub>OL1</sub>	R <sub>L</sub> =20kΩ to 1.5V	-	0.05	0.1	V
Maximum Output Voltage 2	V <sub>OH2</sub>	R <sub>L</sub> =2kΩ to 1.5V	2.75	2.85	-	V
	V <sub>OL2</sub>	R <sub>L</sub> =2kΩ to 1.5V	-	0.15	0.25	V
Input Common Mode Voltage Range	V <sub>ICM</sub>	CMR≥48dB	0	-	3	V

(Note4) CMR is represented by either CMR+ or CMR-has lower value.

CMR+ is measured with 1.5V≤V<sub>CM</sub>≤3.0 and CMR- is measured with 0V≤V<sub>CM</sub>≤1.5V.

## ● AC CHARACTERISTICS

(V<sup>+</sup>=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	R <sub>L</sub> =2kΩ to 1.5V	-	1	-	MHz
Phase Margin	Φ <sub>M</sub>	R <sub>L</sub> =2kΩ to 1.5V	-	75	-	Deg
Equivalent Input Noise Voltage	V <sub>NI</sub>	f=1kHz	-	10	-	nV/√Hz
Amp to Amp Separation	CS	f=1kHz R <sub>L</sub> =2kΩ to 1.5V, V <sub>O</sub> =0.7Vrms	-	130	-	dB

## ● TRANSIENT CHARACTERISTICS

(V<sup>+</sup>=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	R <sub>L</sub> =2kΩ to 1.5V	-	0.35	-	V/μs

# NJM2734

## ■ ELECTRICAL CHARACTERISTICS ( $V^+=1.8V$ , $T_a=25^\circ C$ )

### • DC CHARACTERISTICS

( $V^+=1.8V$ ,  $T_a=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Current	$I_{CC}$	No signal applied	-	0.9	1.6	mA
Input Offset Voltage	$V_{IO}$		-	1	5	mV
Input Bias Current	$I_B$		-	50	250	nA
Input Offset Current	$I_{IO}$		-	5	100	nA
Large Signal Voltage Gain	$A_V$	$R_L=2k\Omega$ to 0.9V	60	83	-	dB
Common Mode Rejection Ratio	CMR	CMR+: $0.9 \leq V_{CM} \leq 1.8V$ (Note5) CMR-: $0V \leq V_{CM} \leq 0.9V$ (Note5)	40	55	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+/V = \pm 0.9V \sim \pm 1.2V$	65	80	-	dB
Maximum Output Voltage 1	$V_{OH1}$	$R_L=20k\Omega$ to 0.9V	1.7	1.75	-	V
	$V_{OL1}$	$R_L=20k\Omega$ to 0.9V	-	0.05	0.1	V
Maximum Output Voltage 2	$V_{OH2}$	$R_L=2k\Omega$ to 0.9V	1.55	1.65	-	V
	$V_{OL2}$	$R_L=2k\Omega$ to 0.9V	-	0.15	0.25	V
Input Common Mode Voltage Range	$V_{ICM}$	CMR $\geq 40dB$	0	-	1.8	V

(Note5) CMR is represented by either CMR+ or CMR-has lower value.

CMR+ is measured with  $0.9V \leq V_{CM} \leq 1.8V$  and CMR- is measured with  $0V \leq V_{CM} \leq 0.9V$ .

### • AC CHARACTERISTICS

( $V^+=1.8V$ ,  $T_a=25^\circ C$ )







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Unity Gain Bandwidth	GB	$R_L=2k\Omega$ to 0.9V	-	1	-	MHz
Phase Margin	$\Phi_M$	$R_L=2k\Omega$ to 0.9V	-	75	-	Deg
Equivalent Input Noise Voltage	$V_NI$	f=1kHz	-	10	-	nV/ $\sqrt{Hz}$
Amp to Amp Separation	CS	f=1kHz $R_L=2k\Omega$ to 0.9V, $V_o=0.4V_{rms}$	-	125	-	dB

### • TRANSIENT CHARACTERISTICS

( $V^+=1.8V$ ,  $T_a=25^\circ C$ )

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Slew Rate	SR	$R_L=2k\Omega$ to 0.9V	-	0.3	-	V/ $\mu s$


## ■ Typical Characteristics

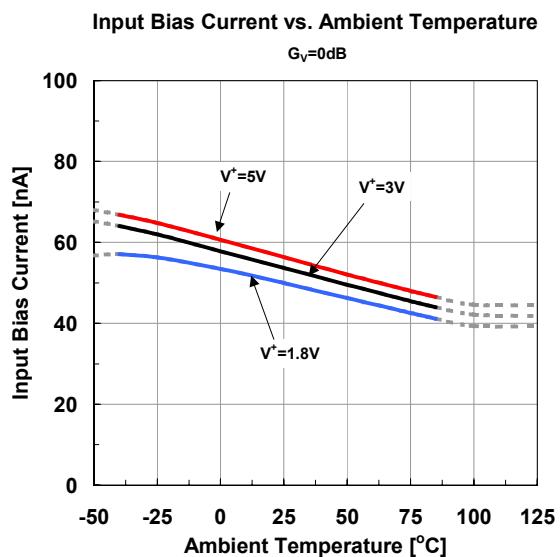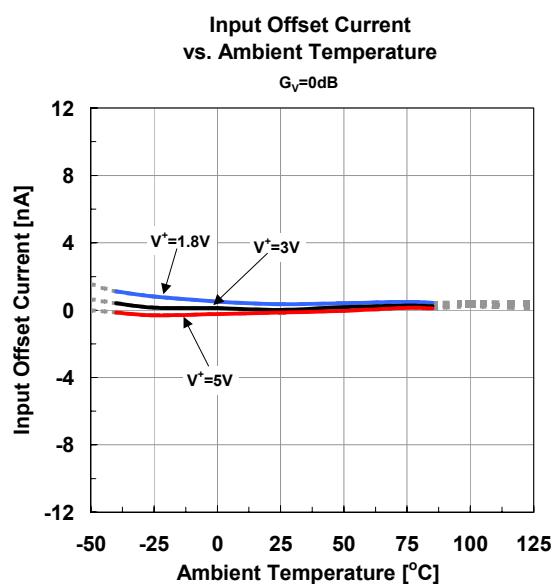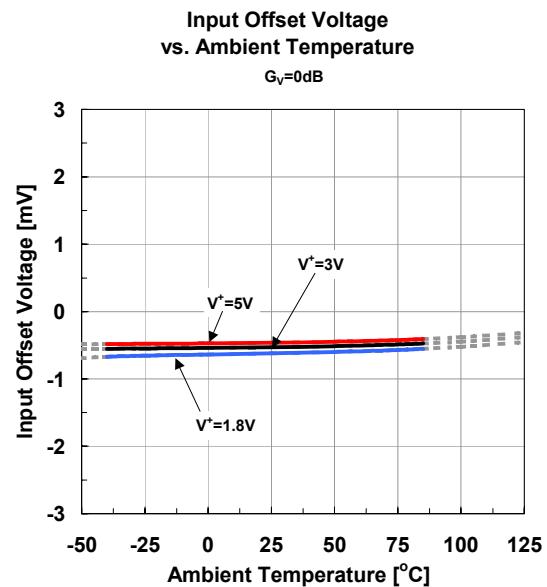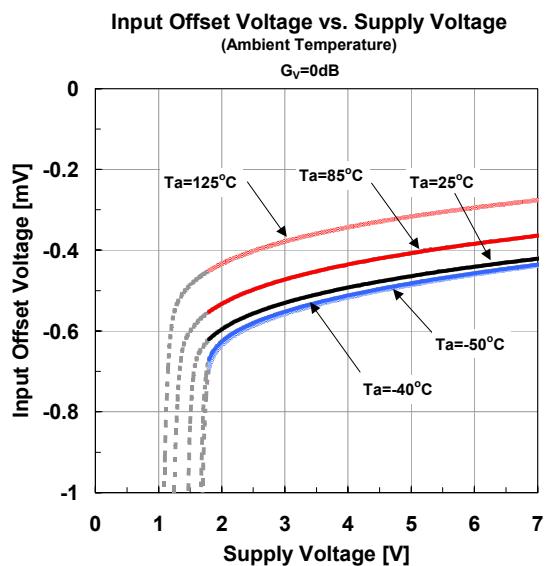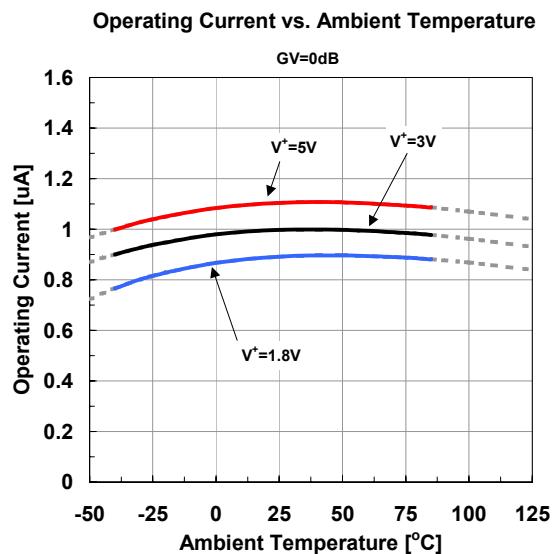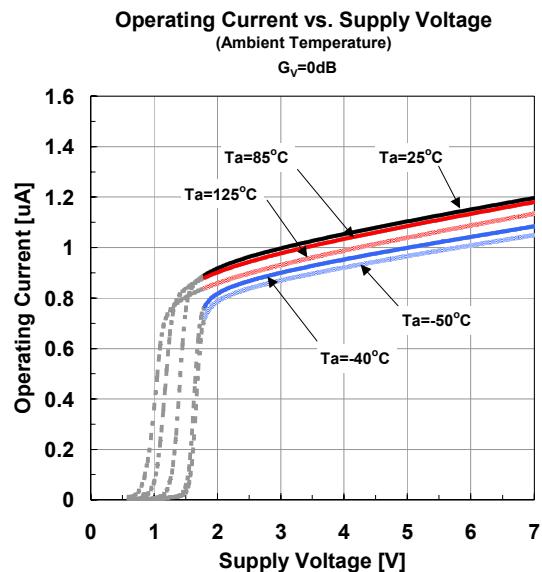


# NJM2734

## ■ Typical Characteristics


Supply Voltage Rejection Ratio  
vs. Ambient Temperature

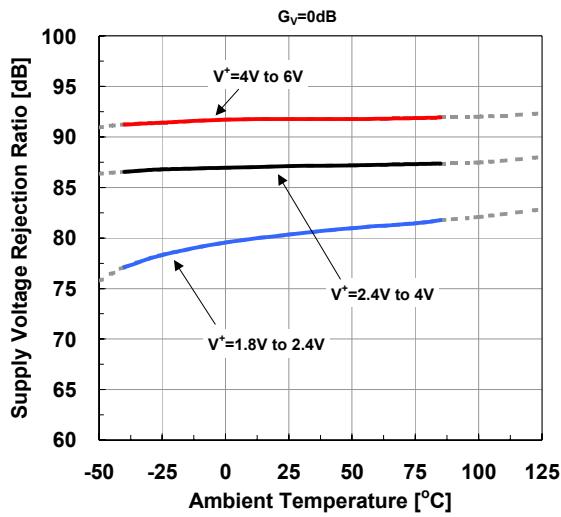


Common Mode Rejection Ratio  
vs. Ambient Temperature

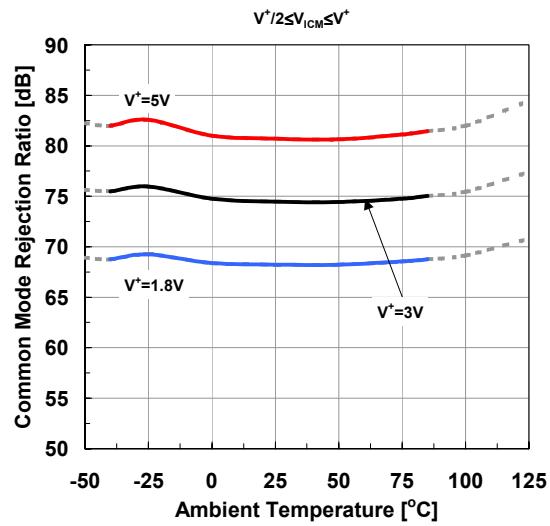


Common Mode Rejection ratio  
vs. Ambient Temperature

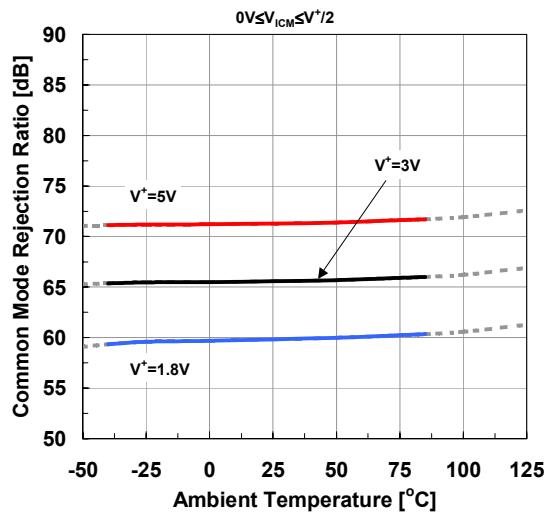


Input Offset Voltage  
vs. Common Mode Input Voltage

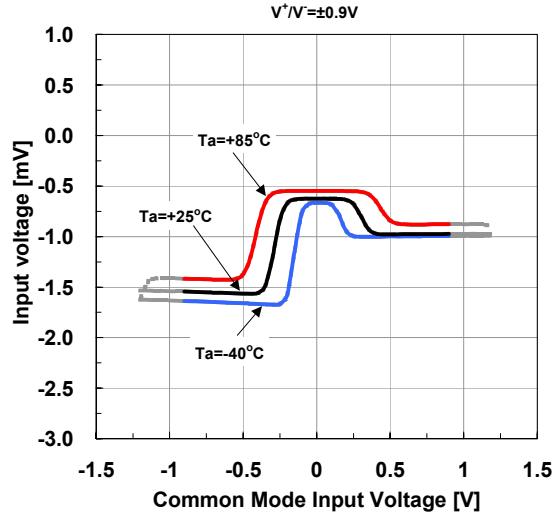

Input Offset Voltage  
vs. Common Mode Input Voltage

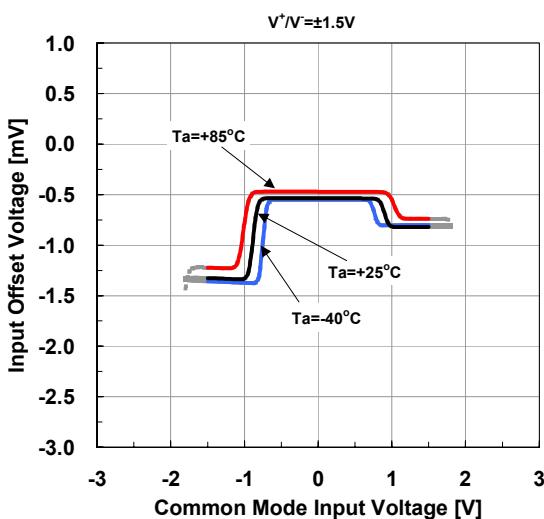


Input Offset Voltage  
vs. Common Mode Input Voltage

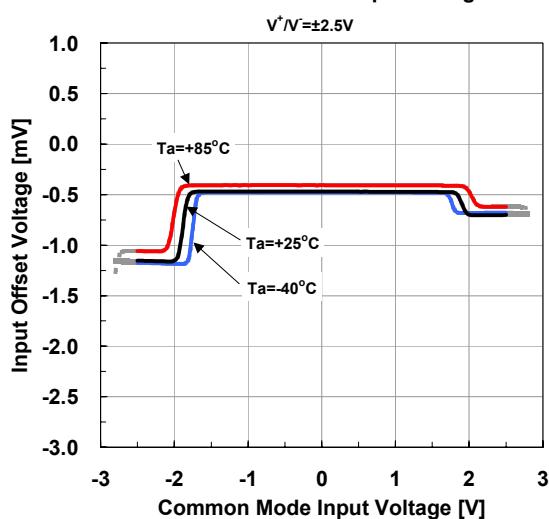

## ■ Typical Characteristics


**Input bias Current  
vs. Common Mode Input Voltage**

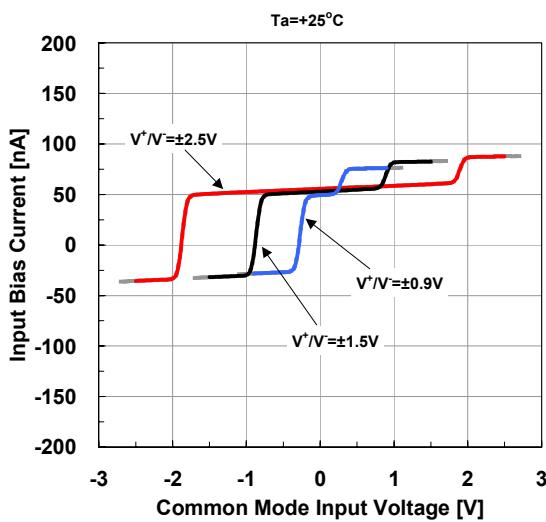

**Maximum Output Voltage  
vs. Load Resistance**


(Ambient Temperature)

$V^+ = 1.8V$ ,  $G_V = \text{OPEN}$ ,  $R_L$  to  $1/2V^+$

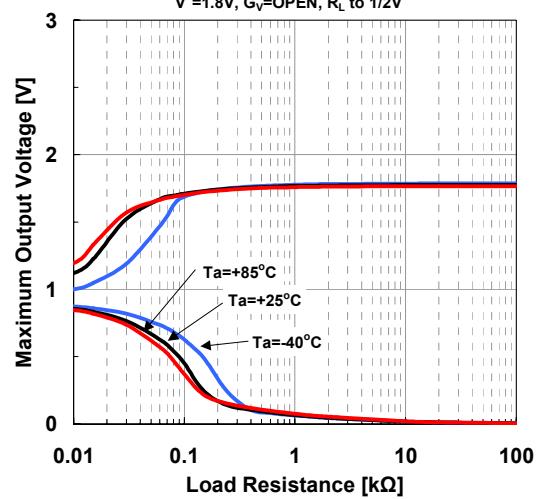


**Maximum Output Voltage  
vs. Load Resistance  
(Ambient Temperature)**

$V^+ = 3V$ ,  $G_V = \text{OPEN}$ ,  $R_L$  to  $1/2V^+$

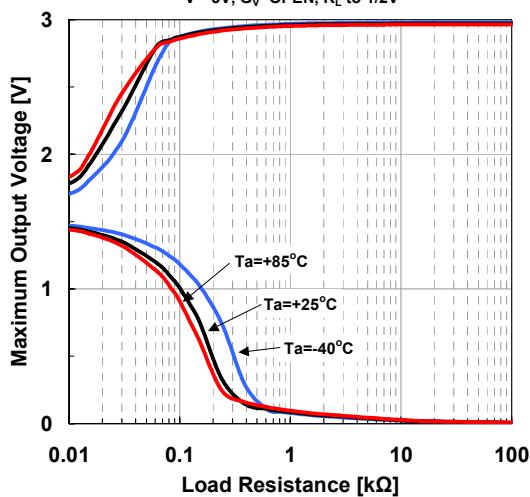







**Maximum Output Voltage  
vs. Load Resistance  
(Ambient Temperature)**

$V^+ = 5V$ ,  $G_V = \text{OPEN}$ ,  $R_L$  to  $1/2V^+$






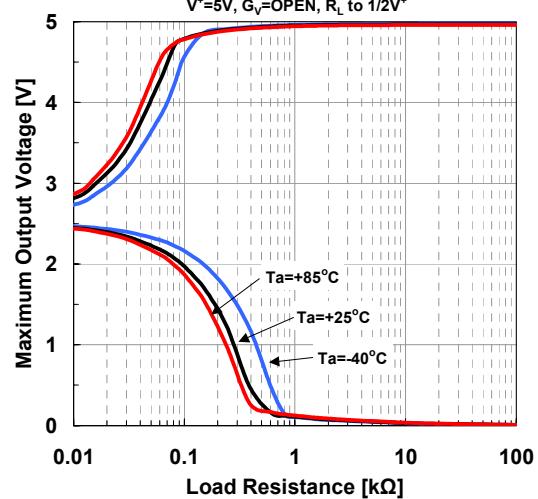


# NJM2734

## ■ Typical Characteristics

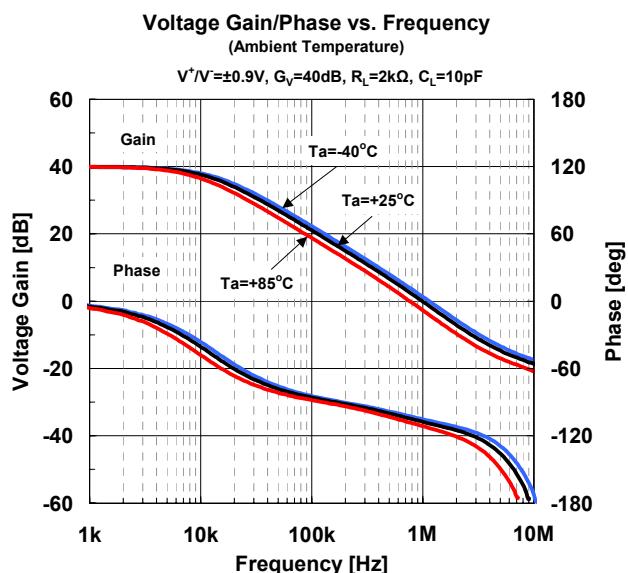
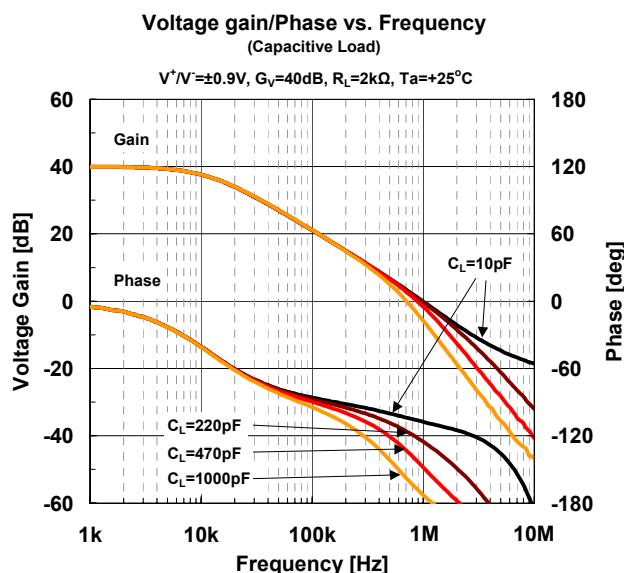
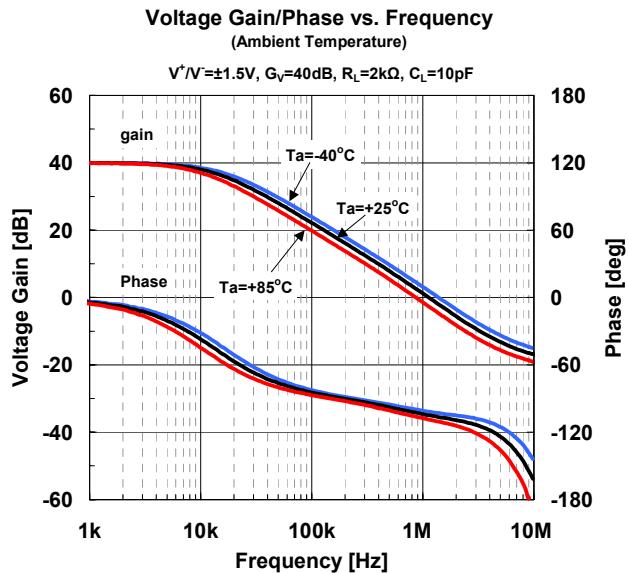
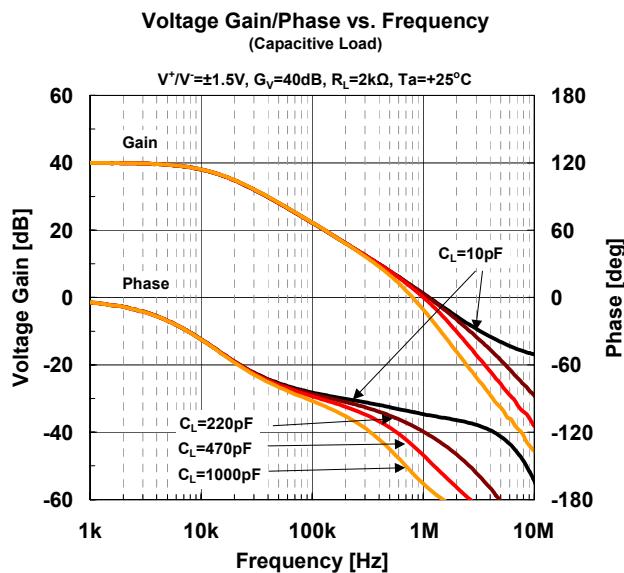
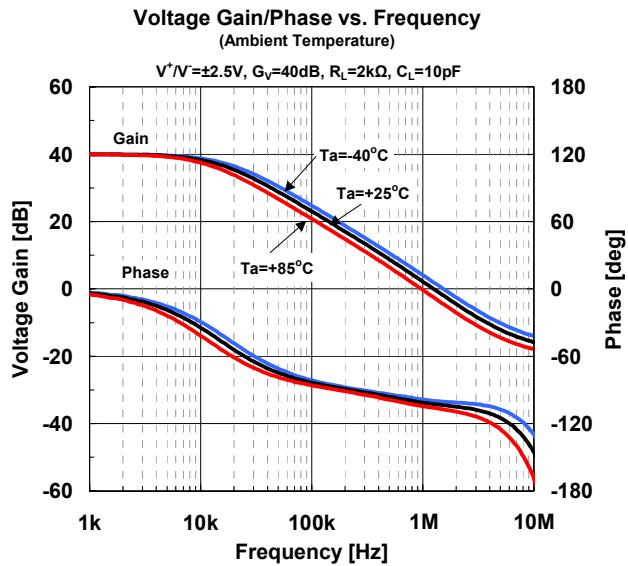
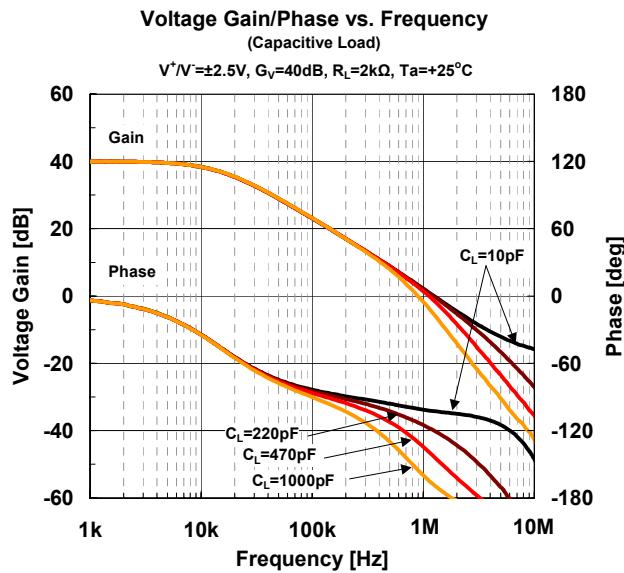


## ■ Typical Characteristics

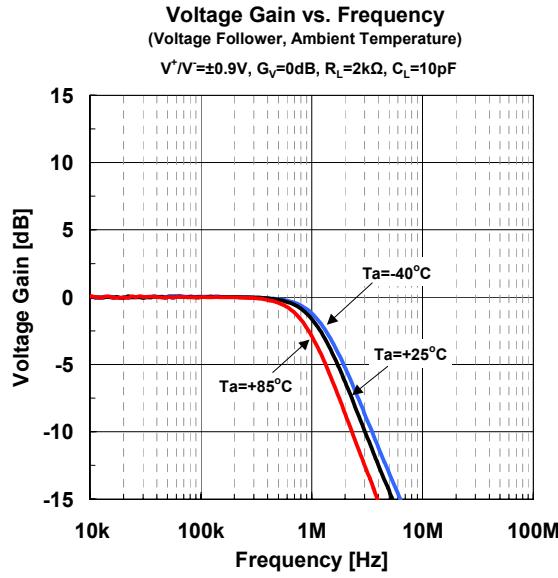
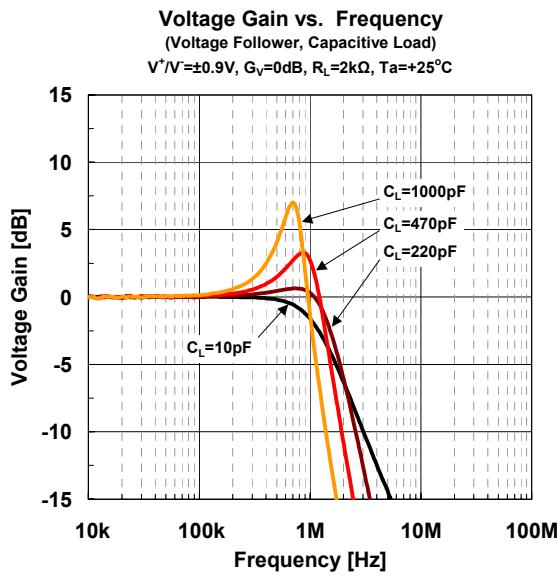
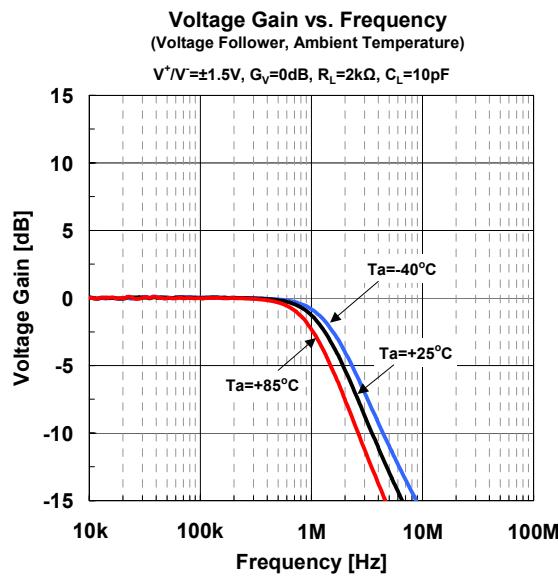
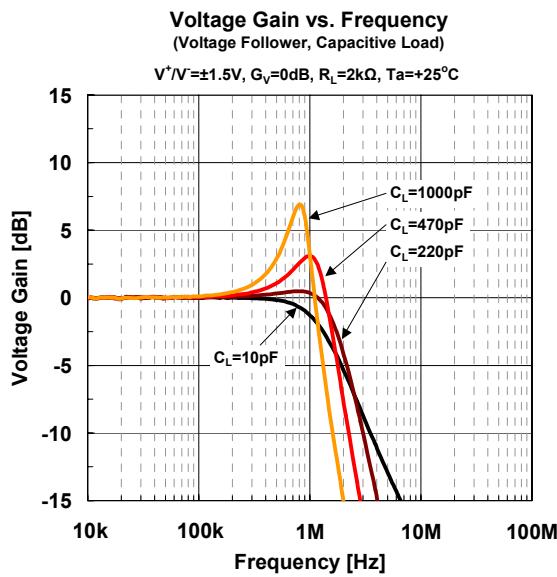
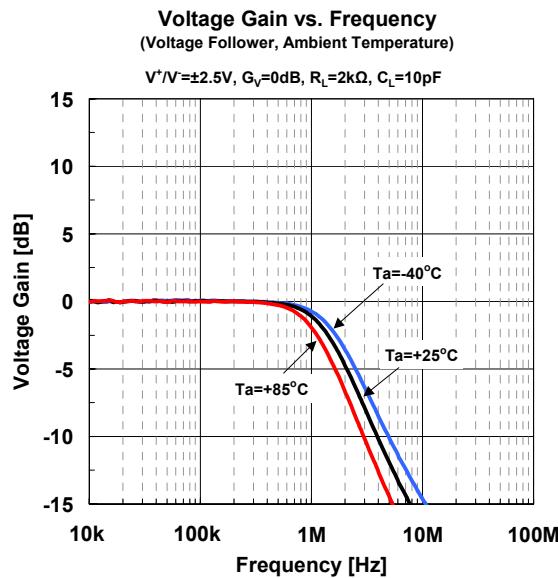
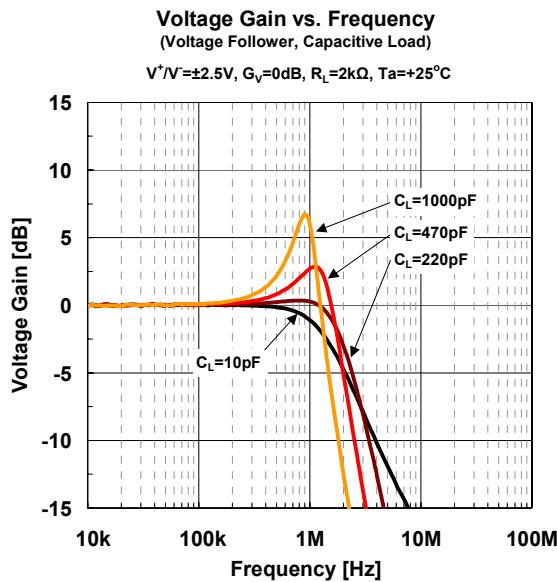


# NJM2734

## ■ Typical Characteristics

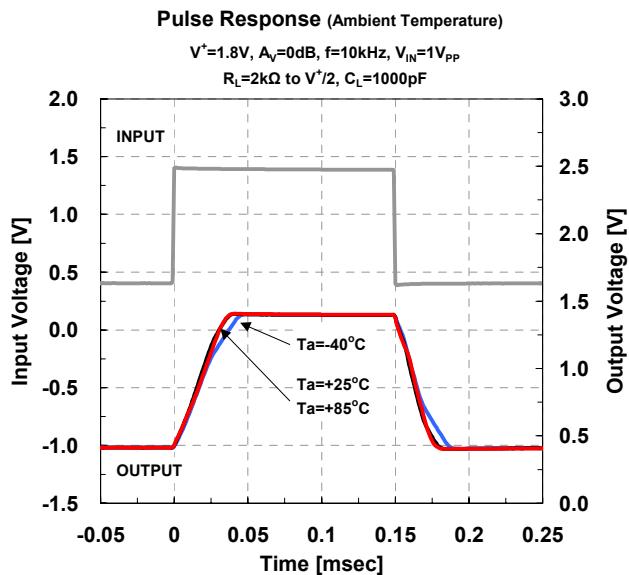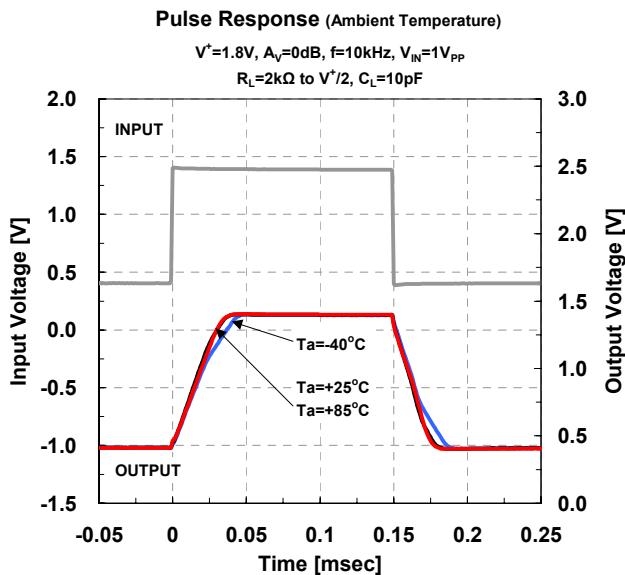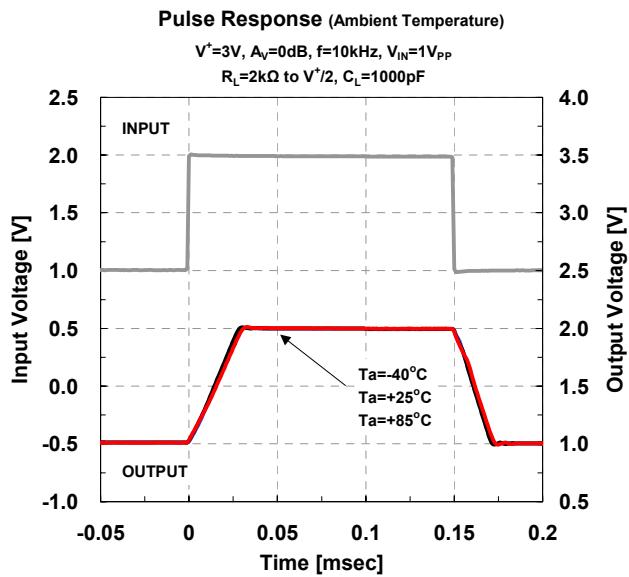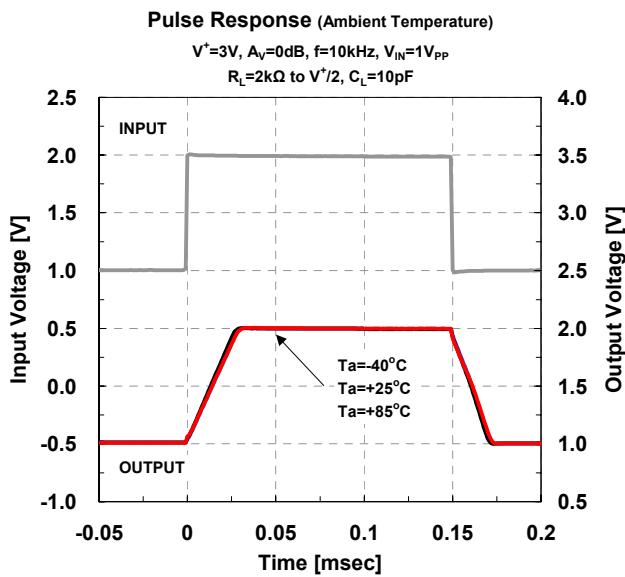
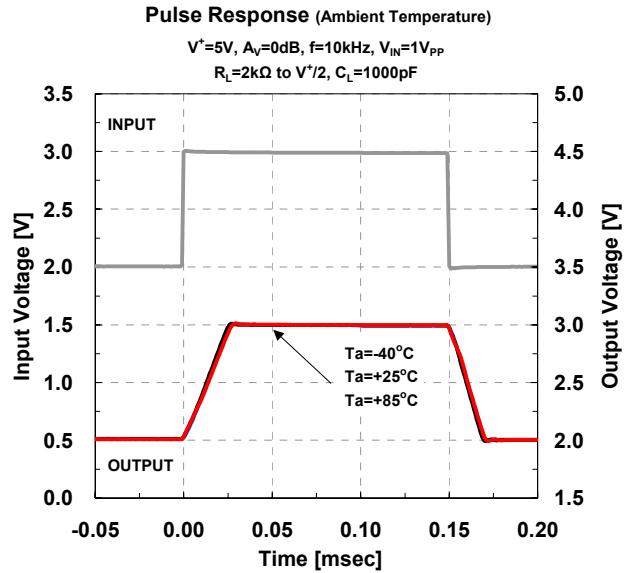
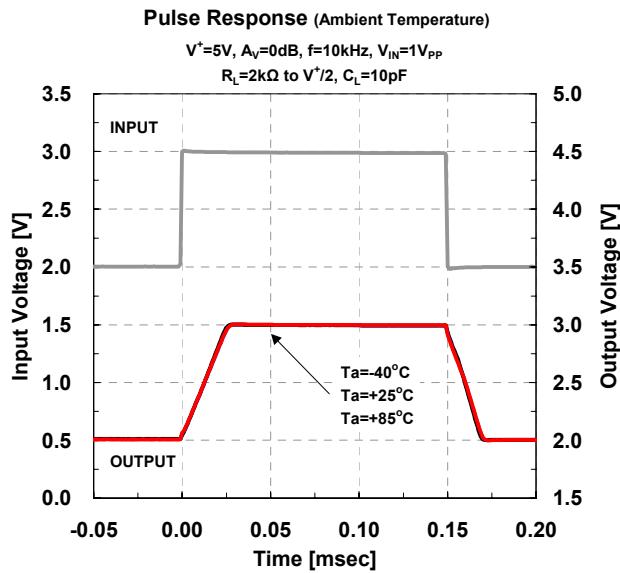


## ■ Typical Characteristics

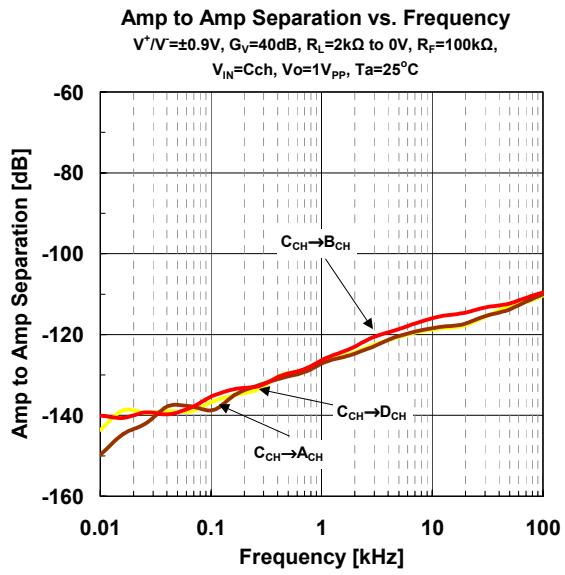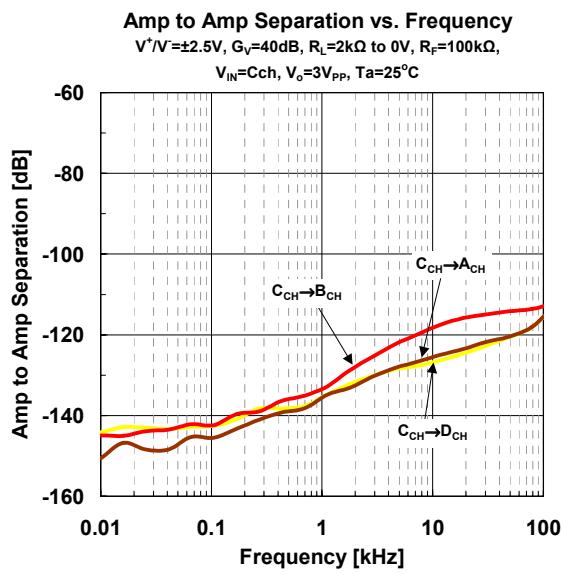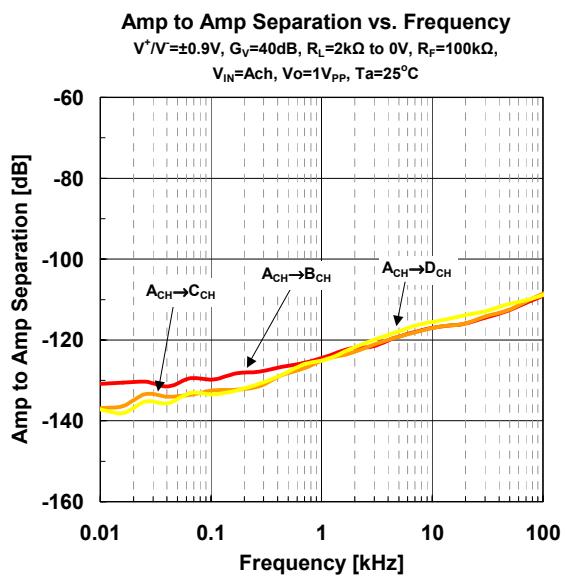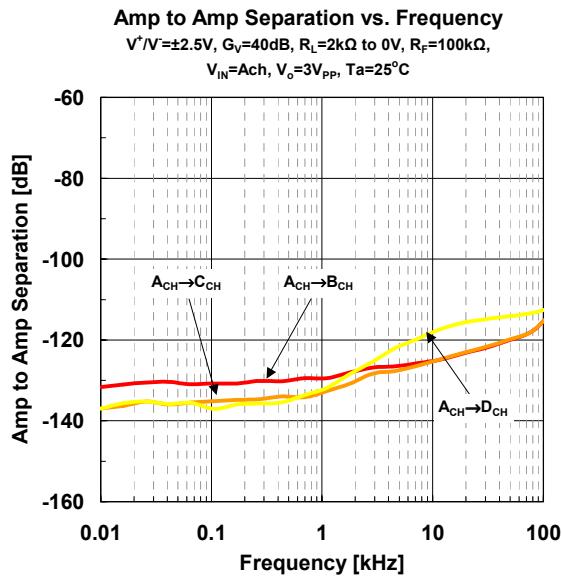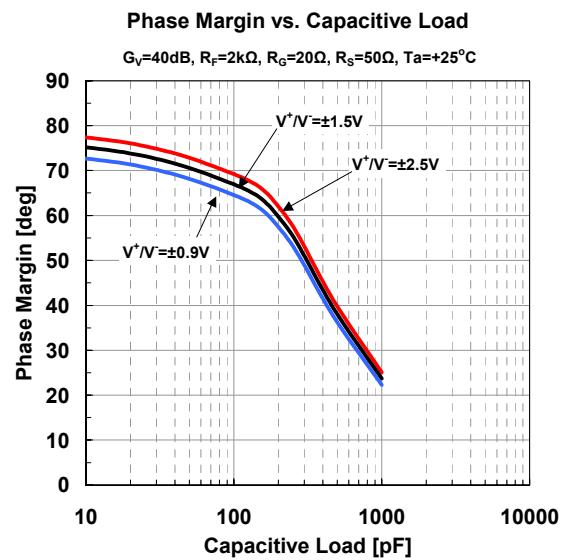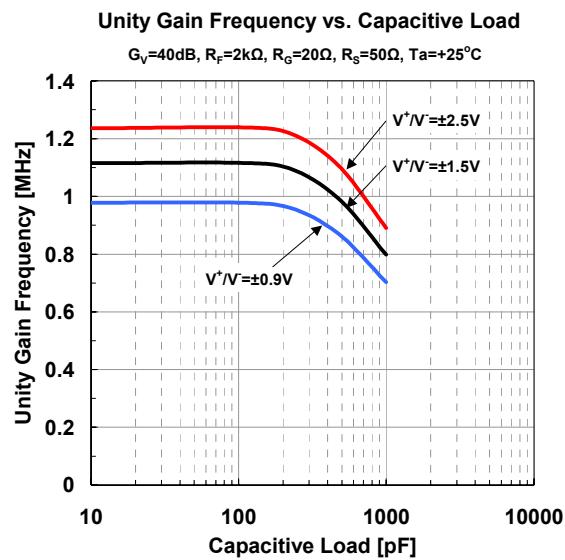

# NJM2734

## ■ Typical Characteristics

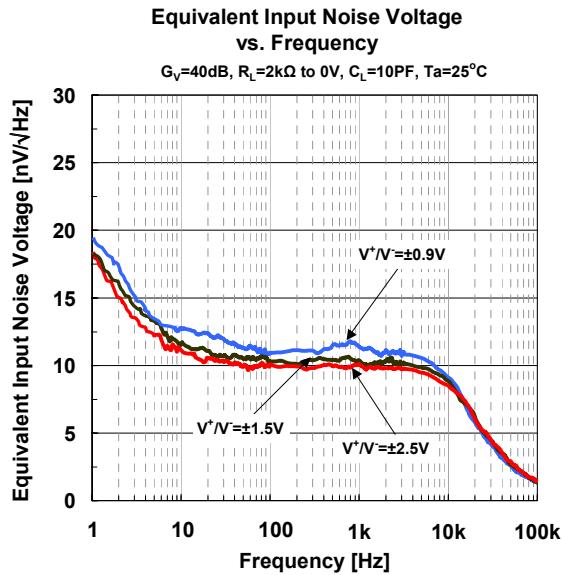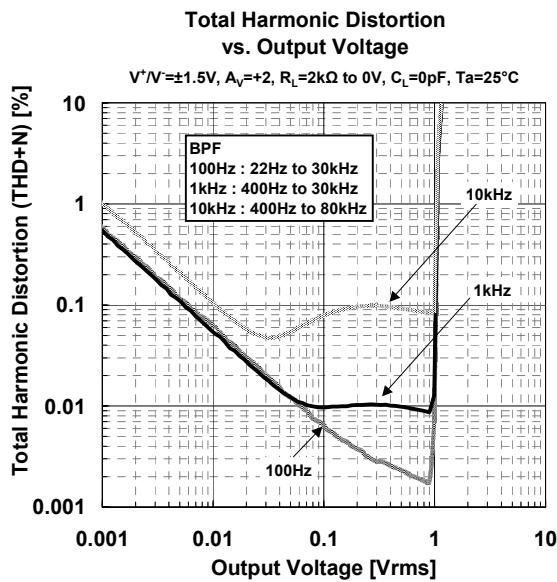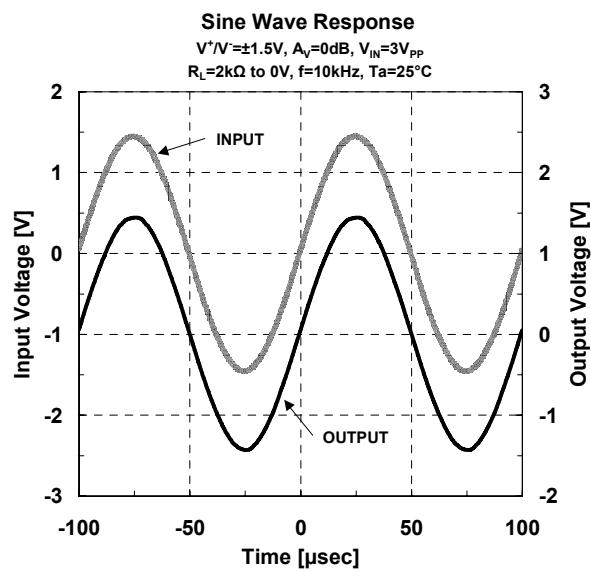

**[CAUTION]**  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.



**Стандарт  
Электрон  
Связь**

Мы молодая и активно развивающаяся компания в области поставок электронных компонентов. Мы поставляем электронные компоненты отечественного и импортного производства напрямую от производителей и с крупнейших складов мира.

Благодаря сотрудничеству с мировыми поставщиками мы осуществляем комплексные и плановые поставки широчайшего спектра электронных компонентов.

Собственная эффективная логистика и склад в обеспечивает надежную поставку продукции в точно указанные сроки по всей России.

Мы осуществляем техническую поддержку нашим клиентам и предпродажную проверку качества продукции. На все поставляемые продукты мы предоставляем гарантию .

Осуществляем поставки продукции под контролем ВП МО РФ на предприятия военно-промышленного комплекса России , а также работаем в рамках 275 ФЗ с открытием отдельных счетов в уполномоченном банке. Система менеджмента качества компании соответствует требованиям ГОСТ ISO 9001.

Минимальные сроки поставки, гибкие цены, неограниченный ассортимент и индивидуальный подход к клиентам являются основой для выстраивания долгосрочного и эффективного сотрудничества с предприятиями радиоэлектронной промышленности, предприятиями ВПК и научно-исследовательскими институтами России.

С нами вы становитесь еще успешнее!

**Наши контакты:**

**Телефон:** +7 812 627 14 35

**Электронная почта:** [sales@st-electron.ru](mailto:sales@st-electron.ru)

**Адрес:** 198099, Санкт-Петербург,  
Промышленная ул, дом № 19, литер Н,  
помещение 100-Н Офис 331